Chapter Seventeen

How does Javascript Handle Asynchronous Programming



```
console.log('I am Line One')
setTimeout(() ⇒ {
    console.log('I am Line Two')
}, 3000)
console.log('I am Line Three')

Call Stack

WEB API

Call Stack

Ca
```



```
console.log('I am Line One')
setTimeout(() ⇒ {
    console.log('I am Line Two')
}, 3000)
console.log('I am Line Three')

Call Stack

WEB API

Call Stack

Call Stack

WEB API

Call Stack

WEB API

Call Stack

Call Stack

WEB API

Call Stack

WEB API

Call Stack

Call Stack

WEB API

Call Stack

Main()

Call Stack

WEB API

Call Stack

Call Stack

Call Stack

Call Stack

Call Stack

Main()

Call Stack

Call Stack

Call Stack

Main()

Call Stack

Call Stack


MEB API

Call Stack


Ca
```






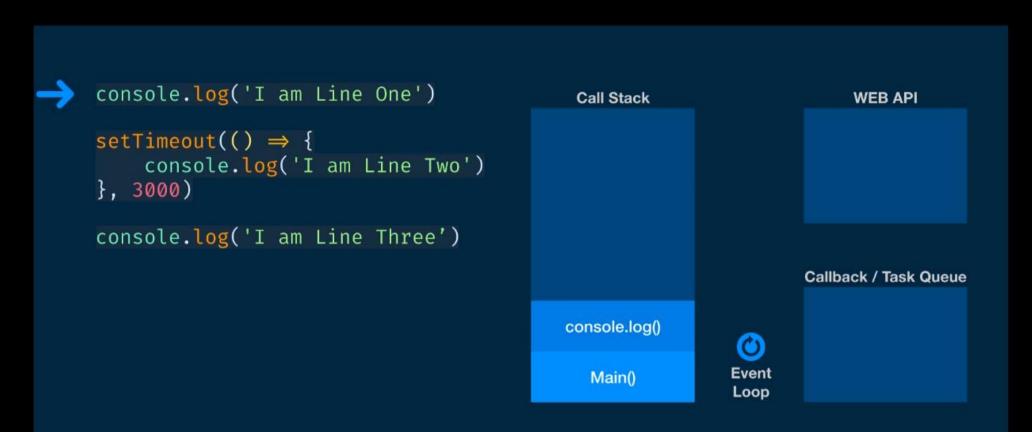




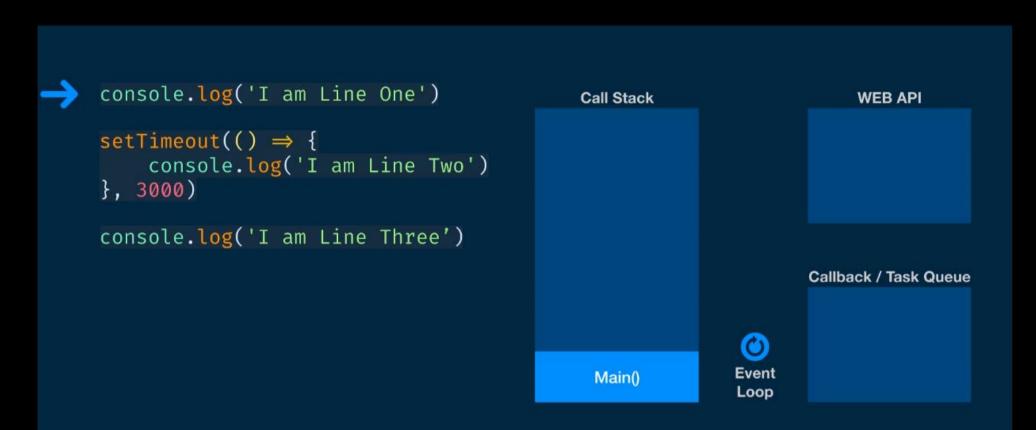




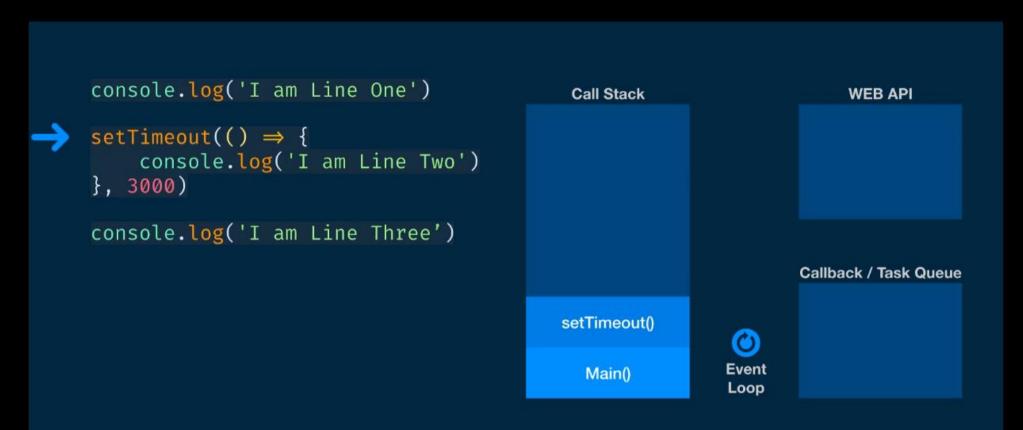



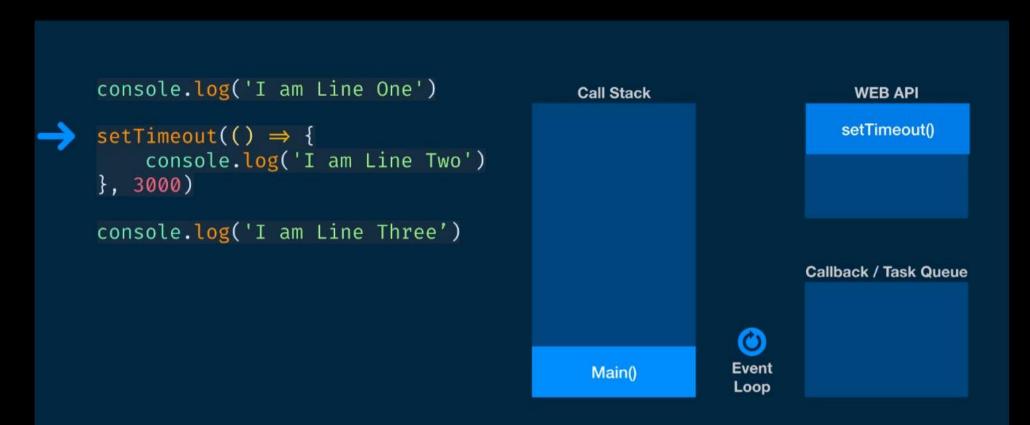



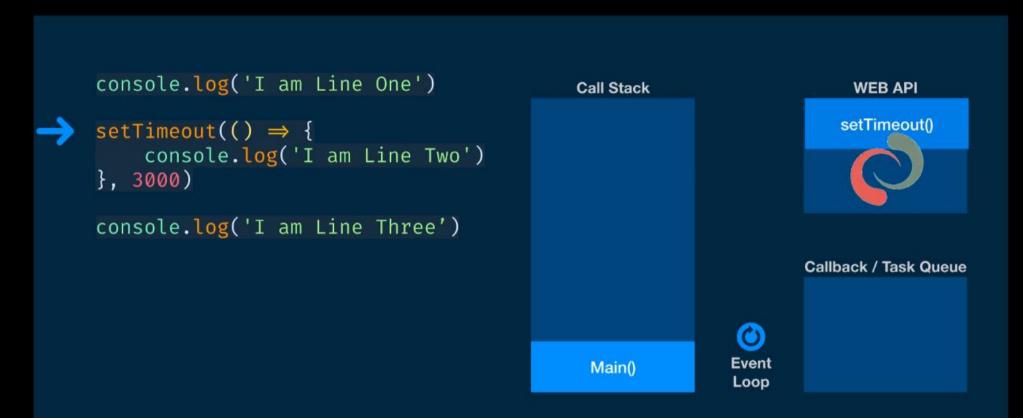



```
console.log('I am Line One')

setTimeout(() ⇒ {
    console.log('I am Line Two')
}, 3000)

console.log('I am Line Three')

Call Stack

WEB API

setTimeout()

console.log('I am Line Three')


Call Stack

WEB API

SetTimeout()


SetTimeout()
```



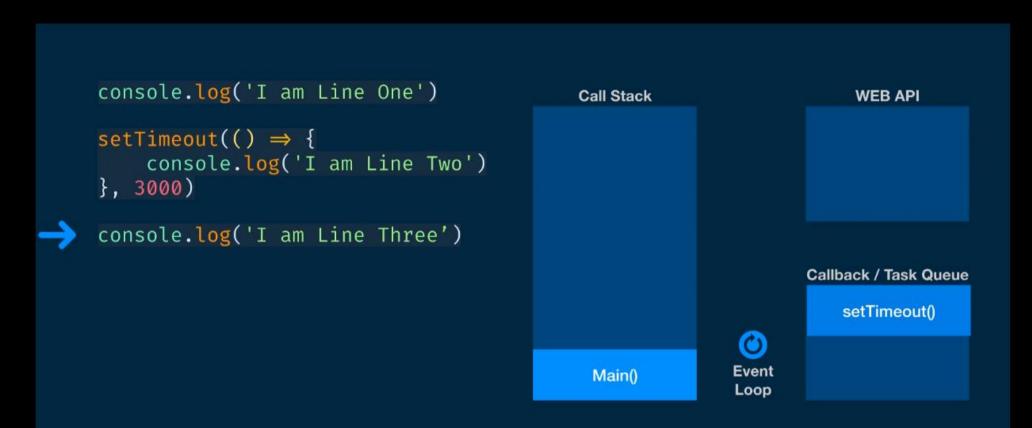


I am Line One
I am Line Three



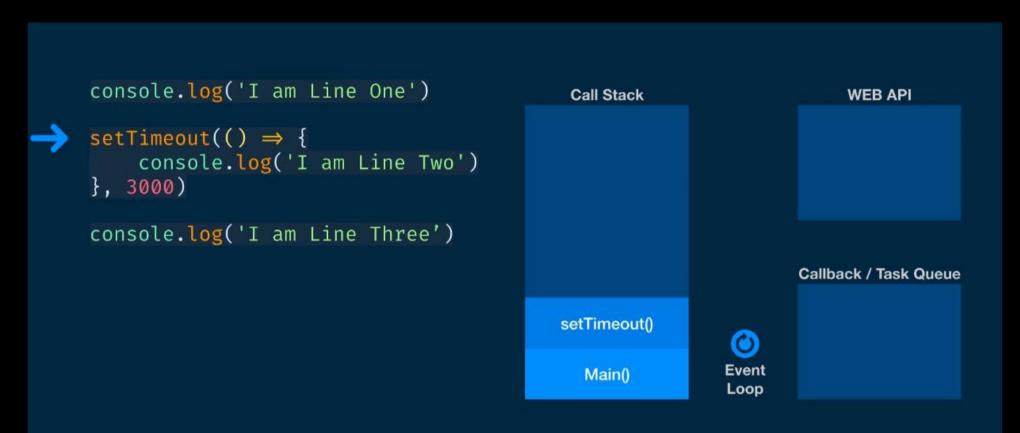

I am Line One
I am Line Three



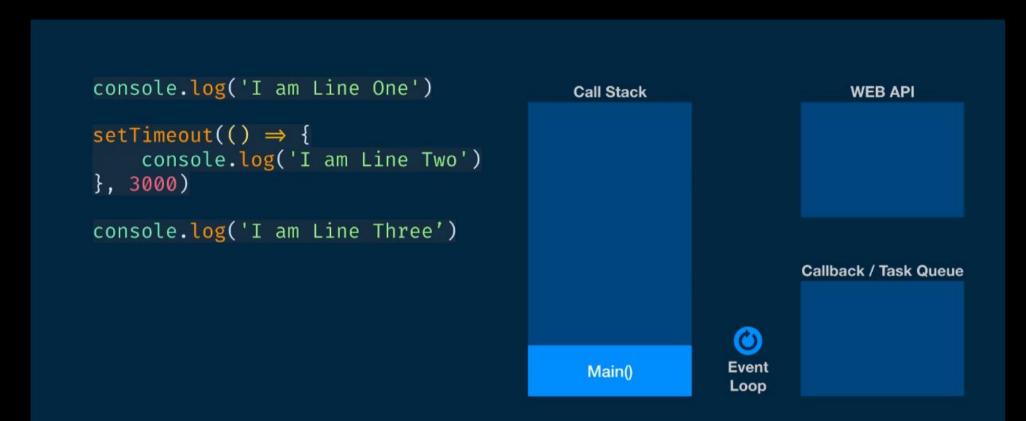

I am Line One
I am Line Three
I am Line Two

