

Adviewer

Mohammad Sadegh Boorooni

Mohsen Rahimi

Hamid Fallah

Ali Dehghani

Milad Mohammadi

Mohammad Akhgari

Banafshe Javaheri

Mastaneh Pahlevan Hosseini

Contents

1	Namespace Index	1
1.1	Namespace List	1
2	Hierarchical Index	3
2.1	Class Hierarchy	3
3	Class Index	5
3.1	Class List	5
4	Namespace Documentation	7
4.1	Package ADVIEWER	7
4.2	Package ADVIEWER.Account	7
4.3	Package ADVIEWER.BAL	7
4.4	Package ADVIEWER.DAL	8
4.5	Package ADVIEWER.Main	9
4.6	Package ADVIEWER.Manage	9
4.7	Package ADVIEWER.Member	9
5	Class Documentation	11
5.1	ADVIEWER.Main._404 Class Reference	11
5.2	ADVIEWER.Main._Default Class Reference	12
5.2.1	Member Data Documentation	12
5.2.1.1	LastAdvsRepeater	13
5.3	ADVIEWER.Main.About Class Reference	13
5.4	ADVIEWER.BAL.AccountFunctions Class Reference	14
5.5	ADVIEWER.Member.AddNewAdv Class Reference	14
5.5.1	Member Data Documentation	17
5.5.1.1	Addresstxt	17
5.5.1.2	AdvKindDrop	17
5.5.1.3	AdvShorttxt	17
5.5.1.4	AdvTexttxt	17
5.5.1.5	AdvTitleTxt	17
5.5.1.6	AsyncFileUpload1	17

5.5.1.7	Button1	18
5.5.1.8	Emailtxt	18
5.5.1.9	Faxtxt	18
5.5.1.10	groupsDropDownList	18
5.5.1.11	imgLoader	18
5.5.1.12	KeyWordtxt	18
5.5.1.13	IblContentType	18
5.5.1.14	IblContentTypeDisplay	18
5.5.1.15	IblErrorStatus	18
5.5.1.16	IblFileName	19
5.5.1.17	IblFileNameDisplay	19
5.5.1.18	IblFileSize	19
5.5.1.19	IblFileSizeDisplay	19
5.5.1.20	IblMesg	19
5.5.1.21	IblSuccess	19
5.5.1.22	Linktxt	19
5.5.1.23	ltr_error	19
5.5.1.24	Mobiletxt	19
5.5.1.25	MonthDrop	20
5.5.1.26	Nametxt	20
5.5.1.27	Pricetxt	20
5.5.1.28	RegularExpressionValidator1	20
5.5.1.29	RegularExpressionValidator2	20
5.5.1.30	RegularExpressionValidator3	20
5.5.1.31	RegularExpressionValidator4	20
5.5.1.32	RegularExpressionValidator5	20
5.5.1.33	RequiredFieldValidator1	21
5.5.1.34	RequiredFieldValidator2	21
5.5.1.35	RequiredFieldValidator3	21
5.5.1.36	RequiredFieldValidator4	21
5.5.1.37	StateCityDropDownList	21
5.5.1.38	SuccessMessage	21
5.5.1.39	TellTimetxt	21
5.5.1.40	Telltxt	21
5.5.1.41	ToolkitScriptManager1	22
5.5.1.42	YahooIDtxt	22
5.6	ADVIEWER.Member.AddNewTicket Class Reference	22
5.6.1	Member Data Documentation	23
5.6.1.1	Button1	23
5.6.1.2	MessageText	23

5.6.1.3	RequiredFieldValidator1	24
5.6.1.4	RequiredFieldValidator2	24
5.6.1.5	SubjectText	24
5.6.1.6	SuccessMessage	24
5.7	ADVIEWER.Main.AdvContent Class Reference	24
5.7.1	Member Data Documentation	26
5.7.1.1	AddCommentText	26
5.7.1.2	AllComments	26
5.7.1.3	CommentContent	26
5.7.1.4	EmailTextBox	26
5.7.1.5	imglist	26
5.7.1.6	ltrexmsg	26
5.7.1.7	ltrstars	27
5.7.1.8	RegularExpressionValidator1	27
5.7.1.9	RequiredFieldValidator2	27
5.7.1.10	RequiredFieldValidator3	27
5.7.1.11	subgroupadi	27
5.7.1.12	SubmitComment	27
5.7.1.13	UserAdvsRepeater	27
5.8	ADVIEWER.DAL.AdvertisementMessage Class Reference	27
5.8.1	Detailed Description	29
5.8.2	Member Function Documentation	29
5.8.2.1	CreateAdvertisementMessage	29
5.8.3	Property Documentation	29
5.8.3.1	AgahilID	29
5.8.3.2	Date	29
5.8.3.3	Email	29
5.8.3.4	FullName	29
5.8.3.5	ID	29
5.8.3.6	Inbox	30
5.8.3.7	IsRead	30
5.8.3.8	reply	30
5.8.3.9	Tell	30
5.8.3.10	Text	30
5.8.3.11	UserID	30
5.9	ADVIEWER.DAL.Advertisment Class Reference	30
5.9.1	Detailed Description	33
5.9.2	Member Function Documentation	33
5.9.2.1	CreateAdvertisment	33
5.9.3	Property Documentation	33

5.9.3.1	Address	33
5.9.3.2	AdvDuration	33
5.9.3.3	Comments	33
5.9.3.4	DenyReason	33
5.9.3.5	Description	33
5.9.3.6	Email	34
5.9.3.7	ExpirationDate	34
5.9.3.8	FullName	34
5.9.3.9	Group	34
5.9.3.10	GroupID	34
5.9.3.11	GroupReference	34
5.9.3.12	ID	34
5.9.3.13	IsConfirmed	34
5.9.3.14	IsPaid	34
5.9.3.15	IsRead	34
5.9.3.16	KeyWords	34
5.9.3.17	LastRenewal	34
5.9.3.18	Link	35
5.9.3.19	Mobile	35
5.9.3.20	PaidID	35
5.9.3.21	Pic	35
5.9.3.22	Price	35
5.9.3.23	Ratings	35
5.9.3.24	RegistrationDate	35
5.9.3.25	ReviewCount	35
5.9.3.26	ShortDescription	35
5.9.3.27	StarCount	35
5.9.3.28	StateCity	35
5.9.3.29	StateCityID	35
5.9.3.30	StateCityReference	36
5.9.3.31	Tell	36
5.9.3.32	TellTime	36
5.9.3.33	Title	36
5.9.3.34	User	36
5.9.3.35	UserId	36
5.9.3.36	UserReference	36
5.9.3.37	YahooID	36
5.10	ADVIEWER.Member.AdvsList Class Reference	37
5.10.1	Member Data Documentation	37
5.10.1.1	GridView1	37

5.10.1.2	ltr_error	38
5.11	ADVIEWER.BAL.AssignorAdvertisement Class Reference	38
5.12	ADVIEWER.BAL.AssignorComment Class Reference	39
5.13	ADVIEWER.BAL.AssignorGroup Class Reference	40
5.14	ADVIEWER.BAL.AssignorMessage Class Reference	41
5.15	ADVIEWER.BAL.AssignorParent Class Reference	42
5.16	ADVIEWER.BAL.AssignorRate Class Reference	43
5.17	ADVIEWER.BAL.AssignorStateCity Class Reference	44
5.18	ADVIEWER.BAL.AssignorTicket Class Reference	45
5.19	ADVIEWER.BAL.AssignorUser Class Reference	45
5.20	ADVIEWER.BAL.AssignorUserMessage Class Reference	46
5.21	ADVIEWER.Member.Avatar Class Reference	46
5.21.1	Member Data Documentation	48
5.21.1.1	AsyncImageUpload	48
5.21.1.2	deleteImage	48
5.21.1.3	imgLoader	48
5.21.1.4	lblContentType	48
5.21.1.5	lblContentTypeDisplay	48
5.21.1.6	lblErrorStatus	48
5.21.1.7	lblFileName	49
5.21.1.8	lblFileNameDisplay	49
5.21.1.9	lblFileSize	49
5.21.1.10	lblFileSizeDisplay	49
5.21.1.11	lblMesg	49
5.21.1.12	lblSuccess	49
5.21.1.13	ltrprofile	49
5.21.1.14	msg	49
5.21.1.15	saveImage	49
5.21.1.16	ToolkitScriptManager1	50
5.22	ADVIEWER.Account.ChangePassword Class Reference	50
5.22.1	Member Data Documentation	51
5.22.1.1	ChangeUserPassword	51
5.22.1.2	ErrorMessage	51
5.23	ADVIEWER.DAL.Comment Class Reference	51
5.23.1	Detailed Description	52
5.23.2	Member Function Documentation	52
5.23.2.1	CreateComment	52
5.23.3	Property Documentation	53
5.23.3.1	Advertisement	53
5.23.3.2	AdvertisementReference	53

5.23.3.3	AdvID	53
5.23.3.4	IsConfirmed	53
5.24	ADVIEWER.Manage.CommentsList Class Reference	53
5.24.1	Member Data Documentation	54
5.24.1.1	CommentGridView	54
5.24.1.2	ConfirmAllComment	54
5.24.1.3	DeleteAllComments	55
5.25	ADVIEWER.DAL.ContactMessage Class Reference	55
5.25.1	Detailed Description	56
5.25.2	Member Function Documentation	56
5.25.2.1	CreateContactMessage	56
5.25.3	Property Documentation	56
5.25.3.1	Email	56
5.25.3.2	FulName	56
5.25.3.3	ID	56
5.25.3.4	IsRead	57
5.25.3.5	RegDate	57
5.25.3.6	Reply	57
5.25.3.7	Tell	57
5.25.3.8	Text	57
5.25.3.9	Title	57
5.25.3.10	UserID	57
5.26	ADVIEWER.Manage.Default Class Reference	57
5.26.1	Member Data Documentation	58
5.26.1.1	LinkButton1	58
5.27	ADVIEWER.Manage.EditGroup Class Reference	59
5.27.1	Member Data Documentation	60
5.27.1.1	parentsDropDownList	60
5.27.1.2	RequiredFieldValidator1	60
5.27.1.3	submitButton	60
5.27.1.4	titleTextBox	60
5.28	ADVIEWER.Member.EditProfile Class Reference	60
5.28.1	Member Data Documentation	62
5.28.1.1	Button1	62
5.28.1.2	FavGrouptxt	62
5.28.1.3	ltrmail	62
5.28.1.4	ltrprofile	62
5.28.1.5	msg	62
5.28.1.6	RegularExpressionValidator1	62
5.28.1.7	RegularExpressionValidator4	63

5.28.1.8	RegularExpressionValidator5	63
5.28.1.9	RequiredFieldValidator2	63
5.28.1.10	txtAbout	63
5.28.1.11	txtAddress	63
5.28.1.12	txtfax	63
5.28.1.13	txtMob	63
5.28.1.14	txtName	63
5.28.1.15	txtTell	63
5.28.1.16	txtYahoo	64
5.29	ADVIEWER.Manage.EditStateCity Class Reference	64
5.29.1	Member Data Documentation	65
5.29.1.1	NameTextBox	65
5.29.1.2	RequiredFieldValidator1	65
5.29.1.3	statesDropDownList	65
5.29.1.4	submitButton	65
5.30	ADVIEWER.BAL.FilesStatus Class Reference	65
5.31	ADVIEWER.BAL.FileTransferHandler Class Reference	66
5.32	ADVIEWER.Main.Global Class Reference	67
5.33	ADVIEWER.DAL.Group Class Reference	68
5.33.1	Detailed Description	69
5.33.2	Member Function Documentation	69
5.33.2.1	CreateGroup	69
5.33.3	Property Documentation	69
5.33.3.1	Advertisements	69
5.33.3.2	childGroup	69
5.33.3.3	GroupName	69
5.33.3.4	ID	69
5.33.3.5	parentGroup	69
5.33.3.6	parentGroupReference	69
5.33.3.7	ParentID	70
5.33.3.8	Pic	70
5.33.3.9	Users	70
5.34	ADVIEWER.Manage.GroupsList Class Reference	70
5.34.1	Member Data Documentation	71
5.34.1.1	groupsGridView	71
5.34.1.2	parentsDropDownList	71
5.34.1.3	RequiredFieldValidator1	71
5.34.1.4	submitButton	71
5.34.1.5	titleTextBox	72
5.35	ADVIEWER.BAL.JsonMaker Class Reference	72

5.36	ADVIEWER.DAL.KeyWord Class Reference	73
5.36.1	Detailed Description	73
5.36.2	Member Function Documentation	74
5.36.2.1	CreateKeyWord	74
5.36.3	Property Documentation	74
5.36.3.1	Advertisement	74
5.36.3.2	ID	74
5.36.3.3	Text	74
5.37	ADVIEWER.Account.Login Class Reference	74
5.37.1	Member Data Documentation	75
5.37.1.1	ErrorMessage	75
5.37.1.2	LoginUser	75
5.37.1.3	RegisterHyperLink	75
5.38	ADVIEWER.Main.MainMaster Class Reference	76
5.38.1	Member Data Documentation	77
5.38.1.1	form1	77
5.38.1.2	GroupsRepeater	77
5.38.1.3	head	77
5.38.1.4	Head1	77
5.38.1.5	HeadLoginView	77
5.38.1.6	mainContent	77
5.38.1.7	MoreAdvs	78
5.38.1.8	statesDiv	78
5.39	ADVIEWER.Member.ManageAdvGallery Class Reference	78
5.40	ADVIEWER.Manage.ManageMaster Class Reference	79
5.40.1	Member Data Documentation	80
5.40.1.1	form1	80
5.40.1.2	head	80
5.40.1.3	Head1	80
5.40.1.4	HeadLoginView	80
5.40.1.5	mainContent	80
5.40.1.6	MoreAdvs	80
5.41	ADVIEWER.Member.MemberDefault Class Reference	81
5.42	ADVIEWER.BAL.MemberFunctions Class Reference	81
5.43	ADVIEWER.Member.MemberMaster Class Reference	82
5.43.1	Member Data Documentation	84
5.43.1.1	form1	84
5.43.1.2	GroupsRepeater	84
5.43.1.3	head	84
5.43.1.4	HeadLoginView	84

5.43.1.5	ltr_unpaid	84
5.43.1.6	ltr_username2	84
5.43.1.7	ltrprofile	84
5.43.1.8	mainContent	85
5.43.1.9	ManagerPanel	85
5.43.1.10	statesDiv	85
5.44	ADVIEWER.DAL.Message Class Reference	85
5.44.1	Detailed Description	86
5.44.2	Member Function Documentation	86
5.44.2.1	CreateMessage	86
5.44.3	Property Documentation	87
5.44.3.1	Email	87
5.44.3.2	ID	87
5.44.3.3	RegistrationDate	87
5.44.3.4	Sender	87
5.44.3.5	SenderID	87
5.44.3.6	SenderReference	87
5.44.3.7	Text	87
5.45	ADVIEWER.DAL.ModelContainer Class Reference	87
5.45.1	Detailed Description	89
5.45.2	Constructor & Destructor Documentation	90
5.45.2.1	ModelContainer	90
5.45.2.2	ModelContainer	90
5.45.2.3	ModelContainer	90
5.45.3	Member Function Documentation	90
5.45.3.1	AddToAdvertisementMessages	90
5.45.3.2	AddToAdvertisements	90
5.45.3.3	AddToContactMessages	90
5.45.3.4	AddToGroups	90
5.45.3.5	AddToKeyWords	90
5.45.3.6	AddToMessages	90
5.45.3.7	AddToPayments1	91
5.45.3.8	AddToRates	91
5.45.3.9	AddToStateCities	91
5.45.3.10	AddToTickets1	91
5.45.3.11	AddToUsers	91
5.45.4	Property Documentation	91
5.45.4.1	AdvertisementMessages	91
5.45.4.2	Advertisements	91
5.45.4.3	ContactMessages	91

5.45.4.4	Groups	91
5.45.4.5	KeyWords	91
5.45.4.6	Messages	91
5.45.4.7	Payments1	92
5.45.4.8	Rates	92
5.45.4.9	StateCities	92
5.45.4.10	Tickets1	92
5.45.4.11	Users	92
5.46	ADVIEWER.DAL.Payment Class Reference	92
5.46.1	Detailed Description	94
5.46.2	Member Function Documentation	94
5.46.2.1	CreatePayment	94
5.46.3	Property Documentation	94
5.46.3.1	AgahID	94
5.46.3.2	Bank	94
5.46.3.3	Description	94
5.46.3.4	IsRead	94
5.46.3.5	Mablagh	94
5.46.3.6	Name	94
5.46.3.7	RegisterDate	94
5.46.3.8	RequestID	94
5.46.3.9	ResidNum	95
5.46.3.10	SanadNum	95
5.46.3.11	Status	95
5.46.3.12	Tel	95
5.46.3.13	Title	95
5.46.3.14	UserID	95
5.47	ADVIEWER.Main.Profile Class Reference	95
5.47.1	Member Data Documentation	96
5.47.1.1	abottext	96
5.47.1.2	CollectionPager1	96
5.47.1.3	ltrstars	97
5.47.1.4	Repeater1	97
5.48	ADVIEWER.BAL.PublicFunctions Class Reference	97
5.49	ADVIEWER.DAL.Rate Class Reference	97
5.49.1	Detailed Description	99
5.49.2	Member Function Documentation	99
5.49.2.1	CreateRate	99
5.49.3	Property Documentation	99
5.49.3.1	Advertisement	99

5.49.3.2	AdvertisementId	99
5.49.3.3	AdvertisementReference	99
5.49.3.4	ID	99
5.49.3.5	User	99
5.49.3.6	UserId	99
5.49.3.7	UserReference	99
5.49.3.8	Value	100
5.50	ADVIEWER.Main.RatingHandler Class Reference	100
5.50.1	Detailed Description	101
5.51	ADVIEWER.Account.Register Class Reference	101
5.51.1	Member Data Documentation	102
5.51.1.1	RegisterUser	102
5.51.1.2	RegisterUserWizardStep	102
5.52	ADVIEWER.Rss Class Reference	102
5.52.1	Detailed Description	103
5.53	ADVIEWER.BAL.ShowAdvertisement Class Reference	103
5.54	ADVIEWER.Main.ShowGroupAdvs Class Reference	104
5.54.1	Member Data Documentation	104
5.54.1.1	GroupAdvRepeater	105
5.55	ADVIEWER.Main.ShowStateAdvs Class Reference	105
5.55.1	Member Data Documentation	106
5.55.1.1	GroupAdvRepeater	106
5.56	ADVIEWER.Member.SpecialAdvprivileges Class Reference	106
5.56.1	Member Data Documentation	107
5.56.1.1	form1	107
5.57	ADVIEWER.BAL.StateAndCitiesForReapeater Class Reference	107
5.58	ADVIEWER.DAL.StateCity Class Reference	107
5.58.1	Detailed Description	109
5.58.2	Member Function Documentation	109
5.58.2.1	CreateStateCity	109
5.58.3	Property Documentation	109
5.58.3.1	Advertisements	109
5.58.3.2	Cities	109
5.58.3.3	ID	109
5.58.3.4	Name	109
5.58.3.5	State	109
5.58.3.6	StatId	109
5.58.3.7	StateReference	109
5.59	ADVIEWER.Main.StateCityList Class Reference	110
5.59.1	Member Data Documentation	110

5.59.1.1 Repeater1	110
5.60 ADVIEWER.Manage.StatesCitiesList Class Reference	111
5.60.1 Member Data Documentation	112
5.60.1.1 AddCityButton	112
5.60.1.2 CityStateNameTextBox	112
5.60.1.3 RequiredFieldValidator1	112
5.60.1.4 statesCitiesGridView	112
5.60.1.5 StatesDropDownList	112
5.61 ADVIEWER.Member.TestMail Class Reference	113
5.61.1 Member Data Documentation	113
5.61.1.1 Button1	113
5.61.1.2 form1	114
5.62 ADVIEWER.BAL.Thumbnail Class Reference	114
5.63 ADVIEWER.DAL.Ticket Class Reference	115
5.63.1 Detailed Description	116
5.63.2 Member Function Documentation	116
5.63.2.1 CreateTicket	116
5.63.3 Property Documentation	116
5.63.3.1 Answer	116
5.63.3.2 ID	116
5.63.3.3 IsRead	116
5.63.3.4 LastUpdate	117
5.63.3.5 Priority	117
5.63.3.6 RegDate	117
5.63.3.7 Text	117
5.63.3.8 Title	117
5.63.3.9 User	117
5.63.3.10 UserID	117
5.63.3.11 UserReference	117
5.64 ADVIEWER.Manage.Tickets Class Reference	118
5.64.1 Member Data Documentation	118
5.64.1.1 DeleteAllTickets	119
5.64.1.2 TicketGridView	119
5.65 ADVIEWER.Member.TicketsList Class Reference	119
5.65.1 Member Data Documentation	120
5.65.1.1 DeleteAllTickets	120
5.65.1.2 TicketGridView	120
5.66 ADVIEWER.Manage.UnconfirmedAdvs Class Reference	120
5.66.1 Member Data Documentation	122
5.66.1.1 ConfirmFreeAdvsButton	122

5.66.1.2	ConfirmStaredAdvsButton	122
5.66.1.3	DenyFreeAdvsButton	122
5.66.1.4	denyReasonStaredTextBox	122
5.66.1.5	DenyStaredAdvsButton	122
5.66.1.6	FreeAdvsGridView	122
5.66.1.7	staredAdvsGridView	122
5.66.1.8	TextBox2	123
5.67	ADVIEWER.DAL.User Class Reference	123
5.67.1	Detailed Description	125
5.67.2	Member Function Documentation	125
5.67.2.1	CreateUser	125
5.67.3	Property Documentation	125
5.67.3.1	About	125
5.67.3.2	Address	125
5.67.3.3	Advertisements	125
5.67.3.4	BannedMsg	125
5.67.3.5	CityID	125
5.67.3.6	CommentDatas	125
5.67.3.7	Fax	125
5.67.3.8	FullName	126
5.67.3.9	Groups	126
5.67.3.10	ID	126
5.67.3.11	IsManager	126
5.67.3.12	LastLogin	126
5.67.3.13	Mail	126
5.67.3.14	Mobile	126
5.67.3.15	PicAddress	126
5.67.3.16	Ratings	126
5.67.3.17	RegisterDate	126
5.67.3.18	StateID	126
5.67.3.19	Tell	126
5.67.3.20	Tickets	127
5.67.3.21	UserMessage	127
5.67.3.22	UserProviderKey	127
5.67.3.23	YahooID	127
5.68	ADVIEWER.DAL.UserMessage Class Reference	127
5.68.1	Detailed Description	128
5.68.2	Member Function Documentation	128
5.68.2.1	CreateUserMessage	128
5.68.3	Property Documentation	129

5.68.3.1	Reciever	129
5.68.3.2	RecieverID	129
5.68.3.3	RecieverReference	129
5.69	ADVIEWER.Manage.ViewComment Class Reference	129
5.69.1	Member Data Documentation	130
5.69.1.1	CommentText	130
5.70	ADVIEWER.Member.ViewTicket Class Reference	131
5.70.1	Member Data Documentation	132
5.70.1.1	answerdatediv	132
5.70.1.2	ticketAnswer	132
5.71	ADVIEWER.Manage.ViewTicket Class Reference	132
5.71.1	Member Data Documentation	133
5.71.1.1	AnswerTextBox	133
5.71.1.2	sendButton	133
5.71.1.3	txt	134
5.72	ADVIEWER.BAL.PublicFunctions.Wight Struct Reference	134

Chapter 1

Namespace Index

1.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

ADVIEWER	??
ADVIEWER.Account	??
ADVIEWER.BAL	??
ADVIEWER.DAL	??
ADVIEWER.Main	??
ADVIEWER.Manage	??
ADVIEWER.Member	??

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

ADVIEWER.BAL.AccountFunctions	??
ADVIEWER.BAL.AssignorParent	??
ADVIEWER.BAL.AssignorAdvertisement	??
ADVIEWER.BAL.AssignorGroup	??
ADVIEWER.BAL.AssignorMessage	??
ADVIEWER.BAL.AssignorComment	??
ADVIEWER.BAL.AssignorRate	??
ADVIEWER.BAL.AssignorStateCity	??
ADVIEWER.BAL.AssignorTicket	??
ADVIEWER.BAL.AssignorUser	??
ADVIEWER.BAL.AssignorUserMessage	??
EntityObject	
ADVIEWER.DAL.AdvertisementMessage	??
ADVIEWER.DAL.Advertisement	??
ADVIEWER.DAL.ContactMessage	??
ADVIEWER.DAL.Group	??
ADVIEWER.DAL.KeyWord	??
ADVIEWER.DAL.Message	??
ADVIEWER.DAL.Comment	??
ADVIEWER.DAL.UserMessage	??
ADVIEWER.DAL.Payment	??
ADVIEWER.DAL.Rate	??
ADVIEWER.DAL.StateCity	??
ADVIEWER.DAL.Ticket	??
ADVIEWER.DAL.User	??
ADVIEWER.BAL.FilesStatus	??
HttpApplication	
ADVIEWER.Main.Global	??
IHttpHandler	
ADVIEWER.BAL.FileTransferHandler	??
ADVIEWER.BAL.Thumbnail	??
ADVIEWER.Main.RatingHandler	??
IRequiresSessionState	
ADVIEWER.Main.RatingHandler	??
MasterPage	
ADVIEWER.Main.MainMaster	??
ADVIEWER.Manage.ManageMaster	??

ADVIEWER.Member.MemberMaster	??
ADVIEWER.BAL.MemberFunctions	??
ObjectContext	
ADVIEWER.DAL.ModelContainer	??
Page	
ADVIEWER.Account.ChangePassword	??
ADVIEWER.Account.Login	??
ADVIEWER.Account.Register	??
ADVIEWER.BAL.JsonMaker	??
ADVIEWER.Main._404	??
ADVIEWER.Main._Default	??
ADVIEWER.Main.About	??
ADVIEWER.Main.AdvContent	??
ADVIEWER.Main.Profile	??
ADVIEWER.Main.ShowGroupAdvs	??
ADVIEWER.Main.ShowStateAdvs	??
ADVIEWER.Main.StateCityList	??
ADVIEWER.Manage.CommentsList	??
ADVIEWER.Manage.Default	??
ADVIEWER.Manage.EditGroup	??
ADVIEWER.Manage.EditStateCity	??
ADVIEWER.Manage.GroupsList	??
ADVIEWER.Manage.StatesCitiesList	??
ADVIEWER.Manage.Tickets	??
ADVIEWER.Manage.UnconfirmedAdvs	??
ADVIEWER.Manage.ViewComment	??
ADVIEWER.Manage.ViewTicket	??
ADVIEWER.Member.AddNewAdv	??
ADVIEWER.Member.AddNewTicket	??
ADVIEWER.Member.AdvsList	??
ADVIEWER.Member.Avatar	??
ADVIEWER.Member.EditProfile	??
ADVIEWER.Member.ManageAdvGallery	??
ADVIEWER.Member.MemberDefault	??
ADVIEWER.Member.SpecialAdvprivileges	??
ADVIEWER.Member.TestMail	??
ADVIEWER.Member.TicketsList	??
ADVIEWER.Member.ViewTicket	??
ADVIEWER.BAL.PublicFunctions	??
RssDocumentHttpHandler	
ADVIEWER.Rss	??
ADVIEWER.BAL.ShowAdvertisement	??
ADVIEWER.BAL.StateAndCitiesForRepeater	??
ADVIEWER.BAL.PublicFunctions.Wight	??

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

ADVIEWER.Main._404	??
ADVIEWER.Main._Default	??
ADVIEWER.Main.About	??
ADVIEWER.BAL.AccountFunctions	??
ADVIEWER.Member.AddNewAdv	??
ADVIEWER.Member.AddNewTicket	??
ADVIEWER.Main.AdvContent	??
ADVIEWER.DAL.AdvertisementMessage	
No Metadata Documentation available.	??
ADVIEWER.DAL.Advertisement	
No Metadata Documentation available.	??
ADVIEWER.Member.AdvsList	??
ADVIEWER.BAL.AssignorAdvertisment	??
ADVIEWER.BAL.AssignorComment	??
ADVIEWER.BAL.AssignorGroup	??
ADVIEWER.BAL.AssignorMessage	??
ADVIEWER.BAL.AssignorParent	??
ADVIEWER.BAL.AssignorRate	??
ADVIEWER.BAL.AssignorStateCity	??
ADVIEWER.BAL.AssignorTicket	??
ADVIEWER.BAL.AssignorUser	??
ADVIEWER.BAL.AssignorUserMessage	??
ADVIEWER.Member.Avatar	??
ADVIEWER.Account.ChangePassword	??
ADVIEWER.DAL.Comment	
No Metadata Documentation available.	??
ADVIEWER.Manage.CommentsList	??
ADVIEWER.DAL.ContactMessage	
No Metadata Documentation available.	??
ADVIEWER.Manage.Default	??
ADVIEWER.Manage.EditGroup	??
ADVIEWER.Member.EditProfile	??
ADVIEWER.Manage.EditStateCity	??
ADVIEWER.BAL.FilesStatus	??
ADVIEWER.BAL.FileTransferHandler	??
ADVIEWER.Main.Global	??
ADVIEWER.DAL.Group	
No Metadata Documentation available.	??

ADVIEWER.Manage.GroupsList	??
ADVIEWER.BAL.JsonMaker	??
ADVIEWER.DAL.KeyWord	
No Metadata Documentation available.	??
ADVIEWER.Account.Login	??
ADVIEWER.Main.MainMaster	??
ADVIEWER.Member.ManageAdvGallery	??
ADVIEWER.Manage.ManageMaster	??
ADVIEWER.Member.MemberDefault	??
ADVIEWER.BAL.MemberFunctions	??
ADVIEWER.Member.MemberMaster	??
ADVIEWER.DAL.Message	
No Metadata Documentation available.	??
ADVIEWER.DAL.ModelContainer	
No Metadata Documentation available.	??
ADVIEWER.DAL.Payment	
No Metadata Documentation available.	??
ADVIEWER.Main.Profile	??
ADVIEWER.BAL.PublicFunctions	??
ADVIEWER.DAL.Rate	
No Metadata Documentation available.	??
ADVIEWER.Main.RatingHandler	
Summary description for RatingHandler	??
ADVIEWER.Account.Register	??
ADVIEWER.Rss	
Summary description for Rss	??
ADVIEWER.BAL.ShowAdvertisement	??
ADVIEWER.Main.ShowGroupAdvs	??
ADVIEWER.Main.ShowStateAdvs	??
ADVIEWER.Member.SpecialAdvprivileges	??
ADVIEWER.BAL.StateAndCitiesForReapeater	??
ADVIEWER.DAL.StateCity	
No Metadata Documentation available.	??
ADVIEWER.Main.StateCityList	??
ADVIEWER.Manage.StatesCitiesList	??
ADVIEWER.Member.TestMail	??
ADVIEWER.BAL.Thumbnail	??
ADVIEWER.DAL.Ticket	
No Metadata Documentation available.	??
ADVIEWER.Manage.Tickets	??
ADVIEWER.Member.TicketsList	??
ADVIEWER.Manage.UnconfirmedAdvs	??
ADVIEWER.DAL.User	
No Metadata Documentation available.	??
ADVIEWER.DAL.UserMessage	
No Metadata Documentation available.	??
ADVIEWER.Manage.ViewComment	??
ADVIEWER.Member.ViewTicket	??
ADVIEWER.Manage.ViewTicket	??
ADVIEWER.BAL.PublicFunctions.Wight	??

Chapter 4

Namespace Documentation

4.1 Package ADVIEWER

Namespaces

- package [Account](#)
- package [BAL](#)
- package [DAL](#)
- package [Main](#)
- package [Manage](#)
- package [Member](#)

Classes

- class [Rss](#)
Summary description for [Rss](#)

4.2 Package ADVIEWER.Account

Classes

- class [ChangePassword](#)
- class [Login](#)
- class [Register](#)

4.3 Package ADVIEWER.BAL

Classes

- class [AccountFunctions](#)
- class [JsonMaker](#)
- class [MemberFunctions](#)
- class [ShowAdvertisement](#)
- class [PublicFunctions](#)
- class [StateAndCitiesForReapeater](#)
- class [AssignorParent](#)
- class [AssignorTicket](#)

- class [AssignorRate](#)
- class [AssignorUser](#)
- class [AssignorAdvertisement](#)
- class [AssignorGroup](#)
- class [AssignorStateCity](#)
- class [AssignorMessage](#)
- class [AssignorComment](#)
- class [AssignorUserMessage](#)
- class [FilesStatus](#)
- class [FileTransferHandler](#)
- class [Thumbnail](#)

4.4 Package ADVIEWER.DAL

Classes

- class [ModelContainer](#)
No Metadata Documentation available.
- class [AdvertisementMessage](#)
No Metadata Documentation available.
- class [Advertisement](#)
No Metadata Documentation available.
- class [Comment](#)
No Metadata Documentation available.
- class [ContactMessage](#)
No Metadata Documentation available.
- class [Group](#)
No Metadata Documentation available.
- class [KeyWord](#)
No Metadata Documentation available.
- class [Message](#)
No Metadata Documentation available.
- class [Payment](#)
No Metadata Documentation available.
- class [Rate](#)
No Metadata Documentation available.
- class [StateCity](#)
No Metadata Documentation available.
- class [Ticket](#)
No Metadata Documentation available.
- class [User](#)
No Metadata Documentation available.
- class [UserMessage](#)
No Metadata Documentation available.

4.5 Package ADVIEWER.Main

Classes

- class [_404](#)
- class [About](#)
- class [AdvContent](#)
- class [_Default](#)
- class [Global](#)
- class [MainMaster](#)
- class [Profile](#)
- class [RatingHandler](#)
Summary description for [RatingHandler](#)
- class [ShowGroupAdvs](#)
- class [ShowStateAdvs](#)
- class [StateCityList](#)

4.6 Package ADVIEWER.Manage

Classes

- class [CommentsList](#)
- class [Default](#)
- class [EditGroup](#)
- class [EditStateCity](#)
- class [GroupsList](#)
- class [ManageMaster](#)
- class [StatesCitiesList](#)
- class [Tickets](#)
- class [UnconfirmedAdvs](#)
- class [ViewComment](#)
- class [ViewTicket](#)

4.7 Package ADVIEWER.Member

Classes


- class [AddNewAdv](#)
- class [AddNewTicket](#)
- class [AdvsList](#)
- class [Avatar](#)
- class [EditProfile](#)
- class [ManageAdvGallery](#)
- class [MemberDefault](#)
- class [MemberMaster](#)
- class [SpecialAdvprivileges](#)
- class [TestMail](#)
- class [TicketsList](#)
- class [ViewTicket](#)

Chapter 5


Class Documentation

5.1 ADVIEWER.Main._404 Class Reference

Inheritance diagram for ADVIEWER.Main._404:



Collaboration diagram for ADVIEWER.Main._404:



Protected Member Functions


- void **Page_Load** (object sender, EventArgs e)

The documentation for this class was generated from the following file:


- 404.aspx.cs

5.2 ADVIEWER.Main._Default Class Reference

Inheritance diagram for ADVIEWER.Main._Default:



Collaboration diagram for ADVIEWER.Main._Default:

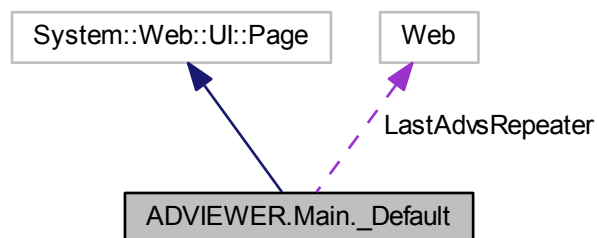

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Repeater [LastAdvsRepeater](#)
LastAdvsRepeater control.

5.2.1 Member Data Documentation

5.2.1.1 global.System.Web.UI.WebControls.Repeater ADVIEWER.Main._Default.LastAdvsRepeater [protected]

LastAdvsRepeater control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Default.aspx.cs
- Default.aspx.designer.cs

5.3 ADVIEWER.Main.About Class Reference

Inheritance diagram for ADVIEWER.Main.About:



Collaboration diagram for ADVIEWER.Main.About:



Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

The documentation for this class was generated from the following file:

- About.aspx.cs

5.4 ADVIEWER.BAL.AccountFunctions Class Reference

Static Public Member Functions


- static bool **newUser** (Guid UserId, string UserFullName, string mail)
- static void **SetLastLogin** (Guid UserId)
- static int **currentUserId** ()
- static [AssignorUser](#) **GetUserInformation** (int UserID)
- static void **UpdateUserInfo** (Int32 id, String fullName, String about, String address, String fax, String mobile, String tell, String yahoold, String favgroups)
- static bool **IsManager** ()

The documentation for this class was generated from the following file:


- BAL/AccountFunctions.cs

5.5 ADVIEWER.Member.AddNewAdv Class Reference

Inheritance diagram for ADVIEWER.Member.AddNewAdv:

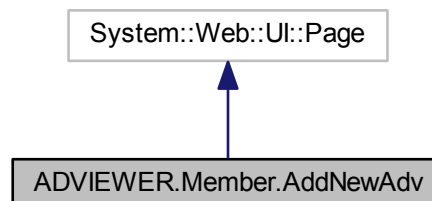

Collaboration diagram for ADVIEWER.Member.AddNewAdv:

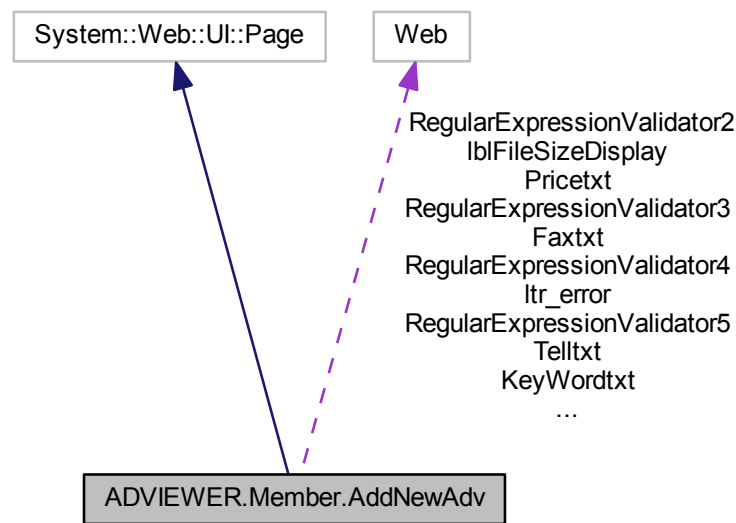

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **Button1_Click** (object sender, EventArgs e)
- void **AsyncFileUpload1_UploadedComplete** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Literal [SuccessMessage](#)
SuccessMessage control.
- global::System.Web.UI.WebControls.Literal [ltr_error](#)
ltr_error control.
- global::System.Web.UI.WebControls.DropDownList [AdvKindDrop](#)
AdvKindDrop control.
- global::System.Web.UI.WebControls.DropDownList [MonthDrop](#)
MonthDrop control.
- global::System.Web.UI.WebControls.DropDownList [groupsDropDownList](#)
groupsDropDownList control.
- global::System.Web.UI.WebControls.DropDownList [StateCityDropDownList](#)
StateCityDropDownList control.
- global::System.Web.UI.WebControls.TextBox [AdvTitleTxt](#)
AdvTitleTxt control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- global::System.Web.UI.WebControls.TextBox [AdvShorttxt](#)
AdvShorttxt control.
- global::System.Web.UI.WebControls.TextBox [AdvTexttxt](#)

- AdvTexttxt control.*

 - global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator2](#)

RequiredFieldValidator2 control.
- global::System.Web.UI.WebControls.TextBox [KeyWordtxt](#)

KeyWordtxt control.
- global::System.Web.UI.WebControls.TextBox [Pricetxt](#)

Pricetxt control.
- global::System.Web.UI.WebControls.RegularExpressionValidator [RegularExpressionValidator3](#)

RegularExpressionValidator3 control.
- global::System.Web.UI.WebControls.TextBox [Linktxt](#)

Linktxt control.
- global::AjaxControlToolkit.ToolkitScriptManager [ToolkitScriptManager1](#)

ToolkitScriptManager1 control.
- global::AjaxControlToolkit.AsyncFileUpload [AsyncFileUpload1](#)

AsyncFileUpload1 control.
- global::System.Web.UI.WebControls.Image [imgLoader](#)

imgLoader control.
- global::System.Web.UI.WebControls.Label [lblErrorStatus](#)

lblErrorStatus control.
- global::System.Web.UI.WebControls.Label [lblMesg](#)

lblMesg control.
- global::System.Web.UI.WebControls.Label [lblSuccess](#)

lblSuccess control.
- global::System.Web.UI.WebControls.Label [lblFileName](#)

lblFileName control.
- global::System.Web.UI.WebControls.Label [lblFileNameDisplay](#)

lblFileNameDisplay control.
- global::System.Web.UI.WebControls.Label [lblFileSize](#)

lblFileSize control.
- global::System.Web.UI.WebControls.Label [lblFileSizeDisplay](#)

lblFileSizeDisplay control.
- global::System.Web.UI.WebControls.Label [lblContentType](#)

lblContentType control.
- global::System.Web.UI.WebControls.Label [lblContentTypeDisplay](#)

lblContentTypeDisplay control.
- global::System.Web.UI.WebControls.TextBox [Nametxt](#)

Nametxt control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator4](#)

RequiredFieldValidator4 control.
- global::System.Web.UI.WebControls.TextBox [Mobiletxt](#)

Mobiletxt control.
- global::System.Web.UI.WebControls.RegularExpressionValidator [RegularExpressionValidator4](#)

RegularExpressionValidator4 control.
- global::System.Web.UI.WebControls.TextBox [Telltxt](#)

Telltxt control.
- global::System.Web.UI.WebControls.RegularExpressionValidator [RegularExpressionValidator5](#)

RegularExpressionValidator5 control.
- global::System.Web.UI.WebControls.TextBox [Faxtxt](#)

Faxtxt control.
- global::System.Web.UI.WebControls.TextBox [TellTimetxt](#)

TellTimetxt control.

- `global::System.Web.UI.WebControls.TextBox` [Emailtxt](#)
Emailtxt control.
- `global::System.Web.UI.WebControls.RequiredFieldValidator` [RequiredFieldValidator3](#)
RequiredFieldValidator3 control.
- `global::System.Web.UI.WebControls.RegularExpressionValidator` [RegularExpressionValidator1](#)
RegularExpressionValidator1 control.
- `global::System.Web.UI.WebControls.TextBox` [YahoolDtxt](#)
YahoolDtxt control.
- `global::System.Web.UI.WebControls.RegularExpressionValidator` [RegularExpressionValidator2](#)
RegularExpressionValidator2 control.
- `global::System.Web.UI.WebControls.TextBox` [Addresstxt](#)
Addresstxt control.
- `global::System.Web.UI.WebControls.Button` [Button1](#)
Button1 control.

5.5.1 Member Data Documentation

5.5.1.1 `global.System.Web.UI.WebControls.TextBox` ADVIEWER.Member.AddNewAdv.Addresstxt [protected]

Addresstxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.2 `global.System.Web.UI.WebControls.DropDownList` ADVIEWER.Member.AddNewAdv.AdvKindDrop [protected]

AdvKindDrop control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.3 `global.System.Web.UI.WebControls.TextBox` ADVIEWER.Member.AddNewAdv.AdvShorttxt [protected]

AdvShorttxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.4 `global.System.Web.UI.WebControls.TextBox` ADVIEWER.Member.AddNewAdv.AdvTexttxt [protected]

AdvTexttxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.5 `global.System.Web.UI.WebControls.TextBox` ADVIEWER.Member.AddNewAdv.AdvTitleTxt [protected]

AdvTitleTxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.6 `global.AjaxControlToolkit.AsyncFileUpload` ADVIEWER.Member.AddNewAdv.AsyncFileUpload1 [protected]

AsyncFileUpload1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.7 `global.System.Web.UI.WebControls.Button ADVIEWER.Member.AddNewAdv.Button1` [protected]

Button1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.8 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Emailtxt` [protected]

Emailtxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.9 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Faxtxt` [protected]

Faxtxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.10 `global.System.Web.UI.WebControls.DropDownList ADVIEWER.Member.AddNewAdv.groupsDropDownList`
[protected]

groupsDropDownList control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.11 `global.System.Web.UI.WebControls.Image ADVIEWER.Member.AddNewAdv.imgLoader` [protected]

imgLoader control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.12 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.KeyWordtxt` [protected]

KeyWordtxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.13 `global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblContentType` [protected]

IblContentType control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.14 `global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblContentTypeDisplay` [protected]

IblContentTypeDisplay control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.15 `global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblErrorStatus` [protected]

IblErrorStatus control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.16 `global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblFileName` `[protected]`

IblFileName control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.17 `global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblFileNameDisplay` `[protected]`

IblFileNameDisplay control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.18 `global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblFileSize` `[protected]`

IblFileSize control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.19 `global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblFileSizeDisplay` `[protected]`

IblFileSizeDisplay control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.20 `global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblMesg` `[protected]`

IblMesg control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.21 `global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblSuccess` `[protected]`

IblSuccess control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.22 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Linktxt` `[protected]`

Linktxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.23 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.AddNewAdv.ltr_error` `[protected]`

ltr_error control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.24 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Mobiletxt` `[protected]`

Mobiletxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.25 `global.System.Web.UI.WebControls.DropDownList ADVIEWER.Member.AddNewAdv.MonthDrop` [protected]

MonthDrop control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.26 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Nametxt` [protected]

Nametxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.27 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Pricetxt` [protected]

Pricetxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.28 `global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.AddNewAdv.RegularExpressionValidator1` [protected]

RegularExpressionValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.29 `global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.AddNewAdv.RegularExpressionValidator2` [protected]

RegularExpressionValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.30 `global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.AddNewAdv.RegularExpressionValidator3` [protected]

RegularExpressionValidator3 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.31 `global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.AddNewAdv.RegularExpressionValidator4` [protected]

RegularExpressionValidator4 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.32 `global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.AddNewAdv.RegularExpressionValidator5` [protected]

RegularExpressionValidator5 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.33 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.AddNewAdv.RequiredFieldValidator1`
[protected]

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.34 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.AddNewAdv.RequiredFieldValidator2`
[protected]

RequiredFieldValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.35 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.AddNewAdv.RequiredFieldValidator3`
[protected]

RequiredFieldValidator3 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.36 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.AddNewAdv.RequiredFieldValidator4`
[protected]

RequiredFieldValidator4 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.37 `global.System.Web.UI.WebControls.DropDownList ADVIEWER.Member.AddNewAdv.StateCityDropDownList`
[protected]

StateCityDropDownList control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.38 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.AddNewAdv.SuccessMessage` [protected]

SuccessMessage control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.39 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.TellTimetxt` [protected]

TellTimetxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.40 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Telltxt` [protected]

Telltxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.41 `global.AjaxControlToolkit.ToolkitScriptManager ADVIEWER.Member.AddNewAdv.ToolkitScriptManager1` [protected]

ToolkitScriptManager1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.42 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.YahooIDtxt` [protected]

YahooIDtxt control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/AddNewAdv.aspx.cs
- Member/AddNewAdv.aspx.designer.cs

5.6 ADVIEWER.Member.AddNewTicket Class Reference

Inheritance diagram for ADVIEWER.Member.AddNewTicket:

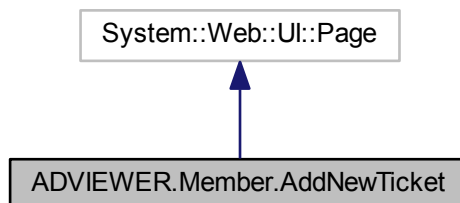

Collaboration diagram for ADVIEWER.Member.AddNewTicket:

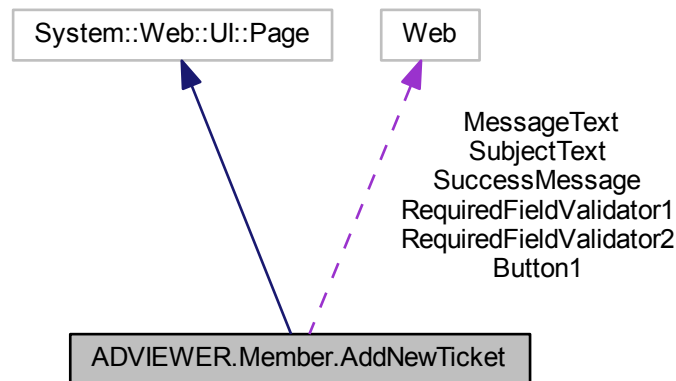

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **Button1_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Literal [SuccessMessage](#)
SuccessMessage control.
- global::System.Web.UI.WebControls.TextBox [SubjectText](#)
SubjectText control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- global::System.Web.UI.WebControls.TextBox [MessageText](#)
MessageText control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator2](#)
RequiredFieldValidator2 control.
- global::System.Web.UI.WebControls.Button [Button1](#)
Button1 control.

5.6.1 Member Data Documentation

5.6.1.1 global.System.Web.UI.WebControls.Button ADVIEWER.Member.AddNewTicket.Button1 [protected]

Button1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.6.1.2 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewTicket.MessageText [protected]

MessageText control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.6.1.3 `global.System.Web.UI.WebControls.RequiredFieldValidator` `ADVIEWER.Member.AddNewTicket.RequiredFieldValidator1` `[protected]`

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.6.1.4 `global.System.Web.UI.WebControls.RequiredFieldValidator` `ADVIEWER.Member.AddNewTicket.RequiredFieldValidator2` `[protected]`

RequiredFieldValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.6.1.5 `global.System.Web.UI.WebControls.TextBox` `ADVIEWER.Member.AddNewTicket.SubjectText` `[protected]`

SubjectText control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.6.1.6 `global.System.Web.UI.WebControls.Literal` `ADVIEWER.Member.AddNewTicket.SuccessMessage` `[protected]`

SuccessMessage control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/AddNewTicket.aspx.cs
- Member/AddNewTicket.aspx.designer.cs

5.7 `ADVIEWER.Main.AdvContent` Class Reference

Inheritance diagram for `ADVIEWER.Main.AdvContent`:

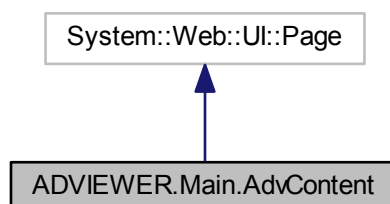

Collaboration diagram for ADVIEWER.Main.AdvContent:

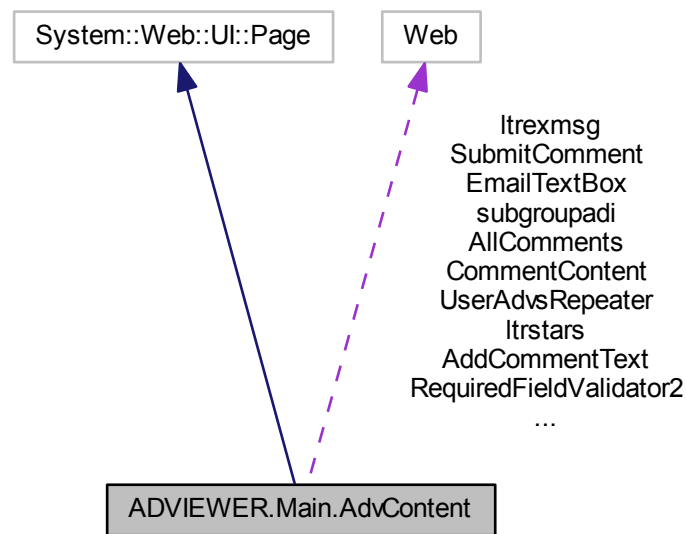

Public Attributes

- [AssignorAdvertisement](#) **curAdv**
- [AssignorUser](#) **CurUser**
- Single **UserAdvRate** = 0
- int **CountOfRates**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **LoadUserAdvertisements** ()
- void **UserAdvsRepeater_PreRender** (object sender, EventArgs e)
- void **SubmitComment_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [AddCommentText](#)
AddCommentText control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator3](#)
RequiredFieldValidator3 control.
- global::System.Web.UI.WebControls.TextBox [EmailTextBox](#)
EmailTextBox control.
- global::System.Web.UI.WebControls.Button [SubmitComment](#)
SubmitComment control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator2](#)
RequiredFieldValidator2 control.
- global::System.Web.UI.WebControls.RegularExpressionValidator [RegularExpressionValidator1](#)

- RegularExpressionValidator1 control.*
- `global::System.Web.UI.HtmlControls.HtmlGenericControl` [CommentContent](#)
CommentContent control.
- `global::System.Web.UI.HtmlControls.HtmlGenericControl` [AllComments](#)
AllComments control.
- `global::System.Web.UI.WebControls.Literal` [ltrstars](#)
ltrstars control.
- `global::System.Web.UI.HtmlControls.HtmlGenericControl` [imglist](#)
imglist control.
- `global::System.Web.UI.WebControls.Literal` [ltrexmsg](#)
ltrexmsg control.
- `global::System.Web.UI.HtmlControls.HtmlGenericControl` [subgroupadi](#)
subgroupadi control.
- `global::System.Web.UI.WebControls.Repeater` [UserAdvsRepeater](#)
UserAdvsRepeater control.

5.7.1 Member Data Documentation

5.7.1.1 `global.System.Web.UI.WebControls.TextBox` `ADVIEWS.Main.AdvContent.AddCommentText` [protected]

AddCommentText control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.2 `global.System.Web.UI.HtmlControls.HtmlGenericControl` `ADVIEWS.Main.AdvContent.AllComments` [protected]

AllComments control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.3 `global.System.Web.UI.HtmlControls.HtmlGenericControl` `ADVIEWS.Main.AdvContent.CommentContent` [protected]

CommentContent control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.4 `global.System.Web.UI.WebControls.TextBox` `ADVIEWS.Main.AdvContent.EmailTextBox` [protected]

EmailTextBox control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.5 `global.System.Web.UI.HtmlControls.HtmlGenericControl` `ADVIEWS.Main.AdvContent.imglist` [protected]

imglist control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.6 `global.System.Web.UI.WebControls.Literal` `ADVIEWS.Main.AdvContent.ltrexmsg` [protected]

ltrexmsg control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.7 global.System.Web.UI.WebControls.Literal ADVIEWER.Main.AdvContent.ltrstars [protected]

ltrstars control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.8 global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Main.AdvContent.RegularExpressionValidator1 [protected]

RegularExpressionValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.9 global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Main.AdvContent.RequiredFieldValidator2 [protected]

RequiredFieldValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.10 global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Main.AdvContent.RequiredFieldValidator3 [protected]

RequiredFieldValidator3 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.11 global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Main.AdvContent.subgroupadi [protected]

subgroupadi control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.12 global.System.Web.UI.WebControls.Button ADVIEWER.Main.AdvContent.SubmitComment [protected]

SubmitComment control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.13 global.System.Web.UI.WebControls.Repeater ADVIEWER.Main.AdvContent.UserAdvsRepeater [protected]

UserAdvsRepeater control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- AdvContent.aspx.cs
- AdvContent.aspx.designer.cs


5.8 ADVIEWER.DAL.AdvertisementMessage Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.AdvertisementMessage:

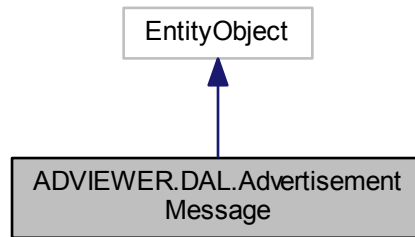

Collaboration diagram for ADVIEWER.DAL.AdvertisementMessage:

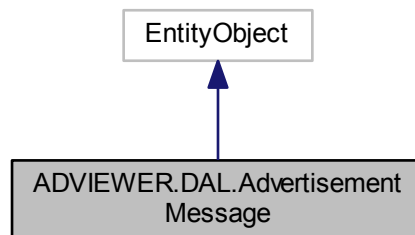

Static Public Member Functions

- static [AdvertisementMessage CreateAdvertisementMessage](#) (global::System.Int64 id)
Create a new [AdvertisementMessage](#) object.

Properties

- global::System.Int64 [ID](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int64 > [AgahiID](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int64 > [UserID](#) [get, set]
No Metadata Documentation available.
- global::System.String [FullName](#) [get, set]
No Metadata Documentation available.
- global::System.String [Email](#) [get, set]
No Metadata Documentation available.
- global::System.String [Text](#) [get, set]

No Metadata Documentation available.

- Nullable< global::System.DateTime > [Date](#) [get, set]

No Metadata Documentation available.

- Nullable< global::System.Boolean > [IsRead](#) [get, set]

No Metadata Documentation available.

- global::System.String [Tell](#) [get, set]

No Metadata Documentation available.

- Nullable< global::System.Boolean > [Inbox](#) [get, set]

No Metadata Documentation available.

- global::System.String [reply](#) [get, set]

No Metadata Documentation available.

5.8.1 Detailed Description

No Metadata Documentation available.

5.8.2 Member Function Documentation

5.8.2.1 static **AdvertisementMessage** ADVIEWER.DAL.AdvertisementMessage.CreateAdvertisementMessage (global::System.Int64 *id*) [inline], [static]

Create a new [AdvertisementMessage](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
-----------	-----------------------------------

5.8.3 Property Documentation

5.8.3.1 Nullable<global.System.Int64> **ADVIEWER.DAL.AdvertisementMessage.AgahiID** [get], [set]

No Metadata Documentation available.

5.8.3.2 Nullable<global.System.DateTime> **ADVIEWER.DAL.AdvertisementMessage.Date** [get], [set]

No Metadata Documentation available.

5.8.3.3 global.System.String **ADVIEWER.DAL.AdvertisementMessage.Email** [get], [set]

No Metadata Documentation available.

5.8.3.4 global.System.String **ADVIEWER.DAL.AdvertisementMessage.FullName** [get], [set]

No Metadata Documentation available.

5.8.3.5 global.System.Int64 **ADVIEWER.DAL.AdvertisementMessage.ID** [get], [set]

No Metadata Documentation available.

5.8.3.6 `Nullable<global.System.Boolean> ADVIEWER.DAL.AdvertisementMessage.Inbox` `[get]`, `[set]`

No Metadata Documentation available.

5.8.3.7 `Nullable<global.System.Boolean> ADVIEWER.DAL.AdvertisementMessage.IsRead` `[get]`, `[set]`

No Metadata Documentation available.

5.8.3.8 `global.System.String ADVIEWER.DAL.AdvertisementMessage.reply` `[get]`, `[set]`

No Metadata Documentation available.

5.8.3.9 `global.System.String ADVIEWER.DAL.AdvertisementMessage.Tell` `[get]`, `[set]`

No Metadata Documentation available.

5.8.3.10 `global.System.String ADVIEWER.DAL.AdvertisementMessage.Text` `[get]`, `[set]`

No Metadata Documentation available.

5.8.3.11 `Nullable<global.System.Int64> ADVIEWER.DAL.AdvertisementMessage.UserID` `[get]`, `[set]`

No Metadata Documentation available.


The documentation for this class was generated from the following file:

- `DAL/Model1.Designer.cs`


5.9 ADVIEWER.DAL.Advertisement Class Reference

No Metadata Documentation available.

Inheritance diagram for `ADVIEWER.DAL.Advertisement`:

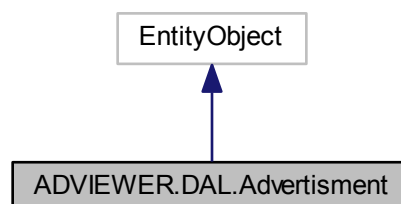

Collaboration diagram for ADVIEWER.DAL.Advertisement:

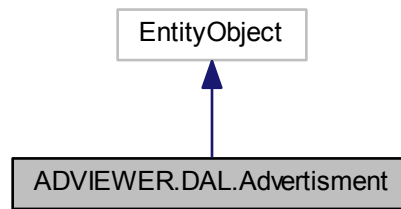

Static Public Member Functions

- static [Advertisement CreateAdvertisement](#) (global::System.Int32 id, global::System.Int32 groupId, global::System.Int32 starCount, global::System.String title, global::System.String description, global::System.String fullName, global::System.String email, global::System.DateTime expirationDate, global::System.DateTime registrationDate, global::System.DateTime lastRenewal, global::System.Int32 reviewCount, global::System.String tellTime, global::System.Int32 advDuration, global::System.Int32 userId)

Create a new [Advertisement](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.Int32 [GroupID](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [StateCityID](#) [get, set]
No Metadata Documentation available.
- global::System.Int32 [StarCount](#) [get, set]
No Metadata Documentation available.
- global::System.String [Title](#) [get, set]
No Metadata Documentation available.
- global::System.String [ShortDescription](#) [get, set]
No Metadata Documentation available.
- global::System.String [Description](#) [get, set]
No Metadata Documentation available.
- global::System.String [Pic](#) [get, set]
No Metadata Documentation available.
- global::System.Boolean [IsConfirmed](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Boolean > [IsPaid](#) [get, set]
No Metadata Documentation available.
- global::System.Boolean [IsRead](#) [get, set]
No Metadata Documentation available.
- global::System.String [DenyReason](#) [get, set]
No Metadata Documentation available.
- global::System.String [FullName](#) [get, set]

- No Metadata Documentation available.*

 - global::System.String [Tell](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.String [Mobile](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.String [Address](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.String [Email](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.String [YahooID](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.String [Price](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.DateTime [ExpirationDate](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.DateTime [RegistrationDate](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.DateTime [LastRenewal](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.Int32 [ReviewCount](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.String [TellTime](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.String [Link](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - Nullable< global::System.Int64 > [PaidID](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.Int32 [AdvDuration](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - global::System.Int32 [UserId](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - EntityCollection< [Keyword](#) > [Keywords](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - [User](#) [User](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - EntityReference< [User](#) > [UserReference](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - [Group](#) [Group](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - EntityReference< [Group](#) > [GroupReference](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - EntityCollection< [Rate](#) > [Ratings](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - [StateCity](#) [StateCity](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - EntityReference< [StateCity](#) > [StateCityReference](#) [get, set]

No Metadata Documentation available.
- No Metadata Documentation available.*

 - EntityCollection< [Comment](#) > [Comments](#) [get, set]

No Metadata Documentation available.

5.9.1 Detailed Description

No Metadata Documentation available.

5.9.2 Member Function Documentation

5.9.2.1 static Advertisement ADVIEWER.DAL.Advertisement.CreateAdvertisement (global::System.Int32 *id*, global::System.Int32 *groupId*, global::System.Int32 *starCount*, global::System.String *title*, global::System.String *description*, global::System.String *fullName*, global::System.String *email*, global::System.DateTime *expirationDate*, global::System.DateTime *registrationDate*, global::System.DateTime *lastRenewal*, global::System.Int32 *reviewCount*, global::System.String *tellTime*, global::System.Int32 *advDuration*, global::System.Int32 *userId*) [inline], [static]

Create a new [Advertisement](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>groupId</i>	Initial value of the GroupID property.
<i>starCount</i>	Initial value of the StarCount property.
<i>title</i>	Initial value of the Title property.
<i>description</i>	Initial value of the Description property.
<i>fullName</i>	Initial value of the FullName property.
<i>email</i>	Initial value of the Email property.
<i>expirationDate</i>	Initial value of the ExpirationDate property.
<i>registrationDate</i>	Initial value of the RegistrationDate property.
<i>lastRenewal</i>	Initial value of the LastRenewal property.
<i>reviewCount</i>	Initial value of the ReviewCount property.
<i>tellTime</i>	Initial value of the TellTime property.
<i>advDuration</i>	Initial value of the AdvDuration property.
<i>userId</i>	Initial value of the UserId property.

5.9.3 Property Documentation

5.9.3.1 global.System.String ADVIEWER.DAL.Advertisement.Address [get], [set]

No Metadata Documentation available.

5.9.3.2 global.System.Int32 ADVIEWER.DAL.Advertisement.AdvDuration [get], [set]

No Metadata Documentation available.

5.9.3.3 EntityCollection<Comment> ADVIEWER.DAL.Advertisement.Comments [get], [set]

No Metadata Documentation available.

5.9.3.4 global.System.String ADVIEWER.DAL.Advertisement.DenyReason [get], [set]

No Metadata Documentation available.

5.9.3.5 global.System.String ADVIEWER.DAL.Advertisement.Description [get], [set]

No Metadata Documentation available.

5.9.3.6 `global.System.String ADVIEWER.DAL.Advertisement.Email` `[get], [set]`

No Metadata Documentation available.

5.9.3.7 `global.System.DateTime ADVIEWER.DAL.Advertisement.ExpirationDate` `[get], [set]`

No Metadata Documentation available.

5.9.3.8 `global.System.String ADVIEWER.DAL.Advertisement.FullName` `[get], [set]`

No Metadata Documentation available.

5.9.3.9 `Group ADVIEWER.DAL.Advertisement.Group` `[get], [set]`

No Metadata Documentation available.

5.9.3.10 `global.System.Int32 ADVIEWER.DAL.Advertisement.GroupID` `[get], [set]`

No Metadata Documentation available.

5.9.3.11 `EntityReference<Group> ADVIEWER.DAL.Advertisement.GroupReference` `[get], [set]`

No Metadata Documentation available.

5.9.3.12 `global.System.Int32 ADVIEWER.DAL.Advertisement.ID` `[get], [set]`

No Metadata Documentation available.

5.9.3.13 `global.System.Boolean ADVIEWER.DAL.Advertisement.IsConfirmed` `[get], [set]`

No Metadata Documentation available.

5.9.3.14 `Nullable<global.System.Boolean> ADVIEWER.DAL.Advertisement.IsPaid` `[get], [set]`

No Metadata Documentation available.

5.9.3.15 `global.System.Boolean ADVIEWER.DAL.Advertisement.IsRead` `[get], [set]`

No Metadata Documentation available.

5.9.3.16 `EntityCollection<KeyWord> ADVIEWER.DAL.Advertisement.KeyWords` `[get], [set]`

No Metadata Documentation available.

5.9.3.17 `global.System.DateTime ADVIEWER.DAL.Advertisement.LastRenewal` `[get], [set]`

No Metadata Documentation available.

5.9.3.18 `global.System.String ADVIEWER.DAL.Advertisement.Link` [get], [set]

No Metadata Documentation available.

5.9.3.19 `global.System.String ADVIEWER.DAL.Advertisement.Mobile` [get], [set]

No Metadata Documentation available.

5.9.3.20 `Nullable<global.System.Int64> ADVIEWER.DAL.Advertisement.PaidID` [get], [set]

No Metadata Documentation available.

5.9.3.21 `global.System.String ADVIEWER.DAL.Advertisement.Pic` [get], [set]

No Metadata Documentation available.

5.9.3.22 `global.System.String ADVIEWER.DAL.Advertisement.Price` [get], [set]

No Metadata Documentation available.

5.9.3.23 `EntityCollection<Rate> ADVIEWER.DAL.Advertisement.Ratings` [get], [set]

No Metadata Documentation available.

5.9.3.24 `global.System.DateTime ADVIEWER.DAL.Advertisement.RegistrationDate` [get], [set]

No Metadata Documentation available.

5.9.3.25 `global.System.Int32 ADVIEWER.DAL.Advertisement.ReviewCount` [get], [set]

No Metadata Documentation available.

5.9.3.26 `global.System.String ADVIEWER.DAL.Advertisement.ShortDescription` [get], [set]

No Metadata Documentation available.

5.9.3.27 `global.System.Int32 ADVIEWER.DAL.Advertisement.StarCount` [get], [set]

No Metadata Documentation available.

5.9.3.28 `StateCity ADVIEWER.DAL.Advertisement.StateCity` [get], [set]

No Metadata Documentation available.

5.9.3.29 `Nullable<global.System.Int32> ADVIEWER.DAL.Advertisement.StateCityID` [get], [set]

No Metadata Documentation available.

5.9.3.30 EntityReference<StateCity> ADVIEWER.DAL.Advertisement.StateCityReference [get], [set]

No Metadata Documentation available.

5.9.3.31 global.System.String ADVIEWER.DAL.Advertisement.Tell [get], [set]

No Metadata Documentation available.

5.9.3.32 global.System.String ADVIEWER.DAL.Advertisement.TellTime [get], [set]

No Metadata Documentation available.

5.9.3.33 global.System.String ADVIEWER.DAL.Advertisement.Title [get], [set]

No Metadata Documentation available.

5.9.3.34 User ADVIEWER.DAL.Advertisement.User [get], [set]

No Metadata Documentation available.

5.9.3.35 global.System.Int32 ADVIEWER.DAL.Advertisement.UserId [get], [set]

No Metadata Documentation available.

5.9.3.36 EntityReference<User> ADVIEWER.DAL.Advertisement.UserReference [get], [set]

No Metadata Documentation available.

5.9.3.37 global.System.String ADVIEWER.DAL.Advertisement.YahooID [get], [set]


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.10 ADVIEWER.Member.AdvsList Class Reference

Inheritance diagram for ADVIEWER.Member.AdvsList:

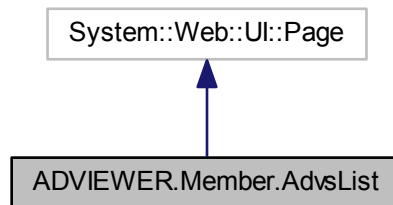

Collaboration diagram for ADVIEWER.Member.AdvsList:

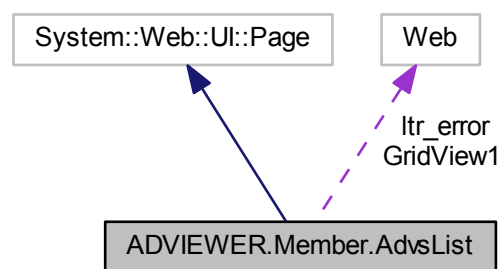

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **GridView1_RowCommand** (object sender, GridViewCommandEventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Literal [ltr_error](#)
ltr_error control.
- global::System.Web.UI.WebControls.GridView [GridView1](#)
GridView1 control.

5.10.1 Member Data Documentation

5.10.1.1 `global::System.Web.UI.WebControls.GridView ADVIEWER.Member.AdvsList.GridView1` [protected]

GridView1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.10.1.2 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.AdvsList.ltr_error` [protected]

ltr_error control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/AdvsList.aspx.cs
- Member/AdvsList.aspx.designer.cs

5.11 ADVIEWER.BAL.AssignorAdvertisment Class Reference

Inheritance diagram for ADVIEWER.BAL.AssignorAdvertisment:

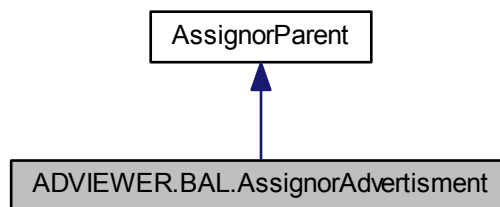

Collaboration diagram for ADVIEWER.BAL.AssignorAdvertisment:

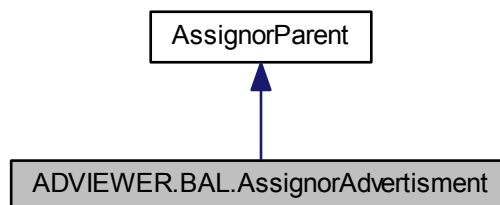

Properties

- Boolean **IsConfirmed** [get, set]
- bool **IsRead** [get, set]
- int **UserId** [get, set]
- [AssignorUser](#) **User** [get]


- int **GroupID** [get, set]
- [AssignorGroup](#) **Group** [get]
- int **StateCityID** [get, set]
- [AssignorStateCity](#) **StateCity** [get]
- string **Title** [get, set]
- string **Pic** [get, set]
- string **FullName** [get, set]
- string **Mobile** [get, set]
- string **Tell** [get, set]
- string **Description** [get, set]
- string **TellTime** [get, set]
- string **Email** [get, set]
- int **ReviewCount** [get, set]
- string **Price** [get, set]
- DateTime **RegistrationDate** [get, set]
- DateTime **LastRenewal** [get, set]
- DateTime **ExpirationDate** [get, set]
- int **AdvDuration** [get, set]
- int **StarCount** [get, set]

The documentation for this class was generated from the following file:


- BAL/PublicFunctions.cs

5.12 ADVIEWER.BAL.AssignorComment Class Reference

Inheritance diagram for ADVIEWER.BAL.AssignorComment:

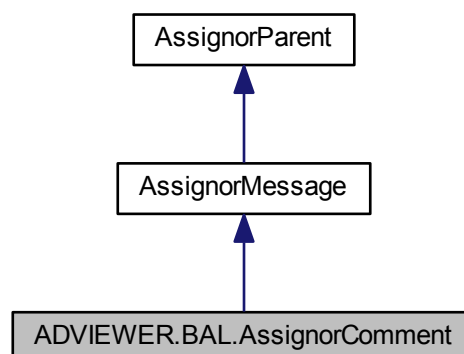

Collaboration diagram for ADVIEWER.BAL.AssignorComment:

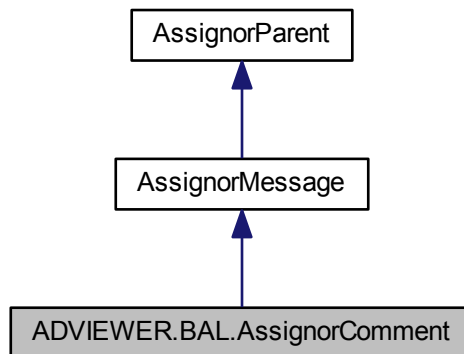

Properties


- [AssignorAdvertisement Adv](#) [get]
- int **AdvID** [get, set]
- bool **IsConfirmed** [get, set]

The documentation for this class was generated from the following file:


- BAL/PublicFunctions.cs

5.13 ADVIEWER.BAL.AssignorGroup Class Reference

Inheritance diagram for ADVIEWER.BAL.AssignorGroup:

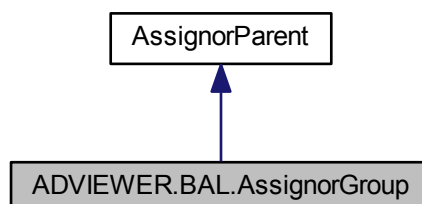

Collaboration diagram for ADVIEWER.BAL.AssignorGroup:

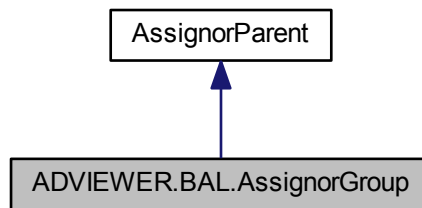

Properties


- string **GroupName** [get, set]
- int **ParentID** [get, set]
- [AssignorGroup](#) **ParentGroup** [get]

The documentation for this class was generated from the following file:


- BAL/PublicFunctions.cs

5.14 ADVIEWER.BAL.AssignorMessage Class Reference

Inheritance diagram for ADVIEWER.BAL.AssignorMessage:

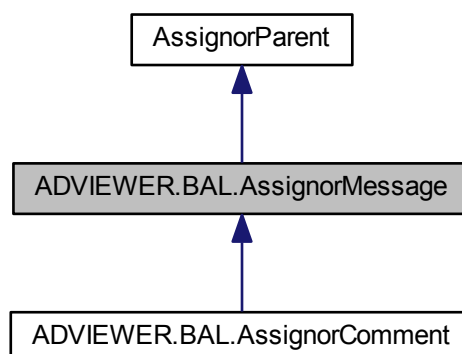

Collaboration diagram for ADVIEWER.BAL.AssignorMessage:

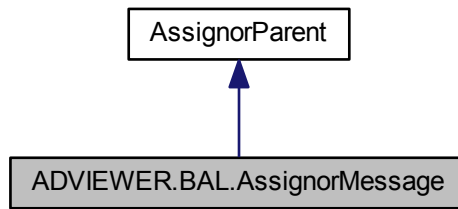

Properties


- string **Text** [get, set]
- DateTime **RegistrationDate** [get, set]
- [AssignorUser](#) **User** [get]
- int **SenderID** [get, set]
- string **Email** [get, set]

The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs

5.15 ADVIEWER.BAL.AssignorParent Class Reference

Inheritance diagram for ADVIEWER.BAL.AssignorParent:

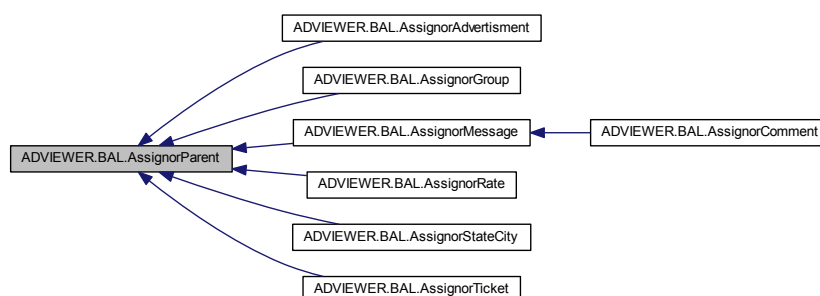

Properties


- int **ID** [get, set]

The documentation for this class was generated from the following file:


- BAL/PublicFunctions.cs

5.16 ADVIEWER.BAL.AssignorRate Class Reference

Inheritance diagram for ADVIEWER.BAL.AssignorRate:

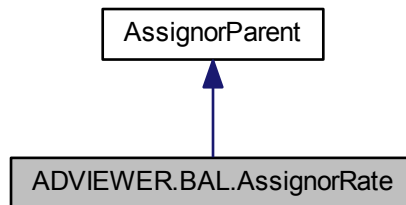

Collaboration diagram for ADVIEWER.BAL.AssignorRate:

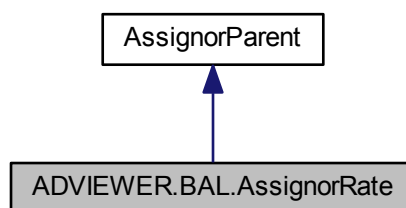

Properties


- int **AdvertisementId** [get, set]
- Single **Value** [get, set]

The documentation for this class was generated from the following file:


- BAL/PublicFunctions.cs

5.17 ADVIEWER.BAL.AssignorStateCity Class Reference

Inheritance diagram for ADVIEWER.BAL.AssignorStateCity:

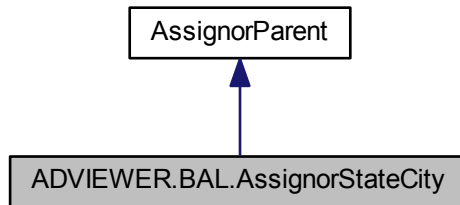

Collaboration diagram for ADVIEWER.BAL.AssignorStateCity:

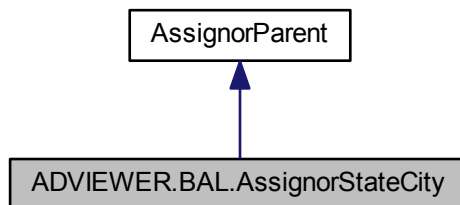

Properties


- string **Name** [get, set]
- int **Stateld** [get, set]
- [AssignorStateCity](#) **State** [get]

The documentation for this class was generated from the following file:


- BAL/PublicFunctions.cs

5.18 ADVIEWER.BAL.AssignorTicket Class Reference

Inheritance diagram for ADVIEWER.BAL.AssignorTicket:



Collaboration diagram for ADVIEWER.BAL.AssignorTicket:



Properties

- string **Answer** [get, set]
- DateTime **LastUpdate** [get, set]
- DateTime **RegDate** [get, set]
- string **Text** [get, set]
- string **Title** [get, set]
- int **UserID** [get, set]
- [AssignorUser](#) **User** [get]

The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs

5.19 ADVIEWER.BAL.AssignorUser Class Reference

Properties

- int **ID** [get, set]

- [AssignorGroup](#)[] **Groups** [get]
- string **About** [get, set]
- string **Address** [get, set]
- string **Fax** [get, set]
- string **FullName** [get, set]
- string **Mail** [get, set]
- string **Mobile** [get, set]
- string **PicAddress** [get, set]
- string **Tell** [get, set]
- string **YahooID** [get, set]

The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs

5.20 ADVIEWER.BAL.AssignorUserMessage Class Reference

Properties


- [AssignorUser](#) **User** [get]
- int **RecieverID** [get, set]

The documentation for this class was generated from the following file:


- BAL/PublicFunctions.cs

5.21 ADVIEWER.Member.Avatar Class Reference

Inheritance diagram for ADVIEWER.Member.Avatar:

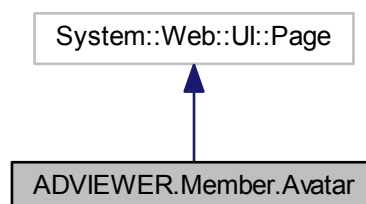

Collaboration diagram for ADVIEWER.Member.Avatar:

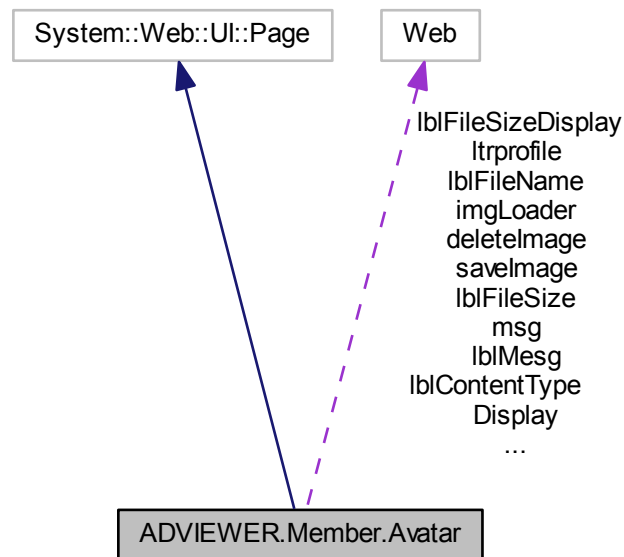

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **Savelimage_Click** (object sender, EventArgs e)
- void **AsyncImageUpload_UploadedComplete** (object sender, EventArgs e)
- void **deletelimage_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl [msg](#)
msg control.
- global::System.Web.UI.WebControls.Literal [ltrprofile](#)
ltrprofile control.
- global::AjaxControlToolkit.ToolkitScriptManager [ToolkitScriptManager1](#)
ToolkitScriptManager1 control.
- global::AjaxControlToolkit.AsyncFileUpload [AsyncImageUpload](#)
AsyncImageUpload control.
- global::System.Web.UI.WebControls.Image [imgLoader](#)
imgLoader control.
- global::System.Web.UI.WebControls.Label [lblErrorStatus](#)
lblErrorStatus control.
- global::System.Web.UI.WebControls.Label [lblMesg](#)
lblMesg control.
- global::System.Web.UI.WebControls.Label [lblSuccess](#)
lblSuccess control.
- global::System.Web.UI.WebControls.Label [lblFileName](#)

- IblFileName control.*
- `global::System.Web.UI.WebControls.Label` [IblFileNameDisplay](#)
IblFileNameDisplay control.
- `global::System.Web.UI.WebControls.Label` [IblFileSize](#)
IblFileSize control.
- `global::System.Web.UI.WebControls.Label` [IblFileSizeDisplay](#)
IblFileSizeDisplay control.
- `global::System.Web.UI.WebControls.Label` [IblContentType](#)
IblContentType control.
- `global::System.Web.UI.WebControls.Label` [IblContentTypeDisplay](#)
IblContentTypeDisplay control.
- `global::System.Web.UI.WebControls.Button` [saveImage](#)
saveImage control.
- `global::System.Web.UI.WebControls.Button` [deleteImage](#)
deleteImage control.

5.21.1 Member Data Documentation

5.21.1.1 `global.AjaxControlToolkit.AsyncFileUpload` `ADVIEWER.Member.Avatar.AsyncImageUpload` [protected]

`AsyncImageUpload` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.2 `global.System.Web.UI.WebControls.Button` `ADVIEWER.Member.Avatar.deleteImage` [protected]

`deleteImage` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.3 `global.System.Web.UI.WebControls.Image` `ADVIEWER.Member.Avatar.imgLoader` [protected]

`imgLoader` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.4 `global.System.Web.UI.WebControls.Label` `ADVIEWER.Member.Avatar.IblContentType` [protected]

`IblContentType` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.5 `global.System.Web.UI.WebControls.Label` `ADVIEWER.Member.Avatar.IblContentTypeDisplay` [protected]

`IblContentTypeDisplay` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.6 `global.System.Web.UI.WebControls.Label` `ADVIEWER.Member.Avatar.IblErrorStatus` [protected]

`IblErrorStatus` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.7 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblFileName [protected]

IblFileName control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.8 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblFileNameDisplay [protected]

IblFileNameDisplay control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.9 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblFileSize [protected]

IblFileSize control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.10 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblFileSizeDisplay [protected]

IblFileSizeDisplay control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.11 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblMesg [protected]

IblMesg control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.12 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblSuccess [protected]

IblSuccess control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.13 global.System.Web.UI.WebControls.Literal ADVIEWER.Member.Avatar.Itrprofile [protected]

Itrprofile control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.14 global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Member.Avatar.msg [protected]

msg control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.15 global.System.Web.UI.WebControls.Button ADVIEWER.Member.Avatar.savImage [protected]

savImage control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.21.1.16 global.AjaxControlToolkit.ToolkitScriptManager ADVIEWER.Member.Avatar.ToolkitScriptManager1 [protected]

ToolkitScriptManager1 control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/Avatar.aspx.cs
- Member/Avatar.aspx.designer.cs

5.22 ADVIEWER.Account.ChangePassword Class Reference

Inheritance diagram for ADVIEWER.Account.ChangePassword:

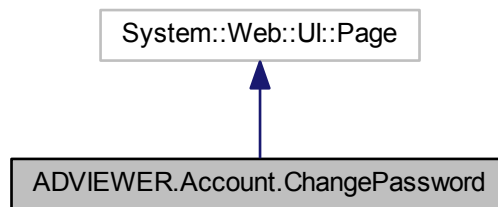

Collaboration diagram for ADVIEWER.Account.ChangePassword:

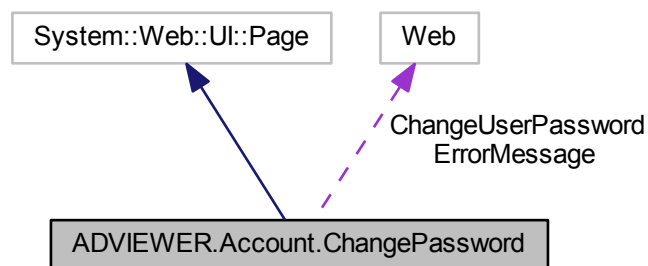

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **setError** (object sender, EventArgs e)

Protected Attributes

- `global::System.Web.UI.WebControls.Literal` [ErrorMessage](#)
ErrorMessage control.
- `global::System.Web.UI.WebControls.ChangePassword` [ChangeUserPassword](#)
ChangeUserPassword control.

5.22.1 Member Data Documentation

5.22.1.1 `global.System.Web.UI.WebControls.ChangePassword` `ADVIEWER.Account.ChangePassword.ChangeUserPassword` `[protected]`

`ChangeUserPassword` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.2 `global.System.Web.UI.WebControls.Literal` `ADVIEWER.Account.ChangePassword.ErrorMessage` `[protected]`

`ErrorMessage` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- `Account/ChangePassword.aspx.cs`
- `Account/ChangePassword.aspx.designer.cs`


5.23 ADVIEWER.DAL.Comment Class Reference

No Metadata Documentation available.

Inheritance diagram for `ADVIEWER.DAL.Comment`:

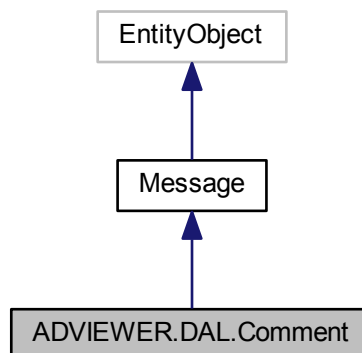

Collaboration diagram for ADVIEWER.DAL.Comment:

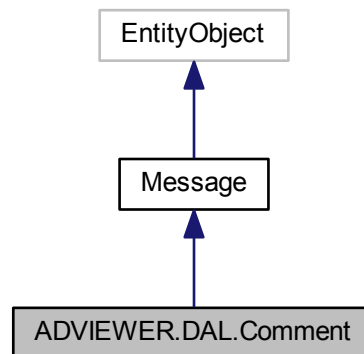

Static Public Member Functions

- static [Comment](#) [CreateComment](#) (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate, global::System.Int32 advID)
Create a new [Comment](#) object.

Properties

- global::System.Int32 [AdvID](#) [get, set]
No Metadata Documentation available.
- global::System.Boolean [IsConfirmed](#) [get, set]
No Metadata Documentation available.
- [Advertisement](#) [Advertisement](#) [get, set]
No Metadata Documentation available.
- EntityReference< [Advertisement](#) > [AdvertisementReference](#) [get, set]
No Metadata Documentation available.

5.23.1 Detailed Description

No Metadata Documentation available.

5.23.2 Member Function Documentation

- 5.23.2.1 static [Comment](#) ADVIEWER.DAL.Comment.CreateComment (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate, global::System.Int32 advID) [inline],[static]

Create a new [Comment](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>text</i>	Initial value of the Text property.
<i>registrationDate</i>	Initial value of the RegistrationDate property.
<i>advID</i>	Initial value of the AdvID property.

5.23.3 Property Documentation

5.23.3.1 Advertisement ADVIEWER.DAL.Comment.Advertisement [get], [set]

No Metadata Documentation available.

5.23.3.2 EntityReference<Advertisement> ADVIEWER.DAL.Comment.AdvertisementReference [get], [set]

No Metadata Documentation available.

5.23.3.3 global.System.Int32 ADVIEWER.DAL.Comment.AdvID [get], [set]

No Metadata Documentation available.

5.23.3.4 global.System.Boolean ADVIEWER.DAL.Comment.IsConfirmed [get], [set]


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.24 ADVIEWER.Manage.CommentsList Class Reference

Inheritance diagram for ADVIEWER.Manage.CommentsList:



Collaboration diagram for ADVIEWER.Manage.CommentsList:

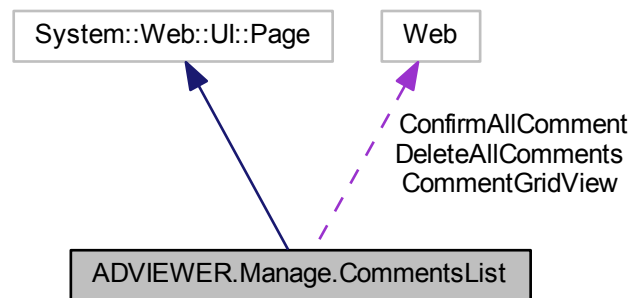

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **CommentGridView_RowCommand** (object sender, GridViewCommandEventArgs e)
- void **DeleteSelectedComments** (object sender, EventArgs e)
- void **ConfirmSelectedComments** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.GridView [CommentGridView](#)
CommentGridView control.
- global::System.Web.UI.WebControls.LinkButton [DeleteAllComments](#)
DeleteAllComments control.
- global::System.Web.UI.WebControls.LinkButton [ConfirmAllComment](#)
ConfirmAllComment control.

5.24.1 Member Data Documentation

5.24.1.1 global::System.Web.UI.WebControls.GridView ADVIEWER.Manage.CommentsList.CommentGridView [protected]

CommentGridView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.24.1.2 global::System.Web.UI.WebControls.LinkButton ADVIEWER.Manage.CommentsList.ConfirmAllComment [protected]

ConfirmAllComment control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.24.1.3 global.System.Web.UI.WebControls.LinkButton ADVIEWER.Manage.CommentsList.DeleteAllComments [protected]

DeleteAllComments control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- Manage/CommentsList.aspx.cs
- Manage/CommentsList.aspx.designer.cs


5.25 ADVIEWER.DAL.ContactMessage Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.ContactMessage:

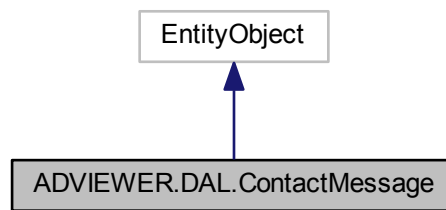

Collaboration diagram for ADVIEWER.DAL.ContactMessage:

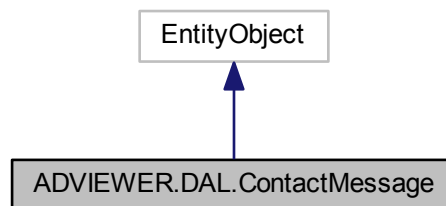

Static Public Member Functions

- static [ContactMessage CreateContactMessage](#) (global::System.Int32 id)
Create a new [ContactMessage](#) object.

Properties

- global::System.Int32 **ID** [get, set]
No Metadata Documentation available.
- global::System.String **FulName** [get, set]
No Metadata Documentation available.
- global::System.String **Email** [get, set]
No Metadata Documentation available.
- global::System.String **Tell** [get, set]
No Metadata Documentation available.
- global::System.String **Title** [get, set]
No Metadata Documentation available.
- global::System.String **Text** [get, set]
No Metadata Documentation available.
- global::System.String **Reply** [get, set]
No Metadata Documentation available.
- Nullable< global::System.Boolean > **IsRead** [get, set]
No Metadata Documentation available.
- Nullable< global::System.DateTime > **RegDate** [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > **UserID** [get, set]
No Metadata Documentation available.

5.25.1 Detailed Description

No Metadata Documentation available.

5.25.2 Member Function Documentation

5.25.2.1 static ContactMessage ADVIEWER.DAL.ContactMessage.CreateContactMessage (global::System.Int32 id)
[inline],[static]

Create a new **ContactMessage** object.

Parameters

<i>id</i>	Initial value of the ID property.
-----------	-----------------------------------

5.25.3 Property Documentation

5.25.3.1 global.System.String ADVIEWER.DAL.ContactMessage.Email [get],[set]

No Metadata Documentation available.

5.25.3.2 global.System.String ADVIEWER.DAL.ContactMessage.FulName [get],[set]

No Metadata Documentation available.

5.25.3.3 global.System.Int32 ADVIEWER.DAL.ContactMessage.ID [get],[set]

No Metadata Documentation available.

5.25.3.4 `Nullable<global.System.Boolean> ADVIEWER.DAL.ContactMessage.IsRead` `[get]`, `[set]`

No Metadata Documentation available.

5.25.3.5 `Nullable<global.System.DateTime> ADVIEWER.DAL.ContactMessage.RegDate` `[get]`, `[set]`

No Metadata Documentation available.

5.25.3.6 `global.System.String ADVIEWER.DAL.ContactMessage.Reply` `[get]`, `[set]`

No Metadata Documentation available.

5.25.3.7 `global.System.String ADVIEWER.DAL.ContactMessage.Tell` `[get]`, `[set]`

No Metadata Documentation available.

5.25.3.8 `global.System.String ADVIEWER.DAL.ContactMessage.Text` `[get]`, `[set]`

No Metadata Documentation available.

5.25.3.9 `global.System.String ADVIEWER.DAL.ContactMessage.Title` `[get]`, `[set]`

No Metadata Documentation available.

5.25.3.10 `Nullable<global.System.Int32> ADVIEWER.DAL.ContactMessage.UserID` `[get]`, `[set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.26 ADVIEWER.Manage.Default Class Reference

Inheritance diagram for ADVIEWER.Manage.Default:

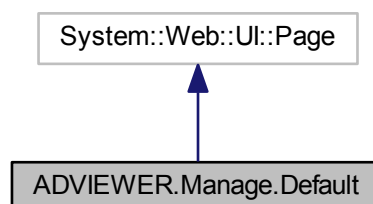

Collaboration diagram for ADVIEWER.Manage.Default:

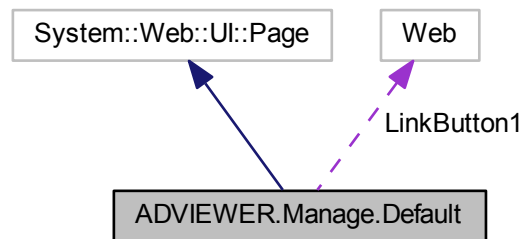

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **ExitFunction** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.LinkButton [LinkButton1](#)

LinkButton1 control.

5.26.1 Member Data Documentation

5.26.1.1 global::System.Web.UI.WebControls.LinkButton ADVIEWER.Manage.Default.LinkButton1 [protected]

LinkButton1 control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/Default.aspx.cs
- Manage/Default.aspx.designer.cs

5.27 ADVIEWER.Manage.EditGroup Class Reference

Inheritance diagram for ADVIEWER.Manage.EditGroup:

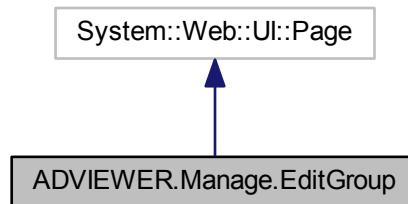

Collaboration diagram for ADVIEWER.Manage.EditGroup:

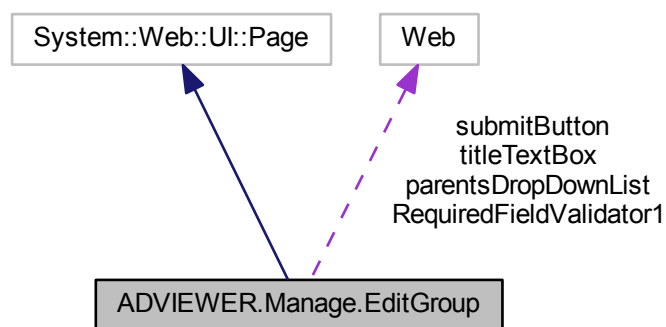

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **submitButton_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [titleTextBox](#)
titleTextBox control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- global::System.Web.UI.WebControls.DropDownList [parentsDropDownList](#)
parentsDropDownList control.
- global::System.Web.UI.WebControls.Button [submitButton](#)
submitButton control.

5.27.1 Member Data Documentation

5.27.1.1 `global.System.Web.UI.WebControls.DropDownList` `ADVIEWER.Manage.EditGroup.parentsDropDownList` `[protected]`

`parentsDropDownList` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.27.1.2 `global.System.Web.UI.WebControls.RequiredFieldValidator` `ADVIEWER.Manage.EditGroup.RequiredFieldValidator1` `[protected]`

`RequiredFieldValidator1` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.27.1.3 `global.System.Web.UI.WebControls.Button` `ADVIEWER.Manage.EditGroup.submitButton` `[protected]`

`submitButton` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.27.1.4 `global.System.Web.UI.WebControls.TextBox` `ADVIEWER.Manage.EditGroup.titleTextBox` `[protected]`

`titleTextBox` control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- `Manage/EditGroup.aspx.cs`
- `Manage/EditGroup.aspx.designer.cs`

5.28 `ADVIEWER.Member.EditProfile` Class Reference

Inheritance diagram for `ADVIEWER.Member.EditProfile`:

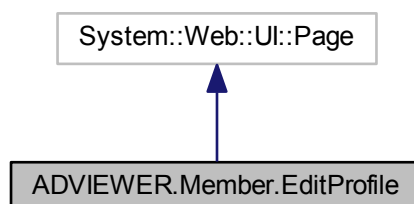

Collaboration diagram for ADVIEWER.Member.EditProfile:

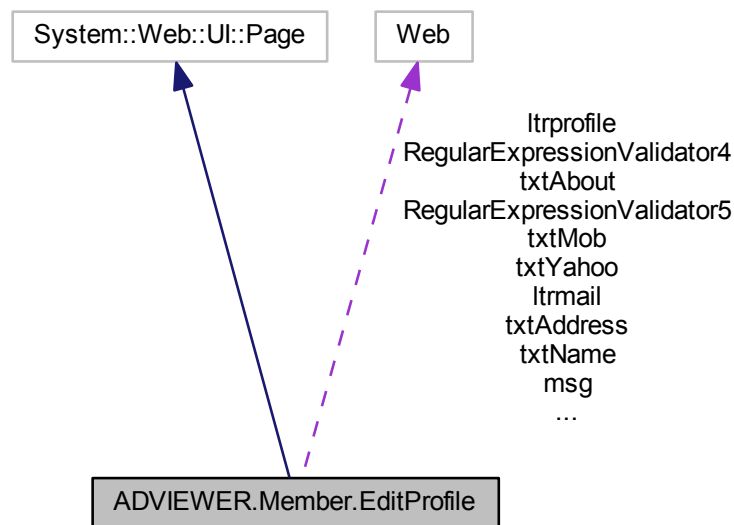

Public Attributes

- string **UserFavoriteGroups**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **Button1_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl [msg](#)
msg control.
- global::System.Web.UI.WebControls.TextBox [FavGrouptxt](#)
FavGrouptxt control.
- global::System.Web.UI.WebControls.Literal [ltrprofile](#)
ltrprofile control.
- global::System.Web.UI.WebControls.Literal [ltrmail](#)
ltrmail control.
- global::System.Web.UI.WebControls.TextBox [txtName](#)
txtName control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator2](#)
RequiredFieldValidator2 control.
- global::System.Web.UI.WebControls.TextBox [txtMob](#)
txtMob control.
- global::System.Web.UI.WebControls.RegularExpressionValidator [RegularExpressionValidator4](#)
RegularExpressionValidator4 control.

- `global::System.Web.UI.WebControls.TextBox` [txtTell](#)
txtTell control.
- `global::System.Web.UI.WebControls.RegularExpressionValidator` [RegularExpressionValidator5](#)
RegularExpressionValidator5 control.
- `global::System.Web.UI.WebControls.TextBox` [txtfax](#)
txtfax control.
- `global::System.Web.UI.WebControls.TextBox` [txtYahoo](#)
txtYahoo control.
- `global::System.Web.UI.WebControls.RegularExpressionValidator` [RegularExpressionValidator1](#)
RegularExpressionValidator1 control.
- `global::System.Web.UI.WebControls.TextBox` [txtAbout](#)
txtAbout control.
- `global::System.Web.UI.WebControls.TextBox` [txtAddress](#)
txtAddress control.
- `global::System.Web.UI.WebControls.Button` [Button1](#)
Button1 control.

5.28.1 Member Data Documentation

5.28.1.1 `global.System.Web.UI.WebControls.Button ADVIEWER.Member.EditProfile.Button1` [protected]

Button1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.2 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.FavGrouptxt` [protected]

FavGrouptxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.3 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.EditProfile.Itmail` [protected]

Itmail control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.4 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.EditProfile.Itprofile` [protected]

Itprofile control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.5 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Member.EditProfile.msg` [protected]

msg control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.6 `global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.EditProfile.RegularExpressionValidator1` [protected]

RegularExpressionValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.7 `global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.EditProfile.RegularExpressionValidator4` [protected]

RegularExpressionValidator4 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.8 `global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.EditProfile.RegularExpressionValidator5` [protected]

RegularExpressionValidator5 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.9 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.EditProfile.RequiredFieldValidator2` [protected]

RequiredFieldValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.10 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtAbout` [protected]

txtAbout control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.11 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtAddress` [protected]

txtAddress control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.12 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtfax` [protected]

txtfax control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.13 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtMob` [protected]

txtMob control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.14 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtName` [protected]

txtName control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.15 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtTell` [protected]

txtTell control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.16 `global.System.Web.UI.WebControls.TextBox` `ADVIEWER.Member.EditProfile.txtYahoo` `[protected]`

`txtYahoo` control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- `Member/EditProfile.aspx.cs`
- `Member/EditProfile.aspx.designer.cs`

5.29 ADVIEWER.Manage.EditStateCity Class Reference

Inheritance diagram for `ADVIEWER.Manage.EditStateCity`:

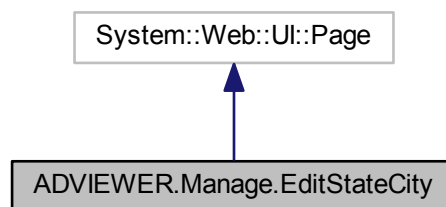

Collaboration diagram for `ADVIEWER.Manage.EditStateCity`:

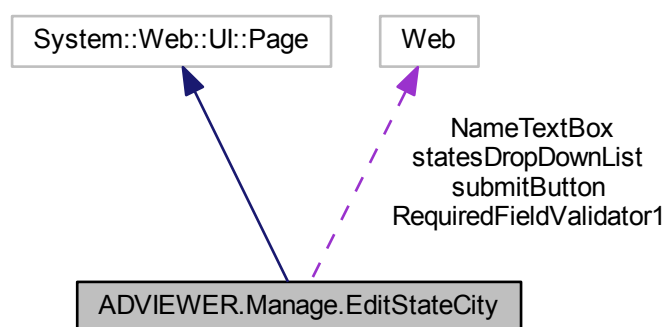

Protected Member Functions

- `void Page_Load` (object sender, EventArgs e)
- `void submitButton_Click` (object sender, EventArgs e)

Protected Attributes

- `global::System.Web.UI.WebControls.TextBox` [NameTextBox](#)
NameTextBox control.
- `global::System.Web.UI.WebControls.RequiredFieldValidator` [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- `global::System.Web.UI.WebControls.DropDownList` [statesDropDownList](#)
statesDropDownList control.
- `global::System.Web.UI.WebControls.Button` [submitButton](#)
submitButton control.

5.29.1 Member Data Documentation

5.29.1.1 `global.System.Web.UI.WebControls.TextBox` ADVIEWER.Manage.EditStateCity.NameTextBox [protected]

NameTextBox control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.2 `global.System.Web.UI.WebControls.RequiredFieldValidator` ADVIEWER.Manage.EditStateCity.RequiredFieldValidator1 [protected]

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.3 `global.System.Web.UI.WebControls.DropDownList` ADVIEWER.Manage.EditStateCity.statesDropDownList [protected]

statesDropDownList control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.4 `global.System.Web.UI.WebControls.Button` ADVIEWER.Manage.EditStateCity.submitButton [protected]

submitButton control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:

- `Manage/EditStateCity.aspx.cs`
- `Manage/EditStateCity.aspx.designer.cs`

5.30 ADVIEWER.BAL.FilesStatus Class Reference

Public Member Functions

- **FilesStatus** (FileInfo fileInfo, string mode, string id)
- **FilesStatus** (string fileName, int fileLength, string mode, string id)

Public Attributes

- const string **HandlerPath** = ""

Properties


- string **group** [get, set]
- string **name** [get, set]
- string **type** [get, set]
- int **size** [get, set]
- string **progress** [get, set]
- string **url** [get, set]
- string **thumbnail_url** [get, set]
- string **delete_url** [get, set]
- string **delete_type** [get, set]
- string **error** [get, set]

The documentation for this class was generated from the following file:


- Member/FilesStatus.ashx.cs

5.31 ADVIEWER.BAL.FileTransferHandler Class Reference

Inheritance diagram for ADVIEWER.BAL.FileTransferHandler:

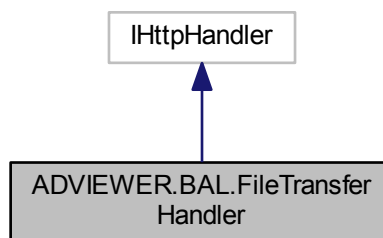

Collaboration diagram for ADVIEWER.BAL.FileTransferHandler:

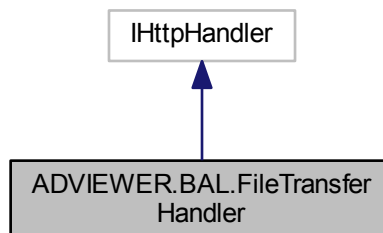

Public Member Functions

- void **ProcessRequest** (HttpContext context)

Properties


- string **StorageRoot** [get]
- bool **IsReusable** [get]

The documentation for this class was generated from the following file:


- Member/FileTransferHandler.ashx.cs

5.32 ADVIEWER.Main.Global Class Reference

Inheritance diagram for ADVIEWER.Main.Global:

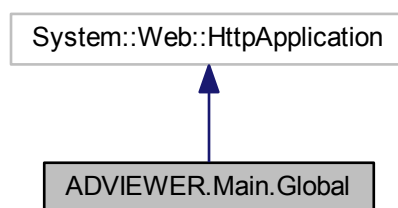

Collaboration diagram for ADVIEWER.Main.Global:

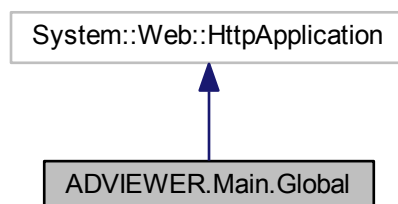


The documentation for this class was generated from the following file:

- Global.asax.cs


5.33 ADVIEWER.DAL.Group Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Group:



Collaboration diagram for ADVIEWER.DAL.Group:



Static Public Member Functions

- static [Group CreateGroup](#) (global::System.Int32 id, global::System.String groupName)
Create a new [Group](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.String [Pic](#) [get, set]
No Metadata Documentation available.
- global::System.String [GroupName](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [ParentID](#) [get, set]
No Metadata Documentation available.
- EntityCollection< [Group](#) > [childGroup](#) [get, set]
No Metadata Documentation available.

- [Group parentGroup](#) [get, set]
No Metadata Documentation available.
- EntityReference< [Group](#) > [parentGroupReference](#) [get, set]
No Metadata Documentation available.
- EntityCollection< [User](#) > [Users](#) [get, set]
No Metadata Documentation available.
- EntityCollection< [Advertisement](#) > [Advertisements](#) [get, set]
No Metadata Documentation available.

5.33.1 Detailed Description

No Metadata Documentation available.

5.33.2 Member Function Documentation

5.33.2.1 **static Group** ADVIEWER.DAL.Group.CreateGroup (*global::System.Int32 id*, *global::System.String groupName*)
[inline], [static]

Create a new [Group](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>groupName</i>	Initial value of the GroupName property.

5.33.3 Property Documentation

5.33.3.1 EntityCollection<[Advertisement](#)> ADVIEWER.DAL.Group.Advertisements [get], [set]

No Metadata Documentation available.

5.33.3.2 EntityCollection<[Group](#)> ADVIEWER.DAL.Group.childGroup [get], [set]

No Metadata Documentation available.

5.33.3.3 *global::System.String* ADVIEWER.DAL.Group.GroupName [get], [set]

No Metadata Documentation available.

5.33.3.4 *global::System.Int32* ADVIEWER.DAL.Group.ID [get], [set]

No Metadata Documentation available.

5.33.3.5 **Group** ADVIEWER.DAL.Group.parentGroup [get], [set]

No Metadata Documentation available.

5.33.3.6 EntityReference<[Group](#)> ADVIEWER.DAL.Group.parentGroupReference [get], [set]

No Metadata Documentation available.

5.33.3.7 `Nullable<global.System.Int32> ADVIEWER.DAL.Group.ParentID` `[get]`, `[set]`

No Metadata Documentation available.

5.33.3.8 `global.System.String ADVIEWER.DAL.Group.Pic` `[get]`, `[set]`

No Metadata Documentation available.

5.33.3.9 `EntityCollection<User> ADVIEWER.DAL.Group.Users` `[get]`, `[set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.34 ADVIEWER.Manage.GroupsList Class Reference

Inheritance diagram for ADVIEWER.Manage.GroupsList:

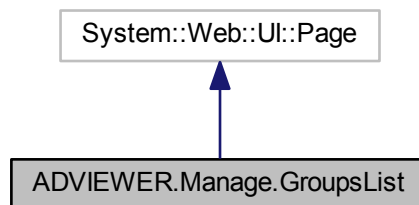

Collaboration diagram for ADVIEWER.Manage.GroupsList:

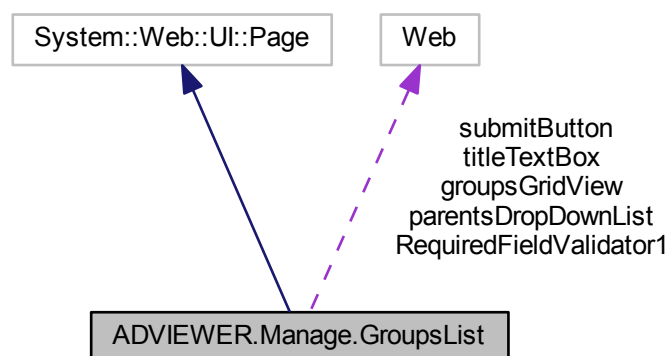

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **groupsGridView_RowCommand** (object sender, GridViewCommandEventArgs e)
- void **groupsGridView_RowDataBound** (object sender, GridViewRowEventArgs e)
- void **groupsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **submitButton_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [titleTextBox](#)
titleTextBox control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- global::System.Web.UI.WebControls.DropDownList [parentsDropDownList](#)
parentsDropDownList control.
- global::System.Web.UI.WebControls.Button [submitButton](#)
submitButton control.
- global::System.Web.UI.WebControls.GridView [groupsGridView](#)
groupsGridView control.

5.34.1 Member Data Documentation

5.34.1.1 `global::System.Web.UI.WebControls.GridView ADVIEWER.Manage.GroupsList.groupsGridView` [protected]

groupsGridView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.34.1.2 `global::System.Web.UI.WebControls.DropDownList ADVIEWER.Manage.GroupsList.parentsDropDownList` [protected]

parentsDropDownList control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.34.1.3 `global::System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Manage.GroupsList.RequiredFieldValidator1` [protected]

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.34.1.4 `global::System.Web.UI.WebControls.Button ADVIEWER.Manage.GroupsList.submitButton` [protected]

submitButton control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.34.1.5 global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.GroupsList.titleTextBox [protected]

titleTextBox control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/GroupsList.aspx.cs
- Manage/GroupsList.aspx.designer.cs

5.35 ADVIEWER.BAL.JsonMaker Class Reference

Inheritance diagram for ADVIEWER.BAL.JsonMaker:



Collaboration diagram for ADVIEWER.BAL.JsonMaker:

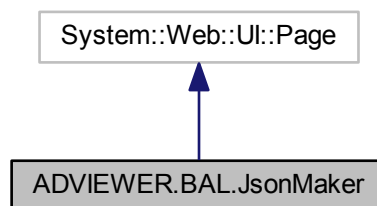

Protected Member Functions

- void **Page_PreRender** (object sender, EventArgs e)


The documentation for this class was generated from the following file:

- BAL/JsonMaker.aspx.cs


5.36 ADVIEWER.DAL.KeyWord Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.KeyWord:



Collaboration diagram for ADVIEWER.DAL.KeyWord:

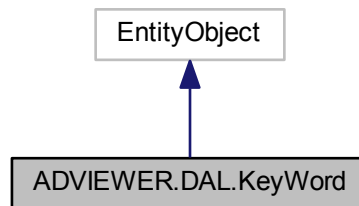

Static Public Member Functions

- static `Keyword CreateKeyword` (global::System.Int32 id, global::System.String text)
Create a new `Keyword` object.

Properties

- global::System.Int32 `ID` [get, set]
No Metadata Documentation available.
- global::System.String `Text` [get, set]
No Metadata Documentation available.
- EntityCollection< `Advertisement` > `Advertisement` [get, set]
No Metadata Documentation available.

5.36.1 Detailed Description

No Metadata Documentation available.

5.36.2 Member Function Documentation

5.36.2.1 `static KeyWord ADVIEWER.DAL.KeyWord.CreateKeyWord (global::System.Int32 id, global::System.String text)`
[inline], [static]

Create a new [KeyWord](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>text</i>	Initial value of the Text property.

5.36.3 Property Documentation

5.36.3.1 `EntityCollection<Advertisement> ADVIEWER.DAL.KeyWord.Advertisement` [get], [set]

No Metadata Documentation available.

5.36.3.2 `global.System.Int32 ADVIEWER.DAL.KeyWord.ID` [get], [set]

No Metadata Documentation available.

5.36.3.3 `global.System.String ADVIEWER.DAL.KeyWord.Text` [get], [set]


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.37 ADVIEWER.Account.Login Class Reference

Inheritance diagram for ADVIEWER.Account.Login:

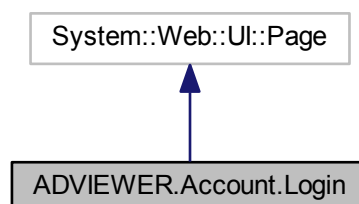

Collaboration diagram for ADVIEWER.Account.Login:

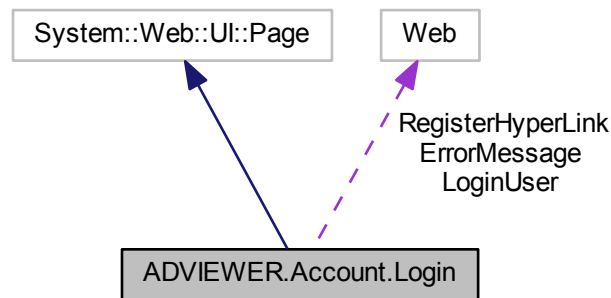

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **LoginUser_LoggedIn** (object sender, EventArgs e)
- void **setError** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.HyperLink [RegisterHyperLink](#)
RegisterHyperLink control.
- global::System.Web.UI.WebControls.Literal [ErrorMessage](#)
ErrorMessage control.
- global::System.Web.UI.WebControls.Login [LoginUser](#)
LoginUser control.

5.37.1 Member Data Documentation

5.37.1.1 global::System.Web.UI.WebControls.Literal ADVIEWER.Account.Login.ErrorMessage [protected]

ErrorMessage control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.37.1.2 global::System.Web.UI.WebControls.Login ADVIEWER.Account.Login.LoginUser [protected]

LoginUser control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.37.1.3 global::System.Web.UI.WebControls.HyperLink ADVIEWER.Account.Login.RegisterHyperLink [protected]

RegisterHyperLink control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Account/Login.aspx.cs
- Account/Login.aspx.designer.cs

5.38 ADVIEWER.Main.MainMaster Class Reference

Inheritance diagram for ADVIEWER.Main.MainMaster:

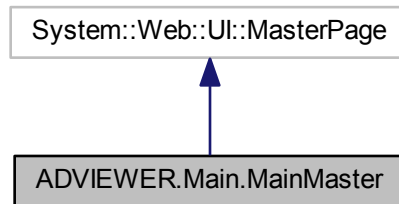

Collaboration diagram for ADVIEWER.Main.MainMaster:

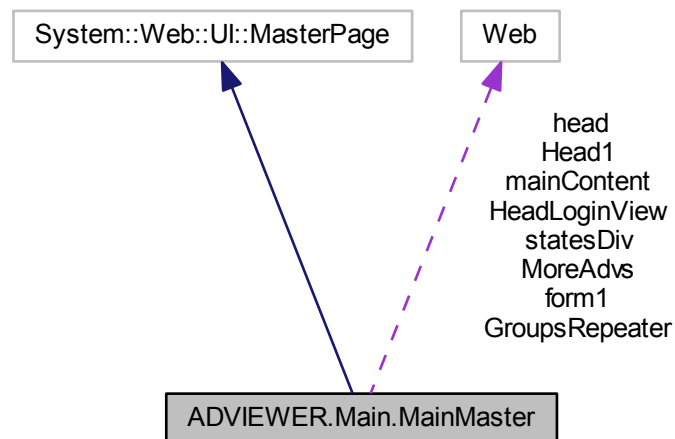

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **LoadGropus** ()
- void **getSubGroupsFunc** (object sender, RepeaterItemEventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlHead [Head1](#)

- Head1 control.*
- `global::System.Web.UI.WebControls.ContentPlaceholder` [head](#)
- head control.*
- `global::System.Web.UI.HtmlControls.HtmlForm` [form1](#)
- form1 control.*
- `global::System.Web.UI.WebControls.LoginView` [HeadLoginView](#)
- HeadLoginView control.*
- `global::System.Web.UI.HtmlControls.HtmlGenericControl` [statesDiv](#)
- statesDiv control.*
- `global::System.Web.UI.WebControls.Repeater` [GroupsRepeater](#)
- GroupsRepeater control.*
- `global::System.Web.UI.WebControls.ContentPlaceholder` [mainContent](#)
- mainContent control.*
- `global::System.Web.UI.WebControls.ContentPlaceholder` [MoreAdvs](#)
- MoreAdvs control.*

5.38.1 Member Data Documentation

5.38.1.1 `global.System.Web.UI.HtmlControls.HtmlForm` ADVIEWER.Main.MainMaster.form1 [protected]

form1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.38.1.2 `global.System.Web.UI.WebControls.Repeater` ADVIEWER.Main.MainMaster.GroupsRepeater [protected]

GroupsRepeater control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.38.1.3 `global.System.Web.UI.WebControls.ContentPlaceholder` ADVIEWER.Main.MainMaster.head [protected]

head control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.38.1.4 `global.System.Web.UI.HtmlControls.HtmlHead` ADVIEWER.Main.MainMaster.Head1 [protected]

Head1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.38.1.5 `global.System.Web.UI.WebControls.LoginView` ADVIEWER.Main.MainMaster.HeadLoginView [protected]

HeadLoginView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.38.1.6 `global.System.Web.UI.WebControls.ContentPlaceholder` ADVIEWER.Main.MainMaster.mainContent [protected]

mainContent control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.38.1.7 `global.System.Web.UI.WebControls.ContentPlaceholder ADVIEWER.Main.MainMaster.MoreAdvs` [protected]

MoreAdvs control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.38.1.8 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Main.MainMaster.statesDiv` [protected]

statesDiv control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- MainMaster.Master.cs
- MainMaster.Master.designer.cs

5.39 ADVIEWER.Member.ManageAdvGallery Class Reference

Inheritance diagram for ADVIEWER.Member.ManageAdvGallery:

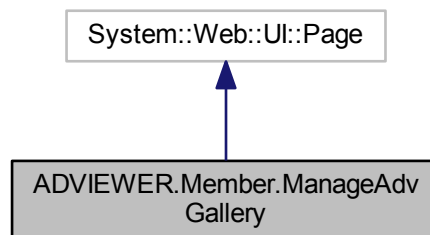

Collaboration diagram for ADVIEWER.Member.ManageAdvGallery:

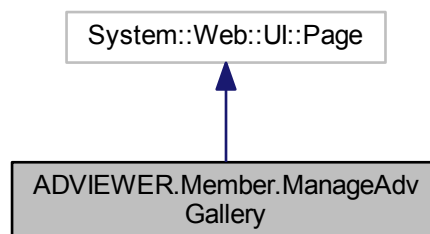

Protected Member Functions


- void **Page_Load** (object sender, EventArgs e)

The documentation for this class was generated from the following file:


- Member/ManageAdvGallery.aspx.cs

5.40 ADVIEWER.Manage.ManageMaster Class Reference

Inheritance diagram for ADVIEWER.Manage.ManageMaster:

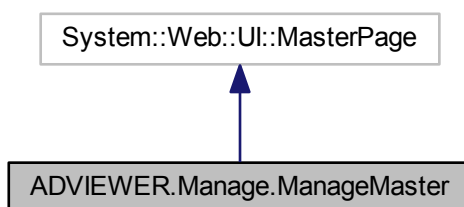

Collaboration diagram for ADVIEWER.Manage.ManageMaster:

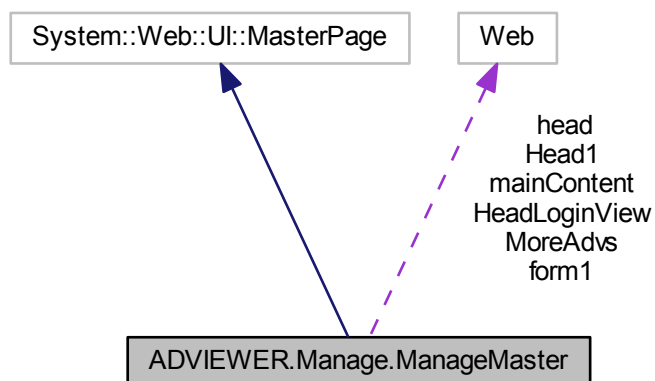

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **ExitFunction** (object sender, EventArgs e)

Protected Attributes

- `global::System.Web.UI.HtmlControls.HtmlHead` [Head1](#)
Head1 control.
- `global::System.Web.UI.WebControls.ContentPlaceholder` [head](#)
head control.
- `global::System.Web.UI.HtmlControls.HtmlForm` [form1](#)
form1 control.
- `global::System.Web.UI.WebControls.LoginView` [HeadLoginView](#)
HeadLoginView control.
- `global::System.Web.UI.WebControls.ContentPlaceholder` [mainContent](#)
mainContent control.
- `global::System.Web.UI.WebControls.ContentPlaceholder` [MoreAdvs](#)
MoreAdvs control.

5.40.1 Member Data Documentation

5.40.1.1 `global.System.Web.UI.HtmlControls.HtmlForm ADVIEWER.Manage.ManageMaster.form1` [protected]

form1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.40.1.2 `global.System.Web.UI.WebControls.ContentPlaceholder ADVIEWER.Manage.ManageMaster.head` [protected]

head control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.40.1.3 `global.System.Web.UI.HtmlControls.HtmlHead ADVIEWER.Manage.ManageMaster.Head1` [protected]

Head1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.40.1.4 `global.System.Web.UI.WebControls.LoginView ADVIEWER.Manage.ManageMaster.HeadLoginView` [protected]

HeadLoginView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.40.1.5 `global.System.Web.UI.WebControls.ContentPlaceholder ADVIEWER.Manage.ManageMaster.mainContent` [protected]

mainContent control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.40.1.6 `global.System.Web.UI.WebControls.ContentPlaceholder ADVIEWER.Manage.ManageMaster.MoreAdvs` [protected]

MoreAdvs control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/ManageMaster.Master.cs
- Manage/ManageMaster.Master.designer.cs

5.41 ADVIEWER.Member.MemberDefault Class Reference

Inheritance diagram for ADVIEWER.Member.MemberDefault:

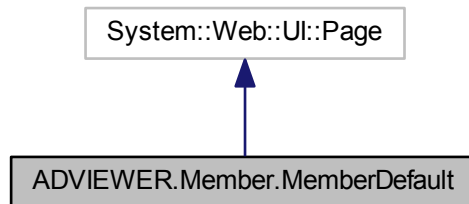

Collaboration diagram for ADVIEWER.Member.MemberDefault:

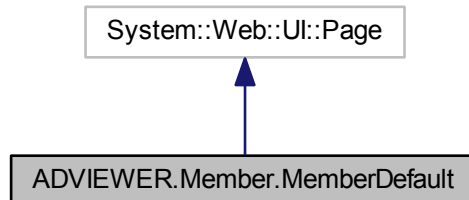

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **ExitFuction** (object sender, EventArgs e)

The documentation for this class was generated from the following file:

- Member/MemberDefault.aspx.cs

5.42 ADVIEWER.BAL.MemberFunctions Class Reference

Static Public Member Functions

- static bool **MakeNewAdvertisement** (int starCount, int advDuration, string title, string shortdescription, string description, string keywordStr, string price, string link, string fullName, string mobile, string tell, string telltime,


- string email, string yahooId, string address, int userId, string tempAdd, string mainAdd, string fileName, int groupId, int StateCityID)
- static string **GetUserFavoriteGroups** (int UserID)
 - static void **SetAdvRate** (int AdvId, Single Value)
 - static void **SaveImage** (string tempAdd, string mainAdd, string filename)
 - static int[] **ParseKeyWords** (string keywordStr)
 - static DataTable **UnconfirmedFreeAdvertisementsDataTable** ()
 - static void **ConfirmAdvertisement** (int AdvID)
 - static void **DenyAdvertisement** (int AdvID, string reason)
 - static void **AddNewTicket** (string text, string title, int userId)
 - static [AssignorTicket](#) **GetTicketData** (int id)
 - static List< [AssignorTicket](#) > **GetListTicketData** (int id)
 - static [AssignorTicket](#)[] **GetListTicketData** ()
 - static [AssignorComment](#)[] **GetListCommentData** ()
 - static [AssignorComment](#) **GetCommentData** (int id)
 - static void **DeleteTicket** (int TicketID)
 - static void **DeleteComment** (int CommentID)
 - static void **ConfirmComment** (int id)
 - static void **DeleteAdv** (int AdvID)
 - static [AssignorAdvertisement](#) **GetAdvertisementData** (int id)
 - static [AssignorAdvertisement](#)[] **GetUserAdvs** (int UserID)
 - static [AssignorAdvertisement](#)[] **GetUserConfirmedAdvs** (int UserID)
 - static [AssignorGroup](#)[] **GetSubGroups** ()
 - static [AssignorStateCity](#)[] **GetStateAndCityForDropDown** ()
 - static [AssignorGroup](#)[] **GetParentGroups** ()
 - static [AssignorGroup](#)[] **GetSubGroupsByID** (int ID)
 - static void **AddNewGroup** (string groupName, int?parentId)
 - static [AssignorAdvertisement](#)[] **GetAdvByGroupID** (int ID)
 - static object **UnconfirmedStaredAdvertisementsDataTable** ()
 - static void **setUserImage** (string tempAdd, string mainAdd, int userId, string fileName)
 - static void **RenewAdv** (int ID)
 - static void **deleteImage** (int userid)

The documentation for this class was generated from the following file:


- BAL/MemberFunctions.cs

5.43 ADVIEWER.Member.MemberMaster Class Reference

Inheritance diagram for ADVIEWER.Member.MemberMaster:

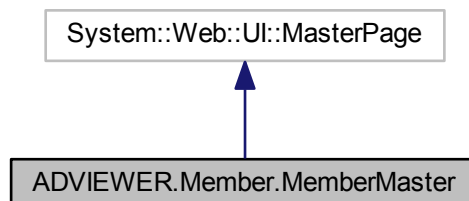

Collaboration diagram for ADVIEWER.Member.MemberMaster:

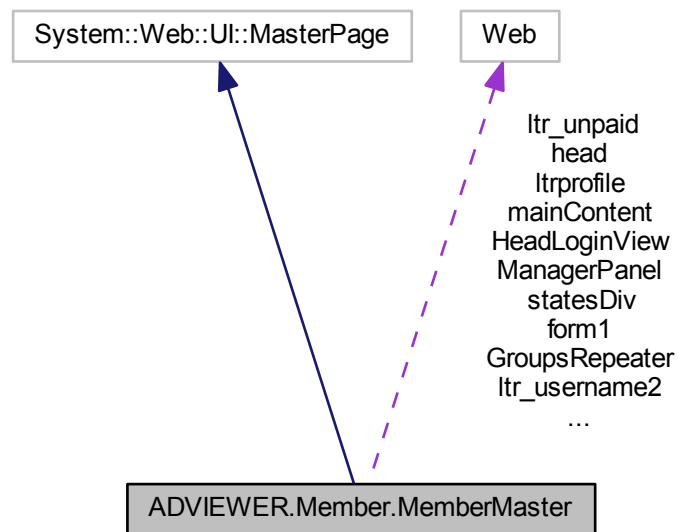

Public Attributes

- [AssignorUser](#) **UserName**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **LoadGropus** ()
- void **getSubGroupsFunc** (object sender, RepeaterItemEventArgs e)
- void **ExitFunction** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.ContentPlaceholder [head](#)
head control.
- global::System.Web.UI.HtmlControls.HtmlForm [form1](#)
form1 control.
- global::System.Web.UI.WebControls.LoginView [HeadLoginView](#)
HeadLoginView control.
- global::System.Web.UI.HtmlControls.HtmlGenericControl [statesDiv](#)
statesDiv control.
- global::System.Web.UI.WebControls.Repeater [GroupsRepeater](#)
GroupsRepeater control.
- global::System.Web.UI.WebControls.Literal [ltr_unpaid](#)
ltr_unpaid control.
- global::System.Web.UI.WebControls.ContentPlaceholder [mainContent](#)

mainContent control.

- `global::System.Web.UI.WebControls.Literal` [ltr_username2](#)

ltr_username2 control.

- `global::System.Web.UI.WebControls.Literal` [ManagerPanel](#)

ManagerPanel control.

- `global::System.Web.UI.WebControls.Literal` [ltrprofile](#)

ltrprofile control.

5.43.1 Member Data Documentation

5.43.1.1 `global.System.Web.UI.HtmlControls.HtmlForm ADVIEWER.Member.MemberMaster.form1` [protected]

form1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.43.1.2 `global.System.Web.UI.WebControls.Repeater ADVIEWER.Member.MemberMaster.GroupsRepeater` [protected]

GroupsRepeater control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.43.1.3 `global.System.Web.UI.WebControls.ContentPlaceHolder ADVIEWER.Member.MemberMaster.head` [protected]

head control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.43.1.4 `global.System.Web.UI.WebControls.LoginView ADVIEWER.Member.MemberMaster.HeadLoginView` [protected]

HeadLoginView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.43.1.5 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.MemberMaster.ltr_unpaid` [protected]

ltr_unpaid control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.43.1.6 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.MemberMaster.ltr_username2` [protected]

ltr_username2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.43.1.7 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.MemberMaster.ltrprofile` [protected]

ltrprofile control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.43.1.8 `global.System.Web.UI.WebControls.ContentPlaceHolder` `ADVIEWER.Member.MemberMaster.mainContent`
[protected]

mainContent control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.43.1.9 `global.System.Web.UI.WebControls.Literal` `ADVIEWER.Member.MemberMaster.ManagerPanel` [protected]

ManagerPanel control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.43.1.10 `global.System.Web.UI.HtmlControls.HtmlGenericControl` `ADVIEWER.Member.MemberMaster.statesDiv`
[protected]

statesDiv control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- Member/MemberMaster.Master.cs
- Member/MemberMaster.Master.designer.cs


5.44 ADVIEWER.DAL.Message Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Message:

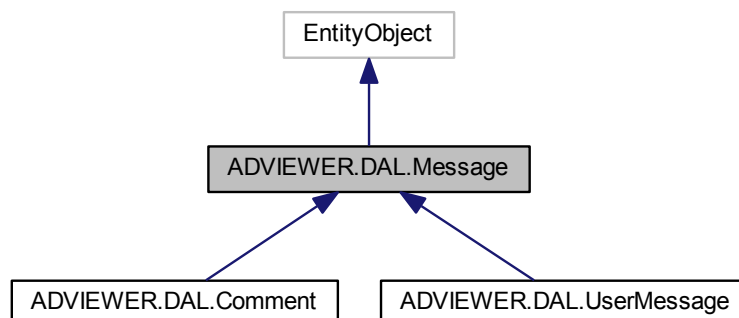

Collaboration diagram for ADVIEWER.DAL.Message:

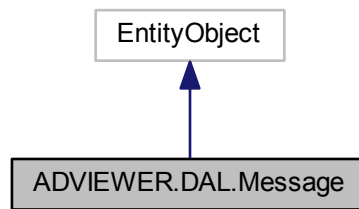

Static Public Member Functions

- static [Message](#) [CreateMessage](#) (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate)
Create a new [Message](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.String [Text](#) [get, set]
No Metadata Documentation available.
- global::System.DateTime [RegistrationDate](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [SenderId](#) [get, set]
No Metadata Documentation available.
- global::System.String [Email](#) [get, set]
No Metadata Documentation available.
- [User Sender](#) [get, set]
No Metadata Documentation available.
- EntityReference< [User](#) > [SenderReference](#) [get, set]
No Metadata Documentation available.

5.44.1 Detailed Description

No Metadata Documentation available.

5.44.2 Member Function Documentation

- 5.44.2.1 static [Message](#) [ADVIEWER.DAL.Message.CreateMessage](#) (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate) [inline],[static]

Create a new [Message](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>text</i>	Initial value of the Text property.
<i>registrationDate</i>	Initial value of the RegistrationDate property.

5.44.3 Property Documentation

5.44.3.1 `global.System.String ADVIEWER.DAL.Message.Email` [get], [set]

No Metadata Documentation available.

5.44.3.2 `global.System.Int32 ADVIEWER.DAL.Message.ID` [get], [set]

No Metadata Documentation available.

5.44.3.3 `global.System.DateTime ADVIEWER.DAL.Message.RegistrationDate` [get], [set]

No Metadata Documentation available.

5.44.3.4 `User ADVIEWER.DAL.Message.Sender` [get], [set]

No Metadata Documentation available.

5.44.3.5 `Nullable<global.System.Int32> ADVIEWER.DAL.Message.SenderID` [get], [set]

No Metadata Documentation available.

5.44.3.6 `EntityReference<User> ADVIEWER.DAL.Message.SenderReference` [get], [set]

No Metadata Documentation available.

5.44.3.7 `global.System.String ADVIEWER.DAL.Message.Text` [get], [set]

No Metadata Documentation available.


The documentation for this class was generated from the following file:

- DAL/Model1.Designer.cs


5.45 ADVIEWER.DAL.ModelContainer Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.ModelContainer:

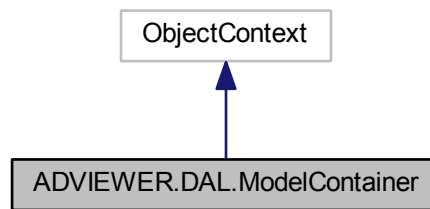

Collaboration diagram for ADVIEWER.DAL.ModelContainer:

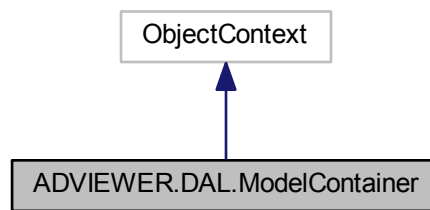

Public Member Functions

- [ModelContainer](#) ()
Initializes a new [ModelContainer](#) object using the connection string found in the '[ModelContainer](#)' section of the application configuration file.
- [ModelContainer](#) (string connectionString)
Initialize a new [ModelContainer](#) object.
- [ModelContainer](#) (EntityConnection connection)
Initialize a new [ModelContainer](#) object.
- void [AddToAdvertisements](#) ([Advertisement](#) advertisement)
Deprecated Method for adding a new object to the Advertisements EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToUsers](#) ([User](#) user)
Deprecated Method for adding a new object to the Users EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToTickets1](#) ([Ticket](#) ticket)
Deprecated Method for adding a new object to the Tickets1 EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToPayments1](#) ([Payment](#) payment)
Deprecated Method for adding a new object to the Payments1 EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

- void [AddToGroups](#) ([Group](#) group)
Deprecated Method for adding a new object to the Groups EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToContactMessages](#) ([ContactMessage](#) contactMessage)
Deprecated Method for adding a new object to the ContactMessages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToAdvertisementMessages](#) ([AdvertisementMessage](#) advertisementMessage)
Deprecated Method for adding a new object to the AdvertisementMessages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToKeyWords](#) ([KeyWord](#) keyWord)
Deprecated Method for adding a new object to the KeyWords EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToRates](#) ([Rate](#) rate)
Deprecated Method for adding a new object to the Rates EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToStateCities](#) ([StateCity](#) stateCity)
Deprecated Method for adding a new object to the StateCities EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToMessages](#) ([Message](#) message)
Deprecated Method for adding a new object to the Messages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

Properties

- ObjectSet< [Advertisement](#) > [Advertisements](#) [get]
No Metadata Documentation available.
- ObjectSet< [User](#) > [Users](#) [get]
No Metadata Documentation available.
- ObjectSet< [Ticket](#) > [Tickets1](#) [get]
No Metadata Documentation available.
- ObjectSet< [Payment](#) > [Payments1](#) [get]
No Metadata Documentation available.
- ObjectSet< [Group](#) > [Groups](#) [get]
No Metadata Documentation available.
- ObjectSet< [ContactMessage](#) > [ContactMessages](#) [get]
No Metadata Documentation available.
- ObjectSet< [AdvertisementMessage](#) > [AdvertisementMessages](#) [get]
No Metadata Documentation available.
- ObjectSet< [KeyWord](#) > [KeyWords](#) [get]
No Metadata Documentation available.
- ObjectSet< [Rate](#) > [Rates](#) [get]
No Metadata Documentation available.
- ObjectSet< [StateCity](#) > [StateCities](#) [get]
No Metadata Documentation available.
- ObjectSet< [Message](#) > [Messages](#) [get]
No Metadata Documentation available.

5.45.1 Detailed Description

No Metadata Documentation available.

5.45.2 Constructor & Destructor Documentation

5.45.2.1 ADVIEWER.DAL.ModelContainer.ModelContainer () [inline]

Initializes a new [ModelContainer](#) object using the connection string found in the '[ModelContainer](#)' section of the application configuration file.

5.45.2.2 ADVIEWER.DAL.ModelContainer.ModelContainer (string *connectionString*) [inline]

Initialize a new [ModelContainer](#) object.

5.45.2.3 ADVIEWER.DAL.ModelContainer.ModelContainer (EntityConnection *connection*) [inline]

Initialize a new [ModelContainer](#) object.

5.45.3 Member Function Documentation

5.45.3.1 void ADVIEWER.DAL.ModelContainer.AddToAdvertisementMessages (AdvertisementMessage *advertisementMessage*) [inline]

Deprecated Method for adding a new object to the AdvertisementMessages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.3.2 void ADVIEWER.DAL.ModelContainer.AddToAdvertisements (Advertisement *advertisement*) [inline]

Deprecated Method for adding a new object to the Advertisements EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.3.3 void ADVIEWER.DAL.ModelContainer.AddToContactMessages (ContactMessage *contactMessage*) [inline]

Deprecated Method for adding a new object to the ContactMessages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.3.4 void ADVIEWER.DAL.ModelContainer.AddToGroups (Group *group*) [inline]

Deprecated Method for adding a new object to the Groups EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.3.5 void ADVIEWER.DAL.ModelContainer.AddToKeyWords (KeyWord *keyWord*) [inline]

Deprecated Method for adding a new object to the KeyWords EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.3.6 void ADVIEWER.DAL.ModelContainer.AddToMessages (Message *message*) [inline]

Deprecated Method for adding a new object to the Messages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.3.7 void ADVIEWER.DAL.ModelContainer.AddToPayments1 (**Payment** *payment*) [inline]

Deprecated Method for adding a new object to the Payments1 EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.3.8 void ADVIEWER.DAL.ModelContainer.AddToRates (**Rate** *rate*) [inline]

Deprecated Method for adding a new object to the Rates EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.3.9 void ADVIEWER.DAL.ModelContainer.AddToStateCities (**StateCity** *stateCity*) [inline]

Deprecated Method for adding a new object to the StateCities EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.3.10 void ADVIEWER.DAL.ModelContainer.AddToTickets1 (**Ticket** *ticket*) [inline]

Deprecated Method for adding a new object to the Tickets1 EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.3.11 void ADVIEWER.DAL.ModelContainer.AddToUsers (**User** *user*) [inline]

Deprecated Method for adding a new object to the Users EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.45.4 Property Documentation

5.45.4.1 ObjectSet<AdvertisementMessage> ADVIEWER.DAL.ModelContainer.AdvertisementMessages [get]

No Metadata Documentation available.

5.45.4.2 ObjectSet<Advertisment> ADVIEWER.DAL.ModelContainer.Advertisments [get]

No Metadata Documentation available.

5.45.4.3 ObjectSet<ContactMessage> ADVIEWER.DAL.ModelContainer.ContactMessages [get]

No Metadata Documentation available.

5.45.4.4 ObjectSet<Group> ADVIEWER.DAL.ModelContainer.Groups [get]

No Metadata Documentation available.

5.45.4.5 ObjectSet<KeyWord> ADVIEWER.DAL.ModelContainer.KeyWords [get]

No Metadata Documentation available.

5.45.4.6 ObjectSet<Message> ADVIEWER.DAL.ModelContainer.Messages [get]

No Metadata Documentation available.

5.45.4.7 **ObjectSet<Payment>** ADVIEWER.DAL.ModelContainer.Payments1 [get]

No Metadata Documentation available.

5.45.4.8 **ObjectSet<Rate>** ADVIEWER.DAL.ModelContainer.Rates [get]

No Metadata Documentation available.

5.45.4.9 **ObjectSet<StateCity>** ADVIEWER.DAL.ModelContainer.StateCities [get]

No Metadata Documentation available.

5.45.4.10 **ObjectSet<Ticket>** ADVIEWER.DAL.ModelContainer.Tickets1 [get]

No Metadata Documentation available.

5.45.4.11 **ObjectSet<User>** ADVIEWER.DAL.ModelContainer.Users [get]

No Metadata Documentation available.


The documentation for this class was generated from the following file:

- DAL/Model1.Designer.cs


5.46 ADVIEWER.DAL.Payment Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Payment:

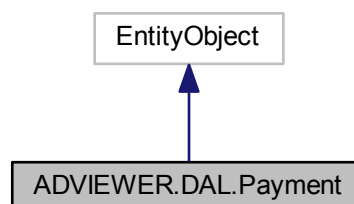

Collaboration diagram for ADVIEWER.DAL.Payment:

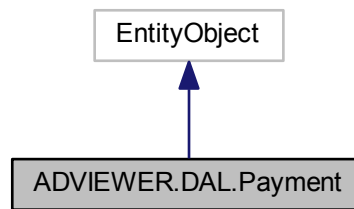

Static Public Member Functions

- static [Payment CreatePayment](#) (global::System.Int64 requestID)
Create a new [Payment](#) object.

Properties

- global::System.Int64 [RequestID](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int64 > [UserID](#) [get, set]
No Metadata Documentation available.
- global::System.String [AgahilID](#) [get, set]
No Metadata Documentation available.
- global::System.String [Title](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.DateTime > [RegisterDate](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [Mablagh](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Boolean > [IsRead](#) [get, set]
No Metadata Documentation available.
- global::System.String [SanadNum](#) [get, set]
No Metadata Documentation available.
- global::System.String [ResidNum](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [Status](#) [get, set]
No Metadata Documentation available.
- global::System.String [Name](#) [get, set]
No Metadata Documentation available.
- global::System.String [Tel](#) [get, set]
No Metadata Documentation available.
- global::System.String [Description](#) [get, set]
No Metadata Documentation available.
- global::System.String [Bank](#) [get, set]
No Metadata Documentation available.

5.46.1 Detailed Description

No Metadata Documentation available.

5.46.2 Member Function Documentation

5.46.2.1 `static Payment ADVIEWER.DAL.Payment.CreatePayment (global::System.Int64 requestID) [inline], [static]`

Create a new [Payment](#) object.

Parameters

<i>requestID</i>	Initial value of the RequestID property.
------------------	--

5.46.3 Property Documentation

5.46.3.1 `global.System.String ADVIEWER.DAL.Payment.AgahilID [get], [set]`

No Metadata Documentation available.

5.46.3.2 `global.System.String ADVIEWER.DAL.Payment.Bank [get], [set]`

No Metadata Documentation available.

5.46.3.3 `global.System.String ADVIEWER.DAL.Payment.Description [get], [set]`

No Metadata Documentation available.

5.46.3.4 `Nullable<global.System.Boolean> ADVIEWER.DAL.Payment.IsRead [get], [set]`

No Metadata Documentation available.

5.46.3.5 `Nullable<global.System.Int32> ADVIEWER.DAL.Payment.Mablagh [get], [set]`

No Metadata Documentation available.

5.46.3.6 `global.System.String ADVIEWER.DAL.Payment.Name [get], [set]`

No Metadata Documentation available.

5.46.3.7 `Nullable<global.System.DateTime> ADVIEWER.DAL.Payment.RegisterDate [get], [set]`

No Metadata Documentation available.

5.46.3.8 `global.System.Int64 ADVIEWER.DAL.Payment.RequestID [get], [set]`

No Metadata Documentation available.

5.46.3.9 `global.System.String ADVIEWER.DAL.Payment.ResidNum` `[get]`, `[set]`

No Metadata Documentation available.

5.46.3.10 `global.System.String ADVIEWER.DAL.Payment.SanadNum` `[get]`, `[set]`

No Metadata Documentation available.

5.46.3.11 `Nullable<global.System.Int32> ADVIEWER.DAL.Payment.Status` `[get]`, `[set]`

No Metadata Documentation available.

5.46.3.12 `global.System.String ADVIEWER.DAL.Payment.Tel` `[get]`, `[set]`

No Metadata Documentation available.

5.46.3.13 `global.System.String ADVIEWER.DAL.Payment.Title` `[get]`, `[set]`

No Metadata Documentation available.

5.46.3.14 `Nullable<global.System.Int64> ADVIEWER.DAL.Payment.UserID` `[get]`, `[set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- `DAL/Model1.Designer.cs`

5.47 ADVIEWER.Main.Profile Class Reference

Inheritance diagram for ADVIEWER.Main.Profile:



Collaboration diagram for ADVIEWER.Main.Profile:

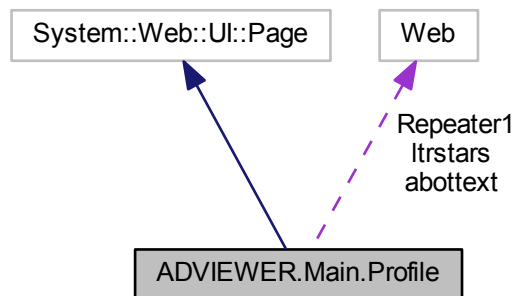

Public Attributes

- string **about**

Protected Member Functions

- void **Page_Init** (object sender, EventArgs e)
- void **Page_Load** (object sender, EventArgs e)
- void **Repeater1_ItemDataBound** (object sender, RepeaterItemEventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl **abottext**
abottext control.
- global::System.Web.UI.WebControls.Literal **ltrstars**
ltrstars control.
- global::System.Web.UI.WebControls.Repeater **Repeater1**
Repeater1 control.
- global::SiteUtils.CollectionPager **CollectionPager1**
CollectionPager1 control.

5.47.1 Member Data Documentation

5.47.1.1 global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Main.Profile.abottext [protected]

abottext control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.47.1.2 global.SiteUtils.CollectionPager ADVIEWER.Main.Profile.CollectionPager1 [protected]

CollectionPager1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.47.1.3 `global.System.Web.UI.WebControls.Literal ADVIEWER.Main.Profile.Itrstars` `[protected]`

Itrstars control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.47.1.4 `global.System.Web.UI.WebControls.Repeater ADVIEWER.Main.Profile.Repeater1` `[protected]`

Repeater1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:

- Profile.aspx.cs
- Profile.aspx.designer.cs

5.48 ADVIEWER.BAL.PublicFunctions Class Reference

Classes

- struct [Wight](#)

Static Public Member Functions

- static AssignorClass **MakeAssignor**< **EntityClass**, **AssignorClass** > (EntityClass EntityObject)
- static [AssignorAdvertisement](#)[] **GetLast9Advs** ()
- static DataTable **ToDataTable**< **T** > (List< **T** > items)
- static [AssignorStateCity](#)[] **GetStatesAndCities** ()
- static [AssignorAdvertisement](#)[] **GetAdvByStateID** (int ID)
- static List< [StateAndCitiesForReapeater](#) > **GetStatesWithCities** ()
- static string **SolarDateConvector** (object InputDate, int Mode=2, string type="")
- static [AssignorComment](#)[] **GetAdvComments** (int AdvID)
- static void **SetComment** (int AdvID, string Text, string Email, int UserID)
- static [AssignorAdvertisement](#)[] **SortByRate** ([AssignorAdvertisement](#)[] AdvList)


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.49 ADVIEWER.DAL.Rate Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Rate:



Collaboration diagram for ADVIEWER.DAL.Rate:



Static Public Member Functions

- static [Rate CreateRate](#) (global::System.Int32 id, global::System.Int32 advertisementId, global::System.Single value)
Create a new [Rate](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.Int32 [AdvertisementId](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [UserId](#) [get, set]
No Metadata Documentation available.
- global::System.Single [Value](#) [get, set]
No Metadata Documentation available.
- [Advertisement Advertisement](#) [get, set]
No Metadata Documentation available.
- EntityReference< [Advertisement](#) > [AdvertisementReference](#) [get, set]
No Metadata Documentation available.

- [User User](#) [get, set]
No Metadata Documentation available.
- EntityReference<[User](#)> [UserReference](#) [get, set]
No Metadata Documentation available.

5.49.1 Detailed Description

No Metadata Documentation available.

5.49.2 Member Function Documentation

5.49.2.1 static [Rate](#) ADVIEWER.DAL.Rate.CreateRate ([global::System.Int32 id](#), [global::System.Int32 advertisementId](#), [global::System.Single value](#)) [inline],[static]

Create a new [Rate](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>advertisementId</i>	Initial value of the AdvertisementId property.
<i>value</i>	Initial value of the Value property.

5.49.3 Property Documentation

5.49.3.1 [Advertisement](#) ADVIEWER.DAL.Rate.Advertisement [get],[set]

No Metadata Documentation available.

5.49.3.2 [global.System.Int32](#) ADVIEWER.DAL.Rate.AdvertisementId [get],[set]

No Metadata Documentation available.

5.49.3.3 EntityReference<[Advertisement](#)> ADVIEWER.DAL.Rate.AdvertisementReference [get],[set]

No Metadata Documentation available.

5.49.3.4 [global.System.Int32](#) ADVIEWER.DAL.Rate.ID [get],[set]

No Metadata Documentation available.

5.49.3.5 [User](#) ADVIEWER.DAL.Rate.User [get],[set]

No Metadata Documentation available.

5.49.3.6 Nullable<[global.System.Int32](#)> ADVIEWER.DAL.Rate.UserId [get],[set]

No Metadata Documentation available.

5.49.3.7 EntityReference<[User](#)> ADVIEWER.DAL.Rate.UserReference [get],[set]

No Metadata Documentation available.

5.49.3.8 `global.System.Single ADVIEWER.DAL.Rate.Value` `[get]`, `[set]`

No Metadata Documentation available.


The documentation for this class was generated from the following file:

- DAL/Model1.Designer.cs


5.50 ADVIEWER.Main.RatingHandler Class Reference

Summary description for [RatingHandler](#)

Inheritance diagram for ADVIEWER.Main.RatingHandler:

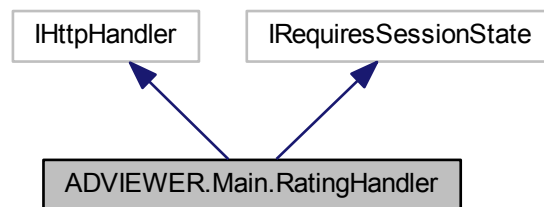

Collaboration diagram for ADVIEWER.Main.RatingHandler:

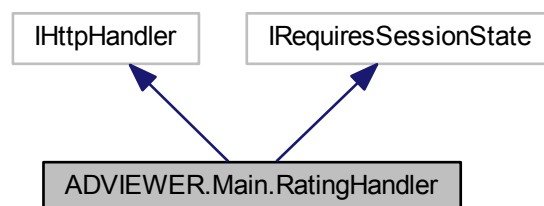

Public Member Functions

- void **ProcessRequest** (HttpContext context)

Properties

- bool **IsReusable** `[get]`

5.50.1 Detailed Description


Summary description for [RatingHandler](#)

The documentation for this class was generated from the following file:


- RatingHandler.ashx.cs

5.51 ADVIEWER.Account.Register Class Reference

Inheritance diagram for ADVIEWER.Account.Register:

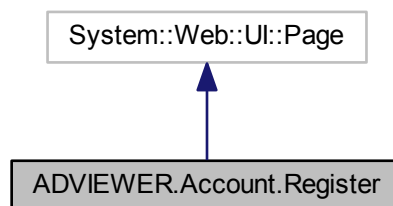

Collaboration diagram for ADVIEWER.Account.Register:

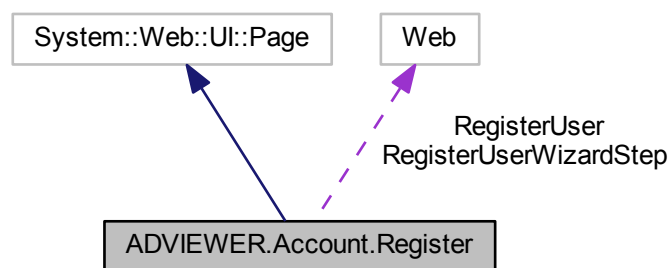

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **RegisterUser_CreatedUser** (object sender, EventArgs e)
- void **setErrorStyle** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.CreateUserWizard [RegisterUser](#)

RegisterUser control.

- `global::System.Web.UI.WebControls.CreateUserWizardStep` [RegisterUserWizardStep](#)

RegisterUserWizardStep control.

5.51.1 Member Data Documentation

5.51.1.1 `global.System.Web.UI.WebControls.CreateUserWizard` `ADVIEWER.Account.Register.RegisterUser` [protected]

RegisterUser control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.51.1.2 `global.System.Web.UI.WebControls.CreateUserWizardStep` `ADVIEWER.Account.Register.RegisterUserWizardStep` [protected]

RegisterUserWizardStep control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- `Account/Register.aspx.cs`
- `Account/Register.aspx.designer.cs`


5.52 ADVIEWER.Rss Class Reference

Summary description for [Rss](#)

Inheritance diagram for `ADVIEWER.Rss`:



Collaboration diagram for ADVIEWER.Rss:



Protected Member Functions

- override void **PopulateRss** (string rssName, string userName)

5.52.1 Detailed Description

Summary description for [Rss](#)

The documentation for this class was generated from the following file:

- Rss.ashx.cs

5.53 ADVIEWER.BAL.ShowAdvertisement Class Reference

Public Member Functions

- **ShowAdvertisement** (int ID, string Title, string Description, string FullName, string Pic, DateTime RegistrationDate, int starcount, int UserId)

Public Attributes


- string **Description**
- int **ID**
- DateTime **RegistrationDate**

The documentation for this class was generated from the following file:


- BAL/MemberFunctions.cs

5.54 ADVIEWER.Main.ShowGroupAdvs Class Reference

Inheritance diagram for ADVIEWER.Main.ShowGroupAdvs:

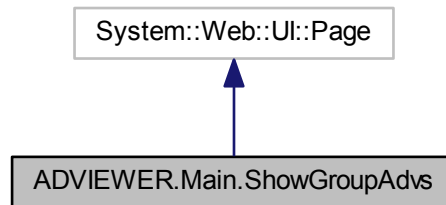

Collaboration diagram for ADVIEWER.Main.ShowGroupAdvs:

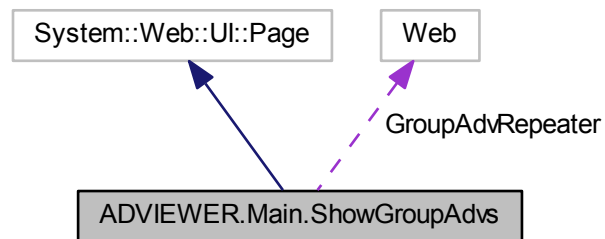

Public Attributes

- string **GroupTitle**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Repeater [GroupAdvRepeater](#)
GroupAdvRepeater control.

5.54.1 Member Data Documentation

5.54.1.1 `global.System.Web.UI.WebControls.Repeater` ADVIEWER.Main.ShowGroupAdvs.GroupAdvRepeater [protected]

GroupAdvRepeater control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- ShowGroupAdvs.aspx.cs
- ShowGroupAdvs.aspx.designer.cs

5.55 ADVIEWER.Main.ShowStateAdvs Class Reference

Inheritance diagram for ADVIEWER.Main.ShowStateAdvs:

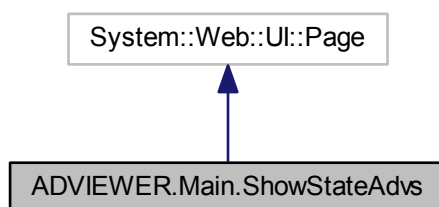

Collaboration diagram for ADVIEWER.Main.ShowStateAdvs:

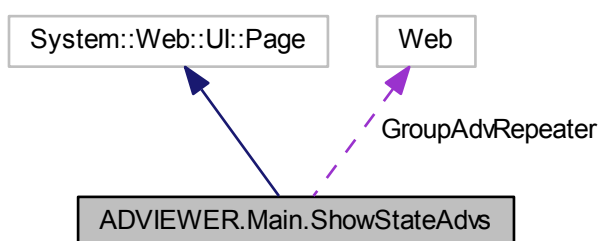

Public Attributes

- string **StateTitle**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Repeater [GroupAdvRepeater](#)
GroupAdvRepeater control.

5.55.1 Member Data Documentation

5.55.1.1 global::System.Web.UI.WebControls.Repeater ADVIEWER.Main.ShowStateAdvs.GroupAdvRepeater [protected]

GroupAdvRepeater control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- ShowStateAdvs.aspx.cs
- ShowStateAdvs.aspx.designer.cs

5.56 ADVIEWER.Member.SpecialAdvprivileges Class Reference

Inheritance diagram for ADVIEWER.Member.SpecialAdvprivileges:

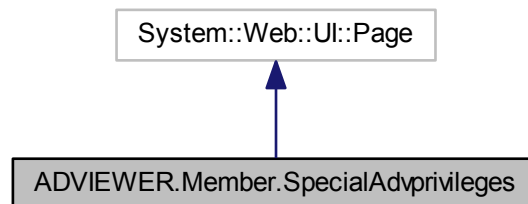

Collaboration diagram for ADVIEWER.Member.SpecialAdvprivileges:

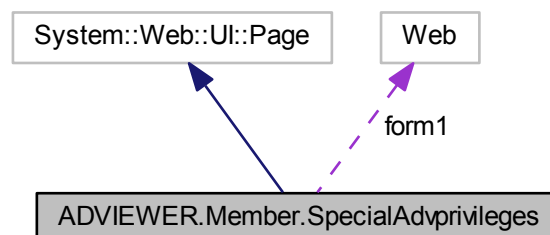

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlForm [form1](#)

form1 control.

5.56.1 Member Data Documentation

5.56.1.1 global.System.Web.UI.HtmlControls.HtmlForm ADVIEWER.Member.SpecialAdvprivileges.form1 [protected]

form1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:

- Member/SpecialAdvprivileges.aspx.cs
- Member/SpecialAdvprivileges.aspx.designer.cs

5.57 ADVIEWER.BAL.StateAndCitiesForReapeater Class Reference

Public Member Functions

- **StateAndCitiesForReapeater** (int ID)

Properties

- int **ID** [get, set]
- string **Name** [get, set]
- [StateCity\[\]](#) **Cities** [get, set]


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.58 ADVIEWER.DAL.StateCity Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.StateCity:

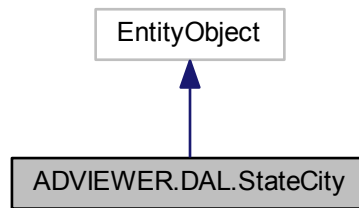

Collaboration diagram for ADVIEWER.DAL.StateCity:

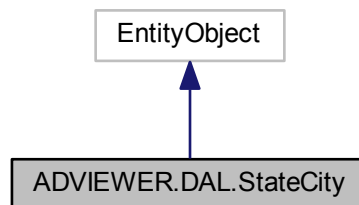

Static Public Member Functions

- static [StateCity CreateStateCity](#) (global::System.Int32 id, global::System.String name)
Create a new [StateCity](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.String [Name](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [Stateld](#) [get, set]
No Metadata Documentation available.
- EntityCollection< [Advertisement](#) > [Advertisements](#) [get, set]
No Metadata Documentation available.
- EntityCollection< [StateCity](#) > [Cities](#) [get, set]
No Metadata Documentation available.
- [StateCity State](#) [get, set]
No Metadata Documentation available.
- EntityReference< [StateCity](#) > [StateReference](#) [get, set]
No Metadata Documentation available.

5.58.1 Detailed Description

No Metadata Documentation available.

5.58.2 Member Function Documentation

5.58.2.1 `static StateCity ADVIEWER.DAL.StateCity.CreateStateCity (global::System.Int32 id, global::System.String name)`
`[inline], [static]`

Create a new [StateCity](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>name</i>	Initial value of the Name property.

5.58.3 Property Documentation

5.58.3.1 `EntityCollection<Advertisement> ADVIEWER.DAL.StateCity.Advertisements` `[get], [set]`

No Metadata Documentation available.

5.58.3.2 `EntityCollection<StateCity> ADVIEWER.DAL.StateCity.Cities` `[get], [set]`

No Metadata Documentation available.

5.58.3.3 `global.System.Int32 ADVIEWER.DAL.StateCity.ID` `[get], [set]`

No Metadata Documentation available.

5.58.3.4 `global.System.String ADVIEWER.DAL.StateCity.Name` `[get], [set]`

No Metadata Documentation available.

5.58.3.5 `StateCity ADVIEWER.DAL.StateCity.State` `[get], [set]`

No Metadata Documentation available.

5.58.3.6 `Nullable<global.System.Int32> ADVIEWER.DAL.StateCity.StateId` `[get], [set]`

No Metadata Documentation available.

5.58.3.7 `EntityReference<StateCity> ADVIEWER.DAL.StateCity.StateReference` `[get], [set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.59 ADVIEWER.Main.StateCityList Class Reference

Inheritance diagram for ADVIEWER.Main.StateCityList:

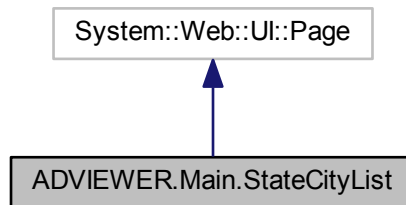

Collaboration diagram for ADVIEWER.Main.StateCityList:

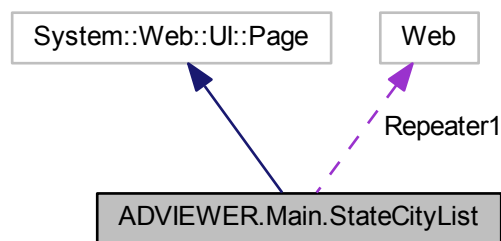

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Repeater [Repeater1](#)
Repeater1 control.

5.59.1 Member Data Documentation

5.59.1.1 global::System.Web.UI.WebControls.Repeater **ADVIEWER.Main.StateCityList.Repeater1** [protected]

Repeater1 control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- StateCityList.aspx.cs
- StateCityList.aspx.designer.cs

5.60 ADVIEWER.Manage.StatesCitiesList Class Reference

Inheritance diagram for ADVIEWER.Manage.StatesCitiesList:

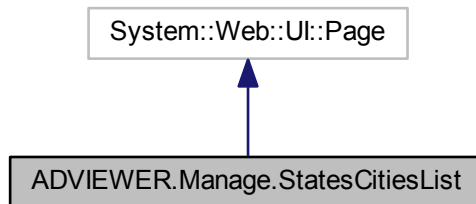

Collaboration diagram for ADVIEWER.Manage.StatesCitiesList:

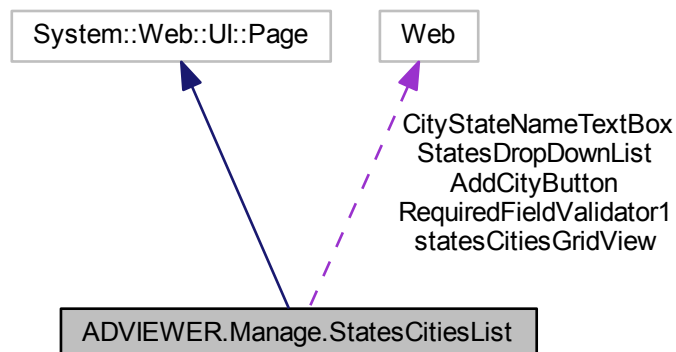

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **statesCitiesGridView_RowCommand** (object sender, GridViewCommandEventArgs e)
- void **statesCitiesGridView_RowDataBound** (object sender, GridViewRowEventArgs e)
- void **statesCitiesGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **AddCityButton_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [CityStateNameTextBox](#)

CityStateNameTextBox control.

- `global::System.Web.UI.WebControls.RequiredFieldValidator` [RequiredFieldValidator1](#)

RequiredFieldValidator1 control.

- `global::System.Web.UI.WebControls.DropDownList` [StatesDropDownList](#)

StatesDropDownList control.

- `global::System.Web.UI.WebControls.Button` [AddCityButton](#)

AddCityButton control.

- `global::System.Web.UI.WebControls.GridView` [statesCitiesGridView](#)

statesCitiesGridView control.

5.60.1 Member Data Documentation

5.60.1.1 `global.System.Web.UI.WebControls.Button ADVIEWER.Manage.StatesCitiesList.AddCityButton` [protected]

AddCityButton control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.60.1.2 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.StatesCitiesList.CityStateNameTextBox` [protected]

CityStateNameTextBox control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.60.1.3 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Manage.StatesCitiesList.RequiredFieldValidator1` [protected]

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.60.1.4 `global.System.Web.UI.WebControls.GridView ADVIEWER.Manage.StatesCitiesList.statesCitiesGridView` [protected]

statesCitiesGridView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.60.1.5 `global.System.Web.UI.WebControls.DropDownList ADVIEWER.Manage.StatesCitiesList.StatesDropDownList` [protected]

StatesDropDownList control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- `Manage/StatesCitiesList.aspx.cs`
- `Manage/StatesCitiesList.aspx.designer.cs`

5.61 ADVIEWER.Member.TestMail Class Reference

Inheritance diagram for ADVIEWER.Member.TestMail:

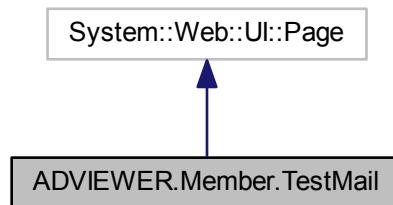

Collaboration diagram for ADVIEWER.Member.TestMail:

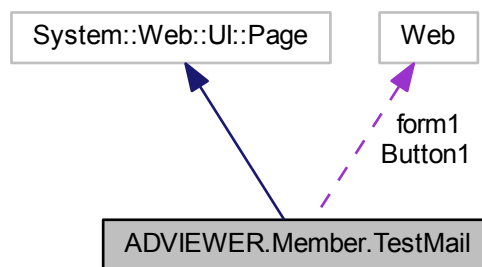

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **Button1_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlForm **form1**
form1 control.
- global::System.Web.UI.WebControls.Button **Button1**
Button1 control.

5.61.1 Member Data Documentation

5.61.1.1 global::System.Web.UI.WebControls.Button **ADVIEWER.Member.TestMail.Button1** [protected]

Button1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.61.1.2 `global.System.Web.UI.HtmlControls.HtmlForm ADVIEWER.Member.TestMail.form1` [protected]

form1 control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/TestMail.aspx.cs
- Member/TestMail.aspx.designer.cs

5.62 ADVIEWER.BAL.Thumbnail Class Reference

Inheritance diagram for ADVIEWER.BAL.Thumbnail:

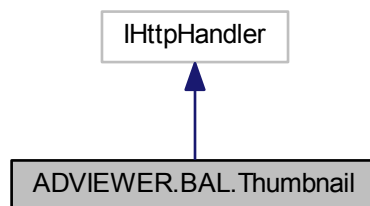

Collaboration diagram for ADVIEWER.BAL.Thumbnail:

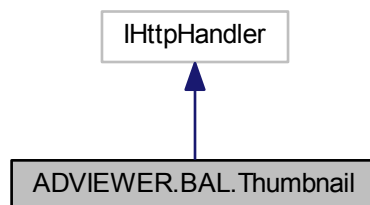

Public Member Functions

- void **ProcessRequest** (HttpContext context)

Properties

- bool **IsReusable** [get]


The documentation for this class was generated from the following file:

- Member/Thumbnail.ashx.cs


5.63 ADVIEWER.DAL.Ticket Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Ticket:



Collaboration diagram for ADVIEWER.DAL.Ticket:



Static Public Member Functions

- static [Ticket CreateTicket](#) (global::System.Int32 id, global::System.Int32 userID)
Create a new [Ticket](#) object.

Properties

- global::System.Int32 **ID** [get, set]

- No Metadata Documentation available.*
- global::System.Int32 [UserID](#) [get, set]
- No Metadata Documentation available.*
- global::System.String [Title](#) [get, set]
- No Metadata Documentation available.*
- global::System.String [Text](#) [get, set]
- No Metadata Documentation available.*
- Nullable< global::System.DateTime > [RegDate](#) [get, set]
- No Metadata Documentation available.*
- global::System.String [Priority](#) [get, set]
- No Metadata Documentation available.*
- Nullable< global::System.Boolean > [IsRead](#) [get, set]
- No Metadata Documentation available.*
- Nullable< global::System.DateTime > [LastUpdate](#) [get, set]
- No Metadata Documentation available.*
- global::System.String [Answer](#) [get, set]
- No Metadata Documentation available.*
- [User](#) [User](#) [get, set]
- No Metadata Documentation available.*
- EntityReference< [User](#) > [UserReference](#) [get, set]
- No Metadata Documentation available.*

5.63.1 Detailed Description

No Metadata Documentation available.

5.63.2 Member Function Documentation

5.63.2.1 static [Ticket](#) [ADVIEWSER.DAL.Ticket.CreateTicket](#) (global::System.Int32 *id*, global::System.Int32 *userID*)
[inline],[static]

Create a new [Ticket](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>userID</i>	Initial value of the UserID property.

5.63.3 Property Documentation

5.63.3.1 global::System.String [ADVIEWSER.DAL.Ticket.Answer](#) [get],[set]

No Metadata Documentation available.

5.63.3.2 global::System.Int32 [ADVIEWSER.DAL.Ticket.ID](#) [get],[set]

No Metadata Documentation available.

5.63.3.3 Nullable<global::System.Boolean> [ADVIEWSER.DAL.Ticket.IsRead](#) [get],[set]

No Metadata Documentation available.

5.63.3.4 `Nullable<global.System.DateTime> ADVIEWER.DAL.Ticket.LastUpdate` `[get]`, `[set]`

No Metadata Documentation available.

5.63.3.5 `global.System.String ADVIEWER.DAL.Ticket.Priority` `[get]`, `[set]`

No Metadata Documentation available.

5.63.3.6 `Nullable<global.System.DateTime> ADVIEWER.DAL.Ticket.RegDate` `[get]`, `[set]`

No Metadata Documentation available.

5.63.3.7 `global.System.String ADVIEWER.DAL.Ticket.Text` `[get]`, `[set]`

No Metadata Documentation available.

5.63.3.8 `global.System.String ADVIEWER.DAL.Ticket.Title` `[get]`, `[set]`

No Metadata Documentation available.

5.63.3.9 `User ADVIEWER.DAL.Ticket.User` `[get]`, `[set]`

No Metadata Documentation available.

5.63.3.10 `global.System.Int32 ADVIEWER.DAL.Ticket.UserID` `[get]`, `[set]`

No Metadata Documentation available.

5.63.3.11 `EntityReference<User> ADVIEWER.DAL.Ticket.UserReference` `[get]`, `[set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.64 ADVIEWER.Manage.Tickets Class Reference

Inheritance diagram for ADVIEWER.Manage.Tickets:

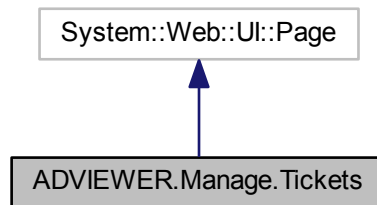

Collaboration diagram for ADVIEWER.Manage.Tickets:

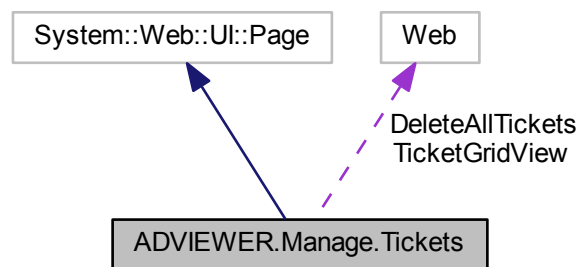

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **TicketGridView_RowCommand** (object sender, GridViewCommandEventArgs e)
- void **DeleteSelectedTickets** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.GridView [TicketGridView](#)
TicketGridView control.
- global::System.Web.UI.WebControls.LinkButton [DeleteAllTickets](#)
DeleteAllTickets control.

5.64.1 Member Data Documentation

5.64.1.1 `global.System.Web.UI.WebControls.LinkButton` ADVIEWER.Manage.Tickets.DeleteAllTickets [protected]

DeleteAllTickets control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.64.1.2 `global.System.Web.UI.WebControls.GridView` ADVIEWER.Manage.Tickets.TicketGridView [protected]

TicketGridView control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/Tickets.aspx.cs
- Manage/Tickets.aspx.designer.cs

5.65 ADVIEWER.Member.TicketsList Class Reference

Inheritance diagram for ADVIEWER.Member.TicketsList:

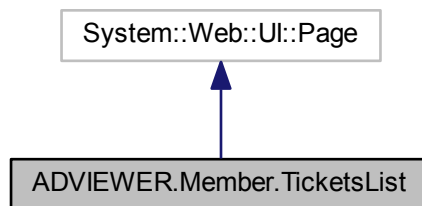

Collaboration diagram for ADVIEWER.Member.TicketsList:

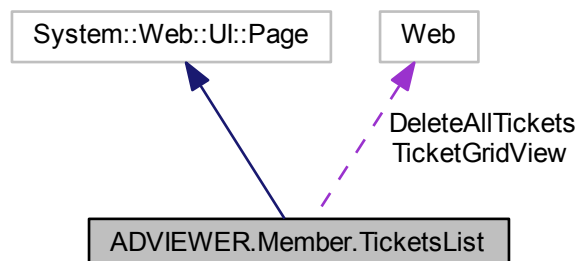

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **TicketGridView_RowCommand** (object sender, GridViewCommandEventArgs e)
- void **DeleteSelectedTickets** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.GridView [TicketGridView](#)
TicketGridView control.
- global::System.Web.UI.WebControls.LinkButton [DeleteAllTickets](#)
DeleteAllTickets control.

5.65.1 Member Data Documentation

5.65.1.1 global.System.Web.UI.WebControls.LinkButton ADVIEWER.Member.TicketsList.DeleteAllTickets [protected]

DeleteAllTickets control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.65.1.2 global.System.Web.UI.WebControls.GridView ADVIEWER.Member.TicketsList.TicketGridView [protected]

TicketGridView control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/TicketsList.aspx.cs
- Member/TicketsList.aspx.designer.cs

5.66 ADVIEWER.Manage.UnconfirmedAdvs Class Reference

Inheritance diagram for ADVIEWER.Manage.UnconfirmedAdvs:

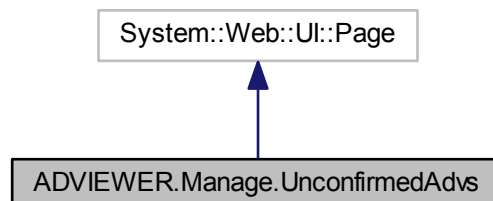

Collaboration diagram for ADVIEWER.Manage.UnconfirmedAdvs:

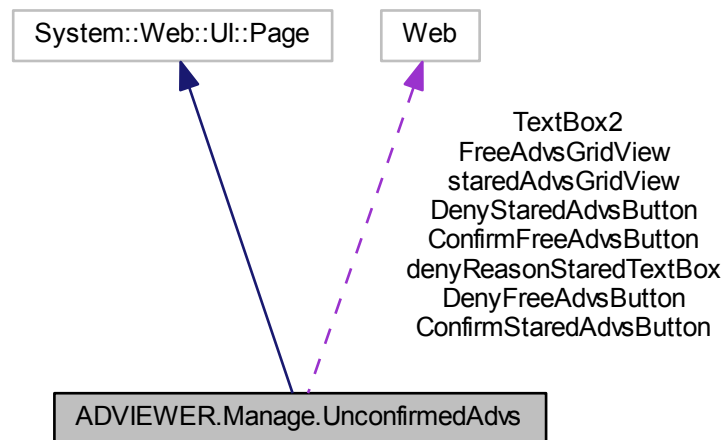

Public Attributes

- int **freeAdvsCount**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **FreeAdvsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **staredAdvsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **ConfirmFreeAdvsButton_Click** (object sender, EventArgs e)
- void **ConfirmStaredAdvsButton_Click** (object sender, EventArgs e)
- void **DenyFreeAdvsButton_Click** (object sender, EventArgs e)
- void **DenyStaredAdvsButton_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.GridView **staredAdvsGridView**
staredAdvsGridView control.
- global::System.Web.UI.WebControls.Button **ConfirmStaredAdvsButton**
ConfirmStaredAdvsButton control.
- global::System.Web.UI.WebControls.TextBox **denyReasonStaredTextBox**
denyReasonStaredTextBox control.
- global::System.Web.UI.WebControls.Button **DenyStaredAdvsButton**
DenyStaredAdvsButton control.
- global::System.Web.UI.WebControls.GridView **FreeAdvsGridView**
FreeAdvsGridView control.
- global::System.Web.UI.WebControls.Button **ConfirmFreeAdvsButton**
ConfirmFreeAdvsButton control.
- global::System.Web.UI.WebControls.TextBox **TextBox2**

TextBox2 control.

- `global::System.Web.UI.WebControls.Button` [DenyFreeAdvsButton](#)

DenyFreeAdvsButton control.

5.66.1 Member Data Documentation

5.66.1.1 `global.System.Web.UI.WebControls.Button ADVIEWER.Manage.UnconfirmedAdvs.ConfirmFreeAdvsButton` [protected]

`ConfirmFreeAdvsButton` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.2 `global.System.Web.UI.WebControls.Button ADVIEWER.Manage.UnconfirmedAdvs.ConfirmStaredAdvsButton` [protected]

`ConfirmStaredAdvsButton` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.3 `global.System.Web.UI.WebControls.Button ADVIEWER.Manage.UnconfirmedAdvs.DenyFreeAdvsButton` [protected]

`DenyFreeAdvsButton` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.4 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.UnconfirmedAdvs.denyReasonStaredTextBox` [protected]

`denyReasonStaredTextBox` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.5 `global.System.Web.UI.WebControls.Button ADVIEWER.Manage.UnconfirmedAdvs.DenyStaredAdvsButton` [protected]

`DenyStaredAdvsButton` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.6 `global.System.Web.UI.WebControls.GridView ADVIEWER.Manage.UnconfirmedAdvs.FreeAdvsGridView` [protected]

`FreeAdvsGridView` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.7 `global.System.Web.UI.WebControls.GridView ADVIEWER.Manage.UnconfirmedAdvs.staredAdvsGridView` [protected]

`staredAdvsGridView` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.8 `global.System.Web.UI.WebControls.TextBox` `ADVIEWER.Manage.UnconfirmedAdvs.TextBox2` [protected]

TextBox2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- `Manage/UnconfirmedAdvs.aspx.cs`
- `Manage/UnconfirmedAdvs.aspx.designer.cs`


5.67 ADVIEWER.DAL.User Class Reference

No Metadata Documentation available.

Inheritance diagram for `ADVIEWER.DAL.User`:



Collaboration diagram for `ADVIEWER.DAL.User`:



Static Public Member Functions

- static `User CreateUser` (`global::System.Int32 id`, `global::System.String fullName`, `global::System.DateTime registerDate`, `global::System.DateTime lastLogin`, `global::System.Guid userProviderKey`, `global::System.String mail`)

Create a new `User` object.

Properties

- global::System.Int32 **ID** [get, set]
No Metadata Documentation available.
- global::System.String **FullName** [get, set]
No Metadata Documentation available.
- global::System.Boolean **IsManager** [get, set]
No Metadata Documentation available.
- global::System.DateTime **RegisterDate** [get, set]
No Metadata Documentation available.
- global::System.String **Mobile** [get, set]
No Metadata Documentation available.
- global::System.String **Tell** [get, set]
No Metadata Documentation available.
- global::System.String **Address** [get, set]
No Metadata Documentation available.
- global::System.DateTime **LastLogin** [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > **StateID** [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > **CityID** [get, set]
No Metadata Documentation available.
- global::System.String **Fax** [get, set]
No Metadata Documentation available.
- global::System.String **YahooID** [get, set]
No Metadata Documentation available.
- global::System.String **About** [get, set]
No Metadata Documentation available.
- global::System.String **PicAddress** [get, set]
No Metadata Documentation available.
- global::System.String **BannedMsg** [get, set]
No Metadata Documentation available.
- global::System.Guid **UserProviderKey** [get, set]
No Metadata Documentation available.
- global::System.String **Mail** [get, set]
No Metadata Documentation available.
- EntityCollection< **Ticket** > **Tickets** [get, set]
No Metadata Documentation available.
- EntityCollection< **Group** > **Groups** [get, set]
No Metadata Documentation available.
- EntityCollection< **Advertisement** > **Advertisements** [get, set]
No Metadata Documentation available.
- EntityCollection< **Rate** > **Ratings** [get, set]
No Metadata Documentation available.
- EntityCollection< **Message** > **CommentDatas** [get, set]
No Metadata Documentation available.
- EntityCollection< **UserMessage** > **UserMessage** [get, set]
No Metadata Documentation available.

5.67.1 Detailed Description

No Metadata Documentation available.

5.67.2 Member Function Documentation

5.67.2.1 `static User ADVIEWER.DAL.User.CreateUser (global::System.Int32 id, global::System.String fullName, global::System.DateTime registerDate, global::System.DateTime lastLogin, global::System.Guid userProviderKey, global::System.String mail)` `[inline], [static]`

Create a new [User](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>fullName</i>	Initial value of the FullName property.
<i>registerDate</i>	Initial value of the RegisterDate property.
<i>lastLogin</i>	Initial value of the LastLogin property.
<i>userProviderKey</i>	Initial value of the UserProviderKey property.
<i>mail</i>	Initial value of the Mail property.

5.67.3 Property Documentation

5.67.3.1 `global.System.String ADVIEWER.DAL.User.About` `[get], [set]`

No Metadata Documentation available.

5.67.3.2 `global.System.String ADVIEWER.DAL.User.Address` `[get], [set]`

No Metadata Documentation available.

5.67.3.3 `EntityCollection<Advertisement> ADVIEWER.DAL.User.Advertisements` `[get], [set]`

No Metadata Documentation available.

5.67.3.4 `global.System.String ADVIEWER.DAL.User.BannedMsg` `[get], [set]`

No Metadata Documentation available.

5.67.3.5 `Nullable<global.System.Int32> ADVIEWER.DAL.User.CityID` `[get], [set]`

No Metadata Documentation available.

5.67.3.6 `EntityCollection<Message> ADVIEWER.DAL.User.CommentDatas` `[get], [set]`

No Metadata Documentation available.

5.67.3.7 `global.System.String ADVIEWER.DAL.User.Fax` `[get], [set]`

No Metadata Documentation available.

5.67.3.8 global.System.String ADVIEWER.DAL.User.FullName [get], [set]

No Metadata Documentation available.

5.67.3.9 EntityCollection<Group> ADVIEWER.DAL.User.Groups [get], [set]

No Metadata Documentation available.

5.67.3.10 global.System.Int32 ADVIEWER.DAL.User.ID [get], [set]

No Metadata Documentation available.

5.67.3.11 global.System.Boolean ADVIEWER.DAL.User.IsManager [get], [set]

No Metadata Documentation available.

5.67.3.12 global.System.DateTime ADVIEWER.DAL.User.LastLogin [get], [set]

No Metadata Documentation available.

5.67.3.13 global.System.String ADVIEWER.DAL.User.Mail [get], [set]

No Metadata Documentation available.

5.67.3.14 global.System.String ADVIEWER.DAL.User.Mobile [get], [set]

No Metadata Documentation available.

5.67.3.15 global.System.String ADVIEWER.DAL.User.PicAddress [get], [set]

No Metadata Documentation available.

5.67.3.16 EntityCollection<Rate> ADVIEWER.DAL.User.Ratings [get], [set]

No Metadata Documentation available.

5.67.3.17 global.System.DateTime ADVIEWER.DAL.User.RegisterDate [get], [set]

No Metadata Documentation available.

5.67.3.18 Nullable<global.System.Int32> ADVIEWER.DAL.User.StateID [get], [set]

No Metadata Documentation available.

5.67.3.19 global.System.String ADVIEWER.DAL.User.Tell [get], [set]

No Metadata Documentation available.

5.67.3.20 EntityCollection<Ticket> ADVIEWER.DAL.User.Tickets [get], [set]

No Metadata Documentation available.

5.67.3.21 EntityCollection<UserMessage> ADVIEWER.DAL.User.UserMessage [get], [set]

No Metadata Documentation available.

5.67.3.22 global.System.Guid ADVIEWER.DAL.User.UserProviderKey [get], [set]

No Metadata Documentation available.

5.67.3.23 global.System.String ADVIEWER.DAL.User.YahooID [get], [set]

No Metadata Documentation available.


The documentation for this class was generated from the following file:

- DAL/Model1.Designer.cs


5.68 ADVIEWER.DAL.UserMessage Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.UserMessage:

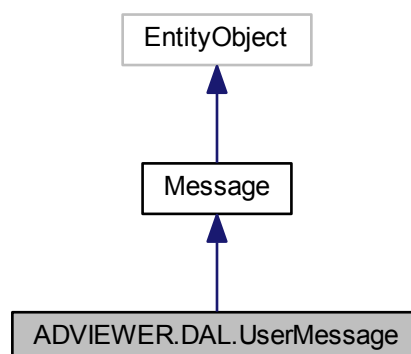

Collaboration diagram for ADVIEWER.DAL.UserMessage:

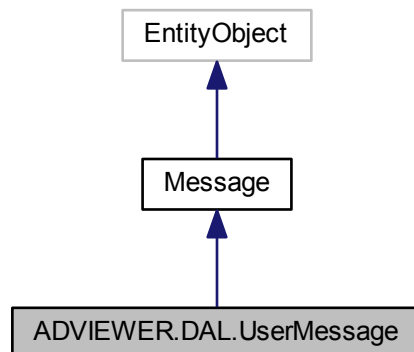

Static Public Member Functions

- static [UserMessage CreateUserMessage](#) (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate, global::System.Int32 recieverID)
Create a new [UserMessage](#) object.

Properties

- global::System.Int32 [RecieverID](#) [get, set]
No Metadata Documentation available.
- [User Reciever](#) [get, set]
No Metadata Documentation available.
- EntityReference< [User](#) > [RecieverReference](#) [get, set]
No Metadata Documentation available.

5.68.1 Detailed Description

No Metadata Documentation available.

5.68.2 Member Function Documentation

- 5.68.2.1 static [UserMessage](#) ADVIEWER.DAL.UserMessage.CreateUserMessage (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate, global::System.Int32 recieverID)
[inline],[static]

Create a new [UserMessage](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>text</i>	Initial value of the Text property.
<i>registrationDate</i>	Initial value of the RegistrationDate property.
<i>recieverID</i>	Initial value of the RecieverID property.

5.68.3 Property Documentation

5.68.3.1 User ADVIEWER.DAL.UserMessage.Reciever [get], [set]

No Metadata Documentation available.

5.68.3.2 global.System.Int32 ADVIEWER.DAL.UserMessage.RecieverID [get], [set]

No Metadata Documentation available.

5.68.3.3 EntityReference<User> ADVIEWER.DAL.UserMessage.RecieverReference [get], [set]


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.69 ADVIEWER.Manage.ViewComment Class Reference

Inheritance diagram for ADVIEWER.Manage.ViewComment:

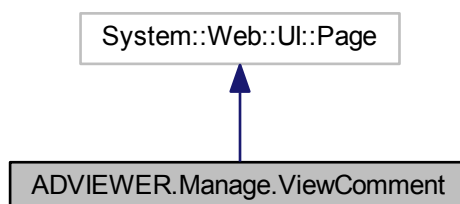

Collaboration diagram for ADVIEWER.Manage.ViewComment:

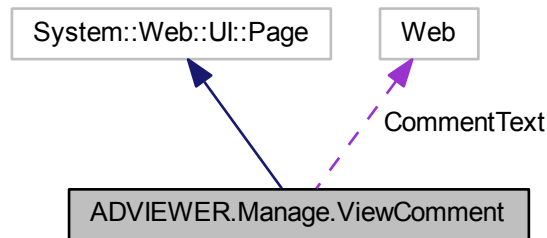

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [CommentText](#)

CommentText control.

5.69.1 Member Data Documentation

5.69.1.1 global::System.Web.UI.WebControls.TextBox ADVIEWER.Manage.ViewComment.CommentText [protected]

CommentText control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/ViewComment.aspx.cs
- Manage/ViewComment.aspx.designer.cs

5.70 ADVIEWER.Member.ViewTicket Class Reference

Inheritance diagram for ADVIEWER.Member.ViewTicket:

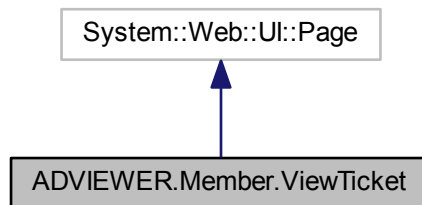

Collaboration diagram for ADVIEWER.Member.ViewTicket:

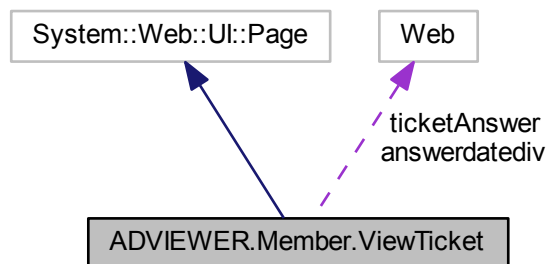

Public Attributes

- string **TicketTitle**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl [answerdatediv](#)
answerdatediv control.
- global::System.Web.UI.HtmlControls.HtmlGenericControl [ticketAnswer](#)
ticketAnswer control.

5.70.1 Member Data Documentation

5.70.1.1 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Member.ViewTicket.answerdatediv` [protected]

answerdatediv control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.70.1.2 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Member.ViewTicket.ticketAnswer` [protected]

ticketAnswer control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/ViewTicket.aspx.cs
- Member/ViewTicket.aspx.designer.cs

5.71 ADVIEWER.Manage.ViewTicket Class Reference

Inheritance diagram for ADVIEWER.Manage.ViewTicket:

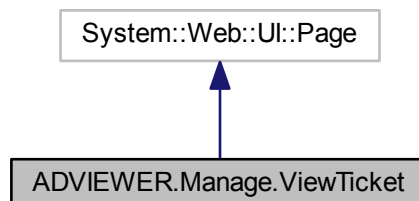

Collaboration diagram for ADVIEWER.Manage.ViewTicket:

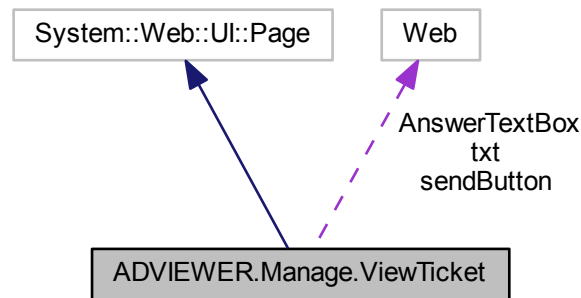

Public Attributes

- string **TicketTitle**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **sendButton_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl **txt**
txt control.
- global::System.Web.UI.WebControls.TextBox **AnswerTextBox**
AnswerTextBox control.
- global::System.Web.UI.WebControls.Button **sendButton**
sendButton control.

5.71.1 Member Data Documentation

5.71.1.1 global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.ViewTicket.AnswerTextBox [protected]

AnswerTextBox control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.71.1.2 global.System.Web.UI.WebControls.Button ADVIEWER.Manage.ViewTicket.sendButton [protected]

sendButton control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.71.1.3 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Manage.ViewTicket.txt` [protected]

txt control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:

- `Manage/ViewTicket.aspx.cs`
- `Manage/ViewTicket.aspx.designer.cs`

5.72 ADVIEWER.BAL.PublicFunctions.Wight Struct Reference

Collaboration diagram for ADVIEWER.BAL.PublicFunctions.Wight:

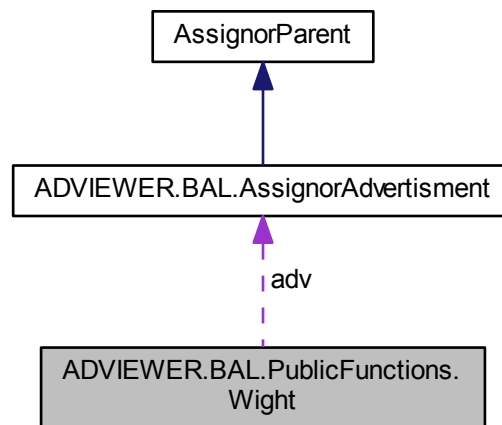

Public Attributes

- double `wr`
- [AssignorAdvertisment](#) `adv`

The documentation for this struct was generated from the following file:

- `BAL/PublicFunctions.cs`