

Adviewer

Generated by Doxygen 1.8.5

Wed Jan 22 2014 13:24:09

Contents

Chapter 1

Namespace Index

1.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

ADVIEWER	??
ADVIEWER.Account	??
ADVIEWER.BAL	??
ADVIEWER.DAL	??
ADVIEWER.Main	??
ADVIEWER.Manage	??
ADVIEWER.Member	??

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

ADVIEWER.BAL.AccountFunctions	??
ADVIEWER.BAL.AssignorParent	??
ADVIEWER.BAL.AssignorAdvertisement	??
ADVIEWER.BAL.AssignorGroup	??
ADVIEWER.BAL.AssignorMessage	??
ADVIEWER.BAL.AssignorComment	??
ADVIEWER.BAL.AssignorUserMessage	??
ADVIEWER.BAL.AssignorRate	??
ADVIEWER.BAL.AssignorStateCity	??
ADVIEWER.BAL.AssignorTicket	??
ADVIEWER.BAL.AssignorUser	??
EntityObject	
ADVIEWER.DAL.AdvertisementMessage	??
ADVIEWER.DAL.Advertisement	??
ADVIEWER.DAL.ContactMessage	??
ADVIEWER.DAL.Group	??
ADVIEWER.DAL.KeyWord	??
ADVIEWER.DAL.Message	??
ADVIEWER.DAL.Comment	??
ADVIEWER.DAL.UserMessage	??
ADVIEWER.DAL.Payment	??
ADVIEWER.DAL.Rate	??
ADVIEWER.DAL.StateCity	??
ADVIEWER.DAL.Ticket	??
ADVIEWER.DAL.User	??
ADVIEWER.BAL.FilesStatus	??
HttpApplication	
ADVIEWER.Main.Global	??
IHttpHandler	
ADVIEWER.BAL.FileTransferHandler	??
ADVIEWER.BAL.Thumbnail	??
ADVIEWER.Main.RatingHandler	??
IRequiresSessionState	
ADVIEWER.Main.RatingHandler	??
MasterPage	
ADVIEWER.Main.MainMaster	??
ADVIEWER.Manage.ManageMaster	??

ADVIEWER.Member.MemberMaster	??
ADVIEWER.BAL.MemberFunctions	??
ObjectContext	
ADVIEWER.DAL.ModelContainer	??
Page	
ADVIEWER.Account.ChangePassword	??
ADVIEWER.Account.Login	??
ADVIEWER.Account.Register	??
ADVIEWER.BAL.JsonMaker	??
ADVIEWER.Main._404	??
ADVIEWER.Main._Default	??
ADVIEWER.Main.About	??
ADVIEWER.Main.AdvContent	??
ADVIEWER.Main.Profile	??
ADVIEWER.Main.ShowGroupAdvs	??
ADVIEWER.Main.ShowStateAdvs	??
ADVIEWER.Main.StateCityList	??
ADVIEWER.Manage.AdReport	??
ADVIEWER.Manage.CommentsList	??
ADVIEWER.Manage.Default	??
ADVIEWER.Manage.EditGroup	??
ADVIEWER.Manage.EditStateCity	??
ADVIEWER.Manage.GroupsList	??
ADVIEWER.Manage.SearchUser	??
ADVIEWER.Manage.StatesCitiesList	??
ADVIEWER.Manage.Tickets	??
ADVIEWER.Manage.UnconfirmedAdvs	??
ADVIEWER.Manage.UserReport	??
ADVIEWER.Manage.ViewComment	??
ADVIEWER.Manage.ViewTicket	??
ADVIEWER.Member.AddNewAdv	??
ADVIEWER.Member.AddNewTicket	??
ADVIEWER.Member.AdvsList	??
ADVIEWER.Member.Avatar	??
ADVIEWER.Member.EditProfile	??
ADVIEWER.Member.ManageAdvGallery	??
ADVIEWER.Member.MemberDefault	??
ADVIEWER.Member.RecieveMessagesInbox	??
ADVIEWER.Member.SendMessagesInbox	??
ADVIEWER.Member.SendMessageToUsers	??
ADVIEWER.Member.SpecialAdvprivileges	??
ADVIEWER.Member.TicketsList	??
ADVIEWER.Member.ViewMessage	??
ADVIEWER.Member.ViewTicket	??
ADVIEWER.BAL.PublicFunctions	??
RssDocumentHttpHandler	
ADVIEWER.Rss	??
ADVIEWER.BAL.ShowAdvertisement	??
ADVIEWER.BAL.ShowUser	??
ADVIEWER.BAL.StateAndCitiesForReapeater	??
ADVIEWER.BAL.PublicFunctions.Wight	??

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

ADVIEWER.Main._404	??
ADVIEWER.Main._Default	??
ADVIEWER.Main.About	??
ADVIEWER.BAL.AccountFunctions	
AccountFunctions	??
ADVIEWER.Member.AddNewAdv	??
ADVIEWER.Member.AddNewTicket	??
ADVIEWER.Manage.AdReport	??
ADVIEWER.Main.AdvContent	??
ADVIEWER.DAL.AdvertisementMessage	
No Metadata Documentation available.	??
ADVIEWER.DAL.Advertisement	
No Metadata Documentation available.	??
ADVIEWER.Member.AdvsList	??
ADVIEWER.BAL.AssignorAdvertisement	
AssignorAdvertisement	??
ADVIEWER.BAL.AssignorComment	
AssignorComment	??
ADVIEWER.BAL.AssignorGroup	
AssignorGroup	??
ADVIEWER.BAL.AssignorMessage	
AssignorMessage	??
ADVIEWER.BAL.AssignorParent	
This class just make id for assignor classes	??
ADVIEWER.BAL.AssignorRate	
AssignorRate	??
ADVIEWER.BAL.AssignorStateCity	
AssignorStateCity	??
ADVIEWER.BAL.AssignorTicket	
AssignorTicket	??
ADVIEWER.BAL.AssignorUser	
AssignorUser	??
ADVIEWER.BAL.AssignorUserMessage	
AssignorUserMessage	??
ADVIEWER.Member.Avatar	??
ADVIEWER.Account.ChangePassword	??
ADVIEWER.DAL.Comment	
No Metadata Documentation available.	??

ADVIEWER.Manage.CommentsList	??
ADVIEWER.DAL.ContactMessage	
No Metadata Documentation available.	??
ADVIEWER.Manage.Default	??
ADVIEWER.Manage.EditGroup	??
ADVIEWER.Member.EditProfile	??
ADVIEWER.Manage.EditStateCity	??
ADVIEWER.BAL.FilesStatus	??
ADVIEWER.BAL.FileTransferHandler	??
ADVIEWER.Main.Global	??
ADVIEWER.DAL.Group	
No Metadata Documentation available.	??
ADVIEWER.Manage.GroupsList	??
ADVIEWER.BAL.JsonMaker	??
ADVIEWER.DAL.KeyWord	
No Metadata Documentation available.	??
ADVIEWER.Account.Login	??
ADVIEWER.Main.MainMaster	??
ADVIEWER.Member.ManageAdvGallery	??
ADVIEWER.Manage.ManageMaster	??
ADVIEWER.Member.MemberDefault	??
ADVIEWER.BAL.MemberFunctions	
MemberFunctions Class	??
ADVIEWER.Member.MemberMaster	??
ADVIEWER.DAL.Message	
No Metadata Documentation available.	??
ADVIEWER.DAL.ModelContainer	
No Metadata Documentation available.	??
ADVIEWER.DAL.Payment	
No Metadata Documentation available.	??
ADVIEWER.Main.Profile	??
ADVIEWER.BAL.PublicFunctions	
PublicFunctions	??
ADVIEWER.DAL.Rate	
No Metadata Documentation available.	??
ADVIEWER.Main.RatingHandler	
Summary description for RatingHandler	??
ADVIEWER.Member.RecieveMessagesInbox	??
ADVIEWER.Account.Register	??
ADVIEWER.Rss	
Summary description for Rss	??
ADVIEWER.Manage.SearchUser	??
ADVIEWER.Member.SendMessagesInbox	??
ADVIEWER.Member.SendMessageToUsers	??
ADVIEWER.BAL.ShowAdvertisment	
ShowAdvertisment	??
ADVIEWER.Main.ShowGroupAdvs	??
ADVIEWER.Main.ShowStateAdvs	??
ADVIEWER.BAL.ShowUser	
ShowUser	??
ADVIEWER.Member.SpecialAdvprivileges	??
ADVIEWER.BAL.StateAndCitiesForReapeater	
StateAndCitiesForReapeater	??
ADVIEWER.DAL.StateCity	
No Metadata Documentation available.	??
ADVIEWER.Main.StateCityList	??
ADVIEWER.Manage.StatesCitiesList	??
ADVIEWER.BAL.Thumbnail	??

ADVIEWER.DAL.Ticket	
No Metadata Documentation available.	??
ADVIEWER.Manage.Tickets	??
ADVIEWER.Member.TicketsList	??
ADVIEWER.Manage.UnconfirmedAdvs	??
ADVIEWER.DAL.User	
No Metadata Documentation available.	??
ADVIEWER.DAL.UserMessage	
No Metadata Documentation available.	??
ADVIEWER.Manage.UserReport	??
ADVIEWER.Manage.ViewComment	??
ADVIEWER.Member.ViewMessage	??
ADVIEWER.Manage.ViewTicket	??
ADVIEWER.Member.ViewTicket	??
ADVIEWER.BAL.PublicFunctions.Wight	
Wight	??

Chapter 4

Namespace Documentation

4.1 Package ADVIEWER

Namespaces

- package [Account](#)
- package [BAL](#)
- package [DAL](#)
- package [Main](#)
- package [Manage](#)
- package [Member](#)

Classes

- class [Rss](#)
Summary description for [Rss](#)

4.2 Package ADVIEWER.Account

Classes

- class [ChangePassword](#)
- class [Login](#)
- class [Register](#)

4.3 Package ADVIEWER.BAL

Classes

- class [AccountFunctions](#)
[AccountFunctions](#).
- class [JsonMaker](#)
- class [MemberFunctions](#)
[MemberFunctions](#) Class.
- class [ShowAdvertisement](#)
[ShowAdvertisement](#).

- class [ShowUser](#)
ShowUser.
- class [PublicFunctions](#)
PublicFunctions.
- class [StateAndCitiesForReapeater](#)
StateAndCitiesForReapeater.
- class [AssignorParent](#)
This class just make id for assignor classes.
- class [AssignorTicket](#)
AssignorTicket.
- class [AssignorRate](#)
AssignorRate.
- class [AssignorUser](#)
AssignorUser.
- class [AssignorAdvertisment](#)
AssignorAdvertisment.
- class [AssignorGroup](#)
AssignorGroup.
- class [AssignorStateCity](#)
AssignorStateCity.
- class [AssignorMessage](#)
AssignorMessage.
- class [AssignorComment](#)
AssignorComment.
- class [AssignorUserMessage](#)
AssignorUserMessage.
- class [FilesStatus](#)
- class [FileTransferHandler](#)
- class [Thumbnail](#)

4.4 Package ADVIEWER.DAL

Classes

- class [ModelContainer](#)
No Metadata Documentation available.
- class [AdvertisementMessage](#)
No Metadata Documentation available.
- class [Advertisment](#)
No Metadata Documentation available.
- class [Comment](#)
No Metadata Documentation available.
- class [ContactMessage](#)
No Metadata Documentation available.
- class [Group](#)
No Metadata Documentation available.
- class [KeyWord](#)
No Metadata Documentation available.
- class [Message](#)
No Metadata Documentation available.

- class [Payment](#)
No Metadata Documentation available.
- class [Rate](#)
No Metadata Documentation available.
- class [StateCity](#)
No Metadata Documentation available.
- class [Ticket](#)
No Metadata Documentation available.
- class [User](#)
No Metadata Documentation available.
- class [UserMessage](#)
No Metadata Documentation available.

4.5 Package ADVIEWER.Main

Classes

- class [_404](#)
- class [About](#)
- class [AdvContent](#)
- class [_Default](#)
- class [Global](#)
- class [MainMaster](#)
- class [Profile](#)
- class [RatingHandler](#)
Summary description for [RatingHandler](#)
- class [ShowGroupAdvs](#)
- class [ShowStateAdvs](#)
- class [StateCityList](#)

4.6 Package ADVIEWER.Manage

Classes

- class [AdReport](#)
- class [CommentsList](#)
- class [Default](#)
- class [EditGroup](#)
- class [EditStateCity](#)
- class [GroupsList](#)
- class [ManageMaster](#)
- class [SearchUser](#)
- class [StatesCitiesList](#)
- class [Tickets](#)
- class [UnconfirmedAdvs](#)
- class [UserReport](#)
- class [ViewComment](#)
- class [ViewTicket](#)

4.7 Package ADVIEWER.Member

Classes


- class [AddNewAdv](#)
- class [AddNewTicket](#)
- class [AdvsList](#)
- class [Avatar](#)
- class [EditProfile](#)
- class [ManageAdvGallery](#)
- class [MemberDefault](#)
- class [MemberMaster](#)
- class [RecieveMessagesInbox](#)
- class [SendMessageInbox](#)
- class [SendMessageToUsers](#)
- class [SpecialAdvprivileges](#)
- class [TicketsList](#)
- class [ViewMessage](#)
- class [ViewTicket](#)

Chapter 5


Class Documentation

5.1 ADVIEWER.Main._404 Class Reference

Inheritance diagram for ADVIEWER.Main._404:



Collaboration diagram for ADVIEWER.Main._404:



Protected Member Functions


- void **Page_Load** (object sender, EventArgs e)

The documentation for this class was generated from the following file:


- 404.aspx.cs

5.2 ADVIEWER.Main._Default Class Reference

Inheritance diagram for ADVIEWER.Main._Default:

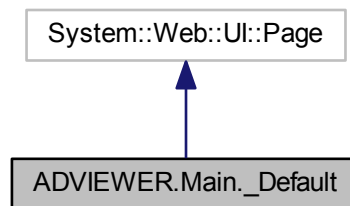

Collaboration diagram for ADVIEWER.Main._Default:

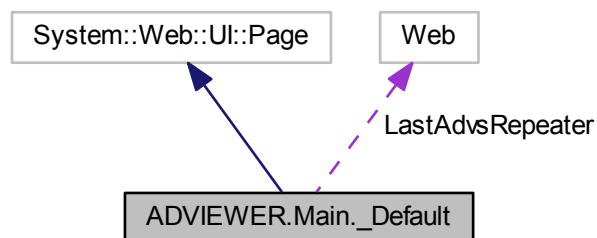

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Repeater [LastAdvsRepeater](#)
LastAdvsRepeater control.

5.2.1 Member Data Documentation

5.2.1.1 global.System.Web.UI.WebControls.Repeater ADVIEWER.Main._Default.LastAdvsRepeater [protected]

LastAdvsRepeater control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Default.aspx.cs
- Default.aspx.designer.cs

5.3 ADVIEWER.Main.About Class Reference

Inheritance diagram for ADVIEWER.Main.About:

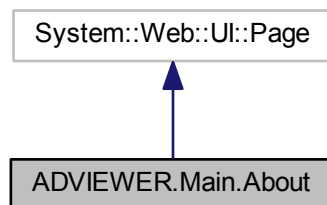

Collaboration diagram for ADVIEWER.Main.About:

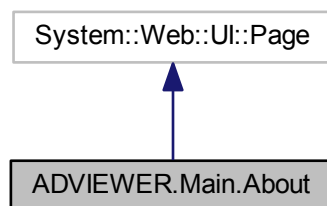

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

The documentation for this class was generated from the following file:

- About.aspx.cs

5.4 ADVIEWER.BAL.AccountFunctions Class Reference

[AccountFunctions.](#)

Static Public Member Functions

- static bool [newUser](#) (Guid UserId, string UserFullName, string mail)
newUser
- static void [SetLastLogin](#) (Guid UserId)
SetLastLogin.
- static int [currentUserId](#) ()
currentUserId
- static [AssignorUser](#) [GetUserInformation](#) (int UserID)
GetUserInformation.
- static void [UpdateUserInfo](#) (Int32 id, String fullName, String about, String address, String fax, String mobile, String tell, String yahooId, String favgroups)
UpdateUserInfo.
- static bool [IsManager](#) ()
IsManager.

5.4.1 Detailed Description

[AccountFunctions.](#)

this class represents the functions for work with membership.

5.4.2 Member Function Documentation

5.4.2.1 static int ADVIEWER.BAL.AccountFunctions.currentUserId () [inline],[static]

currentUserId

return the id of logged in user. return -1 if no user logged in.

5.4.2.2 static AssignorUser ADVIEWER.BAL.AccountFunctions.GetUserInformation (int UserID) [inline],[static]

GetUserInformation.

return the data of specific user that its id passed to this function.

5.4.2.3 static bool ADVIEWER.BAL.AccountFunctions.IsManager () [inline],[static]

IsManager.

if logged in user is manager return true, otherwise return false.

5.4.2.4 static bool ADVIEWER.BAL.AccountFunctions.newUser (Guid UserId, string UserFullName, string mail) [inline],[static]

newUser

make new user in both databases.

5.4.2.5 static void ADVIEWER.BAL.AccountFunctions.SetLastLogin (Guid *UserId*) [inline],[static]

SetLastLogin.

set last login property of user class when specific user logged in.

5.4.2.6 static void ADVIEWER.BAL.AccountFunctions.UpdateUserInfo (Int32 *id*, String *fullName*, String *about*, String *address*, String *fax*, String *mobile*, String *tell*, String *yahoold*, String *favgroups*) [inline],[static]

UpdateUserInfo.


update datas of specific user with fields that passed to it.

The documentation for this class was generated from the following file:


- BAL/AccountFunctions.cs

5.5 ADVIEWER.Member.AddNewAdv Class Reference

Inheritance diagram for ADVIEWER.Member.AddNewAdv:

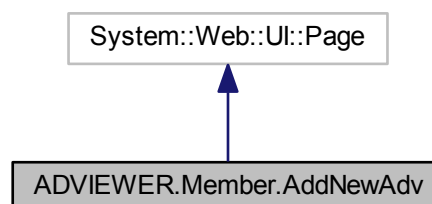

Collaboration diagram for ADVIEWER.Member.AddNewAdv:

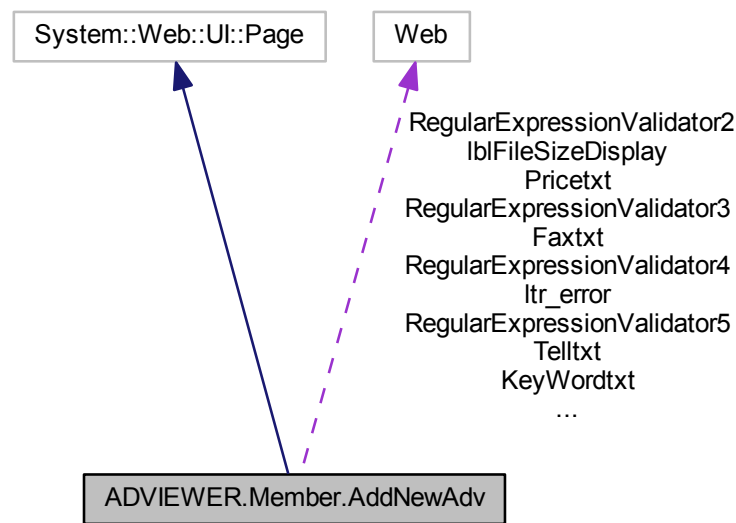

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **Button1_Click** (object sender, EventArgs e)
- void **AsyncFileUpload1_UploadedComplete** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Literal [SuccessMessage](#)
SuccessMessage control.
- global::System.Web.UI.WebControls.Literal [ltr_error](#)
ltr_error control.
- global::System.Web.UI.WebControls.DropDownList [AdvKindDrop](#)
AdvKindDrop control.
- global::System.Web.UI.WebControls.DropDownList [MonthDrop](#)
MonthDrop control.
- global::System.Web.UI.WebControls.DropDownList [groupsDropDownList](#)
groupsDropDownList control.
- global::System.Web.UI.WebControls.DropDownList [StateCityDropDownList](#)
StateCityDropDownList control.
- global::System.Web.UI.WebControls.TextBox [AdvTitleTxt](#)
AdvTitleTxt control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- global::System.Web.UI.WebControls.TextBox [AdvShorttxt](#)
AdvShorttxt control.
- global::System.Web.UI.WebControls.TextBox [AdvTexttxt](#)

- AdvTexttxt control.*
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator2](#)
 - RequiredFieldValidator2 control.*
- global::System.Web.UI.WebControls.TextBox [KeyWordtxt](#)
 - KeyWordtxt control.*
- global::System.Web.UI.WebControls.TextBox [Pricetxt](#)
 - Pricetxt control.*
- global::System.Web.UI.WebControls.RegularExpressionValidator [RegularExpressionValidator3](#)
 - RegularExpressionValidator3 control.*
- global::System.Web.UI.WebControls.TextBox [Linktxt](#)
 - Linktxt control.*
- global::AjaxControlToolkit.ToolkitScriptManager [ToolkitScriptManager1](#)
 - ToolkitScriptManager1 control.*
- global::AjaxControlToolkit.AsyncFileUpload [AsyncFileUpload1](#)
 - AsyncFileUpload1 control.*
- global::System.Web.UI.WebControls.Image [imgLoader](#)
 - imgLoader control.*
- global::System.Web.UI.WebControls.Label [lblErrorStatus](#)
 - lblErrorStatus control.*
- global::System.Web.UI.WebControls.Label [lblMesg](#)
 - lblMesg control.*
- global::System.Web.UI.WebControls.Label [lblSuccess](#)
 - lblSuccess control.*
- global::System.Web.UI.WebControls.Label [lblFileName](#)
 - lblFileName control.*
- global::System.Web.UI.WebControls.Label [lblFileNameDisplay](#)
 - lblFileNameDisplay control.*
- global::System.Web.UI.WebControls.Label [lblFileSize](#)
 - lblFileSize control.*
- global::System.Web.UI.WebControls.Label [lblFileSizeDisplay](#)
 - lblFileSizeDisplay control.*
- global::System.Web.UI.WebControls.Label [lblContentType](#)
 - lblContentType control.*
- global::System.Web.UI.WebControls.Label [lblContentTypeDisplay](#)
 - lblContentTypeDisplay control.*
- global::System.Web.UI.WebControls.TextBox [Nametxt](#)
 - Nametxt control.*
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator4](#)
 - RequiredFieldValidator4 control.*
- global::System.Web.UI.WebControls.TextBox [Mobiletxt](#)
 - Mobiletxt control.*
- global::System.Web.UI.WebControls.RegularExpressionValidator [RegularExpressionValidator4](#)
 - RegularExpressionValidator4 control.*
- global::System.Web.UI.WebControls.TextBox [Telltxt](#)
 - Telltxt control.*
- global::System.Web.UI.WebControls.RegularExpressionValidator [RegularExpressionValidator5](#)
 - RegularExpressionValidator5 control.*
- global::System.Web.UI.WebControls.TextBox [Faxtxt](#)
 - Faxtxt control.*
- global::System.Web.UI.WebControls.TextBox [TellTimetxt](#)
 - TellTimetxt control.*

- `global::System.Web.UI.WebControls.TextBox` [Emailtxt](#)
Emailtxt control.
- `global::System.Web.UI.WebControls.RequiredFieldValidator` [RequiredFieldValidator3](#)
RequiredFieldValidator3 control.
- `global::System.Web.UI.WebControls.RegularExpressionValidator` [RegularExpressionValidator1](#)
RegularExpressionValidator1 control.
- `global::System.Web.UI.WebControls.TextBox` [YahoolDtxt](#)
YahoolDtxt control.
- `global::System.Web.UI.WebControls.RegularExpressionValidator` [RegularExpressionValidator2](#)
RegularExpressionValidator2 control.
- `global::System.Web.UI.WebControls.TextBox` [Addresstxt](#)
Addresstxt control.
- `global::System.Web.UI.WebControls.Button` [Button1](#)
Button1 control.

5.5.1 Member Data Documentation

5.5.1.1 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Addresstxt` [protected]

Addresstxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.2 `global.System.Web.UI.WebControls.DropDownList ADVIEWER.Member.AddNewAdv.AdvKindDrop` [protected]

AdvKindDrop control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.3 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.AdvShorttxt` [protected]

AdvShorttxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.4 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.AdvTexttxt` [protected]

AdvTexttxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.5 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.AdvTitleTxt` [protected]

AdvTitleTxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.6 `global.AjaxControlToolkit.AsyncFileUpload ADVIEWER.Member.AddNewAdv.AsyncFileUpload1` [protected]

AsyncFileUpload1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.7 global.System.Web.UI.WebControls.Button ADVIEWER.Member.AddNewAdv.Button1 [protected]

Button1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.8 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Emailtxt [protected]

Emailtxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.9 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Faxtxt [protected]

Faxtxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.10 global.System.Web.UI.WebControls.DropDownList ADVIEWER.Member.AddNewAdv.groupsDropDownList [protected]

groupsDropDownList control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.11 global.System.Web.UI.WebControls.Image ADVIEWER.Member.AddNewAdv.imgLoader [protected]

imgLoader control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.12 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.KeyWordtxt [protected]

KeyWordtxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.13 global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblContentType [protected]

IblContentType control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.14 global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblContentTypeDisplay [protected]

IblContentTypeDisplay control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.15 global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblErrorStatus [protected]

IblErrorStatus control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.16 global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblFileName [protected]

IblFileName control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.17 global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblFileNameDisplay [protected]

IblFileNameDisplay control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.18 global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblFileSize [protected]

IblFileSize control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.19 global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblFileSizeDisplay [protected]

IblFileSizeDisplay control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.20 global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblMesg [protected]

IblMesg control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.21 global.System.Web.UI.WebControls.Label ADVIEWER.Member.AddNewAdv.IblSuccess [protected]

IblSuccess control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.22 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Linktxt [protected]

Linktxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.23 global.System.Web.UI.WebControls.Literal ADVIEWER.Member.AddNewAdv.ltr_error [protected]

ltr_error control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.24 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Mobiletxt [protected]

Mobiletxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.25 global.System.Web.UI.WebControls.DropDownList ADVIEWER.Member.AddNewAdv.MonthDrop [protected]

MonthDrop control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.26 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Nametxt [protected]

Nametxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.27 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Pricetxt [protected]

Pricetxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.28 global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.AddNewAdv.RegularExpressionValidator1 [protected]

RegularExpressionValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.29 global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.AddNewAdv.RegularExpressionValidator2 [protected]

RegularExpressionValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.30 global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.AddNewAdv.RegularExpressionValidator3 [protected]

RegularExpressionValidator3 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.31 global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.AddNewAdv.RegularExpressionValidator4 [protected]

RegularExpressionValidator4 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.32 global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.AddNewAdv.RegularExpressionValidator5 [protected]

RegularExpressionValidator5 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.33 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.AddNewAdv.RequiredFieldValidator1`
[protected]

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.34 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.AddNewAdv.RequiredFieldValidator2`
[protected]

RequiredFieldValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.35 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.AddNewAdv.RequiredFieldValidator3`
[protected]

RequiredFieldValidator3 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.36 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.AddNewAdv.RequiredFieldValidator4`
[protected]

RequiredFieldValidator4 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.37 `global.System.Web.UI.WebControls.DropDownList ADVIEWER.Member.AddNewAdv.StateCityDropDownList`
[protected]

StateCityDropDownList control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.38 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.AddNewAdv.SuccessMessage` [protected]

SuccessMessage control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.39 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.TellTimetxt` [protected]

TellTimetxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.40 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.Telltxt` [protected]

Telltxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.41 global.AjaxControlToolkit.ToolkitScriptManager ADVIEWER.Member.AddNewAdv.ToolkitScriptManager1 [protected]

ToolkitScriptManager1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.5.1.42 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.AddNewAdv.YahooIDtxt [protected]

YahooIDtxt control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/AddNewAdv.aspx.cs
- Member/AddNewAdv.aspx.designer.cs

5.6 ADVIEWER.Member.AddNewTicket Class Reference

Inheritance diagram for ADVIEWER.Member.AddNewTicket:

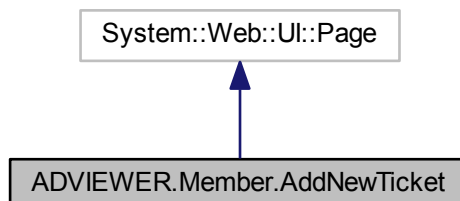

Collaboration diagram for `ADVIEWER.Member.AddNewTicket`:

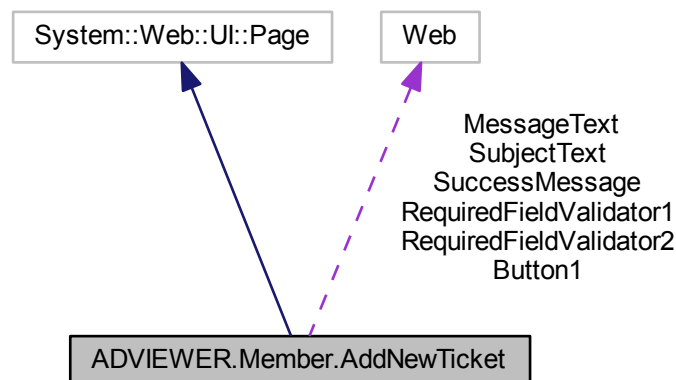

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **Button1_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Literal [SuccessMessage](#)
SuccessMessage control.
- global::System.Web.UI.WebControls.TextBox [SubjectText](#)
SubjectText control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- global::System.Web.UI.WebControls.TextBox [MessageText](#)
MessageText control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator2](#)
RequiredFieldValidator2 control.
- global::System.Web.UI.WebControls.Button [Button1](#)
Button1 control.

5.6.1 Member Data Documentation

5.6.1.1 global.System.Web.UI.WebControls.Button `ADVIEWER.Member.AddNewTicket.Button1` [protected]

Button1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.6.1.2 global.System.Web.UI.WebControls.TextBox `ADVIEWER.Member.AddNewTicket.MessageText` [protected]

MessageText control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.6.1.3 `global.System.Web.UI.WebControls.RequiredFieldValidator` `ADVIEWER.Member.AddNewTicket.RequiredFieldValidator1` `[protected]`

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.6.1.4 `global.System.Web.UI.WebControls.RequiredFieldValidator` `ADVIEWER.Member.AddNewTicket.RequiredFieldValidator2` `[protected]`

RequiredFieldValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.6.1.5 `global.System.Web.UI.WebControls.TextBox` `ADVIEWER.Member.AddNewTicket.SubjectText` `[protected]`

SubjectText control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.6.1.6 `global.System.Web.UI.WebControls.Literal` `ADVIEWER.Member.AddNewTicket.SuccessMessage` `[protected]`

SuccessMessage control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/AddNewTicket.aspx.cs
- Member/AddNewTicket.aspx.designer.cs

5.7 ADVIEWER.Manage.AdReport Class Reference

Inheritance diagram for `ADVIEWER.Manage.AdReport`:

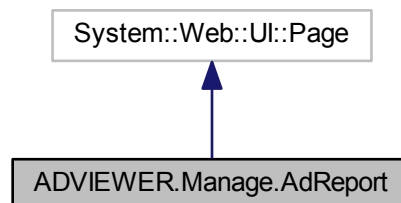

Collaboration diagram for ADVIEWER.Manage.AdReport:

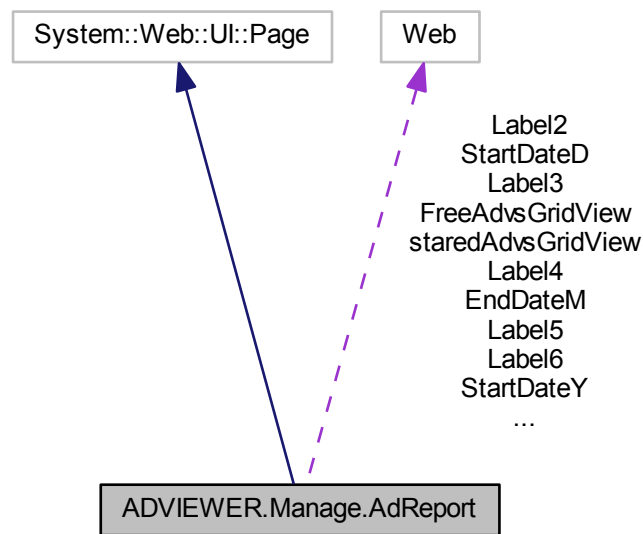

Public Attributes

- int **freeAdvsCount**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **FreeAdvsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **staredAdvsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **ConfirmFreeAdvsButton_Click** (object sender, EventArgs e)
- void **ConfirmStaredAdvsButton_Click** (object sender, EventArgs e)
- void **DenyFreeAdvsButton_Click** (object sender, EventArgs e)
- void **DenyStaredAdvsButton_Click** (object sender, EventArgs e)
- void **Button1_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Label [Label1](#)
Label1 control.
- global::System.Web.UI.WebControls.TextBox [StartDateY](#)
StartDateY control.
- global::System.Web.UI.WebControls.Label [Label3](#)
Label3 control.
- global::System.Web.UI.WebControls.TextBox [StartDateM](#)
StartDateM control.
- global::System.Web.UI.WebControls.Label [Label4](#)
Label4 control.

- global::System.Web.UI.WebControls.TextBox [StartDateD](#)
StartDateD control.
- global::System.Web.UI.WebControls.Label [Label2](#)
Label2 control.
- global::System.Web.UI.WebControls.TextBox [EndDateY](#)
EndDateY control.
- global::System.Web.UI.WebControls.Label [Label5](#)
Label5 control.
- global::System.Web.UI.WebControls.TextBox [EndDateM](#)
EndDateM control.
- global::System.Web.UI.WebControls.Label [Label6](#)
Label6 control.
- global::System.Web.UI.WebControls.TextBox [EndDateD](#)
EndDateD control.
- global::System.Web.UI.WebControls.Button [Button1](#)
Button1 control.
- global::System.Web.UI.WebControls.GridView [staredAdvsGridView](#)
staredAdvsGridView control.
- global::System.Web.UI.WebControls.GridView [FreeAdvsGridView](#)
FreeAdvsGridView control.

5.7.1 Member Data Documentation

5.7.1.1 global.System.Web.UI.WebControls.Button ADVIEWER.Manage.AdReport.Button1 [protected]

Button1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.2 global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.AdReport.EndDateD [protected]

EndDateD control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.3 global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.AdReport.EndDateM [protected]

EndDateM control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.4 global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.AdReport.EndDateY [protected]

EndDateY control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.5 global.System.Web.UI.WebControls.GridView ADVIEWER.Manage.AdReport.FreeAdvsGridView [protected]

FreeAdvsGridView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.6 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.AdReport.Label1` [protected]

Label1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.7 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.AdReport.Label2` [protected]

Label2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.8 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.AdReport.Label3` [protected]

Label3 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.9 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.AdReport.Label4` [protected]

Label4 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.10 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.AdReport.Label5` [protected]

Label5 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.11 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.AdReport.Label6` [protected]

Label6 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.12 `global.System.Web.UI.WebControls.GridView ADVIEWER.Manage.AdReport.staredAdvsGridView` [protected]

staredAdvsGridView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.13 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.AdReport.StartDateD` [protected]

StartDateD control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.14 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.AdReport.StartDateM` [protected]

StartDateM control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.7.1.15 global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.AdReport.StartDateY [protected]

StartDateY control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/AdReport.aspx.cs
- Manage/AdReport.aspx.designer.cs

5.8 ADVIEWER.Main.AdvContent Class Reference

Inheritance diagram for ADVIEWER.Main.AdvContent:

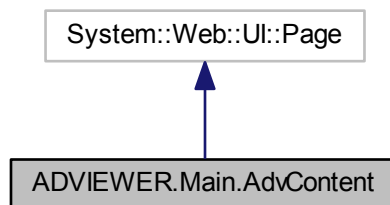

Collaboration diagram for ADVIEWER.Main.AdvContent:

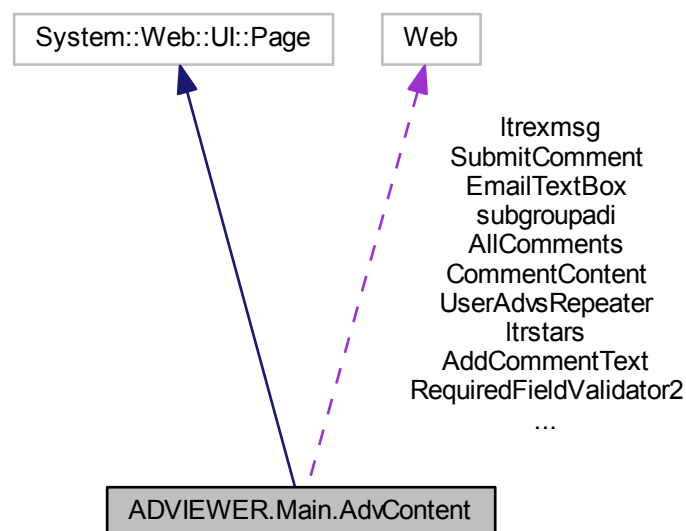

Public Attributes

- [AssignorAdvertisement](#) **curAdv**
- [AssignorUser](#) **CurUser**
- Single **UserAdvRate** = 0
- int **CountOfRates**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **LoadUserAdvertisements** ()
- void **UserAdvsRepeater_PreRender** (object sender, EventArgs e)
- void **SubmitComment_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [AddCommentText](#)
AddCommentText control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator3](#)
RequiredFieldValidator3 control.
- global::System.Web.UI.WebControls.TextBox [EmailTextBox](#)
EmailTextBox control.
- global::System.Web.UI.WebControls.Button [SubmitComment](#)
SubmitComment control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator2](#)
RequiredFieldValidator2 control.
- global::System.Web.UI.WebControls.RegularExpressionValidator [RegularExpressionValidator1](#)
RegularExpressionValidator1 control.
- global::System.Web.UI.HtmlControls.HtmlGenericControl [CommentContent](#)
CommentContent control.
- global::System.Web.UI.HtmlControls.HtmlGenericControl [AllComments](#)
AllComments control.
- global::System.Web.UI.WebControls.Literal [ltrstars](#)
ltrstars control.
- global::System.Web.UI.HtmlControls.HtmlGenericControl [imglist](#)
imglist control.
- global::System.Web.UI.WebControls.Literal [ltrexmsg](#)
ltrexmsg control.
- global::System.Web.UI.HtmlControls.HtmlGenericControl [subgroupadi](#)
subgroupadi control.
- global::System.Web.UI.WebControls.Repeater [UserAdvsRepeater](#)
UserAdvsRepeater control.

5.8.1 Member Data Documentation

5.8.1.1 global.System.Web.UI.WebControls.TextBox ADVIEWER.Main.AdvContent.AddCommentText [protected]

AddCommentText control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.2 global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Main.AdvContent.AllComments
[protected]

AllComments control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.3 global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Main.AdvContent.CommentContent
[protected]

CommentContent control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.4 global.System.Web.UI.WebControls.TextBox ADVIEWER.Main.AdvContent.EmailTextBox [protected]

EmailTextBox control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.5 global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Main.AdvContent.imglist [protected]

imglist control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.6 global.System.Web.UI.WebControls.Literal ADVIEWER.Main.AdvContent.Itrexmsg [protected]

Itrexmsg control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.7 global.System.Web.UI.WebControls.Literal ADVIEWER.Main.AdvContent.Itrstars [protected]

Itrstars control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.8 global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Main.AdvContent.RegularExpressionValidator1 [protected]

RegularExpressionValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.9 global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Main.AdvContent.RequiredFieldValidator2
[protected]

RequiredFieldValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.10 global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Main.AdvContent.RequiredFieldValidator3
[protected]

RequiredFieldValidator3 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.11 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Main.AdvContent.subgroupadi` [protected]

subgroupadi control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.12 `global.System.Web.UI.WebControls.Button ADVIEWER.Main.AdvContent.SubmitComment` [protected]

SubmitComment control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.8.1.13 `global.System.Web.UI.WebControls.Repeater ADVIEWER.Main.AdvContent.UserAdvsRepeater` [protected]

UserAdvsRepeater control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- AdvContent.aspx.cs
- AdvContent.aspx.designer.cs


5.9 ADVIEWER.DAL.AdvertisementMessage Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.AdvertisementMessage:

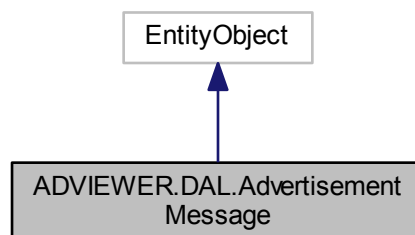

Collaboration diagram for ADVIEWER.DAL.AdvertisementMessage:

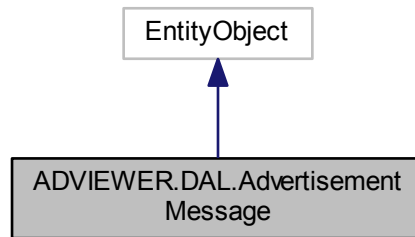

Static Public Member Functions

- static [AdvertisementMessage CreateAdvertisementMessage](#) (global::System.Int64 id)
Create a new [AdvertisementMessage](#) object.

Properties

- global::System.Int64 [ID](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int64 > [AgahiID](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int64 > [UserID](#) [get, set]
No Metadata Documentation available.
- global::System.String [FullName](#) [get, set]
No Metadata Documentation available.
- global::System.String [Email](#) [get, set]
No Metadata Documentation available.
- global::System.String [Text](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.DateTime > [Date](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Boolean > [IsRead](#) [get, set]
No Metadata Documentation available.
- global::System.String [Tell](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Boolean > [Inbox](#) [get, set]
No Metadata Documentation available.
- global::System.String [reply](#) [get, set]
No Metadata Documentation available.

5.9.1 Detailed Description

No Metadata Documentation available.

5.9.2 Member Function Documentation

5.9.2.1 static **AdvertisementMessage** ADVIEWER.DAL.**AdvertisementMessage**.CreateAdvertisementMessage (
global::System.Int64 *id*) [inline],[static]

Create a new [AdvertisementMessage](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
-----------	-----------------------------------

5.9.3 Property Documentation

5.9.3.1 `Nullable<global.System.Int64> ADVIEWER.DAL.AdvertisementMessage.AgahiID` [get], [set]

No Metadata Documentation available.

5.9.3.2 `Nullable<global.System.DateTime> ADVIEWER.DAL.AdvertisementMessage.Date` [get], [set]

No Metadata Documentation available.

5.9.3.3 `global.System.String ADVIEWER.DAL.AdvertisementMessage.Email` [get], [set]

No Metadata Documentation available.

5.9.3.4 `global.System.String ADVIEWER.DAL.AdvertisementMessage.FullName` [get], [set]

No Metadata Documentation available.

5.9.3.5 `global.System.Int64 ADVIEWER.DAL.AdvertisementMessage.ID` [get], [set]

No Metadata Documentation available.

5.9.3.6 `Nullable<global.System.Boolean> ADVIEWER.DAL.AdvertisementMessage.Inbox` [get], [set]

No Metadata Documentation available.

5.9.3.7 `Nullable<global.System.Boolean> ADVIEWER.DAL.AdvertisementMessage.IsRead` [get], [set]

No Metadata Documentation available.

5.9.3.8 `global.System.String ADVIEWER.DAL.AdvertisementMessage.reply` [get], [set]

No Metadata Documentation available.

5.9.3.9 `global.System.String ADVIEWER.DAL.AdvertisementMessage.Tell` [get], [set]

No Metadata Documentation available.

5.9.3.10 `global.System.String ADVIEWER.DAL.AdvertisementMessage.Text` [get], [set]

No Metadata Documentation available.

5.9.3.11 `Nullable<global.System.Int64> ADVIEWER.DAL.AdvertisementMessage.UserID` `[get]`, `[set]`

No Metadata Documentation available.


The documentation for this class was generated from the following file:

- DAL/Model1.Designer.cs


5.10 ADVIEWER.DAL.Advertisement Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Advertisement:

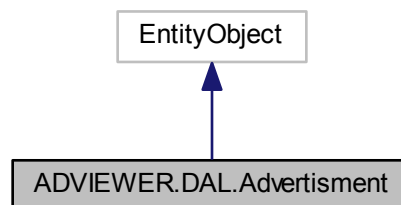

Collaboration diagram for ADVIEWER.DAL.Advertisement:

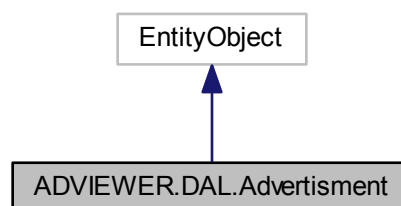

Static Public Member Functions

- static [Advertisement CreateAdvertisement](#) (global::System.Int32 id, global::System.Int32 groupId, global::System.Int32 starCount, global::System.String title, global::System.String description, global::System.String fullName, global::System.String email, global::System.DateTime expirationDate, global::System.DateTime registrationDate, global::System.DateTime lastRenewal, global::System.Int32 reviewCount, global::System.String tellTime, global::System.Int32 advDuration, global::System.Int32 userId)

Create a new [Advertisement](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.Int32 [GroupID](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [StateCityID](#) [get, set]
No Metadata Documentation available.
- global::System.Int32 [StarCount](#) [get, set]
No Metadata Documentation available.
- global::System.String [Title](#) [get, set]
No Metadata Documentation available.
- global::System.String [ShortDescription](#) [get, set]
No Metadata Documentation available.
- global::System.String [Description](#) [get, set]
No Metadata Documentation available.
- global::System.String [Pic](#) [get, set]
No Metadata Documentation available.
- global::System.Boolean [IsConfirmed](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Boolean > [IsPaid](#) [get, set]
No Metadata Documentation available.
- global::System.Boolean [IsRead](#) [get, set]
No Metadata Documentation available.
- global::System.String [DenyReason](#) [get, set]
No Metadata Documentation available.
- global::System.String [FullName](#) [get, set]
No Metadata Documentation available.
- global::System.String [Tell](#) [get, set]
No Metadata Documentation available.
- global::System.String [Mobile](#) [get, set]
No Metadata Documentation available.
- global::System.String [Address](#) [get, set]
No Metadata Documentation available.
- global::System.String [Email](#) [get, set]
No Metadata Documentation available.
- global::System.String [YahooID](#) [get, set]
No Metadata Documentation available.
- global::System.String [Price](#) [get, set]
No Metadata Documentation available.
- global::System.DateTime [ExpirationDate](#) [get, set]
No Metadata Documentation available.
- global::System.DateTime [RegistrationDate](#) [get, set]
No Metadata Documentation available.
- global::System.DateTime [LastRenewal](#) [get, set]
No Metadata Documentation available.
- global::System.Int32 [ReviewCount](#) [get, set]
No Metadata Documentation available.
- global::System.String [TellTime](#) [get, set]
No Metadata Documentation available.
- global::System.String [Link](#) [get, set]

- No Metadata Documentation available.*
- Nullable< global::System.Int64 > [PaidID](#) [get, set]
- No Metadata Documentation available.*
- global::System.Int32 [AdvDuration](#) [get, set]
- No Metadata Documentation available.*
- global::System.Int32 [UserId](#) [get, set]
- No Metadata Documentation available.*
- EntityCollection< [Keyword](#) > [Keywords](#) [get, set]
- No Metadata Documentation available.*
- [User](#) [User](#) [get, set]
- No Metadata Documentation available.*
- EntityReference< [User](#) > [UserReference](#) [get, set]
- No Metadata Documentation available.*
- [Group](#) [Group](#) [get, set]
- No Metadata Documentation available.*
- EntityReference< [Group](#) > [GroupReference](#) [get, set]
- No Metadata Documentation available.*
- EntityCollection< [Rate](#) > [Ratings](#) [get, set]
- No Metadata Documentation available.*
- [StateCity](#) [StateCity](#) [get, set]
- No Metadata Documentation available.*
- EntityReference< [StateCity](#) > [StateCityReference](#) [get, set]
- No Metadata Documentation available.*
- EntityCollection< [Comment](#) > [Comments](#) [get, set]
- No Metadata Documentation available.*

5.10.1 Detailed Description

No Metadata Documentation available.

5.10.2 Member Function Documentation

- 5.10.2.1 static [Advertisement](#) [ADVIEWSER.DAL.Advertisement.CreateAdvertisement](#) (global::System.Int32 *id*, global::System.Int32 *groupId*, global::System.Int32 *starCount*, global::System.String *title*, global::System.String *description*, global::System.String *fullName*, global::System.String *email*, global::System.DateTime *expirationDate*, global::System.DateTime *registrationDate*, global::System.DateTime *lastRenewal*, global::System.Int32 *reviewCount*, global::System.String *telTime*, global::System.Int32 *advDuration*, global::System.Int32 *userId*) [inline], [static]

Create a new [Advertisement](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>groupId</i>	Initial value of the GroupID property.
<i>starCount</i>	Initial value of the StarCount property.
<i>title</i>	Initial value of the Title property.
<i>description</i>	Initial value of the Description property.

<i>fullName</i>	Initial value of the FullName property.
<i>email</i>	Initial value of the Email property.
<i>expirationDate</i>	Initial value of the ExpirationDate property.
<i>registrationDate</i>	Initial value of the RegistrationDate property.
<i>lastRenewal</i>	Initial value of the LastRenewal property.
<i>reviewCount</i>	Initial value of the ReviewCount property.
<i>tellTime</i>	Initial value of the TellTime property.
<i>advDuration</i>	Initial value of the AdvDuration property.
<i>userId</i>	Initial value of the UserId property.

5.10.3 Property Documentation

5.10.3.1 `global.System.String ADVIEWER.DAL.Advertisement.Address` [get], [set]

No Metadata Documentation available.

5.10.3.2 `global.System.Int32 ADVIEWER.DAL.Advertisement.AdvDuration` [get], [set]

No Metadata Documentation available.

5.10.3.3 `EntityCollection<Comment> ADVIEWER.DAL.Advertisement.Comments` [get], [set]

No Metadata Documentation available.

5.10.3.4 `global.System.String ADVIEWER.DAL.Advertisement.DenyReason` [get], [set]

No Metadata Documentation available.

5.10.3.5 `global.System.String ADVIEWER.DAL.Advertisement.Description` [get], [set]

No Metadata Documentation available.

5.10.3.6 `global.System.String ADVIEWER.DAL.Advertisement.Email` [get], [set]

No Metadata Documentation available.

5.10.3.7 `global.System.DateTime ADVIEWER.DAL.Advertisement.ExpirationDate` [get], [set]

No Metadata Documentation available.

5.10.3.8 `global.System.String ADVIEWER.DAL.Advertisement.FullName` [get], [set]

No Metadata Documentation available.

5.10.3.9 `Group ADVIEWER.DAL.Advertisement.Group` [get], [set]

No Metadata Documentation available.

5.10.3.10 `global.System.Int32 ADVIEWER.DAL.Advertisement.GroupID` `[get], [set]`

No Metadata Documentation available.

5.10.3.11 `EntityReference<Group> ADVIEWER.DAL.Advertisement.GroupReference` `[get], [set]`

No Metadata Documentation available.

5.10.3.12 `global.System.Int32 ADVIEWER.DAL.Advertisement.ID` `[get], [set]`

No Metadata Documentation available.

5.10.3.13 `global.System.Boolean ADVIEWER.DAL.Advertisement.IsConfirmed` `[get], [set]`

No Metadata Documentation available.

5.10.3.14 `Nullable<global.System.Boolean> ADVIEWER.DAL.Advertisement.IsPaid` `[get], [set]`

No Metadata Documentation available.

5.10.3.15 `global.System.Boolean ADVIEWER.DAL.Advertisement.IsRead` `[get], [set]`

No Metadata Documentation available.

5.10.3.16 `EntityCollection<KeyWord> ADVIEWER.DAL.Advertisement.KeyWords` `[get], [set]`

No Metadata Documentation available.

5.10.3.17 `global.System.DateTime ADVIEWER.DAL.Advertisement.LastRenewal` `[get], [set]`

No Metadata Documentation available.

5.10.3.18 `global.System.String ADVIEWER.DAL.Advertisement.Link` `[get], [set]`

No Metadata Documentation available.

5.10.3.19 `global.System.String ADVIEWER.DAL.Advertisement.Mobile` `[get], [set]`

No Metadata Documentation available.

5.10.3.20 `Nullable<global.System.Int64> ADVIEWER.DAL.Advertisement.PaidID` `[get], [set]`

No Metadata Documentation available.

5.10.3.21 `global.System.String ADVIEWER.DAL.Advertisement.Pic` `[get], [set]`

No Metadata Documentation available.

5.10.3.22 `global.System.String ADVIEWER.DAL.Advertisement.Price` [get], [set]

No Metadata Documentation available.

5.10.3.23 `EntityCollection<Rate> ADVIEWER.DAL.Advertisement.Ratings` [get], [set]

No Metadata Documentation available.

5.10.3.24 `global.System.DateTime ADVIEWER.DAL.Advertisement.RegistrationDate` [get], [set]

No Metadata Documentation available.

5.10.3.25 `global.System.Int32 ADVIEWER.DAL.Advertisement.ReviewCount` [get], [set]

No Metadata Documentation available.

5.10.3.26 `global.System.String ADVIEWER.DAL.Advertisement.ShortDescription` [get], [set]

No Metadata Documentation available.

5.10.3.27 `global.System.Int32 ADVIEWER.DAL.Advertisement.StarCount` [get], [set]

No Metadata Documentation available.

5.10.3.28 `StateCity ADVIEWER.DAL.Advertisement.StateCity` [get], [set]

No Metadata Documentation available.

5.10.3.29 `Nullable<global.System.Int32> ADVIEWER.DAL.Advertisement.StateCityID` [get], [set]

No Metadata Documentation available.

5.10.3.30 `EntityReference<StateCity> ADVIEWER.DAL.Advertisement.StateCityReference` [get], [set]

No Metadata Documentation available.

5.10.3.31 `global.System.String ADVIEWER.DAL.Advertisement.Tell` [get], [set]

No Metadata Documentation available.

5.10.3.32 `global.System.String ADVIEWER.DAL.Advertisement.TellTime` [get], [set]

No Metadata Documentation available.

5.10.3.33 `global.System.String ADVIEWER.DAL.Advertisement.Title` [get], [set]

No Metadata Documentation available.

5.10.3.34 **User** ADVIEWER.DAL.Advertisement.User [get], [set]

No Metadata Documentation available.

5.10.3.35 **global.System.Int32** ADVIEWER.DAL.Advertisement.UserId [get], [set]

No Metadata Documentation available.

5.10.3.36 **EntityReference<User>** ADVIEWER.DAL.Advertisement.UserReference [get], [set]

No Metadata Documentation available.

5.10.3.37 **global.System.String** ADVIEWER.DAL.Advertisement.YahooID [get], [set]


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.11 ADVIEWER.Member.AdvsList Class Reference

Inheritance diagram for ADVIEWER.Member.AdvsList:

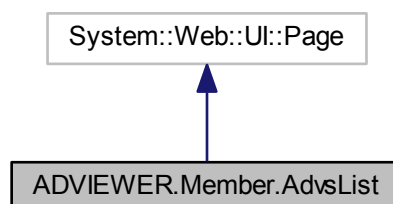

Collaboration diagram for ADVIEWER.Member.AdvsList:

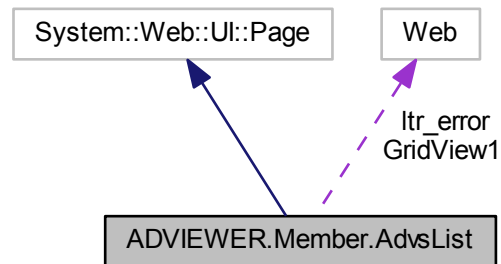

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **GridView1_RowCommand** (object sender, GridViewCommandEventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Literal [ltr_error](#)
ltr_error control.
- global::System.Web.UI.WebControls.GridView [GridView1](#)
GridView1 control.

5.11.1 Member Data Documentation

5.11.1.1 `global.System.Web.UI.WebControls.GridView ADVIEWER.Member.AdvsList.GridView1` [protected]

GridView1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.11.1.2 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.AdvsList.ltr_error` [protected]

ltr_error control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- Member/AdvsList.aspx.cs
- Member/AdvsList.aspx.designer.cs


5.12 ADVIEWER.BAL.AssignorAdvertisement Class Reference

[AssignorAdvertisement](#).

Inheritance diagram for ADVIEWER.BAL.AssignorAdvertisment:

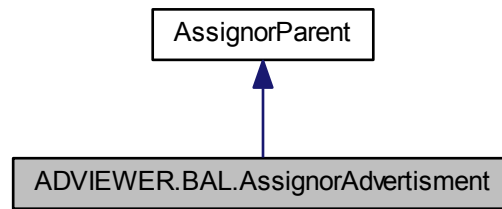

Collaboration diagram for ADVIEWER.BAL.AssignorAdvertisment:

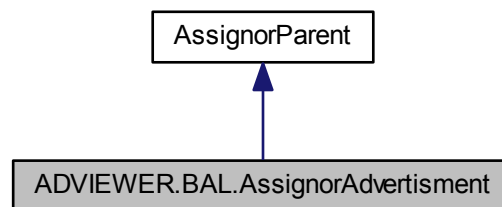

Properties

- Boolean **IsConfirmed** [get, set]
- bool **IsRead** [get, set]
- int **UserId** [get, set]
- [AssignorUser](#) **User** [get]
- int **GroupID** [get, set]
- [AssignorGroup](#) **Group** [get]
- int **StateCityID** [get, set]
- [AssignorStateCity](#) **StateCity** [get]
- string **Title** [get, set]
- string **Pic** [get, set]
- string **FullName** [get, set]
- string **Mobile** [get, set]
- string **Tell** [get, set]
- string **Description** [get, set]
- string **TellTime** [get, set]
- string **Email** [get, set]
- int **ReviewCount** [get, set]
- string **Price** [get, set]
- DateTime **RegistrationDate** [get, set]
- DateTime **LastRenewal** [get, set]

- DateTime **ExpirationDate** [get, set]
- int **AdvDuration** [get, set]
- int **StarCount** [get, set]

5.12.1 Detailed Description

[AssignorAdvertisement](#).

This class make Assignor Advertisement. assignor classes are used to transfer data between [DAL](#) and UI.


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.13 ADVIEWER.BAL.AssignorComment Class Reference

[AssignorComment](#).

Inheritance diagram for ADVIEWER.BAL.AssignorComment:

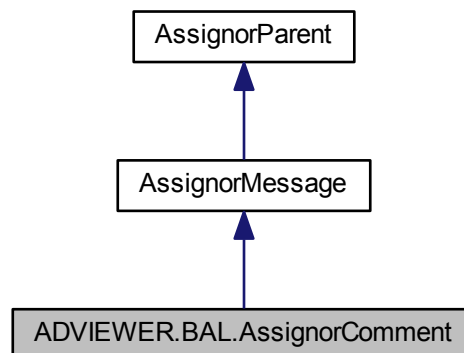

Collaboration diagram for ADVIEWER.BAL.AssignorComment:

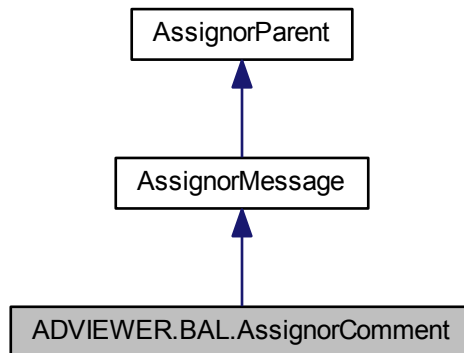

Properties

- [AssignorAdvertisement Adv](#) [get]
- int **AdvID** [get, set]
- bool **IsConfirmed** [get, set]

5.13.1 Detailed Description

[AssignorComment](#).

This class make Assignor Comment. assignor classes are used to transfer data between [DAL](#) and UI.


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.14 ADVIEWER.BAL.AssignorGroup Class Reference

[AssignorGroup](#).

Inheritance diagram for ADVIEWER.BAL.AssignorGroup:

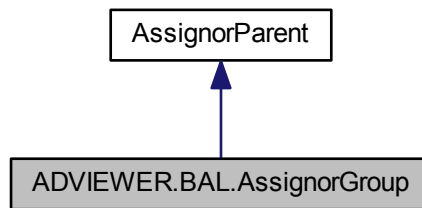

Collaboration diagram for ADVIEWER.BAL.AssignorGroup:

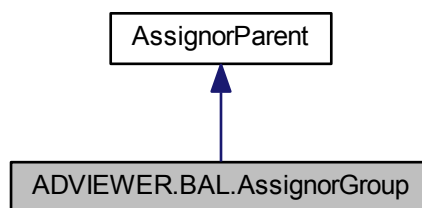

Properties

- string **GroupName** [get, set]
- int **ParentID** [get, set]
- [AssignorGroup](#) **ParentGroup** [get]

5.14.1 Detailed Description

[AssignorGroup](#).

This class make Assignor Group. assignor classes are used to transfer data between [DAL](#) and UI.


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.15 ADVIEWER.BAL.AssignorMessage Class Reference

[AssignorMessage](#).

Inheritance diagram for ADVIEWER.BAL.AssignorMessage:

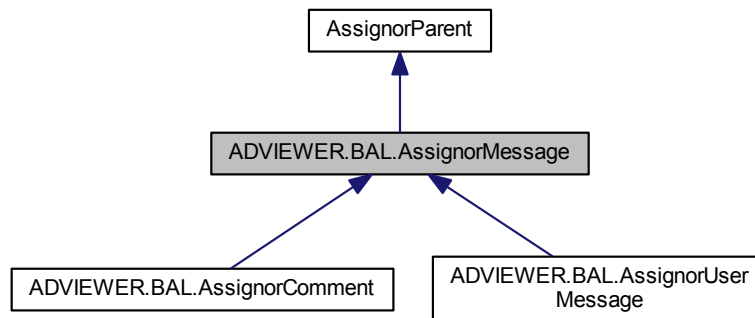

Collaboration diagram for ADVIEWER.BAL.AssignorMessage:

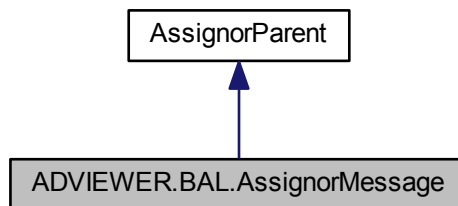

Properties

- string **Text** [get, set]
- DateTime **RegistrationDate** [get, set]
- [AssignorUser](#) **User** [get]
- int **SenderID** [get, set]
- string **Email** [get, set]

5.15.1 Detailed Description

[AssignorMessage](#).

This class make Assignor Message. assignor classes are used to transfer data between [DAL](#) and UI.


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs

5.16 ADVIEWER.BAL.AssignorParent Class Reference

This class just make id for assignor classes.

Inheritance diagram for ADVIEWER.BAL.AssignorParent:

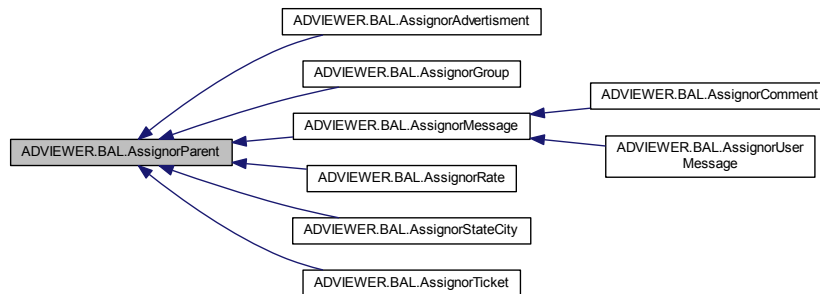

Properties

- **int ID** [get, set]

5.16.1 Detailed Description

This class just make id for assignor classes.

This class just make id


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.17 ADVIEWER.BAL.AssignorRate Class Reference

[AssignorRate](#).

Inheritance diagram for ADVIEWER.BAL.AssignorRate:

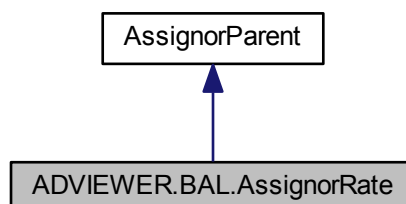

Collaboration diagram for ADVIEWER.BAL.AssignorRate:

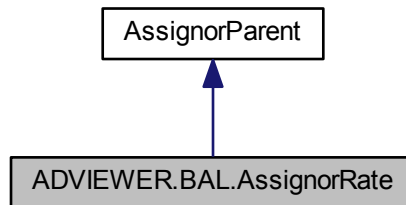

Properties

- int **AdvertisementId** [get, set]
- Single **Value** [get, set]

5.17.1 Detailed Description

[AssignorRate](#).

This class make Assignor Rate. assignor classes are used to transfer data between [DAL](#) and UI.


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.18 ADVIEWER.BAL.AssignorStateCity Class Reference

[AssignorStateCity](#).

Inheritance diagram for ADVIEWER.BAL.AssignorStateCity:

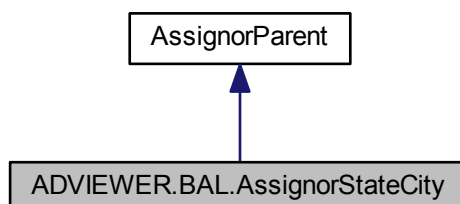

Collaboration diagram for ADVIEWER.BAL.AssignorStateCity:

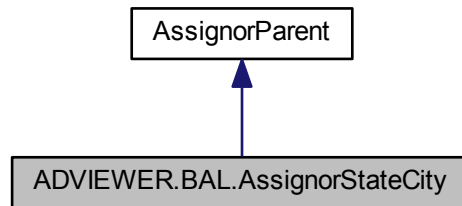

Properties

- string **Name** [get, set]
- int **Stateld** [get, set]
- [AssignorStateCity State](#) [get]

5.18.1 Detailed Description

[AssignorStateCity](#).

This class make Assignor State and City. assignor classes are used to transfer data between [DAL](#) and UI.


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.19 ADVIEWER.BAL.AssignorTicket Class Reference

[AssignorTicket](#).

Inheritance diagram for ADVIEWER.BAL.AssignorTicket:

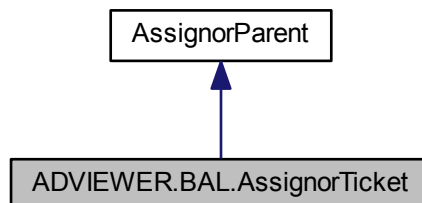

Collaboration diagram for ADVIEWER.BAL.AssignorTicket:

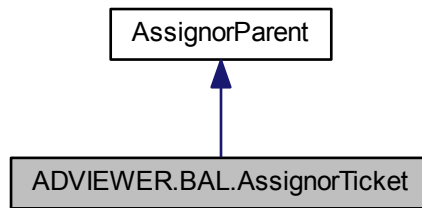

Properties

- string **Answer** [get, set]
- DateTime **LastUpdate** [get, set]
- DateTime **RegDate** [get, set]
- string **Text** [get, set]
- string **Title** [get, set]
- int **UserID** [get, set]
- [AssignorUser](#) **User** [get]

5.19.1 Detailed Description

[AssignorTicket](#).

This class make assignor Ticket. assignor classes are used to transfer data between [DAL](#) and UI.

The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs

5.20 ADVIEWER.BAL.AssignorUser Class Reference

[AssignorUser](#).

Properties

- int **ID** [get, set]
- [AssignorGroup](#)[] **Groups** [get]
- string **About** [get, set]
- string **Address** [get, set]
- string **Fax** [get, set]
- string **FullName** [get, set]
- string **Mail** [get, set]
- string **Mobile** [get, set]
- string **PicAddress** [get, set]
- string **Tell** [get, set]
- string **YahooID** [get, set]
- DateTime **RegisterDate** [get, set]

5.20.1 Detailed Description

[AssignorUser](#).

This class make Assignor User. assignor classes are used to transfer data between [DAL](#) and UI.


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.21 ADVIEWER.BAL.AssignorUserMessage Class Reference

[AssignorUserMessage](#).

Inheritance diagram for ADVIEWER.BAL.AssignorUserMessage:

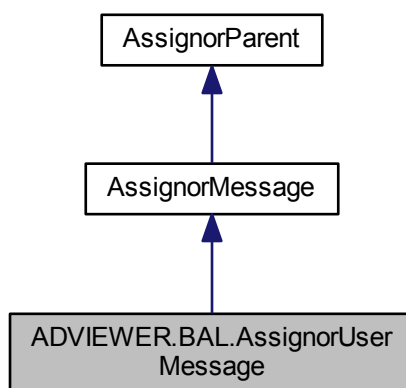

Collaboration diagram for ADVIEWER.BAL.AssignorUserMessage:

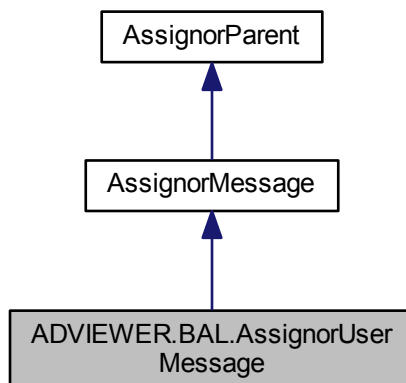

Properties

- [AssignorUser](#) **User** [get]
- int **RecieverID** [get, set]

5.21.1 Detailed Description

[AssignorUserMessage.](#)


This class make Assignor User Message. assignor classes are used to transfer data between [DAL](#) and UI.

The documentation for this class was generated from the following file:


- BAL/PublicFunctions.cs

5.22 ADVIEWER.Member.Avatar Class Reference

Inheritance diagram for ADVIEWER.Member.Avatar:

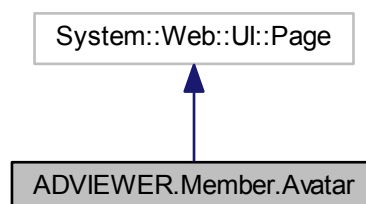

Collaboration diagram for ADVIEWER.Member.Avatar:

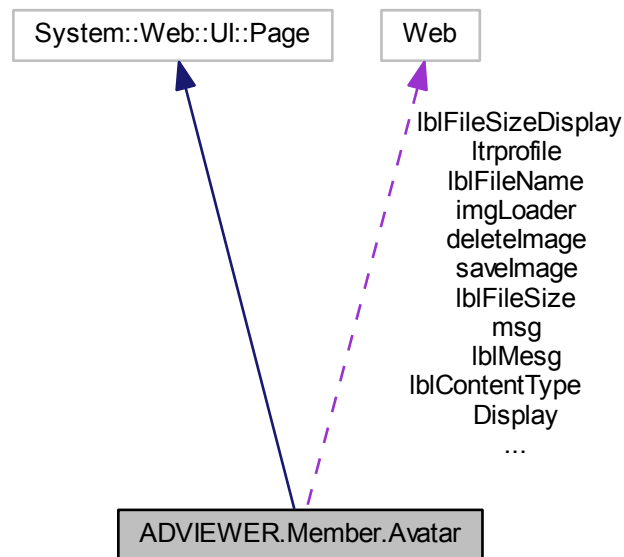

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **Savelimage_Click** (object sender, EventArgs e)
- void **AsyncImageUpload_UploadedComplete** (object sender, EventArgs e)
- void **deletelimage_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl [msg](#)
msg control.
- global::System.Web.UI.WebControls.Literal [ltrprofile](#)
ltrprofile control.
- global::AjaxControlToolkit.ToolkitScriptManager [ToolkitScriptManager1](#)
ToolkitScriptManager1 control.
- global::AjaxControlToolkit.AsyncFileUpload [AsyncImageUpload](#)
AsyncImageUpload control.
- global::System.Web.UI.WebControls.Image [imgLoader](#)
imgLoader control.
- global::System.Web.UI.WebControls.Label [lblErrorStatus](#)
lblErrorStatus control.
- global::System.Web.UI.WebControls.Label [lblMesg](#)
lblMesg control.
- global::System.Web.UI.WebControls.Label [lblSuccess](#)
lblSuccess control.
- global::System.Web.UI.WebControls.Label [lblFileName](#)

- IblFileName control.*
- `global::System.Web.UI.WebControls.Label` [IblFileNameDisplay](#)
IblFileNameDisplay control.
- `global::System.Web.UI.WebControls.Label` [IblFileSize](#)
IblFileSize control.
- `global::System.Web.UI.WebControls.Label` [IblFileSizeDisplay](#)
IblFileSizeDisplay control.
- `global::System.Web.UI.WebControls.Label` [IblContentType](#)
IblContentType control.
- `global::System.Web.UI.WebControls.Label` [IblContentTypeDisplay](#)
IblContentTypeDisplay control.
- `global::System.Web.UI.WebControls.Button` [saveImage](#)
saveImage control.
- `global::System.Web.UI.WebControls.Button` [deleteImage](#)
deleteImage control.

5.22.1 Member Data Documentation

5.22.1.1 `global.AjaxControlToolkit.AsyncFileUpload` `ADVIEWER.Member.Avatar.AsyncImageUpload` [protected]

`AsyncImageUpload` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.2 `global.System.Web.UI.WebControls.Button` `ADVIEWER.Member.Avatar.deleteImage` [protected]

`deleteImage` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.3 `global.System.Web.UI.WebControls.Image` `ADVIEWER.Member.Avatar.imgLoader` [protected]

`imgLoader` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.4 `global.System.Web.UI.WebControls.Label` `ADVIEWER.Member.Avatar.IblContentType` [protected]

`IblContentType` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.5 `global.System.Web.UI.WebControls.Label` `ADVIEWER.Member.Avatar.IblContentTypeDisplay` [protected]

`IblContentTypeDisplay` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.6 `global.System.Web.UI.WebControls.Label` `ADVIEWER.Member.Avatar.IblErrorStatus` [protected]

`IblErrorStatus` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.7 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblFileName [protected]

IblFileName control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.8 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblFileNameDisplay [protected]

IblFileNameDisplay control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.9 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblFileSize [protected]

IblFileSize control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.10 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblFileSizeDisplay [protected]

IblFileSizeDisplay control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.11 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblMesg [protected]

IblMesg control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.12 global.System.Web.UI.WebControls.Label ADVIEWER.Member.Avatar.IblSuccess [protected]

IblSuccess control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.13 global.System.Web.UI.WebControls.Literal ADVIEWER.Member.Avatar.Itrprofile [protected]

Itrprofile control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.14 global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Member.Avatar.msg [protected]

msg control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.15 global.System.Web.UI.WebControls.Button ADVIEWER.Member.Avatar.savImage [protected]

savImage control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.22.1.16 global.AjaxControlToolkit.ToolkitScriptManager ADVIEWER.Member.Avatar.ToolkitScriptManager1 [protected]

ToolkitScriptManager1 control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/Avatar.aspx.cs
- Member/Avatar.aspx.designer.cs

5.23 ADVIEWER.Account.ChangePassword Class Reference

Inheritance diagram for ADVIEWER.Account.ChangePassword:

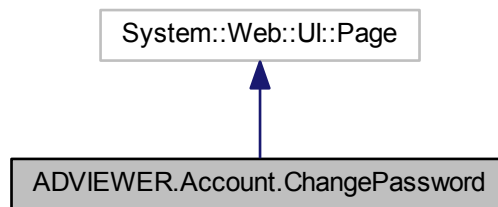

Collaboration diagram for ADVIEWER.Account.ChangePassword:

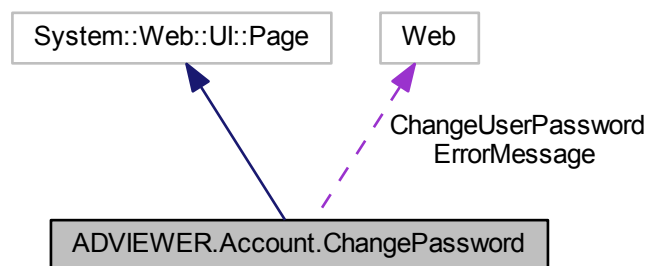

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **setError** (object sender, EventArgs e)

Protected Attributes

- `global::System.Web.UI.WebControls.Literal` [ErrorMessage](#)
ErrorMessage control.
- `global::System.Web.UI.WebControls.ChangePassword` [ChangeUserPassword](#)
ChangeUserPassword control.

5.23.1 Member Data Documentation

5.23.1.1 `global.System.Web.UI.WebControls.ChangePassword` `ADVIEWER.Account.ChangePassword.ChangeUserPassword` `[protected]`

`ChangeUserPassword` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.23.1.2 `global.System.Web.UI.WebControls.Literal` `ADVIEWER.Account.ChangePassword.ErrorMessage` `[protected]`

`ErrorMessage` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- `Account/ChangePassword.aspx.cs`
- `Account/ChangePassword.aspx.designer.cs`


5.24 ADVIEWER.DAL.Comment Class Reference

No Metadata Documentation available.

Inheritance diagram for `ADVIEWER.DAL.Comment`:

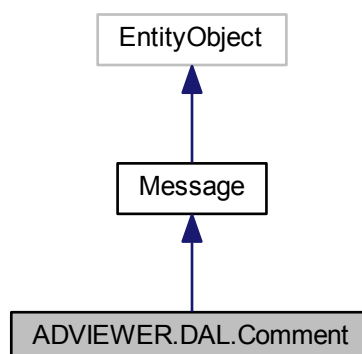

Collaboration diagram for ADVIEWER.DAL.Comment:

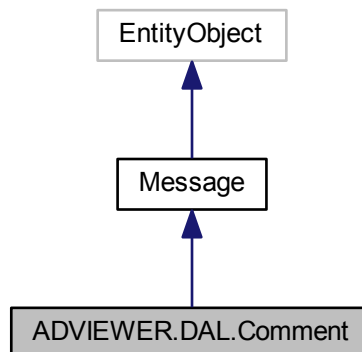

Static Public Member Functions

- static [Comment](#) [CreateComment](#) (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate, global::System.Int32 advID)
Create a new [Comment](#) object.

Properties

- global::System.Int32 [AdvID](#) [get, set]
No Metadata Documentation available.
- global::System.Boolean [IsConfirmed](#) [get, set]
No Metadata Documentation available.
- [Advertisement](#) [Advertisement](#) [get, set]
No Metadata Documentation available.
- EntityReference< [Advertisement](#) > [AdvertisementReference](#) [get, set]
No Metadata Documentation available.

5.24.1 Detailed Description

No Metadata Documentation available.

5.24.2 Member Function Documentation

- 5.24.2.1 static [Comment](#) ADVIEWER.DAL.Comment.CreateComment (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate, global::System.Int32 advID) [inline],[static]

Create a new [Comment](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>text</i>	Initial value of the Text property.
<i>registrationDate</i>	Initial value of the RegistrationDate property.
<i>advID</i>	Initial value of the AdvID property.

5.24.3 Property Documentation

5.24.3.1 Advertisement ADVIEWER.DAL.Comment.Advertisement [get], [set]

No Metadata Documentation available.

5.24.3.2 EntityReference<Advertisement> ADVIEWER.DAL.Comment.AdvertisementReference [get], [set]

No Metadata Documentation available.

5.24.3.3 global.System.Int32 ADVIEWER.DAL.Comment.AdvID [get], [set]

No Metadata Documentation available.

5.24.3.4 global.System.Boolean ADVIEWER.DAL.Comment.IsConfirmed [get], [set]


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.25 ADVIEWER.Manage.CommentsList Class Reference

Inheritance diagram for ADVIEWER.Manage.CommentsList:

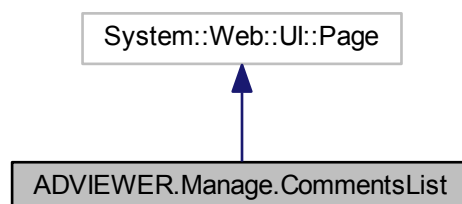

Collaboration diagram for ADVIEWER.Manage.CommentsList:

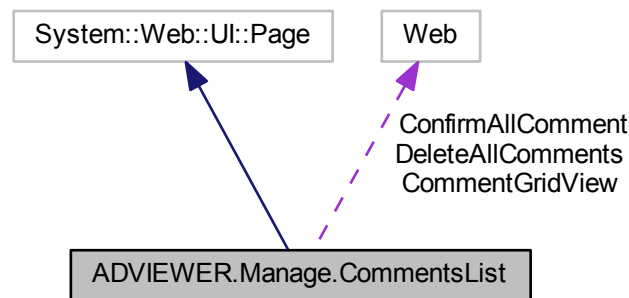

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **CommentGridView_RowCommand** (object sender, GridViewCommandEventArgs e)
- void **DeleteSelectedComments** (object sender, EventArgs e)
- void **ConfirmSelectedComments** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.GridView [CommentGridView](#)
CommentGridView control.
- global::System.Web.UI.WebControls.LinkButton [DeleteAllComments](#)
DeleteAllComments control.
- global::System.Web.UI.WebControls.LinkButton [ConfirmAllComment](#)
ConfirmAllComment control.

5.25.1 Member Data Documentation

5.25.1.1 global::System.Web.UI.WebControls.GridView ADVIEWER.Manage.CommentsList.CommentGridView [protected]

CommentGridView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.25.1.2 global::System.Web.UI.WebControls.LinkButton ADVIEWER.Manage.CommentsList.ConfirmAllComment [protected]

ConfirmAllComment control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.25.1.3 global.System.Web.UI.WebControls.LinkButton ADVIEWER.Manage.CommentsList.DeleteAllComments [protected]

DeleteAllComments control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- Manage/CommentsList.aspx.cs
- Manage/CommentsList.aspx.designer.cs


5.26 ADVIEWER.DAL.ContactMessage Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.ContactMessage:

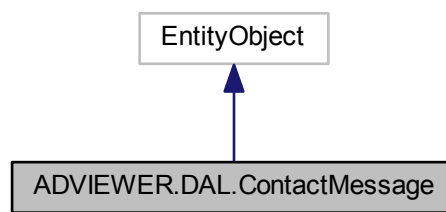

Collaboration diagram for ADVIEWER.DAL.ContactMessage:

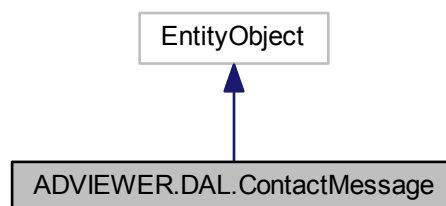

Static Public Member Functions

- static [ContactMessage CreateContactMessage](#) (global::System.Int32 id)
Create a new [ContactMessage](#) object.

Properties

- global::System.Int32 **ID** [get, set]
No Metadata Documentation available.
- global::System.String **FulName** [get, set]
No Metadata Documentation available.
- global::System.String **Email** [get, set]
No Metadata Documentation available.
- global::System.String **Tell** [get, set]
No Metadata Documentation available.
- global::System.String **Title** [get, set]
No Metadata Documentation available.
- global::System.String **Text** [get, set]
No Metadata Documentation available.
- global::System.String **Reply** [get, set]
No Metadata Documentation available.
- Nullable< global::System.Boolean > **IsRead** [get, set]
No Metadata Documentation available.
- Nullable< global::System.DateTime > **RegDate** [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > **UserID** [get, set]
No Metadata Documentation available.

5.26.1 Detailed Description

No Metadata Documentation available.

5.26.2 Member Function Documentation

5.26.2.1 static ContactMessage ADVIEWER.DAL.ContactMessage.CreateContactMessage (global::System.Int32 id)
[inline],[static]

Create a new **ContactMessage** object.

Parameters

<i>id</i>	Initial value of the ID property.
-----------	-----------------------------------

5.26.3 Property Documentation

5.26.3.1 global.System.String ADVIEWER.DAL.ContactMessage.Email [get],[set]

No Metadata Documentation available.

5.26.3.2 global.System.String ADVIEWER.DAL.ContactMessage.FulName [get],[set]

No Metadata Documentation available.

5.26.3.3 global.System.Int32 ADVIEWER.DAL.ContactMessage.ID [get],[set]

No Metadata Documentation available.

5.26.3.4 `Nullable<global.System.Boolean> ADVIEWER.DAL.ContactMessage.IsRead` `[get]`, `[set]`

No Metadata Documentation available.

5.26.3.5 `Nullable<global.System.DateTime> ADVIEWER.DAL.ContactMessage.RegDate` `[get]`, `[set]`

No Metadata Documentation available.

5.26.3.6 `global.System.String ADVIEWER.DAL.ContactMessage.Reply` `[get]`, `[set]`

No Metadata Documentation available.

5.26.3.7 `global.System.String ADVIEWER.DAL.ContactMessage.Tell` `[get]`, `[set]`

No Metadata Documentation available.

5.26.3.8 `global.System.String ADVIEWER.DAL.ContactMessage.Text` `[get]`, `[set]`

No Metadata Documentation available.

5.26.3.9 `global.System.String ADVIEWER.DAL.ContactMessage.Title` `[get]`, `[set]`

No Metadata Documentation available.

5.26.3.10 `Nullable<global.System.Int32> ADVIEWER.DAL.ContactMessage.UserID` `[get]`, `[set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.27 ADVIEWER.Manage.Default Class Reference

Inheritance diagram for ADVIEWER.Manage.Default:

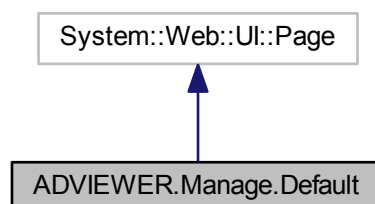

Collaboration diagram for ADVIEWER.Manage.Default:

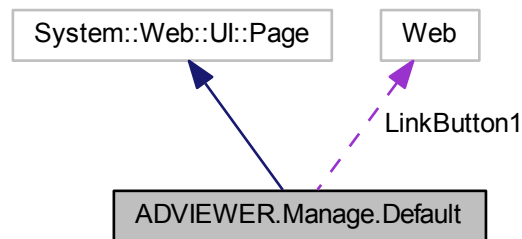

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **ExitFunction** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.LinkButton [LinkButton1](#)

LinkButton1 control.

5.27.1 Member Data Documentation

5.27.1.1 global::System.Web.UI.WebControls.LinkButton ADVIEWER.Manage.Default.LinkButton1 [protected]

LinkButton1 control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/Default.aspx.cs
- Manage/Default.aspx.designer.cs

5.28 ADVIEWER.Manage.EditGroup Class Reference

Inheritance diagram for ADVIEWER.Manage.EditGroup:

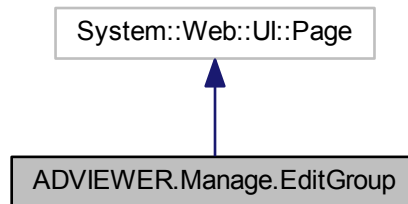

Collaboration diagram for ADVIEWER.Manage.EditGroup:

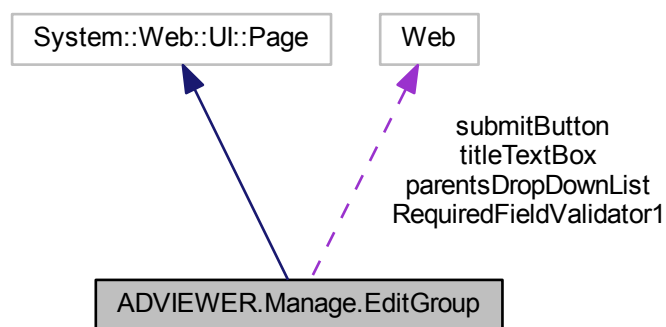

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **submitButton_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [titleTextBox](#)
titleTextBox control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- global::System.Web.UI.WebControls.DropDownList [parentsDropDownList](#)
parentsDropDownList control.
- global::System.Web.UI.WebControls.Button [submitButton](#)
submitButton control.

5.28.1 Member Data Documentation

5.28.1.1 `global.System.Web.UI.WebControls.DropDownList` `ADVIEWER.Manage.EditGroup.parentsDropDownList` [protected]

parentsDropDownList control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.2 `global.System.Web.UI.WebControls.RequiredFieldValidator` `ADVIEWER.Manage.EditGroup.RequiredFieldValidator1` [protected]

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.3 `global.System.Web.UI.WebControls.Button` `ADVIEWER.Manage.EditGroup.submitButton` [protected]

submitButton control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.28.1.4 `global.System.Web.UI.WebControls.TextBox` `ADVIEWER.Manage.EditGroup.titleTextBox` [protected]

titleTextBox control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- `Manage/EditGroup.aspx.cs`
- `Manage/EditGroup.aspx.designer.cs`

5.29 `ADVIEWER.Member.EditProfile` Class Reference

Inheritance diagram for `ADVIEWER.Member.EditProfile`:

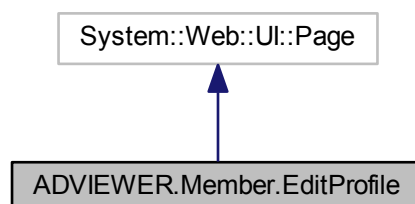

Collaboration diagram for ADVIEWER.Member.EditProfile:

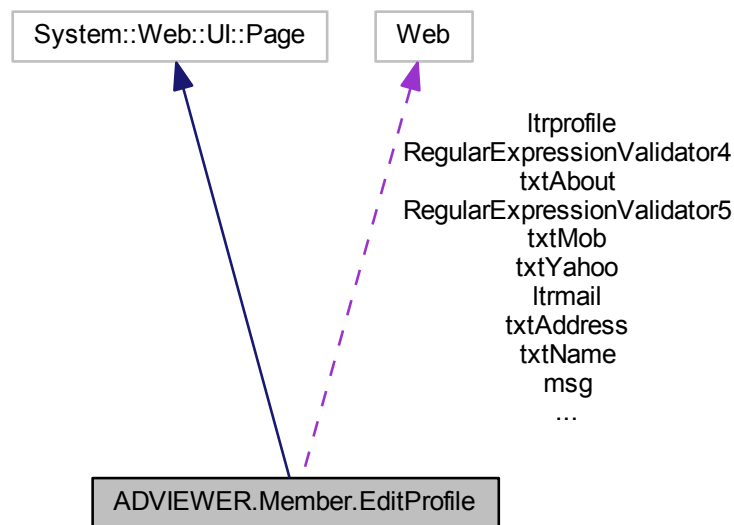

Public Attributes

- string **UserFavoriteGroups**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **Button1_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl [msg](#)
msg control.
- global::System.Web.UI.WebControls.TextBox [FavGrouptxt](#)
FavGrouptxt control.
- global::System.Web.UI.WebControls.Literal [ltrprofile](#)
ltrprofile control.
- global::System.Web.UI.WebControls.Literal [ltrmail](#)
ltrmail control.
- global::System.Web.UI.WebControls.TextBox [txtName](#)
txtName control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator2](#)
RequiredFieldValidator2 control.
- global::System.Web.UI.WebControls.TextBox [txtMob](#)
txtMob control.
- global::System.Web.UI.WebControls.RegularExpressionValidator [RegularExpressionValidator4](#)
RegularExpressionValidator4 control.

- `global::System.Web.UI.WebControls.TextBox` [txtTell](#)
txtTell control.
- `global::System.Web.UI.WebControls.RegularExpressionValidator` [RegularExpressionValidator5](#)
RegularExpressionValidator5 control.
- `global::System.Web.UI.WebControls.TextBox` [txtfax](#)
txtfax control.
- `global::System.Web.UI.WebControls.TextBox` [txtYahoo](#)
txtYahoo control.
- `global::System.Web.UI.WebControls.RegularExpressionValidator` [RegularExpressionValidator1](#)
RegularExpressionValidator1 control.
- `global::System.Web.UI.WebControls.TextBox` [txtAbout](#)
txtAbout control.
- `global::System.Web.UI.WebControls.TextBox` [txtAddress](#)
txtAddress control.
- `global::System.Web.UI.WebControls.Button` [Button1](#)
Button1 control.

5.29.1 Member Data Documentation

5.29.1.1 `global.System.Web.UI.WebControls.Button ADVIEWER.Member.EditProfile.Button1` [protected]

Button1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.2 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.FavGrouptxt` [protected]

FavGrouptxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.3 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.EditProfile.Itmail` [protected]

Itmail control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.4 `global.System.Web.UI.WebControls.Literal ADVIEWER.Member.EditProfile.Itprofile` [protected]

Itprofile control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.5 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Member.EditProfile.msg` [protected]

msg control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.6 `global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.EditProfile.RegularExpressionValidator1` [protected]

RegularExpressionValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.7 global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.EditProfile.RegularExpressionValidator4 [protected]

RegularExpressionValidator4 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.8 global.System.Web.UI.WebControls.RegularExpressionValidator ADVIEWER.Member.EditProfile.RegularExpressionValidator5 [protected]

RegularExpressionValidator5 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.9 global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.EditProfile.RequiredFieldValidator2 [protected]

RequiredFieldValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.10 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtAbout [protected]

txtAbout control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.11 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtAddress [protected]

txtAddress control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.12 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtfax [protected]

txtfax control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.13 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtMob [protected]

txtMob control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.14 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtName [protected]

txtName control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.15 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.EditProfile.txtTell [protected]

txtTell control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.29.1.16 `global.System.Web.UI.WebControls.TextBox` `ADVIEWER.Member.EditProfile.txtYahoo` `[protected]`

`txtYahoo` control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- `Member/EditProfile.aspx.cs`
- `Member/EditProfile.aspx.designer.cs`

5.30 ADVIEWER.Manage.EditStateCity Class Reference

Inheritance diagram for `ADVIEWER.Manage.EditStateCity`:

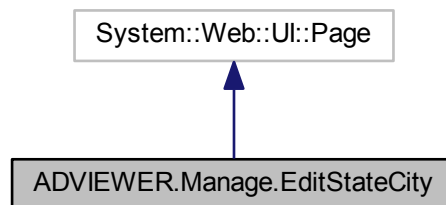

Collaboration diagram for `ADVIEWER.Manage.EditStateCity`:

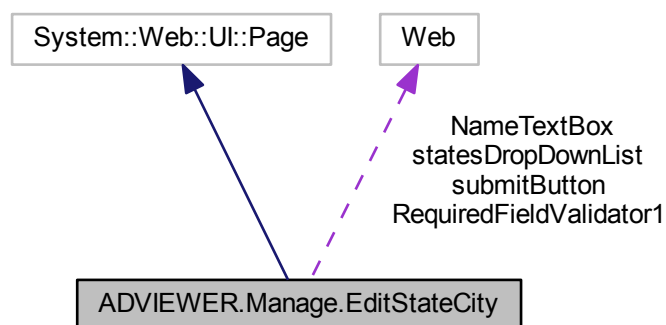

Protected Member Functions

- `void Page_Load` (object sender, EventArgs e)
- `void submitButton_Click` (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [NameTextBox](#)
NameTextBox control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- global::System.Web.UI.WebControls.DropDownList [statesDropDownList](#)
statesDropDownList control.
- global::System.Web.UI.WebControls.Button [submitButton](#)
submitButton control.

5.30.1 Member Data Documentation

5.30.1.1 global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.EditStateCity.NameTextBox [protected]

NameTextBox control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.30.1.2 global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Manage.EditStateCity.RequiredFieldValidator1 [protected]

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.30.1.3 global.System.Web.UI.WebControls.DropDownList ADVIEWER.Manage.EditStateCity.statesDropDownList [protected]

statesDropDownList control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.30.1.4 global.System.Web.UI.WebControls.Button ADVIEWER.Manage.EditStateCity.submitButton [protected]

submitButton control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:

- Manage/EditStateCity.aspx.cs
- Manage/EditStateCity.aspx.designer.cs

5.31 ADVIEWER.BAL.FilesStatus Class Reference

Public Member Functions

- **FilesStatus** (FileInfo fileInfo, string mode, string id)
- **FilesStatus** (string fileName, int fileLength, string mode, string id)

Public Attributes

- const string **HandlerPath** = ""

Properties


- string **group** [get, set]
- string **name** [get, set]
- string **type** [get, set]
- int **size** [get, set]
- string **progress** [get, set]
- string **url** [get, set]
- string **thumbnail_url** [get, set]
- string **delete_url** [get, set]
- string **delete_type** [get, set]
- string **error** [get, set]

The documentation for this class was generated from the following file:


- Member/FilesStatus.ashx.cs

5.32 ADVIEWER.BAL.FileTransferHandler Class Reference

Inheritance diagram for ADVIEWER.BAL.FileTransferHandler:

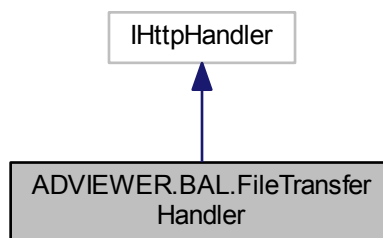

Collaboration diagram for ADVIEWER.BAL.FileTransferHandler:

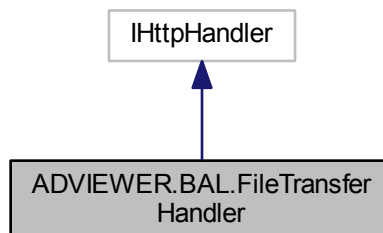

Public Member Functions

- void **ProcessRequest** (HttpContext context)

Properties


- string **StorageRoot** [get]
- bool **IsReusable** [get]

The documentation for this class was generated from the following file:


- Member/FileTransferHandler.ashx.cs

5.33 ADVIEWER.Main.Global Class Reference

Inheritance diagram for ADVIEWER.Main.Global:

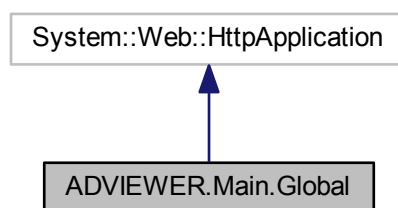

Collaboration diagram for ADVIEWER.Main.Global:

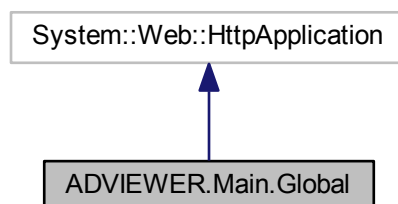


The documentation for this class was generated from the following file:

- Global.asax.cs


5.34 ADVIEWER.DAL.Group Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Group:



Collaboration diagram for ADVIEWER.DAL.Group:



Static Public Member Functions

- static [Group](#) [CreateGroup](#) (global::System.Int32 id, global::System.String groupName)
Create a new [Group](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.String [Pic](#) [get, set]
No Metadata Documentation available.
- global::System.String [GroupName](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [ParentID](#) [get, set]
No Metadata Documentation available.
- EntityCollection< [Group](#) > [childGroup](#) [get, set]
No Metadata Documentation available.

- [Group parentGroup](#) [get, set]
No Metadata Documentation available.
- EntityReference< [Group](#) > [parentGroupReference](#) [get, set]
No Metadata Documentation available.
- EntityCollection< [User](#) > [Users](#) [get, set]
No Metadata Documentation available.
- EntityCollection< [Advertisement](#) > [Advertisements](#) [get, set]
No Metadata Documentation available.

5.34.1 Detailed Description

No Metadata Documentation available.

5.34.2 Member Function Documentation

5.34.2.1 **static Group** ADVIEWER.DAL.Group.CreateGroup (*global::System.Int32 id*, *global::System.String groupName*)
[inline], [static]

Create a new [Group](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>groupName</i>	Initial value of the GroupName property.

5.34.3 Property Documentation

5.34.3.1 EntityCollection<[Advertisement](#)> ADVIEWER.DAL.Group.Advertisements [get], [set]

No Metadata Documentation available.

5.34.3.2 EntityCollection<[Group](#)> ADVIEWER.DAL.Group.childGroup [get], [set]

No Metadata Documentation available.

5.34.3.3 *global::System.String* ADVIEWER.DAL.Group.GroupName [get], [set]

No Metadata Documentation available.

5.34.3.4 *global::System.Int32* ADVIEWER.DAL.Group.ID [get], [set]

No Metadata Documentation available.

5.34.3.5 **Group** ADVIEWER.DAL.Group.parentGroup [get], [set]

No Metadata Documentation available.

5.34.3.6 EntityReference<[Group](#)> ADVIEWER.DAL.Group.parentGroupReference [get], [set]

No Metadata Documentation available.

5.34.3.7 `Nullable<global.System.Int32> ADVIEWER.DAL.Group.ParentID` `[get]`, `[set]`

No Metadata Documentation available.

5.34.3.8 `global.System.String ADVIEWER.DAL.Group.Pic` `[get]`, `[set]`

No Metadata Documentation available.

5.34.3.9 `EntityCollection<User> ADVIEWER.DAL.Group.Users` `[get]`, `[set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.35 ADVIEWER.Manage.GroupsList Class Reference

Inheritance diagram for ADVIEWER.Manage.GroupsList:

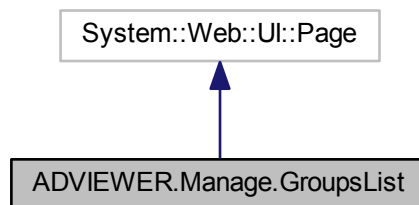

Collaboration diagram for ADVIEWER.Manage.GroupsList:

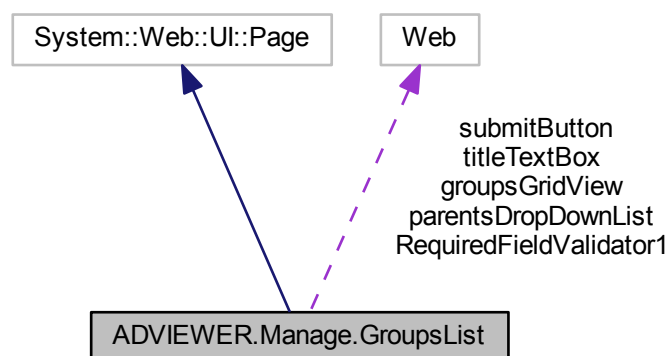

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **groupsGridView_RowCommand** (object sender, GridViewCommandEventArgs e)
- void **groupsGridView_RowDataBound** (object sender, GridViewRowEventArgs e)
- void **groupsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **submitButton_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [titleTextBox](#)
titleTextBox control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- global::System.Web.UI.WebControls.DropDownList [parentsDropDownList](#)
parentsDropDownList control.
- global::System.Web.UI.WebControls.Button [submitButton](#)
submitButton control.
- global::System.Web.UI.WebControls.GridView [groupsGridView](#)
groupsGridView control.

5.35.1 Member Data Documentation

5.35.1.1 global.System.Web.UI.WebControls.GridView ADVIEWER.Manage.GroupsList.groupsGridView [protected]

groupsGridView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.35.1.2 global.System.Web.UI.WebControls.DropDownList ADVIEWER.Manage.GroupsList.parentsDropDownList [protected]

parentsDropDownList control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.35.1.3 global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Manage.GroupsList.RequiredFieldValidator1 [protected]

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.35.1.4 global.System.Web.UI.WebControls.Button ADVIEWER.Manage.GroupsList.submitButton [protected]

submitButton control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.35.1.5 global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.GroupsList.titleTextBox [protected]

titleTextBox control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/GroupsList.aspx.cs
- Manage/GroupsList.aspx.designer.cs

5.36 ADVIEWER.BAL.JsonMaker Class Reference

Inheritance diagram for ADVIEWER.BAL.JsonMaker:

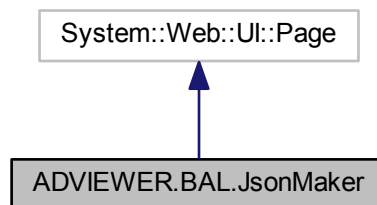

Collaboration diagram for ADVIEWER.BAL.JsonMaker:

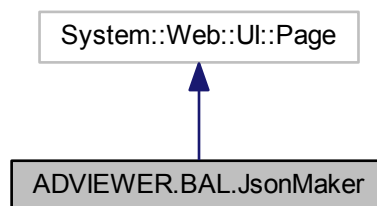

Protected Member Functions

- void **Page_PreRender** (object sender, EventArgs e)


The documentation for this class was generated from the following file:

- BAL/JsonMaker.aspx.cs


5.37 ADVIEWER.DAL.KeyWord Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.KeyWord:

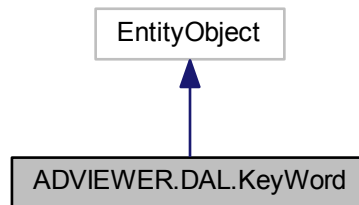

Collaboration diagram for ADVIEWER.DAL.KeyWord:

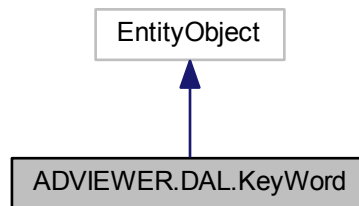

Static Public Member Functions

- static `Keyword CreateKeyword` (global::System.Int32 id, global::System.String text)
Create a new `Keyword` object.

Properties

- global::System.Int32 `ID` [get, set]
No Metadata Documentation available.
- global::System.String `Text` [get, set]
No Metadata Documentation available.
- EntityCollection< `Advertisement` > `Advertisement` [get, set]
No Metadata Documentation available.

5.37.1 Detailed Description

No Metadata Documentation available.

5.37.2 Member Function Documentation

5.37.2.1 `static KeyWord ADVIEWER.DAL.KeyWord.CreateKeyWord (global::System.Int32 id, global::System.String text)`
`[inline], [static]`

Create a new [KeyWord](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>text</i>	Initial value of the Text property.

5.37.3 Property Documentation

5.37.3.1 `EntityCollection<Advertisement> ADVIEWER.DAL.KeyWord.Advertisement` `[get], [set]`

No Metadata Documentation available.

5.37.3.2 `global.System.Int32 ADVIEWER.DAL.KeyWord.ID` `[get], [set]`

No Metadata Documentation available.

5.37.3.3 `global.System.String ADVIEWER.DAL.KeyWord.Text` `[get], [set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.38 ADVIEWER.Account.Login Class Reference

Inheritance diagram for ADVIEWER.Account.Login:

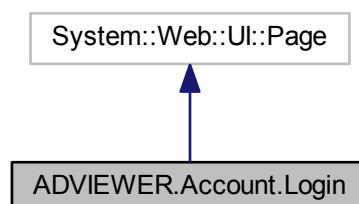

Collaboration diagram for ADVIEWER.Account.Login:

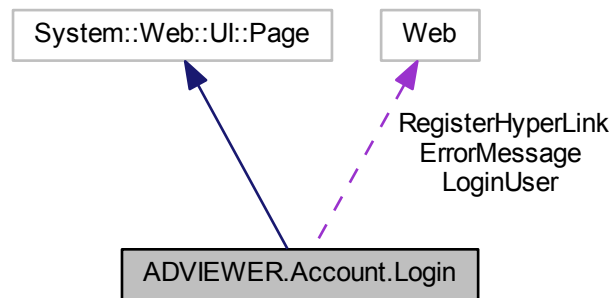

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **LoginUser_LoggedIn** (object sender, EventArgs e)
- void **setError** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.HyperLink [RegisterHyperLink](#)
RegisterHyperLink control.
- global::System.Web.UI.WebControls.Literal [ErrorMessage](#)
ErrorMessage control.
- global::System.Web.UI.WebControls.Login [LoginUser](#)
LoginUser control.

5.38.1 Member Data Documentation

5.38.1.1 global::System.Web.UI.WebControls.Literal ADVIEWER.Account.Login.ErrorMessage [protected]

ErrorMessage control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.38.1.2 global::System.Web.UI.WebControls.Login ADVIEWER.Account.Login.LoginUser [protected]

LoginUser control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.38.1.3 global::System.Web.UI.WebControls.HyperLink ADVIEWER.Account.Login.RegisterHyperLink [protected]

RegisterHyperLink control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Account/Login.aspx.cs
- Account/Login.aspx.designer.cs

5.39 ADVIEWER.Main.MainMaster Class Reference

Inheritance diagram for ADVIEWER.Main.MainMaster:

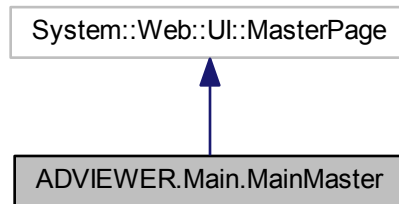

Collaboration diagram for ADVIEWER.Main.MainMaster:

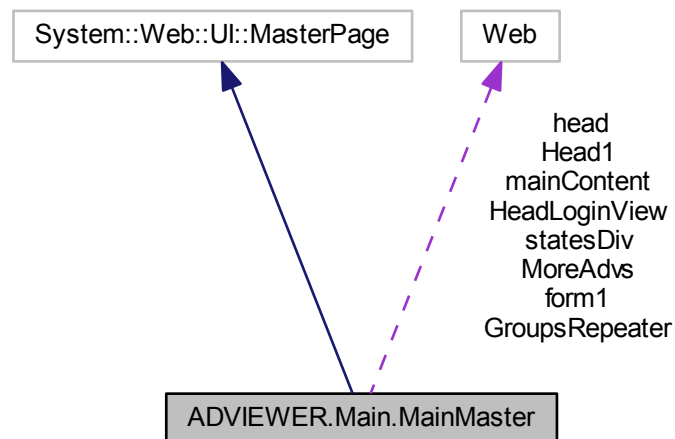

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **LoadGropus** ()
- void **getSubGroupsFunc** (object sender, RepeaterItemEventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlHead [Head1](#)

- Head1 control.*
- `global::System.Web.UI.WebControls.ContentPlaceholder` [head](#)
- head control.*
- `global::System.Web.UI.HtmlControls.HtmlForm` [form1](#)
- form1 control.*
- `global::System.Web.UI.WebControls.LoginView` [HeadLoginView](#)
- HeadLoginView control.*
- `global::System.Web.UI.HtmlControls.HtmlGenericControl` [statesDiv](#)
- statesDiv control.*
- `global::System.Web.UI.WebControls.Repeater` [GroupsRepeater](#)
- GroupsRepeater control.*
- `global::System.Web.UI.WebControls.ContentPlaceholder` [mainContent](#)
- mainContent control.*
- `global::System.Web.UI.WebControls.ContentPlaceholder` [MoreAdvs](#)
- MoreAdvs control.*

5.39.1 Member Data Documentation

5.39.1.1 `global.System.Web.UI.HtmlControls.HtmlForm` ADVIEWER.Main.MainMaster.form1 [protected]

form1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.39.1.2 `global.System.Web.UI.WebControls.Repeater` ADVIEWER.Main.MainMaster.GroupsRepeater [protected]

GroupsRepeater control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.39.1.3 `global.System.Web.UI.WebControls.ContentPlaceholder` ADVIEWER.Main.MainMaster.head [protected]

head control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.39.1.4 `global.System.Web.UI.HtmlControls.HtmlHead` ADVIEWER.Main.MainMaster.Head1 [protected]

Head1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.39.1.5 `global.System.Web.UI.WebControls.LoginView` ADVIEWER.Main.MainMaster.HeadLoginView [protected]

HeadLoginView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.39.1.6 `global.System.Web.UI.WebControls.ContentPlaceholder` ADVIEWER.Main.MainMaster.mainContent [protected]

mainContent control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.39.1.7 `global.System.Web.UI.WebControls.ContentPlaceholder ADVIEWER.Main.MainMaster.MoreAdvs` [protected]

MoreAdvs control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.39.1.8 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Main.MainMaster.statesDiv` [protected]

statesDiv control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- MainMaster.Master.cs
- MainMaster.Master.designer.cs

5.40 ADVIEWER.Member.ManageAdvGallery Class Reference

Inheritance diagram for ADVIEWER.Member.ManageAdvGallery:

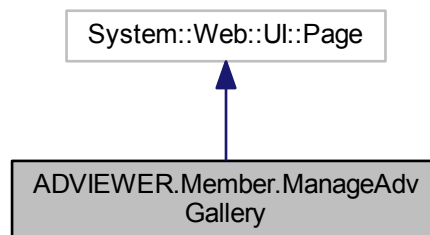

Collaboration diagram for ADVIEWER.Member.ManageAdvGallery:

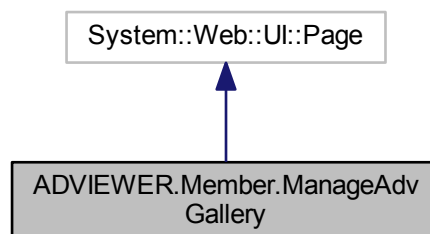

Protected Member Functions


- void **Page_Load** (object sender, EventArgs e)

The documentation for this class was generated from the following file:


- Member/ManageAdvGallery.aspx.cs

5.41 ADVIEWER.Manage.ManageMaster Class Reference

Inheritance diagram for ADVIEWER.Manage.ManageMaster:

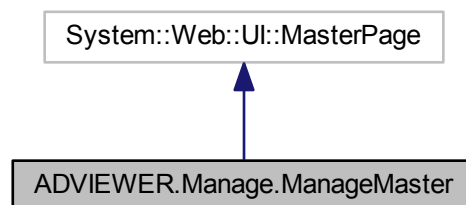

Collaboration diagram for ADVIEWER.Manage.ManageMaster:

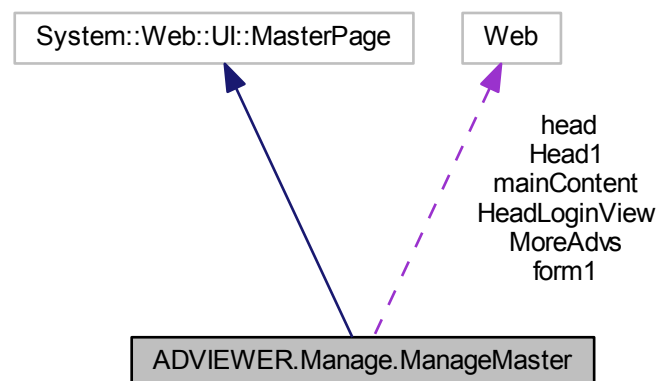

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **ExitFunction** (object sender, EventArgs e)

Protected Attributes

- `global::System.Web.UI.HtmlControls.HtmlHead` [Head1](#)
Head1 control.
- `global::System.Web.UI.WebControls.ContentPlaceholder` [head](#)
head control.
- `global::System.Web.UI.HtmlControls.HtmlForm` [form1](#)
form1 control.
- `global::System.Web.UI.WebControls.LoginView` [HeadLoginView](#)
HeadLoginView control.
- `global::System.Web.UI.WebControls.ContentPlaceholder` [mainContent](#)
mainContent control.
- `global::System.Web.UI.WebControls.ContentPlaceholder` [MoreAdvs](#)
MoreAdvs control.

5.41.1 Member Data Documentation

5.41.1.1 `global.System.Web.UI.HtmlControls.HtmlForm ADVIEWER.Manage.ManageMaster.form1` [protected]

form1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.41.1.2 `global.System.Web.UI.WebControls.ContentPlaceholder ADVIEWER.Manage.ManageMaster.head` [protected]

head control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.41.1.3 `global.System.Web.UI.HtmlControls.HtmlHead ADVIEWER.Manage.ManageMaster.Head1` [protected]

Head1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.41.1.4 `global.System.Web.UI.WebControls.LoginView ADVIEWER.Manage.ManageMaster.HeadLoginView` [protected]

HeadLoginView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.41.1.5 `global.System.Web.UI.WebControls.ContentPlaceholder ADVIEWER.Manage.ManageMaster.mainContent` [protected]

mainContent control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.41.1.6 `global.System.Web.UI.WebControls.ContentPlaceholder ADVIEWER.Manage.ManageMaster.MoreAdvs` [protected]

MoreAdvs control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/ManageMaster.Master.cs
- Manage/ManageMaster.Master.designer.cs

5.42 ADVIEWER.Member.MemberDefault Class Reference

Inheritance diagram for ADVIEWER.Member.MemberDefault:

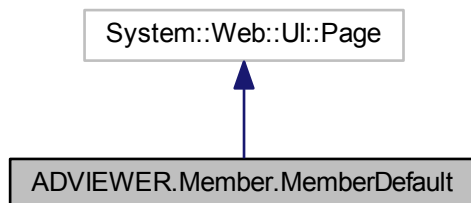

Collaboration diagram for ADVIEWER.Member.MemberDefault:

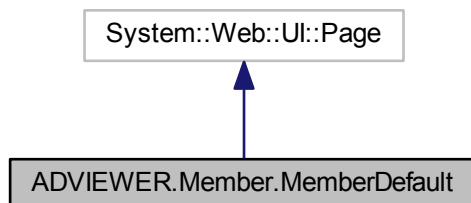

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **ExitFuction** (object sender, EventArgs e)

The documentation for this class was generated from the following file:

- Member/MemberDefault.aspx.cs

5.43 ADVIEWER.BAL.MemberFunctions Class Reference

[MemberFunctions](#) Class.

Static Public Member Functions

- static bool [MakeNewAdvertisement](#) (int starCount, int advDuration, string title, string shortdescription, string description, string keywordStr, string price, string link, string fullName, string mobile, string tell, string telltime, string email, string yahooId, string address, int userId, string tempAdd, string mainAdd, string fileName, int groupId, int StateCityID)
MakeNewAdvertisement.
- static string [GetUserFavoriteGroups](#) (int UserID)
GetUserFavoriteGroups.
- static void [SetAdvRate](#) (int AdvId, Single Value)
SetAdvRate.
- static void [SaveImage](#) (string tempAdd, string mainAdd, string filename)
SaveImage.
- static int[] [ParseKeyWords](#) (string keywordStr)
ParseKeyWords.
- static DataTable [UnconfirmedFreeAdvertisementsDataTable](#) ()
UnconfirmedFreeAdvertisementsDataTable.
- static void [ConfirmAdvertisement](#) (int AdvID)
ConfirmAdvertisement.
- static void [DenyAdvertisement](#) (int AdvID, string reason)
DenyAdvertisement.
- static void [AddNewTicket](#) (string text, string title, int userId)
AddNewTicket.
- static [AssignorTicket](#) [GetTicketData](#) (int id)
GetTicketData.
- static List< [AssignorTicket](#) > [GetListTicketData](#) (int id)
GetListTicketData.
- static [AssignorTicket](#)[] [GetListTicketData](#) ()
GetListTicketData.
- static [AssignorComment](#)[] [GetListCommentData](#) ()
GetListCommentData.
- static [AssignorComment](#) [GetCommentData](#) (int id)
GetCommentData.
- static void [DeleteTicket](#) (int TicketID)
DeleteTicket.
- static void [DeleteComment](#) (int CommentID)
DeleteComment.
- static void [ConfirmComment](#) (int id)
ConfirmComment.
- static void [DeleteAdv](#) (int AdvID)
DeleteAdv.
- static [AssignorAdvertisement](#) [GetAdvertisementData](#) (int id)
GetAdvertisementData.
- static [AssignorAdvertisement](#)[] [GetUserAdvs](#) (int UserID)
GetUserAdvs.
- static [AssignorAdvertisement](#)[] [GetUserConfirmedAdvs](#) (int UserID)
GetUserConfirmedAdvs.
- static [AssignorGroup](#)[] [GetSubGroups](#) ()
GetSubGroups.
- static [AssignorStateCity](#)[] [GetStateAndCityForDropDown](#) ()
GetStateAndCityForDropDown.

- static [AssignorGroup\[\] GetParentGroups \(\)](#)
GetParentGroups.
- static [AssignorGroup\[\] GetSubGroupsByID \(int ID\)](#)
GetSubGroupsByID.
- static void [AddNewGroup \(string groupName, int?parentId\)](#)
AddNewGroup.
- static [AssignorAdvertisement\[\] GetAdvByGroupID \(int ID\)](#)
GetAdvByGroupID.
- static object [UnconfirmedStaredAdvertisementsDataTable \(\)](#)
UnconfirmedStaredAdvertisementsDataTable.
- static object [UserDataTable \(string f, string l\)](#)
UserDataTable.
- static object [UserDataTable2 \(string name, string mail, string id\)](#)
UserDataTable2.
- static int [CountAdReportStar \(\)](#)
CountAdReportStar.
- static object [AdReportStar \(string f, string l\)](#)
AdReportStar.
- static int [CountAdReportNormal \(\)](#)
CountAdReportNormal.
- static object [AdReportNormal \(string f, string l\)](#)
AdReportNormal.
- static void [setUserImage \(string tempAdd, string mainAdd, int userId, string fileName\)](#)
setUserImage
- static void [RenewAdv \(int ID\)](#)
RenewAdv.
- static void [deleteImage \(int userid\)](#)
deleteImage
- static void [AddNewUserMessages \(string UsersList, string MessageContent\)](#)
AddNewUserMessages.
- static [AssignorUserMessage\[\] GetSendMessageInboxDataSource \(int UserID\)](#)
GetSendMessageInboxDataSource.
- static [AssignorUserMessage\[\] GetRecieveMessageInboxDataSource \(int UserID\)](#)
GetRecieveMessageInboxDataSource.
- static [AssignorMessage GetMessageByID \(int MessageID\)](#)
GetRecieveMessageInboxDataSource.

5.43.1 Detailed Description

[MemberFunctions](#) Class.

! This Class is For Functions used in member section, note that manager is a member

5.43.2 Member Function Documentation

5.43.2.1 `static void ADVIEWER.BAL.MemberFunctions.AddNewGroup (string groupName, int? parentId) [inline],
[static]`

AddNewGroup.

This function in a subclass to receive input data and creates a new subgroup.

5.43.2.2 `static void ADVIEWER.BAL.MemberFunctions.AddNewTicket (string text, string title, int userId)` `[inline], [static]`

AddNewTicket.

The function of a ticket will receive all the information it can store.

5.43.2.3 `static void ADVIEWER.BAL.MemberFunctions.AddNewUserMessages (string UsersList, string MessageContent)` `[inline], [static]`

AddNewUserMessages.

Add New User Messages to data base, the receivers passed to function by UsersList.

5.43.2.4 `static object ADVIEWER.BAL.MemberFunctions.AdReportNormal (string f, string l)` `[inline], [static]`

AdReportNormal.

This Function Return list of ad That Registered between f and l

5.43.2.5 `static object ADVIEWER.BAL.MemberFunctions.AdReportStar (string f, string l)` `[inline], [static]`

AdReportStar.

return count of Ad Star between f and l

5.43.2.6 `static void ADVIEWER.BAL.MemberFunctions.ConfirmAdvertisment (int AdvID)` `[inline], [static]`

ConfirmAdvertisment.

This function reads the characteristics of certified puts an ad equals true.

5.43.2.7 `static void ADVIEWER.BAL.MemberFunctions.ConfirmComment (int id)` `[inline], [static]`

ConfirmComment.

do the jobs tha t nessecery to confirm a comment

5.43.2.8 `static int ADVIEWER.BAL.MemberFunctions.CountAdReportNormal ()` `[inline], [static]`

CountAdReportNormal.

return count of Ad Report Star

5.43.2.9 `static int ADVIEWER.BAL.MemberFunctions.CountAdReportStar ()` `[inline], [static]`

CountAdReportStar.

return count of Ad Report Star

5.43.2.10 `static void ADVIEWER.BAL.MemberFunctions.DeleteAdv (int AdvID)` `[inline], [static]`

DeleteAdv.

This function receives an ad in the input id and it will be deleted from the database.

5.43.2.11 `static void ADVIEWER.BAL.MemberFunctions.DeleteComment (int CommentID) [inline],[static]`

DeleteComment.

This entry id in the function receives a comment and it will be deleted from the database.

5.43.2.12 `static void ADVIEWER.BAL.MemberFunctions.deletelImage (int userid) [inline],[static]`

deletelImage

This Function Remove image of a user

5.43.2.13 `static void ADVIEWER.BAL.MemberFunctions.DeleteTicket (int TicketID) [inline],[static]`

DeleteTicket.

This entry id in the function receives a ticket and it will be deleted from the database.

5.43.2.14 `static void ADVIEWER.BAL.MemberFunctions.DenyAdvertisment (int AdvID, string reason) [inline],[static]`

DenyAdvertisment.

do the jobs tha t nessecery to deny an advertisement

5.43.2.15 `static AssignorAdvertisment [] ADVIEWER.BAL.MemberFunctions.GetAdvByGroupID (int ID) [inline],[static]`

GetAdvByGroupID.

The entries will receive an ID and the ID of those that are advertising their GroupID is being input to output will be Brarbr.

5.43.2.16 `static AssignorAdvertisment ADVIEWER.BAL.MemberFunctions.GetAdvertismentData (int id) [inline],[static]`

GetAdvertismentData.

This function takes an advertiser id and all the information it returns.

5.43.2.17 `static AssignorComment ADVIEWER.BAL.MemberFunctions.GetCommentData (int id) [inline],[static]`

GetCommentData.

return the comment that it's id passed to its

5.43.2.18 `static AssignorComment [] ADVIEWER.BAL.MemberFunctions.GetListCommentData () [inline],[static]`

GetListCommentData.

return the array of assignorComments orderd by its registration date

5.43.2.19 `static List<AssignorTicket> ADVIEWER.BAL.MemberFunctions.GetListTicketData (int id) [inline], [static]`

GetListTicketData.

This function takes a user id found it to be a function of all the ticket that was created by that person returns.

5.43.2.20 `static AssignorTicket [] ADVIEWER.BAL.MemberFunctions.GetListTicketData () [inline], [static]`

GetListTicketData.

This function does not enter a value in the input list of ticket that will be the last update they will return back to REG.

5.43.2.21 `static AssignorMessage ADVIEWER.BAL.MemberFunctions.GetMessageByID (int MessageID) [inline], [static]`

GetRecieveMessageInboxDataSource.

return specific message that its ID passed to it.

5.43.2.22 `static AssignorGroup [] ADVIEWER.BAL.MemberFunctions.GetParentGroups () [inline], [static]`

GetParentGroups.

This function will return all key subgroups such as Saipa car but do not open it.

5.43.2.23 `static AssignorUserMessage [] ADVIEWER.BAL.MemberFunctions.GetRecieveMessageInboxDataSource (int UserID) [inline], [static]`

GetRecieveMessageInboxDataSource.

return array of messages that specific user recived.

5.43.2.24 `static AssignorUserMessage [] ADVIEWER.BAL.MemberFunctions.GetSendMessageInboxDataSource (int UserID) [inline], [static]`

GetSendMessageInboxDataSource.

return array of messages that specific user sent.

5.43.2.25 `static AssignorStateCity [] ADVIEWER.BAL.MemberFunctions.GetStateAndCityForDropDown () [inline], [static]`

GetStateAndCityForDropDown.

returns all states and cities

5.43.2.26 `static AssignorGroup [] ADVIEWER.BAL.MemberFunctions.GetSubGroups () [inline], [static]`

GetSubGroups.

This function returns all sub-groups.

5.43.2.27 static AssignorGroup [] ADVIEWER.BAL.MemberFunctions.GetSubGroupsByID (int *ID*) [inline],
[static]

GetSubGroupsByID.

This function get a group id after that return all sub grup of that

5.43.2.28 static AssignorTicket ADVIEWER.BAL.MemberFunctions.GetTicketData (int *id*) [inline],[static]

GetTicketData.

This function returns a ticket id of that information.

5.43.2.29 static AssignorAdvertisment [] ADVIEWER.BAL.MemberFunctions.GetUserAdvs (int *UserID*) [inline],
[static]

GetUserAdvs.

This function receives the input of personal id and insert advertising that person returns.

5.43.2.30 static AssignorAdvertisment [] ADVIEWER.BAL.MemberFunctions.GetUserConfirmedAdvs (int *UserID*)
[inline],[static]

GetUserConfirmedAdvs.

This function receives the input of personal id and advertising inserts and confirmed that a person will return.

5.43.2.31 static string ADVIEWER.BAL.MemberFunctions.GetUserFavoriteGroups (int *UserID*) [inline],[static]

GetUserFavoriteGroups.

returns the string that used in auto complete field for user favorite groups field

5.43.2.32 static bool ADVIEWER.BAL.MemberFunctions.MakeNewAdvertisment (int *starCount*, int *advDuration*, string *title*,
string *shortdescription*, string *description*, string *keywordStr*, string *price*, string *link*, string *fullName*, string
mobile, string *tell*, string *telltime*, string *email*, string *yahooId*, string *address*, int *userId*, string *tempAdd*, string
mainAdd, string *fileName*, int *groupId*, int *StateCityID*) [inline],[static]

MakeNewAdvertisment.

This returns all the data in the chart is an ad for it in the Keyword Abtza Id find them and if you did not have it on the table it will add it id allottable, and it's videos id the adds the information to advertisers. adding the image to the address given in the address information is saved ads

Here is the call graph for this function:



5.43.2.33 `static int [] ADVIEWER.BAL.MemberFunctions.ParseKeyWords (string keywordStr) [inline],[static]`

ParseKeyWords.

This function takes a string input and then it all on the field "," id separator and returns the entire category in the output. If you are not a member of keyword table, then it adds the keyword, and then returns the new id.

5.43.2.34 `static void ADVIEWER.BAL.MemberFunctions.RenewAdv (int ID) [inline],[static]`

RenewAdv.

This Function change attribute of ad that like new ad

5.43.2.35 `static void ADVIEWER.BAL.MemberFunctions.SaveImage (string tempAdd, string mainAdd, string filename) [inline],[static]`

SaveImage.

This is the first Czech to address is that if there is no input, it will generate and store the image at that address.

5.43.2.36 `static void ADVIEWER.BAL.MemberFunctions.SetAdvRate (int Advid, Single Value) [inline],[static]`

SetAdvRate.

insert or update the value of rating an advertisement

5.43.2.37 `static void ADVIEWER.BAL.MemberFunctions.setUserImage (string tempAdd, string mainAdd, int userId, string fileName) [inline],[static]`

setUserImage

This Function Set User image !!!

5.43.2.38 `static DataTable ADVIEWER.BAL.MemberFunctions.UnconfirmedFreeAdvertisementsDataTable () [inline],[static]`

UnconfirmedFreeAdvertisementsDataTable.

This function returns all the free advertising that have been approved

5.43.2.39 `static object ADVIEWER.BAL.MemberFunctions.UnconfirmedStaredAdvertisementsDataTable () [inline],[static]`

UnconfirmedStaredAdvertisementsDataTable.

This function will return all ads starred that have been approved

5.43.2.40 `static object ADVIEWER.BAL.MemberFunctions.UserDataTable (string f, string l) [inline],[static]`

UserDataTable.

This Function Return list of user That login between f and l

5.43.2.41 static object ADVIEWER.BAL.MemberFunctions.UserDataTable2 (string *name*, string *mail*, string *id*)
[inline],[static]

UserDataTable2.


This Function Return list of user That have information name or mail or id

The documentation for this class was generated from the following file:


- BAL/MemberFunctions.cs

5.44 ADVIEWER.Member.MemberMaster Class Reference

Inheritance diagram for ADVIEWER.Member.MemberMaster:

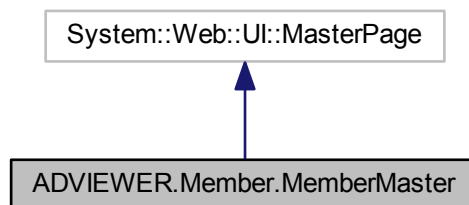

Collaboration diagram for ADVIEWER.Member.MemberMaster:

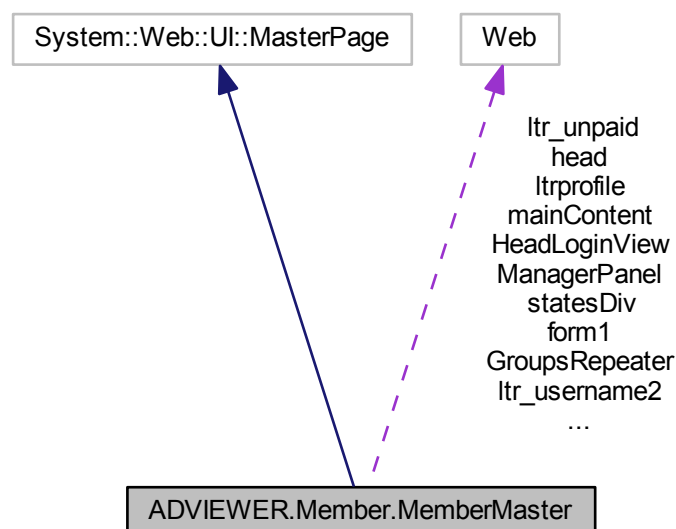

Public Attributes

- [AssignorUser](#) **UserName**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **LoadGropus** ()
- void **getSubGroupsFunc** (object sender, RepeaterItemEventArgs e)
- void **ExitFunction** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.ContentPlaceHolder [head](#)
head control.
- global::System.Web.UI.HtmlControls.HtmlForm [form1](#)
form1 control.
- global::System.Web.UI.WebControls.LoginView [HeadLoginView](#)
HeadLoginView control.
- global::System.Web.UI.HtmlControls.HtmlGenericControl [statesDiv](#)
statesDiv control.
- global::System.Web.UI.WebControls.Repeater [GroupsRepeater](#)
GroupsRepeater control.
- global::System.Web.UI.WebControls.Literal [ltr_unpaid](#)
ltr_unpaid control.
- global::System.Web.UI.WebControls.ContentPlaceHolder [mainContent](#)
mainContent control.
- global::System.Web.UI.WebControls.Literal [ltr_username2](#)
ltr_username2 control.
- global::System.Web.UI.WebControls.Literal [ManagerPanel](#)
ManagerPanel control.
- global::System.Web.UI.WebControls.Literal [ltrprofile](#)
ltrprofile control.

5.44.1 Member Data Documentation

5.44.1.1 global.System.Web.UI.HtmlControls.HtmlForm ADVIEWER.Member.MemberMaster.form1 [protected]

form1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.44.1.2 global.System.Web.UI.WebControls.Repeater ADVIEWER.Member.MemberMaster.GroupsRepeater [protected]

GroupsRepeater control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.44.1.3 global.System.Web.UI.WebControls.ContentPlaceHolder ADVIEWER.Member.MemberMaster.head [protected]

head control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.44.1.4 `global.System.Web.UI.WebControls.LoginView` ADVIEWER.Member.MemberMaster.HeadLoginView [protected]

HeadLoginView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.44.1.5 `global.System.Web.UI.WebControls.Literal` ADVIEWER.Member.MemberMaster.ltr_unpaid [protected]

ltr_unpaid control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.44.1.6 `global.System.Web.UI.WebControls.Literal` ADVIEWER.Member.MemberMaster.ltr_username2 [protected]

ltr_username2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.44.1.7 `global.System.Web.UI.WebControls.Literal` ADVIEWER.Member.MemberMaster.ltrprofile [protected]

ltrprofile control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.44.1.8 `global.System.Web.UI.WebControls.ContentPlaceHolder` ADVIEWER.Member.MemberMaster.mainContent [protected]

mainContent control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.44.1.9 `global.System.Web.UI.WebControls.Literal` ADVIEWER.Member.MemberMaster.ManagerPanel [protected]

ManagerPanel control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.44.1.10 `global.System.Web.UI.HtmlControls.HtmlGenericControl` ADVIEWER.Member.MemberMaster.statesDiv [protected]

statesDiv control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- Member/MemberMaster.Master.cs
- Member/MemberMaster.Master.designer.cs


5.45 ADVIEWER.DAL.Message Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Message:

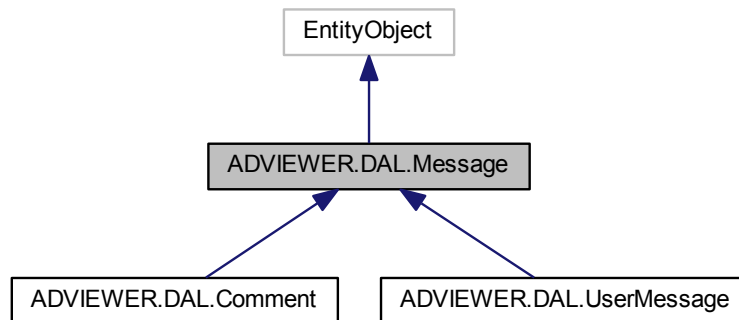

Collaboration diagram for ADVIEWER.DAL.Message:

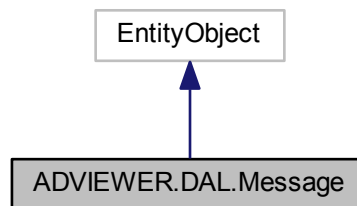

Static Public Member Functions

- static [Message CreateMessage](#) (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate)
Create a new [Message](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.String [Text](#) [get, set]
No Metadata Documentation available.
- global::System.DateTime [RegistrationDate](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [SenderId](#) [get, set]
No Metadata Documentation available.
- global::System.String [Email](#) [get, set]
No Metadata Documentation available.

- [User Sender](#) [get, set]
No Metadata Documentation available.
- EntityReference< [User](#) > [SenderReference](#) [get, set]
No Metadata Documentation available.

5.45.1 Detailed Description

No Metadata Documentation available.

5.45.2 Member Function Documentation

- 5.45.2.1 **static Message** ADVIEWER.DAL.Message.CreateMessage (**global::System.Int32** *id*, **global::System.String** *text*, **global::System.DateTime** *registrationDate*) [inline], [static]

Create a new [Message](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>text</i>	Initial value of the Text property.
<i>registrationDate</i>	Initial value of the RegistrationDate property.

5.45.3 Property Documentation

- 5.45.3.1 **global.System.String** ADVIEWER.DAL.Message.Email [get], [set]

No Metadata Documentation available.

- 5.45.3.2 **global.System.Int32** ADVIEWER.DAL.Message.ID [get], [set]

No Metadata Documentation available.

- 5.45.3.3 **global.System.DateTime** ADVIEWER.DAL.Message.RegistrationDate [get], [set]

No Metadata Documentation available.

- 5.45.3.4 **User** ADVIEWER.DAL.Message.Sender [get], [set]

No Metadata Documentation available.

- 5.45.3.5 **Nullable<global.System.Int32>** ADVIEWER.DAL.Message.SenderID [get], [set]

No Metadata Documentation available.

- 5.45.3.6 **EntityReference<User>** ADVIEWER.DAL.Message.SenderReference [get], [set]

No Metadata Documentation available.

5.45.3.7 `global.System.String ADVIEWER.DAL.Message.Text` `[get]`, `[set]`

No Metadata Documentation available.


The documentation for this class was generated from the following file:

- DAL/Model1.Designer.cs


5.46 ADVIEWER.DAL.ModelContainer Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.ModelContainer:

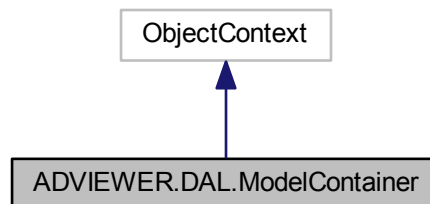

Collaboration diagram for ADVIEWER.DAL.ModelContainer:

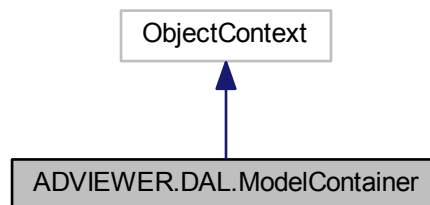

Public Member Functions

- `ModelContainer ()`
Initializes a new `ModelContainer` object using the connection string found in the '`ModelContainer`' section of the application configuration file.
- `ModelContainer (string connectionString)`
Initialize a new `ModelContainer` object.
- `ModelContainer (EntityConnection connection)`
Initialize a new `ModelContainer` object.

- void [AddToAdvertisements](#) ([Advertisement](#) advertisement)
Deprecated Method for adding a new object to the Advertisements EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToUsers](#) ([User](#) user)
Deprecated Method for adding a new object to the Users EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToTickets1](#) ([Ticket](#) ticket)
Deprecated Method for adding a new object to the Tickets1 EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToPayments1](#) ([Payment](#) payment)
Deprecated Method for adding a new object to the Payments1 EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToGroups](#) ([Group](#) group)
Deprecated Method for adding a new object to the Groups EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToContactMessages](#) ([ContactMessage](#) contactMessage)
Deprecated Method for adding a new object to the ContactMessages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToAdvertisementMessages](#) ([AdvertisementMessage](#) advertisementMessage)
Deprecated Method for adding a new object to the AdvertisementMessages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToKeyWords](#) ([KeyWord](#) keyWord)
Deprecated Method for adding a new object to the KeyWords EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToRates](#) ([Rate](#) rate)
Deprecated Method for adding a new object to the Rates EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToStateCities](#) ([StateCity](#) stateCity)
Deprecated Method for adding a new object to the StateCities EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.
- void [AddToMessages](#) ([Message](#) message)
Deprecated Method for adding a new object to the Messages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

Properties

- ObjectSet< [Advertisement](#) > [Advertisements](#) [get]
No Metadata Documentation available.
- ObjectSet< [User](#) > [Users](#) [get]
No Metadata Documentation available.
- ObjectSet< [Ticket](#) > [Tickets1](#) [get]
No Metadata Documentation available.
- ObjectSet< [Payment](#) > [Payments1](#) [get]
No Metadata Documentation available.
- ObjectSet< [Group](#) > [Groups](#) [get]
No Metadata Documentation available.
- ObjectSet< [ContactMessage](#) > [ContactMessages](#) [get]
No Metadata Documentation available.
- ObjectSet< [AdvertisementMessage](#) > [AdvertisementMessages](#) [get]
No Metadata Documentation available.
- ObjectSet< [KeyWord](#) > [KeyWords](#) [get]
No Metadata Documentation available.
- ObjectSet< [Rate](#) > [Rates](#) [get]

No Metadata Documentation available.

- ObjectSet< [StateCity](#) > [StateCities](#) [get]

No Metadata Documentation available.

- ObjectSet< [Message](#) > [Messages](#) [get]

No Metadata Documentation available.

5.46.1 Detailed Description

No Metadata Documentation available.

5.46.2 Constructor & Destructor Documentation

5.46.2.1 ADVIEWER.DAL.ModelContainer.ModelContainer () [inline]

Initializes a new [ModelContainer](#) object using the connection string found in the '[ModelContainer](#)' section of the application configuration file.

5.46.2.2 ADVIEWER.DAL.ModelContainer.ModelContainer (string *connectionString*) [inline]

Initialize a new [ModelContainer](#) object.

5.46.2.3 ADVIEWER.DAL.ModelContainer.ModelContainer (EntityConnection *connection*) [inline]

Initialize a new [ModelContainer](#) object.

5.46.3 Member Function Documentation

5.46.3.1 void ADVIEWER.DAL.ModelContainer.AddToAdvertisementMessages (**AdvertisementMessage** *advertisementMessage*) [inline]

Deprecated Method for adding a new object to the AdvertisementMessages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.3.2 void ADVIEWER.DAL.ModelContainer.AddToAdvertisements (**Advertisment** *advertisement*) [inline]

Deprecated Method for adding a new object to the Advertisments EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.3.3 void ADVIEWER.DAL.ModelContainer.AddToContactMessages (**ContactMessage** *contactMessage*) [inline]

Deprecated Method for adding a new object to the ContactMessages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.3.4 void ADVIEWER.DAL.ModelContainer.AddToGroups (**Group** *group*) [inline]

Deprecated Method for adding a new object to the Groups EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.3.5 void ADVIEWER.DAL.ModelContainer.AddToKeyWords (**KeyWord** *keyWord*) [inline]

Deprecated Method for adding a new object to the KeyWords EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.3.6 void ADVIEWER.DAL.ModelContainer.AddToMessages (**Message** *message*) [inline]

Deprecated Method for adding a new object to the Messages EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.3.7 void ADVIEWER.DAL.ModelContainer.AddToPayments1 (**Payment** *payment*) [inline]

Deprecated Method for adding a new object to the Payments1 EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.3.8 void ADVIEWER.DAL.ModelContainer.AddToRates (**Rate** *rate*) [inline]

Deprecated Method for adding a new object to the Rates EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.3.9 void ADVIEWER.DAL.ModelContainer.AddToStateCities (**StateCity** *stateCity*) [inline]

Deprecated Method for adding a new object to the StateCities EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.3.10 void ADVIEWER.DAL.ModelContainer.AddToTickets1 (**Ticket** *ticket*) [inline]

Deprecated Method for adding a new object to the Tickets1 EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.3.11 void ADVIEWER.DAL.ModelContainer.AddToUsers (**User** *user*) [inline]

Deprecated Method for adding a new object to the Users EntitySet. Consider using the .Add method of the associated ObjectSet<T> property instead.

5.46.4 Property Documentation

5.46.4.1 ObjectSet<AdvertisementMessage> ADVIEWER.DAL.ModelContainer.AdvertisementMessages [get]

No Metadata Documentation available.

5.46.4.2 ObjectSet<Advertisment> ADVIEWER.DAL.ModelContainer.Advertisments [get]

No Metadata Documentation available.

5.46.4.3 ObjectSet<ContactMessage> ADVIEWER.DAL.ModelContainer.ContactMessages [get]

No Metadata Documentation available.

5.46.4.4 **ObjectSet<Group>** ADVIEWER.DAL.ModelContainer.Groups [get]

No Metadata Documentation available.

5.46.4.5 **ObjectSet<KeyWord>** ADVIEWER.DAL.ModelContainer.KeyWords [get]

No Metadata Documentation available.

5.46.4.6 **ObjectSet<Message>** ADVIEWER.DAL.ModelContainer.Messages [get]

No Metadata Documentation available.

5.46.4.7 **ObjectSet<Payment>** ADVIEWER.DAL.ModelContainer.Payments1 [get]

No Metadata Documentation available.

5.46.4.8 **ObjectSet<Rate>** ADVIEWER.DAL.ModelContainer.Rates [get]

No Metadata Documentation available.

5.46.4.9 **ObjectSet<StateCity>** ADVIEWER.DAL.ModelContainer.StateCities [get]

No Metadata Documentation available.

5.46.4.10 **ObjectSet<Ticket>** ADVIEWER.DAL.ModelContainer.Tickets1 [get]

No Metadata Documentation available.

5.46.4.11 **ObjectSet<User>** ADVIEWER.DAL.ModelContainer.Users [get]

No Metadata Documentation available.


The documentation for this class was generated from the following file:

- DAL/Model1.Designer.cs


5.47 ADVIEWER.DAL.Payment Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Payment:

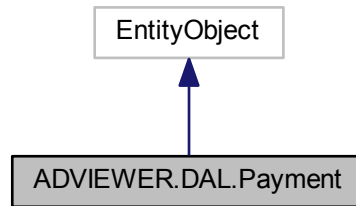

Collaboration diagram for ADVIEWER.DAL.Payment:

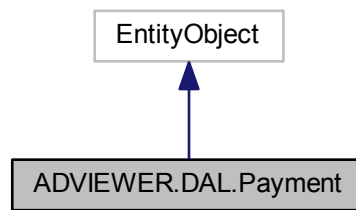

Static Public Member Functions

- static [Payment CreatePayment](#) (global::System.Int64 requestID)
Create a new [Payment](#) object.

Properties

- global::System.Int64 [RequestID](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int64 > [UserID](#) [get, set]
No Metadata Documentation available.
- global::System.String [AgahilD](#) [get, set]
No Metadata Documentation available.
- global::System.String [Title](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.DateTime > [RegisterDate](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [Mablagh](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Boolean > [IsRead](#) [get, set]

No Metadata Documentation available.

- global::System.String [SanadNum](#) [get, set]

No Metadata Documentation available.

- global::System.String [ResidNum](#) [get, set]

No Metadata Documentation available.

- Nullable< global::System.Int32 > [Status](#) [get, set]

No Metadata Documentation available.

- global::System.String [Name](#) [get, set]

No Metadata Documentation available.

- global::System.String [Tel](#) [get, set]

No Metadata Documentation available.

- global::System.String [Description](#) [get, set]

No Metadata Documentation available.

- global::System.String [Bank](#) [get, set]

No Metadata Documentation available.

5.47.1 Detailed Description

No Metadata Documentation available.

5.47.2 Member Function Documentation

- 5.47.2.1 **static** [Payment](#) [ADVIEWER.DAL.Payment.CreatePayment](#) ([global::System.Int64 requestID](#)) [inline],
[static]

Create a new [Payment](#) object.

Parameters

<i>requestID</i>	Initial value of the RequestID property.
------------------	--

5.47.3 Property Documentation

- 5.47.3.1 [global.System.String](#) [ADVIEWER.DAL.Payment.AgahID](#) [get], [set]

No Metadata Documentation available.

- 5.47.3.2 [global.System.String](#) [ADVIEWER.DAL.Payment.Bank](#) [get], [set]

No Metadata Documentation available.

- 5.47.3.3 [global.System.String](#) [ADVIEWER.DAL.Payment.Description](#) [get], [set]

No Metadata Documentation available.

- 5.47.3.4 [Nullable<global.System.Boolean>](#) [ADVIEWER.DAL.Payment.IsRead](#) [get], [set]

No Metadata Documentation available.

5.47.3.5 `Nullable<global.System.Int32> ADVIEWER.DAL.Payment.Mablagh` `[get]`, `[set]`

No Metadata Documentation available.

5.47.3.6 `global.System.String ADVIEWER.DAL.Payment.Name` `[get]`, `[set]`

No Metadata Documentation available.

5.47.3.7 `Nullable<global.System.DateTime> ADVIEWER.DAL.Payment.RegisterDate` `[get]`, `[set]`

No Metadata Documentation available.

5.47.3.8 `global.System.Int64 ADVIEWER.DAL.Payment.RequestID` `[get]`, `[set]`

No Metadata Documentation available.

5.47.3.9 `global.System.String ADVIEWER.DAL.Payment.ResidNum` `[get]`, `[set]`

No Metadata Documentation available.

5.47.3.10 `global.System.String ADVIEWER.DAL.Payment.SanadNum` `[get]`, `[set]`

No Metadata Documentation available.

5.47.3.11 `Nullable<global.System.Int32> ADVIEWER.DAL.Payment.Status` `[get]`, `[set]`

No Metadata Documentation available.

5.47.3.12 `global.System.String ADVIEWER.DAL.Payment.Tel` `[get]`, `[set]`

No Metadata Documentation available.

5.47.3.13 `global.System.String ADVIEWER.DAL.Payment.Title` `[get]`, `[set]`

No Metadata Documentation available.

5.47.3.14 `Nullable<global.System.Int64> ADVIEWER.DAL.Payment.UserID` `[get]`, `[set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.48 ADVIEWER.Main.Profile Class Reference

Inheritance diagram for ADVIEWER.Main.Profile:



Collaboration diagram for ADVIEWER.Main.Profile:

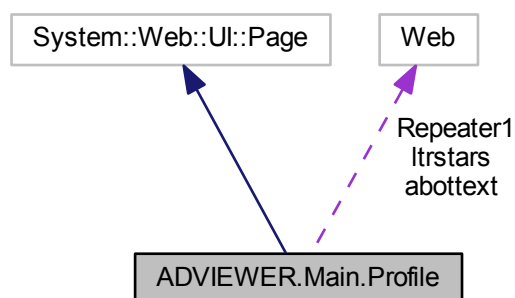

Public Attributes

- string **about**

Protected Member Functions

- void **Page_Init** (object sender, EventArgs e)
- void **Page_Load** (object sender, EventArgs e)
- void **Repeater1_ItemDataBound** (object sender, RepeaterItemEventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl **abottext**
abottext control.
- global::System.Web.UI.WebControls.Literal **ltrstars**
ltrstars control.

- `global::System.Web.UI.WebControls.Repeater` [Repeater1](#)
Repeater1 control.
- `global::SiteUtils.CollectionPager` [CollectionPager1](#)
CollectionPager1 control.

5.48.1 Member Data Documentation

5.48.1.1 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Main.Profile.abottext` [protected]

abottext control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.48.1.2 `global.SiteUtils.CollectionPager ADVIEWER.Main.Profile.CollectionPager1` [protected]

CollectionPager1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.48.1.3 `global.System.Web.UI.WebControls.Literal ADVIEWER.Main.Profile.Itrstars` [protected]

Itrstars control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.48.1.4 `global.System.Web.UI.WebControls.Repeater ADVIEWER.Main.Profile.Repeater1` [protected]

Repeater1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:

- Profile.aspx.cs
- Profile.aspx.designer.cs

5.49 ADVIEWER.BAL.PublicFunctions Class Reference

[PublicFunctions.](#)

Classes

- struct [Wight](#)
Wight.

Static Public Member Functions

- static AssignorClass [MakeAssignor](#)< EntityClass, AssignorClass > (EntityClass EntityObject)
MakeAssignor.
- static [AssignorAdvertisment](#)[] [GetLast9Advs](#) ()
GetLast9Advs.
- static DataTable [ToDataTable](#)< T > (List< T > items)

- ToDataTable.*
- static [AssignorStateCity](#)[] [GetStatesAndCities](#) ()
GetStatesAndCities.
- static [AssignorAdvertisment](#)[] [GetAdvByStateID](#) (int ID)
GetAdvByStateID.
- static List
< [StateAndCitiesForReapeater](#) > [GetStatesWithCities](#) ()
GetStatesWithCities.
- static string [SolarDateConvertor](#) (object InputDate, int Mode=2, string type="")
SolarDateConvertor.
- static [AssignorComment](#)[] [GetAdvComments](#) (int AdvID)
GetAdvComments.
- static void [SetComment](#) (int AdvID, string Text, string Email, int UserID)
SetComment.
- static [AssignorAdvertisment](#)[] [SortByRate](#) ([AssignorAdvertisment](#)[] AdvList)
SortByRate.

5.49.1 Detailed Description

[PublicFunctions.](#)

This Class is For Public Function

5.49.2 Member Function Documentation

5.49.2.1 static [AssignorAdvertisment](#) [] [ADVIEWER.BAL.PublicFunctions.GetAdvByStateID](#) (int *ID*) [inline],
[static]

[GetAdvByStateID.](#)

This get id of state after that return list of ad of that state

5.49.2.2 static [AssignorComment](#) [] [ADVIEWER.BAL.PublicFunctions.GetAdvComments](#) (int *AdvID*) [inline],
[static]

[GetAdvComments.](#)

this get id of ad after that return list of comment that has that ad_id and is confirmed

5.49.2.3 static [AssignorAdvertisment](#) [] [ADVIEWER.BAL.PublicFunctions.GetLast9Advs](#) () [inline], [static]

[GetLast9Advs.](#)

this function return last nine adv for home page

5.49.2.4 static [AssignorStateCity](#) [] [ADVIEWER.BAL.PublicFunctions.GetStatesAndCities](#) () [inline], [static]

[GetStatesAndCities.](#)

This return of state and cities

5.49.2.5 `static List<StateAndCitiesForReapeater> ADVIEWER.BAL.PublicFunctions.GetStatesWithCities ()`
`[inline],[static]`

GetStatesWithCities.

return list of [StateAndCitiesForReapeater](#) that contains a state and its cities

5.49.2.6 `static AssignorClass ADVIEWER.BAL.PublicFunctions.MakeAssignor< EntityClass, AssignorClass > (EntityClass EntityObject)` `[inline],[static]`

MakeAssignor.

get an object, copy its data in assignor object and return it.

5.49.2.7 `static void ADVIEWER.BAL.PublicFunctions.SetComment (int AdvID, string Text, string Email, int UserID)`
`[inline],[static]`

SetComment.

this function set a comment in DB in Comment table

5.49.2.8 `static string ADVIEWER.BAL.PublicFunctions.SolarDateConvertor (object InputDate, int Mode = 2, string type = " ")`
`[inline],[static]`

SolarDateConvertor.

This function convert date to solar date $D = X \quad TY = x \quad p = x \quad x$

$D = // \quad d = // \quad W = \quad // \quad M = \quad H = :$

5.49.2.9 `static AssignorAdvertisement [] ADVIEWER.BAL.PublicFunctions.SortByRate (AssignorAdvertisement[] AdvList)` `[inline],[static]`

SortByRate.

This return best ads for showing in home oage of website

5.49.2.10 `static DataTable ADVIEWER.BAL.PublicFunctions.ToDataTable< T > (List< T > items)` `[inline],[static]`

ToDataTable.

return data table of list. data table columns are the properties of List template.


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.50 ADVIEWER.DAL.Rate Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Rate:

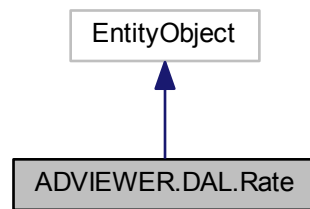

Collaboration diagram for ADVIEWER.DAL.Rate:

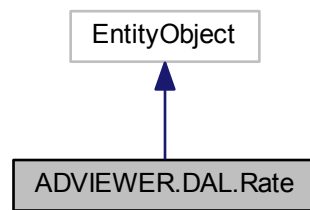

Static Public Member Functions

- static [Rate CreateRate](#) (global::System.Int32 id, global::System.Int32 advertisementId, global::System.Single value)
Create a new [Rate](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.Int32 [AdvertisementId](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [UserId](#) [get, set]
No Metadata Documentation available.
- global::System.Single [Value](#) [get, set]
No Metadata Documentation available.
- [Advertisement Advertisement](#) [get, set]
No Metadata Documentation available.
- EntityReference< [Advertisement](#) > [AdvertisementReference](#) [get, set]
No Metadata Documentation available.

- [User User](#) [get, set]
No Metadata Documentation available.
- EntityReference<[User](#)> [UserReference](#) [get, set]
No Metadata Documentation available.

5.50.1 Detailed Description

No Metadata Documentation available.

5.50.2 Member Function Documentation

5.50.2.1 static [Rate](#) ADVIEWER.DAL.Rate.CreateRate ([global::System.Int32 id](#), [global::System.Int32 advertisementId](#), [global::System.Single value](#)) [inline],[static]

Create a new [Rate](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>advertisementId</i>	Initial value of the AdvertisementId property.
<i>value</i>	Initial value of the Value property.

5.50.3 Property Documentation

5.50.3.1 [Advertisement](#) ADVIEWER.DAL.Rate.Advertisement [get],[set]

No Metadata Documentation available.

5.50.3.2 [global.System.Int32](#) ADVIEWER.DAL.Rate.AdvertisementId [get],[set]

No Metadata Documentation available.

5.50.3.3 EntityReference<[Advertisement](#)> ADVIEWER.DAL.Rate.AdvertisementReference [get],[set]

No Metadata Documentation available.

5.50.3.4 [global.System.Int32](#) ADVIEWER.DAL.Rate.ID [get],[set]

No Metadata Documentation available.

5.50.3.5 [User](#) ADVIEWER.DAL.Rate.User [get],[set]

No Metadata Documentation available.

5.50.3.6 Nullable<[global.System.Int32](#)> ADVIEWER.DAL.Rate.UserId [get],[set]

No Metadata Documentation available.

5.50.3.7 EntityReference<[User](#)> ADVIEWER.DAL.Rate.UserReference [get],[set]

No Metadata Documentation available.

5.50.3.8 `global.System.Single ADVIEWER.DAL.Rate.Value` `[get]`, `[set]`

No Metadata Documentation available.


The documentation for this class was generated from the following file:

- DAL/Model1.Designer.cs


5.51 ADVIEWER.Main.RatingHandler Class Reference

Summary description for [RatingHandler](#)

Inheritance diagram for ADVIEWER.Main.RatingHandler:

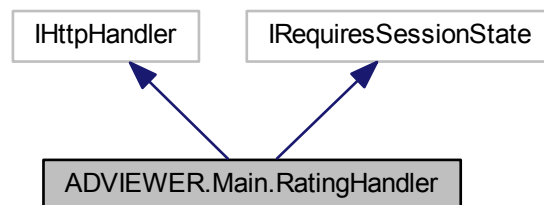

Collaboration diagram for ADVIEWER.Main.RatingHandler:

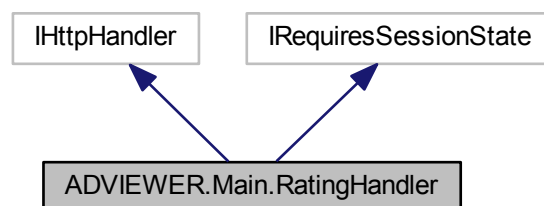

Public Member Functions

- void **ProcessRequest** (HttpContext context)

Properties

- bool **IsReusable** `[get]`

5.51.1 Detailed Description


Summary description for [RatingHandler](#)

The documentation for this class was generated from the following file:


- RatingHandler.ashx.cs

5.52 ADVIEWER.Member.RecieveMessagesInbox Class Reference

Inheritance diagram for ADVIEWER.Member.RecieveMessagesInbox:

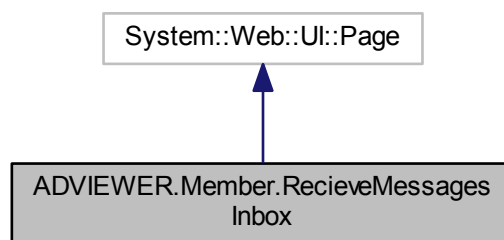

Collaboration diagram for ADVIEWER.Member.RecieveMessagesInbox:

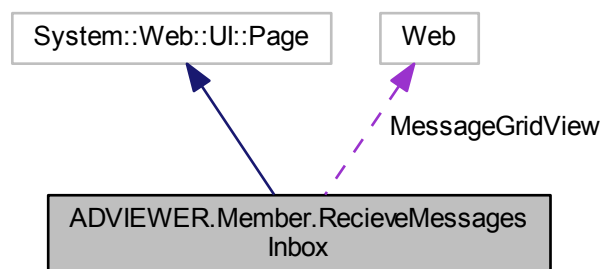

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.GridView [MessageGridView](#)
MessageGridView control.

5.52.1 Member Data Documentation

5.52.1.1 `global.System.Web.UI.WebControls.GridView` `ADVIEWER.Member.RecieveMessagesInbox.MessageGridView` [protected]

MessageGridView control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/RecieveMessagesInbox.aspx.cs
- Member/RecieveMessagesInbox.aspx.designer.cs

5.53 ADVIEWER.Account.Register Class Reference

Inheritance diagram for ADVIEWER.Account.Register:

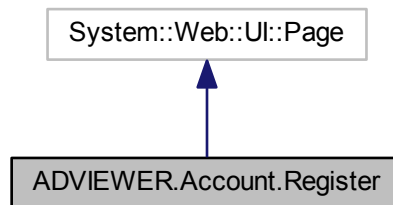

Collaboration diagram for ADVIEWER.Account.Register:

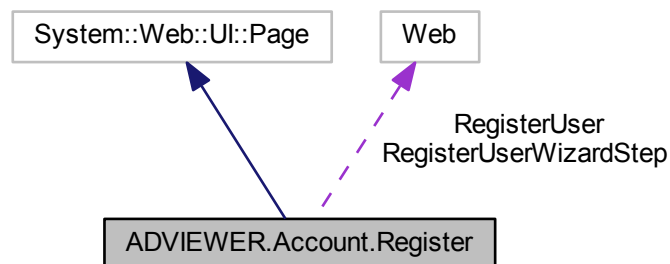

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **RegisterUser_CreatedUser** (object sender, EventArgs e)
- void **setErrorStyle** (object sender, EventArgs e)

Protected Attributes

- `global::System.Web.UI.WebControls.CreateUserWizard` [RegisterUser](#)
RegisterUser control.
- `global::System.Web.UI.WebControls.CreateUserWizardStep` [RegisterUserWizardStep](#)
RegisterUserWizardStep control.

5.53.1 Member Data Documentation

5.53.1.1 `global.System.Web.UI.WebControls.CreateUserWizard` `ADVIEWER.Account.Register.RegisterUser` `[protected]`

RegisterUser control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.53.1.2 `global.System.Web.UI.WebControls.CreateUserWizardStep` `ADVIEWER.Account.Register.RegisterUserWizardStep` `[protected]`

RegisterUserWizardStep control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- Account/Register.aspx.cs
- Account/Register.aspx.designer.cs


5.54 ADVIEWER.Rss Class Reference

Summary description for [Rss](#)

Inheritance diagram for ADVIEWER.Rss:



Collaboration diagram for ADVIEWER.Rss:



Protected Member Functions

- override void **PopulateRss** (string rssName, string userName)

5.54.1 Detailed Description


Summary description for [Rss](#)

The documentation for this class was generated from the following file:


- Rss.ashx.cs

5.55 ADVIEWER.Manage.SearchUser Class Reference

Inheritance diagram for ADVIEWER.Manage.SearchUser:

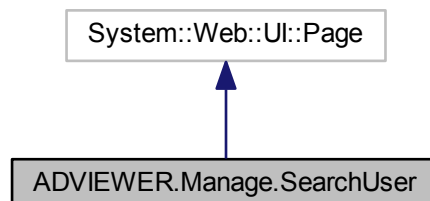

Collaboration diagram for ADVIEWER.Manage.SearchUser:

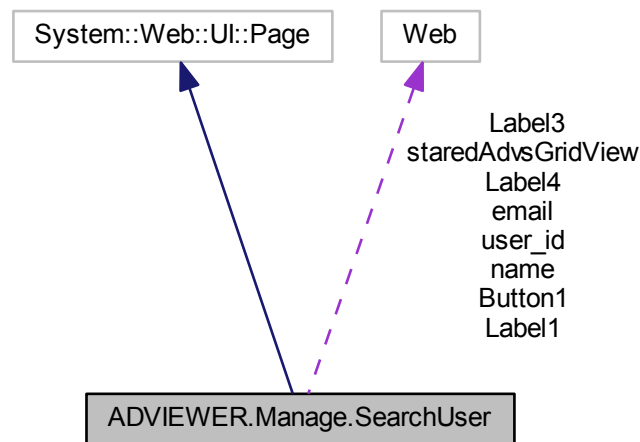

Public Attributes

- int **freeAdvsCount**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **FreeAdvsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **staredAdvsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **ConfirmStaredAdvsButton_Click** (object sender, EventArgs e)
- void **DenyStaredAdvsButton_Click** (object sender, EventArgs e)
- void **Button1_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Label [Label1](#)
Label1 control.
- global::System.Web.UI.WebControls.TextBox [name](#)
name control.
- global::System.Web.UI.WebControls.Label [Label3](#)
Label3 control.
- global::System.Web.UI.WebControls.TextBox [email](#)
email control.
- global::System.Web.UI.WebControls.Label [Label4](#)
Label4 control.
- global::System.Web.UI.WebControls.TextBox [user_id](#)
user_id control.
- global::System.Web.UI.WebControls.Button [Button1](#)
Button1 control.
- global::System.Web.UI.WebControls.GridView [staredAdvsGridView](#)
staredAdvsGridView control.

5.55.1 Member Data Documentation

5.55.1.1 `global.System.Web.UI.WebControls.Button ADVIEWER.Manage.SearchUser.Button1` [protected]

Button1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.55.1.2 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.SearchUser.email` [protected]

email control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.55.1.3 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.SearchUser.Label1` [protected]

Label1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.55.1.4 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.SearchUser.Label3` [protected]

Label3 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.55.1.5 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.SearchUser.Label4` [protected]

Label4 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.55.1.6 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.SearchUser.name` [protected]

name control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.55.1.7 `global.System.Web.UI.WebControls.GridView ADVIEWER.Manage.SearchUser.staredAdvsGridView` [protected]

staredAdvsGridView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.55.1.8 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.SearchUser.user_id` [protected]

user_id control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- `Manage/SearchUser.aspx.cs`
- `Manage/SearchUser.aspx.designer.cs`

5.56 ADVIEWER.Member.SendMessagesInbox Class Reference

Inheritance diagram for ADVIEWER.Member.SendMessagesInbox:

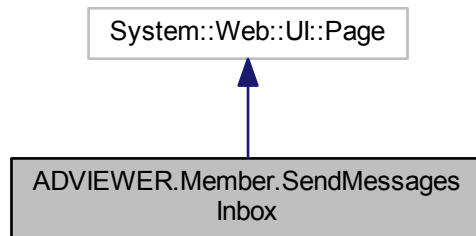

Collaboration diagram for ADVIEWER.Member.SendMessagesInbox:

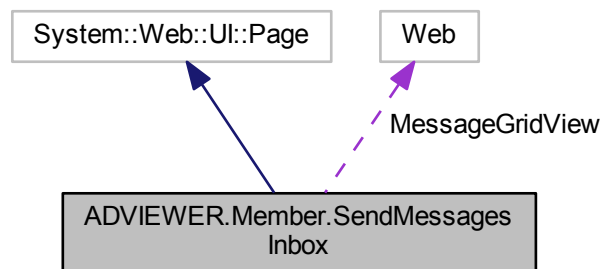

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.GridView [MessageGridView](#)
MessageGridView control.

5.56.1 Member Data Documentation

- 5.56.1.1 global::System.Web.UI.WebControls.GridView ADVIEWER.Member.SendMessagesInbox.MessageGridView
[protected]

MessageGridView control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/SendMessagesInbox.aspx.cs
- Member/SendMessagesInbox.aspx.designer.cs

5.57 ADVIEWER.Member.SendMessageToUsers Class Reference

Inheritance diagram for ADVIEWER.Member.SendMessageToUsers:

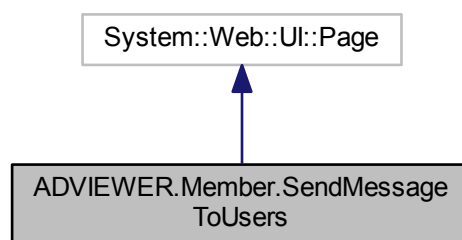

Collaboration diagram for ADVIEWER.Member.SendMessageToUsers:

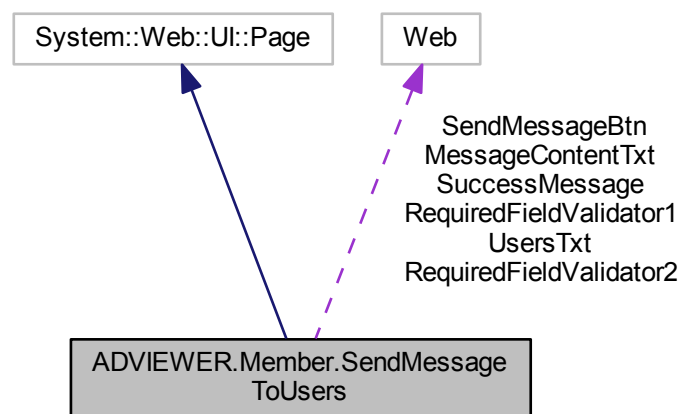

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **SendMessageBtn_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Literal [SuccessMessage](#)
SuccessMessage control.
- global::System.Web.UI.WebControls.TextBox [UsersTxt](#)
UsersTxt control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator2](#)
RequiredFieldValidator2 control.
- global::System.Web.UI.WebControls.TextBox [MessageContentTxt](#)
MessageContentTxt control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.
- global::System.Web.UI.WebControls.Button [SendMessageBtn](#)
SendMessageBtn control.

5.57.1 Member Data Documentation

5.57.1.1 global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.SendMessageToUsers.MessageContentTxt [protected]

MessageContentTxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.57.1.2 global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.SendMessageToUsers.RequiredField-Validator1 [protected]

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.57.1.3 global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Member.SendMessageToUsers.RequiredField-Validator2 [protected]

RequiredFieldValidator2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.57.1.4 global.System.Web.UI.WebControls.Button ADVIEWER.Member.SendMessageToUsers.SendMessageBtn [protected]

SendMessageBtn control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.57.1.5 global.System.Web.UI.WebControls.Literal ADVIEWER.Member.SendMessageToUsers.SuccessMessage [protected]

SuccessMessage control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.57.1.6 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Member.SendMessageToUsers.UsersTxt` [protected]

UsersTxt control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:

- Member/SendMessageToUsers.aspx.cs
- Member/SendMessageToUsers.aspx.designer.cs

5.58 ADVIEWER.BAL.ShowAdvertisement Class Reference

[ShowAdvertisement.](#)

Public Member Functions

- **ShowAdvertisement** (int ID, string Title, string Description, string FullName, string Pic, DateTime RegistrationDate, int starcount, int UserId)

Public Attributes

- string **Description**
- int **ID**
- DateTime **RegistrationDate**

5.58.1 Detailed Description

[ShowAdvertisement.](#)


This class have som atribute of object of advertisement

The documentation for this class was generated from the following file:


- BAL/MemberFunctions.cs

5.59 ADVIEWER.Main.ShowGroupAdvs Class Reference

Inheritance diagram for ADVIEWER.Main.ShowGroupAdvs:

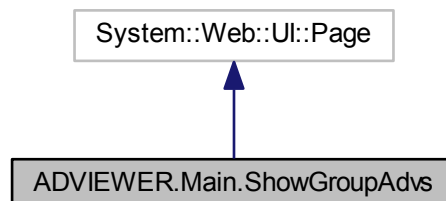

Collaboration diagram for ADVIEWER.Main.ShowGroupAdvs:

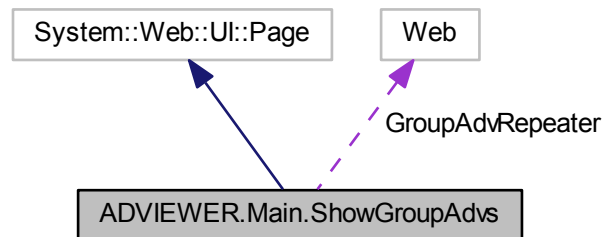

Public Attributes

- string **GroupTitle**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Repeater [GroupAdvRepeater](#)
GroupAdvRepeater control.

5.59.1 Member Data Documentation

5.59.1.1 global::System.Web.UI.WebControls.Repeater ADVIEWER.Main.ShowGroupAdvs.GroupAdvRepeater [protected]

GroupAdvRepeater control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- ShowGroupAdvs.aspx.cs
- ShowGroupAdvs.aspx.designer.cs

5.60 ADVIEWER.Main.ShowStateAdvs Class Reference

Inheritance diagram for ADVIEWER.Main.ShowStateAdvs:

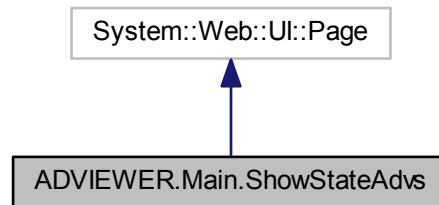

Collaboration diagram for ADVIEWER.Main.ShowStateAdvs:

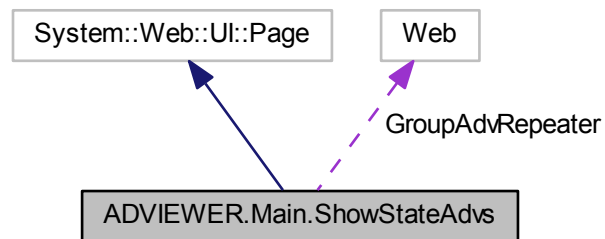

Public Attributes

- string **StateTitle**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Repeater [GroupAdvRepeater](#)
GroupAdvRepeater control.

5.60.1 Member Data Documentation

5.60.1.1 `global.System.Web.UI.WebControls.Repeater` `ADVIEWER.Main.ShowStateAdvs.GroupAdvRepeater` [protected]

GroupAdvRepeater control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:

- ShowStateAdvs.aspx.cs
- ShowStateAdvs.aspx.designer.cs

5.61 ADVIEWER.BAL.ShowUser Class Reference

[ShowUser.](#)

Public Member Functions

- **ShowUser** (int ID, string FullName, string Mail, DateTime RegisterDate, DateTime LastLogin)

Public Attributes

- string **FullName**
- int **ID**
- DateTime **RegisterDate**

5.61.1 Detailed Description

[ShowUser.](#)


This class have som atribute of object of Users

The documentation for this class was generated from the following file:


- BAL/MemberFunctions.cs

5.62 ADVIEWER.Member.SpecialAdvprivileges Class Reference

Inheritance diagram for ADVIEWER.Member.SpecialAdvprivileges:

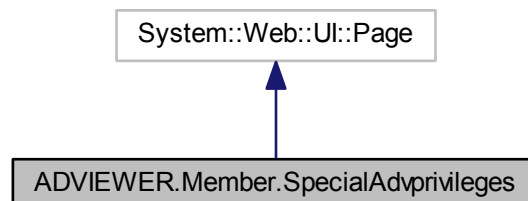

Collaboration diagram for ADVIEWER.Member.SpecialAdvprivileges:

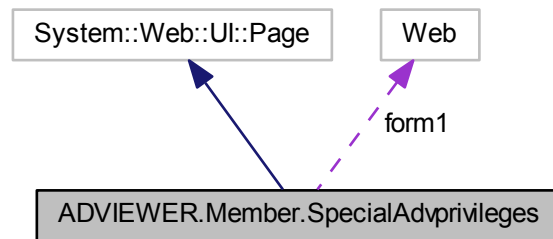

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlForm [form1](#)
form1 control.

5.62.1 Member Data Documentation

5.62.1.1 `global::System.Web.UI.HtmlControls.HtmlForm ADVIEWER.Member.SpecialAdvprivileges.form1` [protected]

`form1` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:

- Member/SpecialAdvprivileges.aspx.cs
- Member/SpecialAdvprivileges.aspx.designer.cs

5.63 ADVIEWER.BAL.StateAndCitiesForReapeater Class Reference

[StateAndCitiesForReapeater](#).

Public Member Functions

- [StateAndCitiesForReapeater](#) (int ID)
StateAndCitiesForReapeater.

Properties

- int **ID** [get, set]
- string **Name** [get, set]
- [StateCity\[\]](#) **Cities** [get, set]

5.63.1 Detailed Description

[StateAndCitiesForReapeater.](#)

represents the set of state and its cities

5.63.2 Constructor & Destructor Documentation

5.63.2.1 `ADVIEWER.DAL.StateAndCitiesForReapeater.StateAndCitiesForReapeater (int ID)` `[inline]`

[StateAndCitiesForReapeater.](#)

get the id of state and set it. call SetCities().


The documentation for this class was generated from the following file:

- BAL/PublicFunctions.cs


5.64 ADVIEWER.DAL.StateCity Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.StateCity:

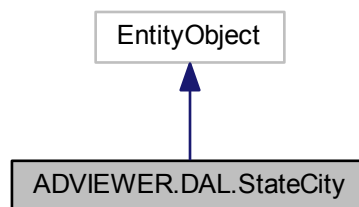

Collaboration diagram for ADVIEWER.DAL.StateCity:

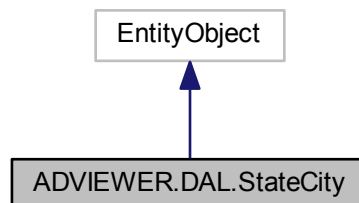

Static Public Member Functions

- static [StateCity](#) [CreateStateCity](#) (global::System.Int32 id, global::System.String name)
Create a new [StateCity](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.String [Name](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > [StateId](#) [get, set]
No Metadata Documentation available.
- EntityCollection< [Advertisement](#) > [Advertisements](#) [get, set]
No Metadata Documentation available.
- EntityCollection< [StateCity](#) > [Cities](#) [get, set]
No Metadata Documentation available.
- [StateCity](#) [State](#) [get, set]
No Metadata Documentation available.
- EntityReference< [StateCity](#) > [StateReference](#) [get, set]
No Metadata Documentation available.

5.64.1 Detailed Description

No Metadata Documentation available.

5.64.2 Member Function Documentation

5.64.2.1 static [StateCity](#) [ADVIEWER.DAL.StateCity.CreateStateCity](#) (global::System.Int32 *id*, global::System.String *name*)
[inline],[static]

Create a new [StateCity](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>name</i>	Initial value of the Name property.

5.64.3 Property Documentation

5.64.3.1 EntityCollection<[Advertisement](#)> [ADVIEWER.DAL.StateCity.Advertisements](#) [get],[set]

No Metadata Documentation available.

5.64.3.2 EntityCollection<[StateCity](#)> [ADVIEWER.DAL.StateCity.Cities](#) [get],[set]

No Metadata Documentation available.

5.64.3.3 global.System.Int32 [ADVIEWER.DAL.StateCity.ID](#) [get],[set]

No Metadata Documentation available.

5.64.3.4 `global.System.String ADVIEWER.DAL.StateCity.Name` `[get]`, `[set]`

No Metadata Documentation available.

5.64.3.5 `StateCity ADVIEWER.DAL.StateCity.State` `[get]`, `[set]`

No Metadata Documentation available.

5.64.3.6 `Nullable<global.System.Int32> ADVIEWER.DAL.StateCity.StateId` `[get]`, `[set]`

No Metadata Documentation available.

5.64.3.7 `EntityReference<StateCity> ADVIEWER.DAL.StateCity.StateReference` `[get]`, `[set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- `DAL/Model1.Designer.cs`

5.65 ADVIEWER.Main.StateCityList Class Reference

Inheritance diagram for `ADVIEWER.Main.StateCityList`:

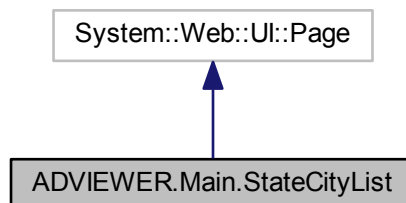

Collaboration diagram for ADVIEWER.Main.StateCityList:

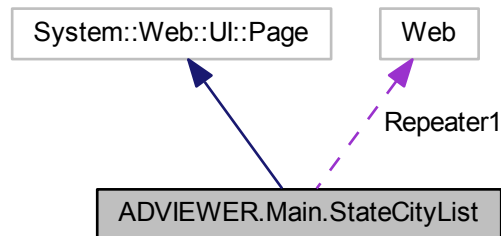

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Repeater [Repeater1](#)

Repeater1 control.

5.65.1 Member Data Documentation

5.65.1.1 global::System.Web.UI.WebControls.Repeater **ADVIEWER.Main.StateCityList.Repeater1** `[protected]`

Repeater1 control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- StateCityList.aspx.cs
- StateCityList.aspx.designer.cs

5.66 ADVIEWER.Manage.StatesCitiesList Class Reference

Inheritance diagram for ADVIEWER.Manage.StatesCitiesList:

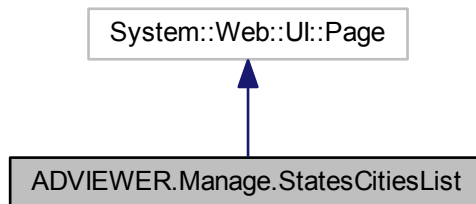

Collaboration diagram for ADVIEWER.Manage.StatesCitiesList:

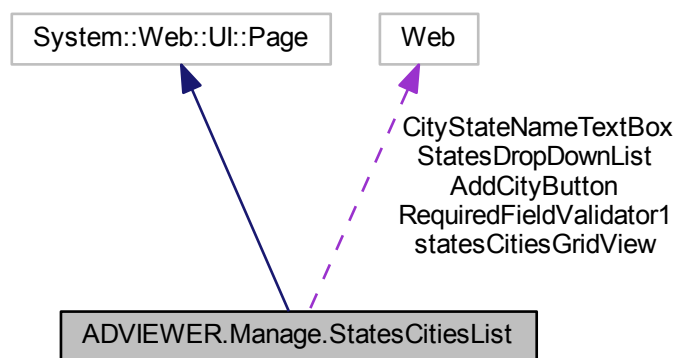

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **statesCitiesGridView_RowCommand** (object sender, GridViewCommandEventArgs e)
- void **statesCitiesGridView_RowDataBound** (object sender, GridViewRowEventArgs e)
- void **statesCitiesGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **AddCityButton_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [CityStateNameTextBox](#)
CityStateNameTextBox control.
- global::System.Web.UI.WebControls.RequiredFieldValidator [RequiredFieldValidator1](#)
RequiredFieldValidator1 control.

- `global::System.Web.UI.WebControls.DropDownList` [StatesDropDownList](#)
StatesDropDownList control.
- `global::System.Web.UI.WebControls.Button` [AddCityButton](#)
AddCityButton control.
- `global::System.Web.UI.WebControls.GridView` [statesCitiesGridView](#)
statesCitiesGridView control.

5.66.1 Member Data Documentation

5.66.1.1 `global.System.Web.UI.WebControls.Button ADVIEWER.Manage.StatesCitiesList.AddCityButton` [protected]

AddCityButton control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.2 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.StatesCitiesList.CityStateNameTextBox` [protected]

CityStateNameTextBox control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.3 `global.System.Web.UI.WebControls.RequiredFieldValidator ADVIEWER.Manage.StatesCitiesList.RequiredFieldValidator1` [protected]

RequiredFieldValidator1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.4 `global.System.Web.UI.WebControls.GridView ADVIEWER.Manage.StatesCitiesList.statesCitiesGridView` [protected]

statesCitiesGridView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.66.1.5 `global.System.Web.UI.WebControls.DropDownList ADVIEWER.Manage.StatesCitiesList.StatesDropDownList` [protected]

StatesDropDownList control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- `Manage/StatesCitiesList.aspx.cs`
- `Manage/StatesCitiesList.aspx.designer.cs`

5.67 ADVIEWER.BAL.Thumbnail Class Reference

Inheritance diagram for ADVIEWER.BAL.Thumbnail:

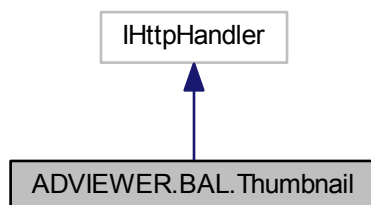

Collaboration diagram for ADVIEWER.BAL.Thumbnail:

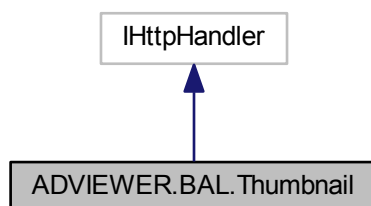

Public Member Functions

- void **ProcessRequest** (HttpContext context)

Properties

- bool **IsReusable** [get]


The documentation for this class was generated from the following file:

- Member/Thumbnail.ashx.cs


5.68 ADVIEWER.DAL.Ticket Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.Ticket:



Collaboration diagram for ADVIEWER.DAL.Ticket:



Static Public Member Functions

- static [Ticket CreateTicket](#) (global::System.Int32 id, global::System.Int32 userID)
Create a new [Ticket](#) object.

Properties

- global::System.Int32 [ID](#) [get, set]
No Metadata Documentation available.
- global::System.Int32 [UserID](#) [get, set]
No Metadata Documentation available.
- global::System.String [Title](#) [get, set]
No Metadata Documentation available.
- global::System.String [Text](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.DateTime > [RegDate](#) [get, set]
No Metadata Documentation available.
- global::System.String [Priority](#) [get, set]
No Metadata Documentation available.
- Nullable< global::System.Boolean > [IsRead](#) [get, set]

No Metadata Documentation available.

- Nullable< global::System.DateTime > [LastUpdate](#) [get, set]

No Metadata Documentation available.

- global::System.String [Answer](#) [get, set]

No Metadata Documentation available.

- [User](#) [User](#) [get, set]

No Metadata Documentation available.

- EntityReference< [User](#) > [UserReference](#) [get, set]

No Metadata Documentation available.

5.68.1 Detailed Description

No Metadata Documentation available.

5.68.2 Member Function Documentation

5.68.2.1 static Ticket ADVIEWER.DAL.Ticket.CreateTicket (global::System.Int32 *id*, global::System.Int32 *userID*)
[inline],[static]

Create a new [Ticket](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>userID</i>	Initial value of the UserID property.

5.68.3 Property Documentation

5.68.3.1 global.System.String ADVIEWER.DAL.Ticket.[Answer](#) [get],[set]

No Metadata Documentation available.

5.68.3.2 global.System.Int32 ADVIEWER.DAL.Ticket.[ID](#) [get],[set]

No Metadata Documentation available.

5.68.3.3 Nullable<global.System.Boolean> ADVIEWER.DAL.Ticket.[IsRead](#) [get],[set]

No Metadata Documentation available.

5.68.3.4 Nullable<global.System.DateTime> ADVIEWER.DAL.Ticket.[LastUpdate](#) [get],[set]

No Metadata Documentation available.

5.68.3.5 global.System.String ADVIEWER.DAL.Ticket.[Priority](#) [get],[set]

No Metadata Documentation available.

5.68.3.6 Nullable<global.System.DateTime> ADVIEWER.DAL.Ticket.[RegDate](#) [get],[set]

No Metadata Documentation available.

5.68.3.7 `global.System.String ADVIEWER.DAL.Ticket.Text` `[get]`, `[set]`

No Metadata Documentation available.

5.68.3.8 `global.System.String ADVIEWER.DAL.Ticket.Title` `[get]`, `[set]`

No Metadata Documentation available.

5.68.3.9 `User ADVIEWER.DAL.Ticket.User` `[get]`, `[set]`

No Metadata Documentation available.

5.68.3.10 `global.System.Int32 ADVIEWER.DAL.Ticket.UserID` `[get]`, `[set]`

No Metadata Documentation available.

5.68.3.11 `EntityReference<User> ADVIEWER.DAL.Ticket.UserReference` `[get]`, `[set]`


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- `DAL/Model1.Designer.cs`

5.69 ADVIEWER.Manage.Tickets Class Reference

Inheritance diagram for `ADVIEWER.Manage.Tickets`:

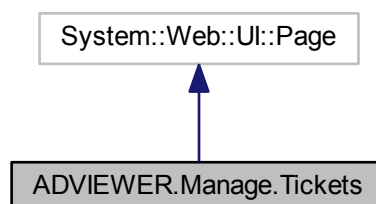

Collaboration diagram for ADVIEWER.Manage.Tickets:

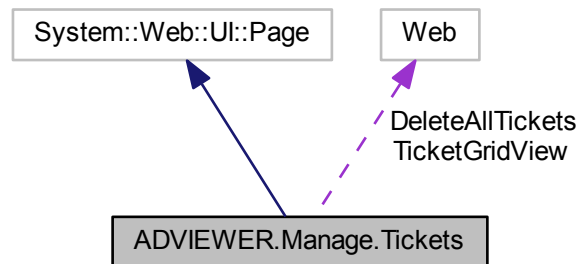

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **TicketGridView_RowCommand** (object sender, GridViewCommandEventArgs e)
- void **DeleteSelectedTickets** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.GridView [TicketGridView](#)
TicketGridView control.
- global::System.Web.UI.WebControls.LinkButton [DeleteAllTickets](#)
DeleteAllTickets control.

5.69.1 Member Data Documentation

5.69.1.1 global::System.Web.UI.WebControls.LinkButton ADVIEWER.Manage.Tickets.DeleteAllTickets [protected]

DeleteAllTickets control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.69.1.2 global::System.Web.UI.WebControls.GridView ADVIEWER.Manage.Tickets.TicketGridView [protected]

TicketGridView control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/Tickets.aspx.cs
- Manage/Tickets.aspx.designer.cs

5.70 ADVIEWER.Member.TicketsList Class Reference

Inheritance diagram for ADVIEWER.Member.TicketsList:

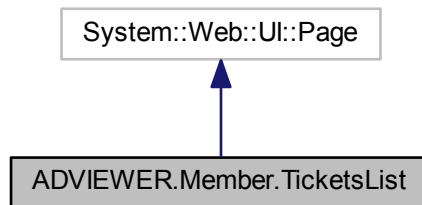

Collaboration diagram for ADVIEWER.Member.TicketsList:

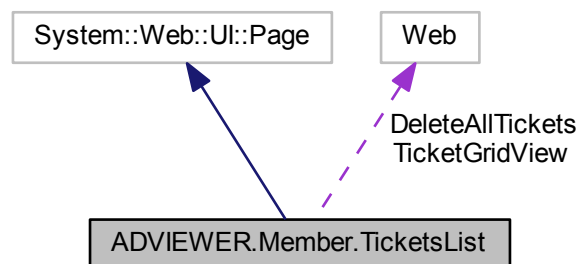

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **TicketGridView_RowCommand** (object sender, GridViewCommandEventArgs e)
- void **DeleteSelectedTickets** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.GridView [TicketGridView](#)
TicketGridView control.
- global::System.Web.UI.WebControls.LinkButton [DeleteAllTickets](#)
DeleteAllTickets control.

5.70.1 Member Data Documentation

5.70.1.1 `global.System.Web.UI.WebControls.LinkButton ADVIEWER.Member.TicketsList.DeleteAllTickets` `[protected]`

DeleteAllTickets control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.70.1.2 `global.System.Web.UI.WebControls.GridView ADVIEWER.Member.TicketsList.TicketGridView` `[protected]`

TicketGridView control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Member/TicketsList.aspx.cs
- Member/TicketsList.aspx.designer.cs

5.71 ADVIEWER.Manage.UnconfirmedAdvs Class Reference

Inheritance diagram for ADVIEWER.Manage.UnconfirmedAdvs:

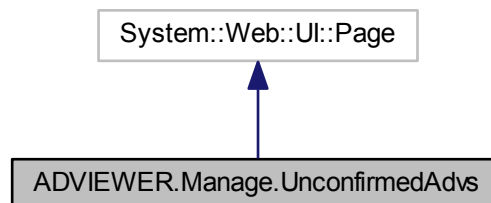

Collaboration diagram for ADVIEWER.Manage.UnconfirmedAdvs:

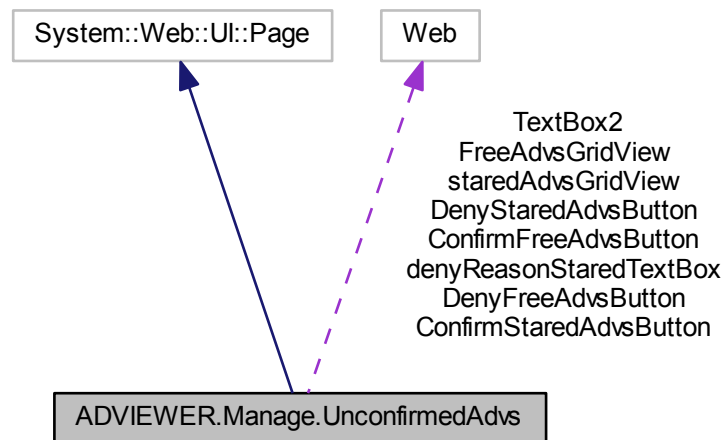

Public Attributes

- int **freeAdvsCount**
- int **freeAdvsCountPer**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **FreeAdvsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **staredAdvsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **ConfirmFreeAdvsButton_Click** (object sender, EventArgs e)
- void **ConfirmStaredAdvsButton_Click** (object sender, EventArgs e)
- void **DenyFreeAdvsButton_Click** (object sender, EventArgs e)
- void **DenyStaredAdvsButton_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.GridView **staredAdvsGridView**
staredAdvsGridView control.
- global::System.Web.UI.WebControls.Button **ConfirmStaredAdvsButton**
ConfirmStaredAdvsButton control.
- global::System.Web.UI.WebControls.TextBox **denyReasonStaredTextBox**
denyReasonStaredTextBox control.
- global::System.Web.UI.WebControls.Button **DenyStaredAdvsButton**
DenyStaredAdvsButton control.
- global::System.Web.UI.WebControls.GridView **FreeAdvsGridView**
FreeAdvsGridView control.
- global::System.Web.UI.WebControls.Button **ConfirmFreeAdvsButton**
ConfirmFreeAdvsButton control.

- `global::System.Web.UI.WebControls.TextBox` [TextBox2](#)
TextBox2 control.
- `global::System.Web.UI.WebControls.Button` [DenyFreeAdvsButton](#)
DenyFreeAdvsButton control.

5.71.1 Member Data Documentation

5.71.1.1 `global.System.Web.UI.WebControls.Button` `ADVIEWER.Manage.UnconfirmedAdvs.ConfirmFreeAdvsButton` [protected]

`ConfirmFreeAdvsButton` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.71.1.2 `global.System.Web.UI.WebControls.Button` `ADVIEWER.Manage.UnconfirmedAdvs.ConfirmStaredAdvsButton` [protected]

`ConfirmStaredAdvsButton` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.71.1.3 `global.System.Web.UI.WebControls.Button` `ADVIEWER.Manage.UnconfirmedAdvs.DenyFreeAdvsButton` [protected]

`DenyFreeAdvsButton` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.71.1.4 `global.System.Web.UI.WebControls.TextBox` `ADVIEWER.Manage.UnconfirmedAdvs.denyReasonStaredTextBox` [protected]

`denyReasonStaredTextBox` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.71.1.5 `global.System.Web.UI.WebControls.Button` `ADVIEWER.Manage.UnconfirmedAdvs.DenyStaredAdvsButton` [protected]

`DenyStaredAdvsButton` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.71.1.6 `global.System.Web.UI.WebControls.GridView` `ADVIEWER.Manage.UnconfirmedAdvs.FreeAdvsGridView` [protected]

`FreeAdvsGridView` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.71.1.7 `global.System.Web.UI.WebControls.GridView` `ADVIEWER.Manage.UnconfirmedAdvs.staredAdvsGridView` [protected]

`staredAdvsGridView` control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.71.1.8 global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.UnconfirmedAdvs.TextBox2 [protected]

TextBox2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- Manage/UnconfirmedAdvs.aspx.cs
- Manage/UnconfirmedAdvs.aspx.designer.cs


5.72 ADVIEWER.DAL.User Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.User:



Collaboration diagram for ADVIEWER.DAL.User:



Static Public Member Functions

- static [User CreateUser](#) (global::System.Int32 id, global::System.String fullName, global::System.DateTime registerDate, global::System.DateTime lastLogin, global::System.Guid userProviderKey, global::System.String mail)

Create a new [User](#) object.

Properties

- global::System.Int32 **ID** [get, set]
No Metadata Documentation available.
- global::System.String **FullName** [get, set]
No Metadata Documentation available.
- global::System.Boolean **IsManager** [get, set]
No Metadata Documentation available.
- global::System.DateTime **RegisterDate** [get, set]
No Metadata Documentation available.
- global::System.String **Mobile** [get, set]
No Metadata Documentation available.
- global::System.String **Tell** [get, set]
No Metadata Documentation available.
- global::System.String **Address** [get, set]
No Metadata Documentation available.
- global::System.DateTime **LastLogin** [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > **StateID** [get, set]
No Metadata Documentation available.
- Nullable< global::System.Int32 > **CityID** [get, set]
No Metadata Documentation available.
- global::System.String **Fax** [get, set]
No Metadata Documentation available.
- global::System.String **YahooID** [get, set]
No Metadata Documentation available.
- global::System.String **About** [get, set]
No Metadata Documentation available.
- global::System.String **PicAddress** [get, set]
No Metadata Documentation available.
- global::System.String **BannedMsg** [get, set]
No Metadata Documentation available.
- global::System.Guid **UserProviderKey** [get, set]
No Metadata Documentation available.
- global::System.String **Mail** [get, set]
No Metadata Documentation available.
- EntityCollection< **Ticket** > **Tickets** [get, set]
No Metadata Documentation available.
- EntityCollection< **Group** > **Groups** [get, set]
No Metadata Documentation available.
- EntityCollection< **Advertiment** > **Advertiments** [get, set]
No Metadata Documentation available.
- EntityCollection< **Rate** > **Ratings** [get, set]
No Metadata Documentation available.
- EntityCollection< **Message** > **CommentDatas** [get, set]
No Metadata Documentation available.
- EntityCollection< **UserMessage** > **UserMessage** [get, set]
No Metadata Documentation available.

5.72.1 Detailed Description

No Metadata Documentation available.

5.72.2 Member Function Documentation

5.72.2.1 `static User ADVIEWER.DAL.User.CreateUser (global::System.Int32 id, global::System.String fullName, global::System.DateTime registerDate, global::System.DateTime lastLogin, global::System.Guid userProviderKey, global::System.String mail) [inline],[static]`

Create a new [User](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>fullName</i>	Initial value of the FullName property.
<i>registerDate</i>	Initial value of the RegisterDate property.
<i>lastLogin</i>	Initial value of the LastLogin property.
<i>userProviderKey</i>	Initial value of the UserProviderKey property.
<i>mail</i>	Initial value of the Mail property.

5.72.3 Property Documentation

5.72.3.1 `global.System.String ADVIEWER.DAL.User.About [get],[set]`

No Metadata Documentation available.

5.72.3.2 `global.System.String ADVIEWER.DAL.User.Address [get],[set]`

No Metadata Documentation available.

5.72.3.3 `EntityCollection<Advertisement> ADVIEWER.DAL.User.Advertisements [get],[set]`

No Metadata Documentation available.

5.72.3.4 `global.System.String ADVIEWER.DAL.User.BannedMsg [get],[set]`

No Metadata Documentation available.

5.72.3.5 `Nullable<global.System.Int32> ADVIEWER.DAL.User.CityID [get],[set]`

No Metadata Documentation available.

5.72.3.6 `EntityCollection<Message> ADVIEWER.DAL.User.CommentDatas [get],[set]`

No Metadata Documentation available.

5.72.3.7 `global.System.String ADVIEWER.DAL.User.Fax [get],[set]`

No Metadata Documentation available.

5.72.3.8 global.System.String ADVIEWER.DAL.User.FullName [get], [set]

No Metadata Documentation available.

5.72.3.9 EntityCollection<Group> ADVIEWER.DAL.User.Groups [get], [set]

No Metadata Documentation available.

5.72.3.10 global.System.Int32 ADVIEWER.DAL.User.ID [get], [set]

No Metadata Documentation available.

5.72.3.11 global.System.Boolean ADVIEWER.DAL.User.IsManager [get], [set]

No Metadata Documentation available.

5.72.3.12 global.System.DateTime ADVIEWER.DAL.User.LastLogin [get], [set]

No Metadata Documentation available.

5.72.3.13 global.System.String ADVIEWER.DAL.User.Mail [get], [set]

No Metadata Documentation available.

5.72.3.14 global.System.String ADVIEWER.DAL.User.Mobile [get], [set]

No Metadata Documentation available.

5.72.3.15 global.System.String ADVIEWER.DAL.User.PicAddress [get], [set]

No Metadata Documentation available.

5.72.3.16 EntityCollection<Rate> ADVIEWER.DAL.User.Ratings [get], [set]

No Metadata Documentation available.

5.72.3.17 global.System.DateTime ADVIEWER.DAL.User.RegisterDate [get], [set]

No Metadata Documentation available.

5.72.3.18 Nullable<global.System.Int32> ADVIEWER.DAL.User.StateID [get], [set]

No Metadata Documentation available.

5.72.3.19 global.System.String ADVIEWER.DAL.User.Tell [get], [set]

No Metadata Documentation available.

5.72.3.20 EntityCollection<Ticket> ADVIEWER.DAL.User.Tickets [get], [set]

No Metadata Documentation available.

5.72.3.21 EntityCollection<UserMessage> ADVIEWER.DAL.User.UserMessage [get], [set]

No Metadata Documentation available.

5.72.3.22 global.System.Guid ADVIEWER.DAL.User.UserProviderKey [get], [set]

No Metadata Documentation available.

5.72.3.23 global.System.String ADVIEWER.DAL.User.YahooID [get], [set]

No Metadata Documentation available.


The documentation for this class was generated from the following file:

- DAL/Model1.Designer.cs


5.73 ADVIEWER.DAL.UserMessage Class Reference

No Metadata Documentation available.

Inheritance diagram for ADVIEWER.DAL.UserMessage:

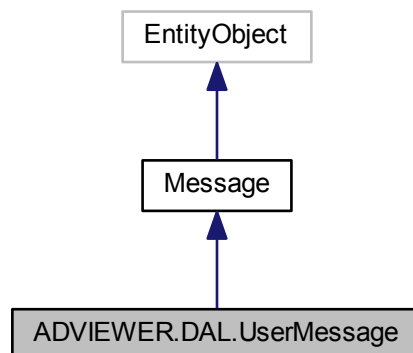

Collaboration diagram for ADVIEWER.DAL.UserMessage:

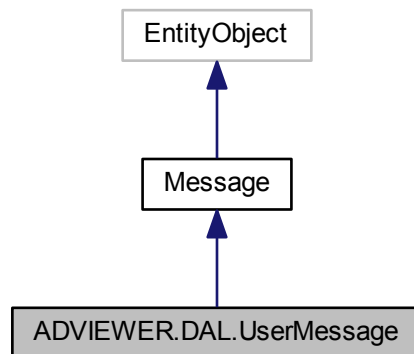

Static Public Member Functions

- static [UserMessage](#) [CreateUserMessage](#) (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate, global::System.Int32 recieverID)
Create a new [UserMessage](#) object.

Properties

- global::System.Int32 [RecieverID](#) [get, set]
No Metadata Documentation available.
- [User Reciever](#) [get, set]
No Metadata Documentation available.
- EntityReference< [User](#) > [RecieverReference](#) [get, set]
No Metadata Documentation available.

5.73.1 Detailed Description

No Metadata Documentation available.

5.73.2 Member Function Documentation

- 5.73.2.1 static [UserMessage](#) ADVIEWER.DAL.UserMessage.CreateUserMessage (global::System.Int32 id, global::System.String text, global::System.DateTime registrationDate, global::System.Int32 recieverID)
[inline], [static]

Create a new [UserMessage](#) object.

Parameters

<i>id</i>	Initial value of the ID property.
<i>text</i>	Initial value of the Text property.
<i>registrationDate</i>	Initial value of the RegistrationDate property.
<i>recieverID</i>	Initial value of the RecieverID property.

5.73.3 Property Documentation

5.73.3.1 User ADVIEWER.DAL.UserMessage.Reciever [get], [set]

No Metadata Documentation available.

5.73.3.2 global.System.Int32 ADVIEWER.DAL.UserMessage.RecieverID [get], [set]

No Metadata Documentation available.

5.73.3.3 EntityReference<User> ADVIEWER.DAL.UserMessage.RecieverReference [get], [set]


No Metadata Documentation available.

The documentation for this class was generated from the following file:


- DAL/Model1.Designer.cs

5.74 ADVIEWER.Manage.UserReport Class Reference

Inheritance diagram for ADVIEWER.Manage.UserReport:

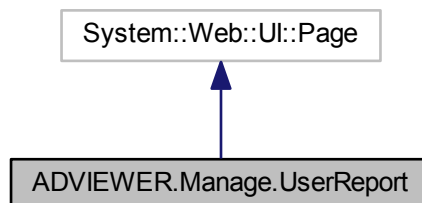

Collaboration diagram for ADVIEWER.Manage.UserReport:

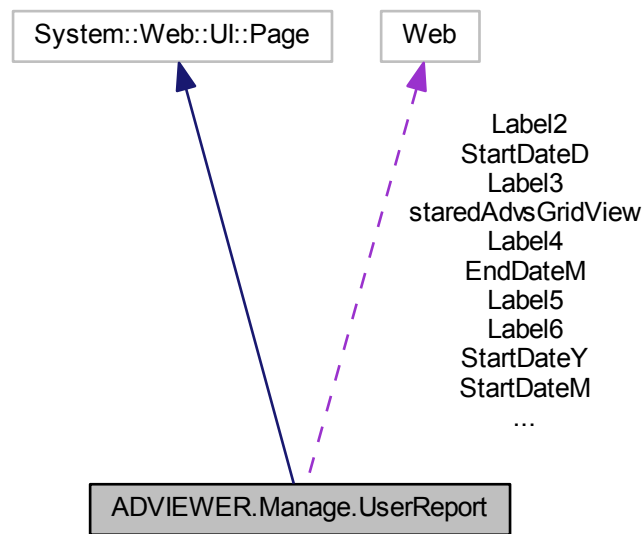

Public Attributes

- int **freeAdvsCount**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **FreeAdvsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **staredAdvsGridView_PageIndexChanging** (object sender, GridViewPageEventArgs e)
- void **ConfirmStaredAdvsButton_Click** (object sender, EventArgs e)
- void **DenyStaredAdvsButton_Click** (object sender, EventArgs e)
- void **Button1_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.Label [Label1](#)
Label1 control.
- global::System.Web.UI.WebControls.TextBox [StartDateY](#)
StartDateY control.
- global::System.Web.UI.WebControls.Label [Label3](#)
Label3 control.
- global::System.Web.UI.WebControls.TextBox [StartDateM](#)
StartDateM control.
- global::System.Web.UI.WebControls.Label [Label4](#)
Label4 control.
- global::System.Web.UI.WebControls.TextBox [StartDateD](#)
StartDateD control.

- `global::System.Web.UI.WebControls.Label` [Label2](#)
Label2 control.
- `global::System.Web.UI.WebControls.TextBox` [EndDateY](#)
EndDateY control.
- `global::System.Web.UI.WebControls.Label` [Label5](#)
Label5 control.
- `global::System.Web.UI.WebControls.TextBox` [EndDateM](#)
EndDateM control.
- `global::System.Web.UI.WebControls.Label` [Label6](#)
Label6 control.
- `global::System.Web.UI.WebControls.TextBox` [EndDateD](#)
EndDateD control.
- `global::System.Web.UI.WebControls.Button` [Button1](#)
Button1 control.
- `global::System.Web.UI.WebControls.GridView` [staredAdvsGridView](#)
staredAdvsGridView control.

5.74.1 Member Data Documentation

5.74.1.1 `global.System.Web.UI.WebControls.Button ADVIEWER.Manage.UserReport.Button1` [protected]

Button1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.2 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.UserReport.EndDateD` [protected]

EndDateD control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.3 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.UserReport.EndDateM` [protected]

EndDateM control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.4 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.UserReport.EndDateY` [protected]

EndDateY control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.5 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.UserReport.Label1` [protected]

Label1 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.6 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.UserReport.Label2` [protected]

Label2 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.7 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.UserReport.Label3` [protected]

Label3 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.8 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.UserReport.Label4` [protected]

Label4 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.9 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.UserReport.Label5` [protected]

Label5 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.10 `global.System.Web.UI.WebControls.Label ADVIEWER.Manage.UserReport.Label6` [protected]

Label6 control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.11 `global.System.Web.UI.WebControls.GridView ADVIEWER.Manage.UserReport.staredAdvsGridView`
[protected]

staredAdvsGridView control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.12 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.UserReport.StartDateD` [protected]

StartDateD control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.13 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.UserReport.StartDateM` [protected]

StartDateM control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.74.1.14 `global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.UserReport.StartDateY` [protected]

StartDateY control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- `Manage/UserReport.aspx.cs`
- `Manage/UserReport.aspx.designer.cs`

5.75 ADVIEWER.Manage.ViewComment Class Reference

Inheritance diagram for ADVIEWER.Manage.ViewComment:

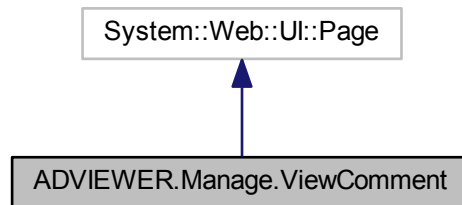

Collaboration diagram for ADVIEWER.Manage.ViewComment:

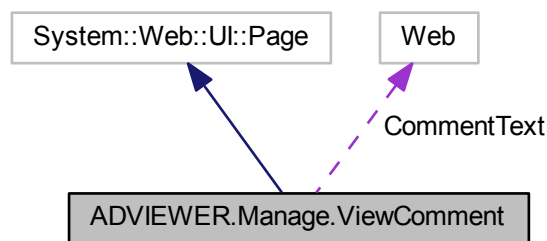

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.WebControls.TextBox [CommentText](#)
CommentText control.

5.75.1 Member Data Documentation

5.75.1.1 global::System.Web.UI.WebControls.TextBox ADVIEWER.Manage.ViewComment.CommentText [protected]

CommentText control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- `Manage/ViewComment.aspx.cs`
- `Manage/ViewComment.aspx.designer.cs`

5.76 ADVIEWER.Member.ViewMessage Class Reference

Inheritance diagram for ADVIEWER.Member.ViewMessage:

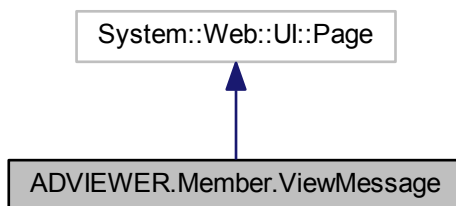

Collaboration diagram for ADVIEWER.Member.ViewMessage:

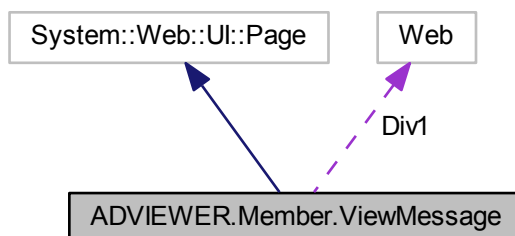

Public Attributes

- string **MessageText**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl **Div1**
Div1 control.

5.76.1 Member Data Documentation

5.76.1.1 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Member.ViewMessage.Div1` `[protected]`

Div1 control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- `Member/ViewMessage.aspx.cs`
- `Member/ViewMessage.aspx.designer.cs`

5.77 ADVIEWER.Manage.ViewTicket Class Reference

Inheritance diagram for `ADVIEWER.Manage.ViewTicket`:

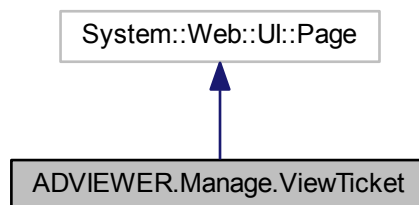

Collaboration diagram for `ADVIEWER.Manage.ViewTicket`:

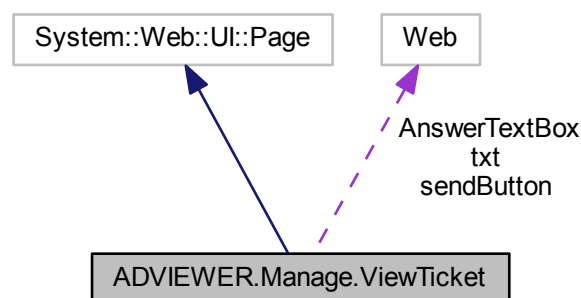

Public Attributes

- string **`TicketTitle`**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)
- void **sendButton_Click** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl [txt](#)
txt control.
- global::System.Web.UI.WebControls.TextBox [AnswerTextBox](#)
AnswerTextBox control.
- global::System.Web.UI.WebControls.Button [sendButton](#)
sendButton control.

5.77.1 Member Data Documentation

5.77.1.1 global.System.Web.UI.WebControls.TextBox ADVIEWER.Manage.ViewTicket.AnswerTextBox [protected]

AnswerTextBox control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.77.1.2 global.System.Web.UI.WebControls.Button ADVIEWER.Manage.ViewTicket.sendButton [protected]

sendButton control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.77.1.3 global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Manage.ViewTicket.txt [protected]

txt control.


Auto-generated field. To modify move field declaration from designer file to code-behind file.

The documentation for this class was generated from the following files:


- Manage/ViewTicket.aspx.cs
- Manage/ViewTicket.aspx.designer.cs

5.78 ADVIEWER.Member.ViewTicket Class Reference

Inheritance diagram for ADVIEWER.Member.ViewTicket:

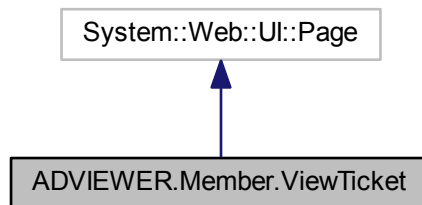

Collaboration diagram for ADVIEWER.Member.ViewTicket:

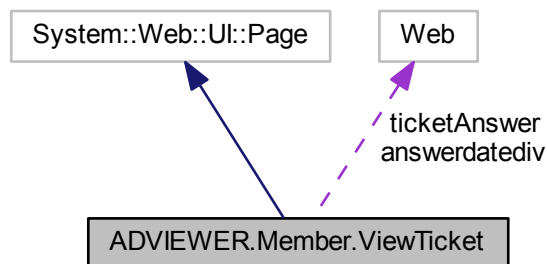

Public Attributes

- string **TicketTitle**

Protected Member Functions

- void **Page_Load** (object sender, EventArgs e)

Protected Attributes

- global::System.Web.UI.HtmlControls.HtmlGenericControl [answerdatediv](#)
answerdatediv control.
- global::System.Web.UI.HtmlControls.HtmlGenericControl [ticketAnswer](#)
ticketAnswer control.

5.78.1 Member Data Documentation

5.78.1.1 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Member.ViewTicket.answerdatediv` [protected]

answerdatediv control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.

5.78.1.2 `global.System.Web.UI.HtmlControls.HtmlGenericControl ADVIEWER.Member.ViewTicket.ticketAnswer` [protected]

ticketAnswer control.

Auto-generated field. To modify move field declaration from designer file to code-behind file.


The documentation for this class was generated from the following files:

- Member/ViewTicket.aspx.cs
- Member/ViewTicket.aspx.designer.cs

5.79 ADVIEWER.BAL.PublicFunctions.Wight Struct Reference

[Wight.](#)

Collaboration diagram for ADVIEWER.BAL.PublicFunctions.Wight:

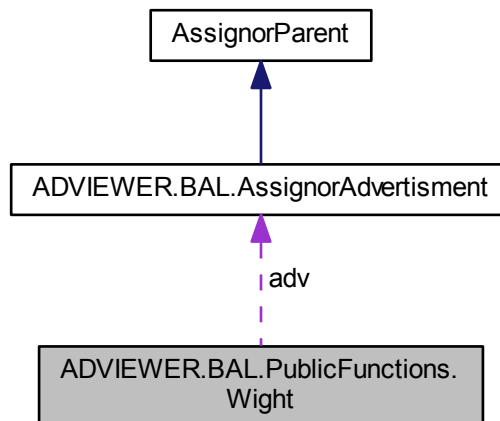

Public Attributes

- double **wr**
- [AssignorAdvertisment](#) **adv**

5.79.1 Detailed Description

[Wight.](#)

This struct has just 2 args double wr and [AssignorAdvertisement](#) adv that adv is object of [AssignorAdvertisement](#)

The documentation for this struct was generated from the following file:

- BAL/PublicFunctions.cs