



Scanned with CamScanner

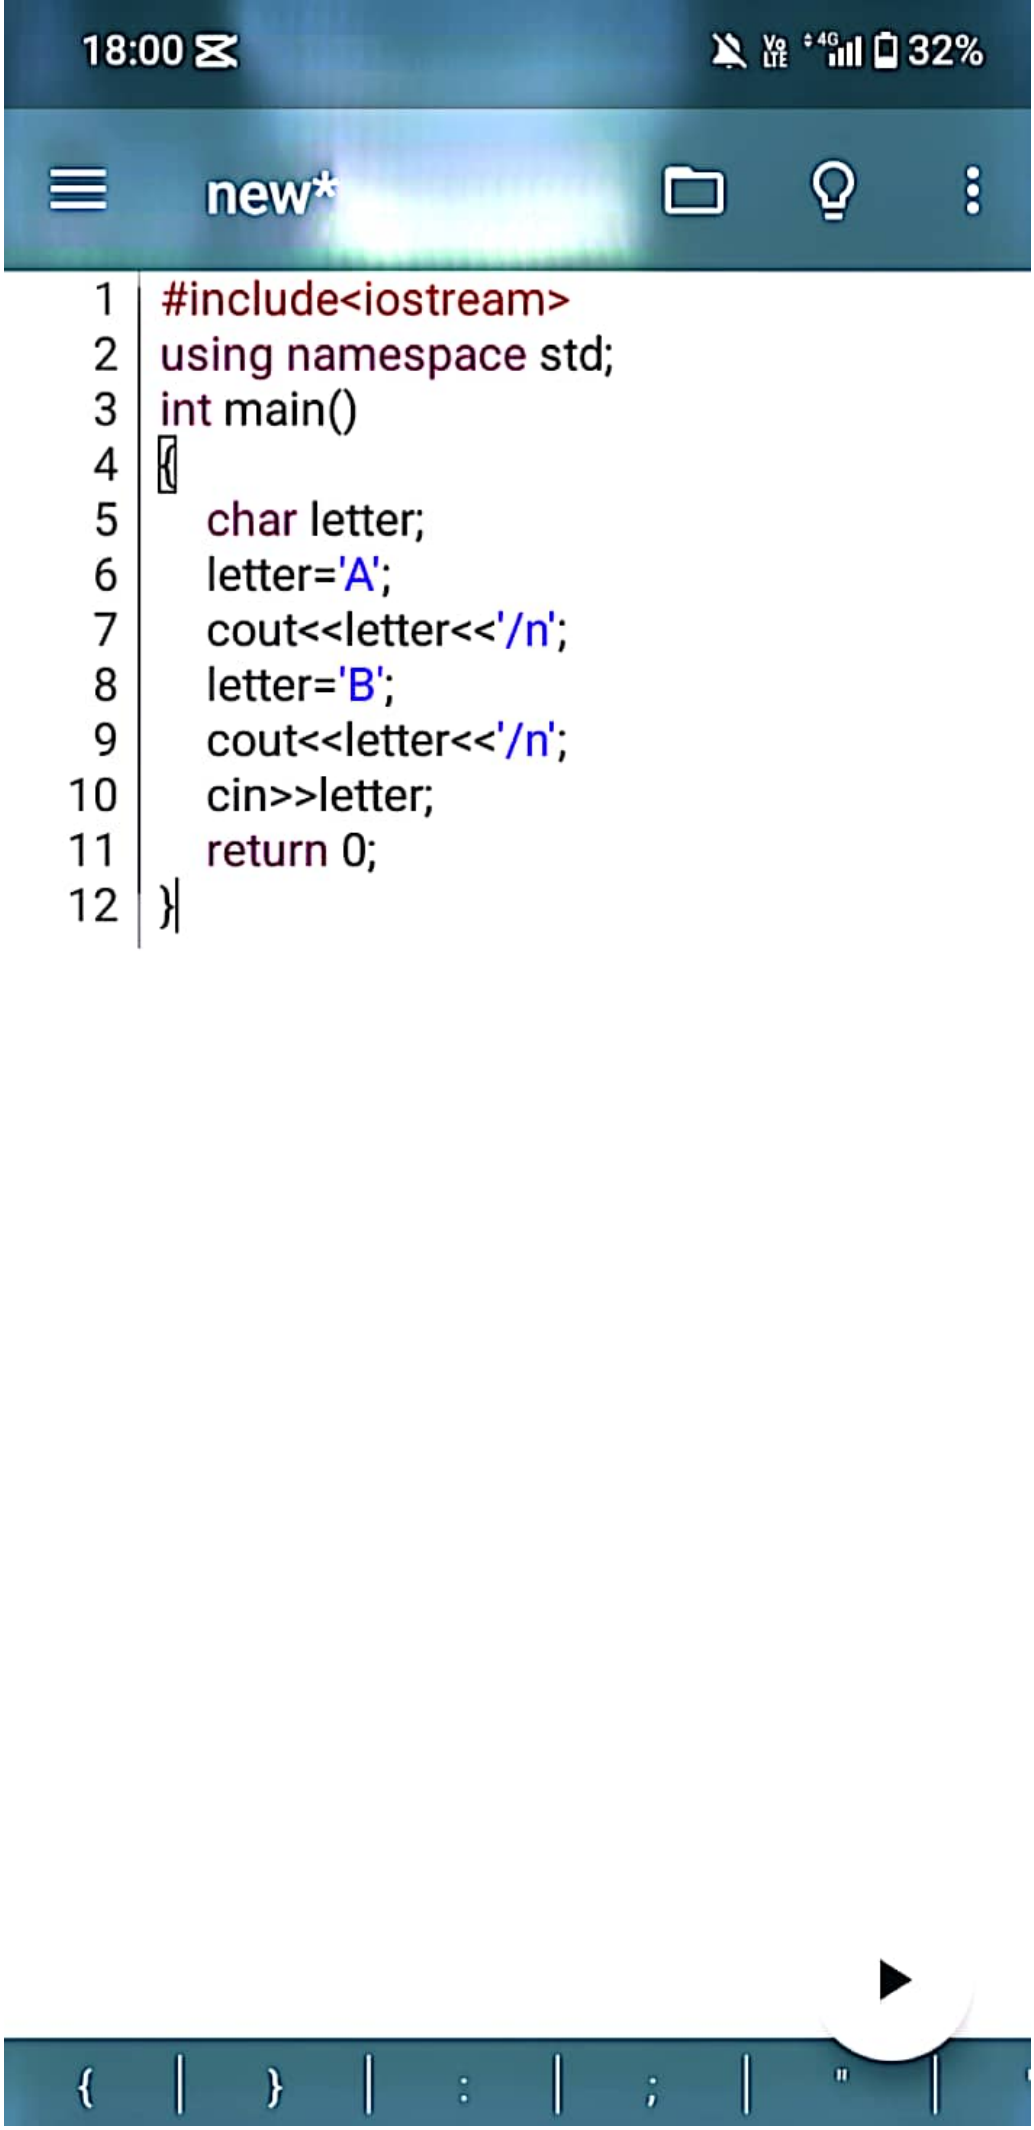


Scanned with CamScanner

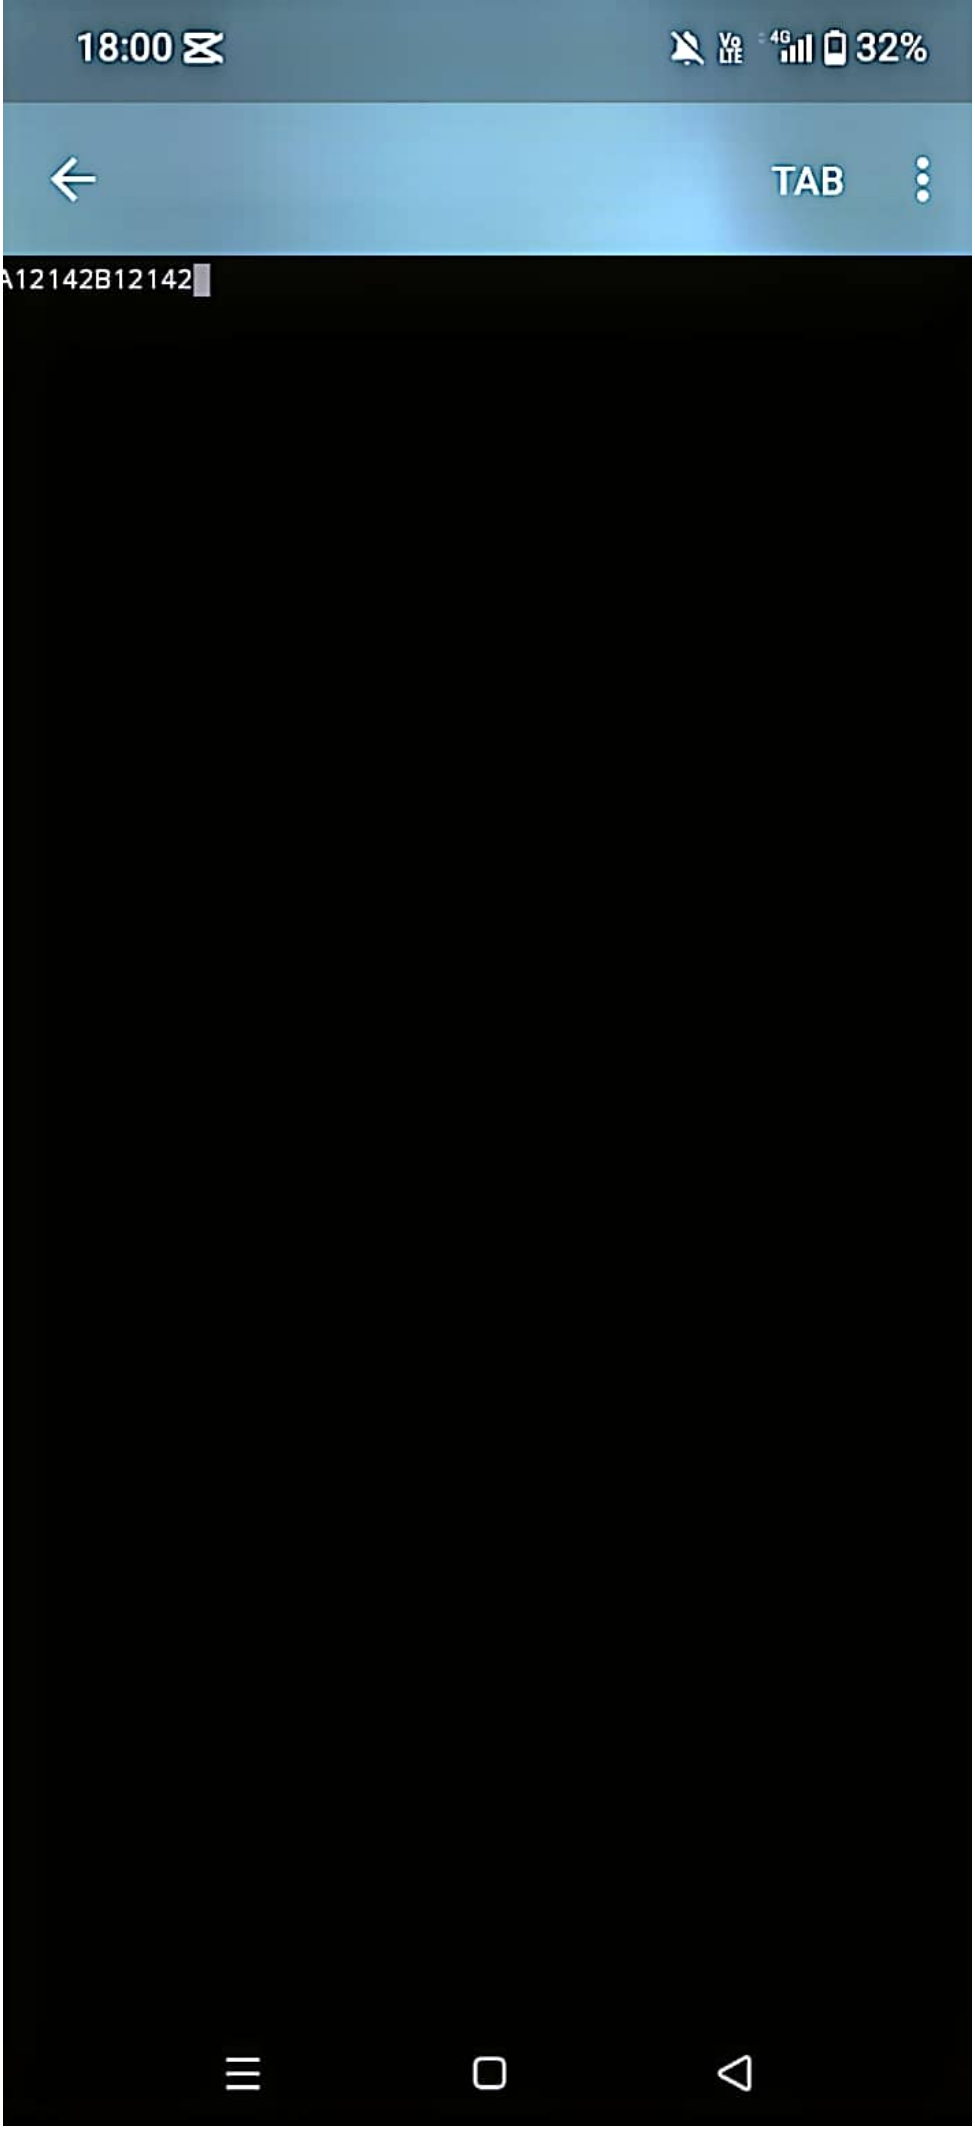



```
1  #include<iostream>
2  using namespace std;
3  int main()
4  {
5      char letter;
6      letter=65;
7      cout<<letter<<'/n';
8      letter=66;
9      cout<<letter<<'/n';
10     cin>>letter;
11     return 0;
12 }
```




Scanned with CamScanner

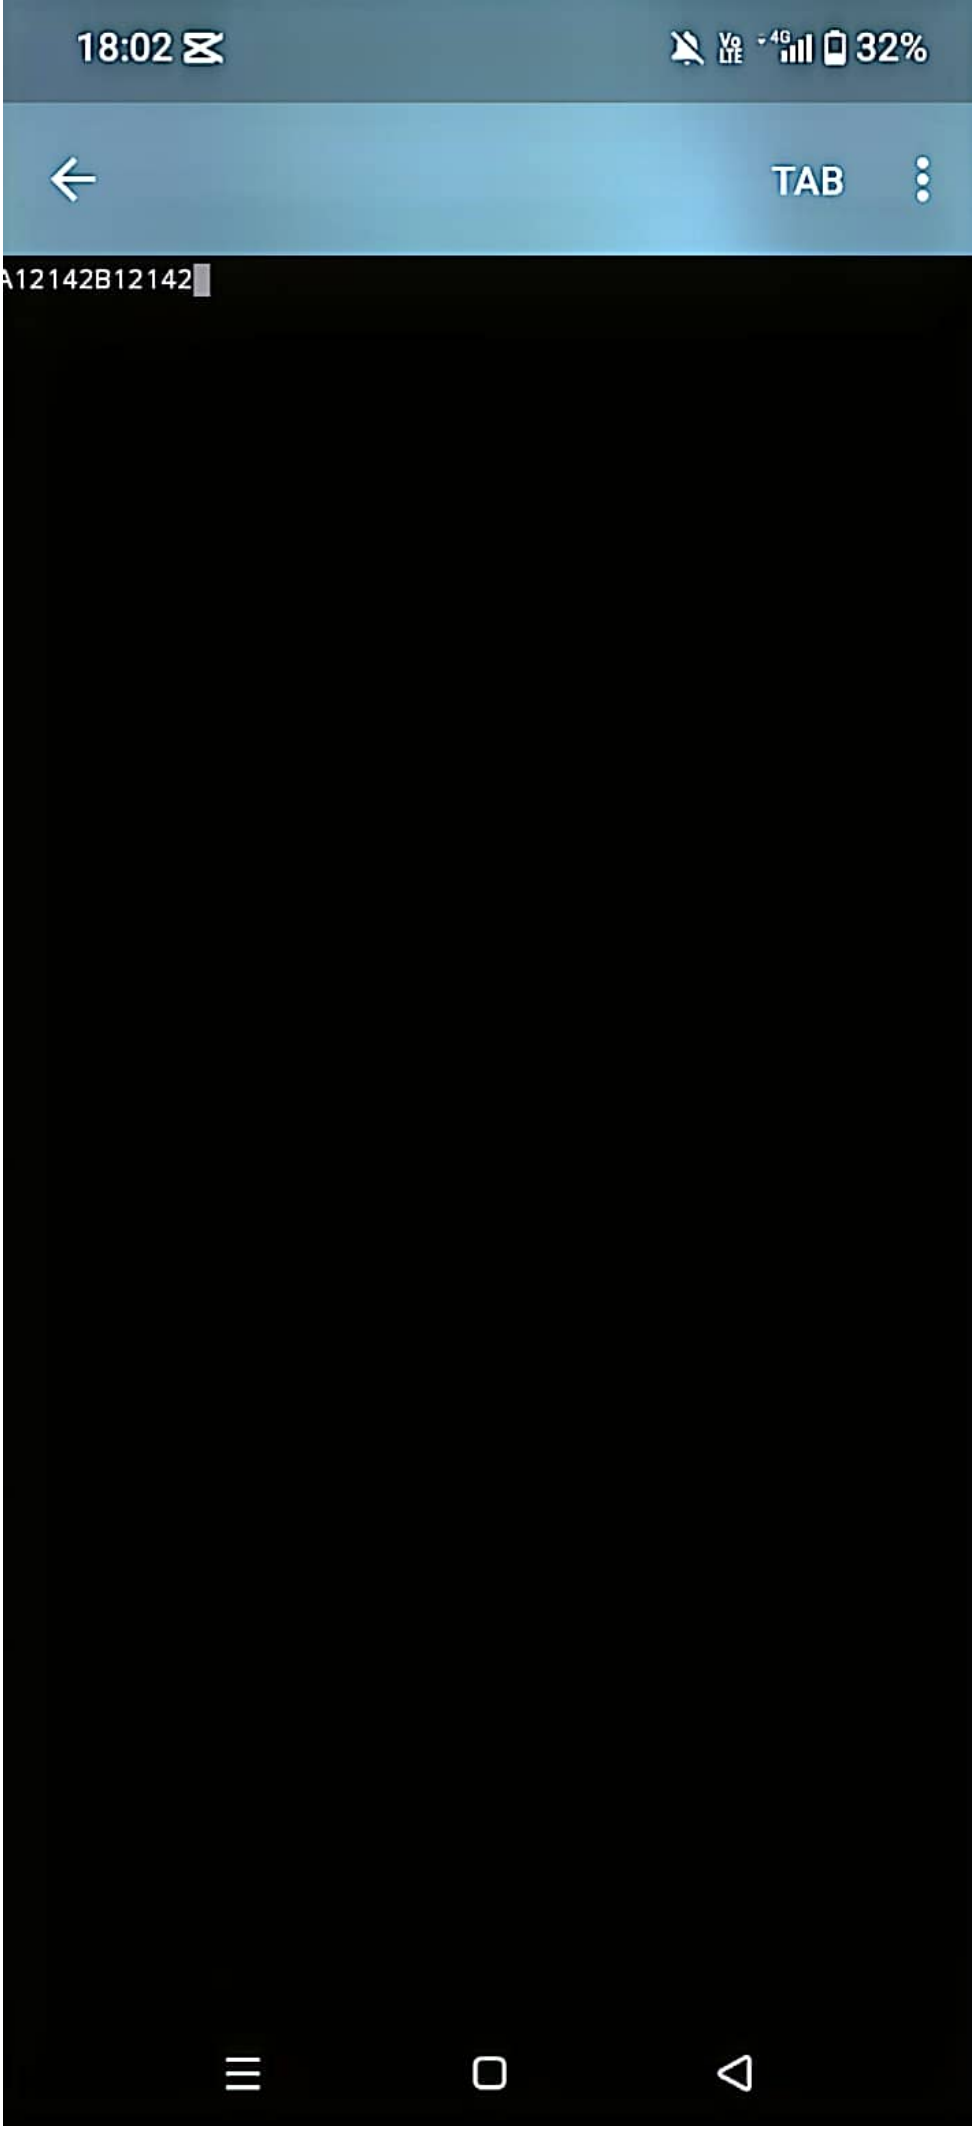


Scanned with CamScanner

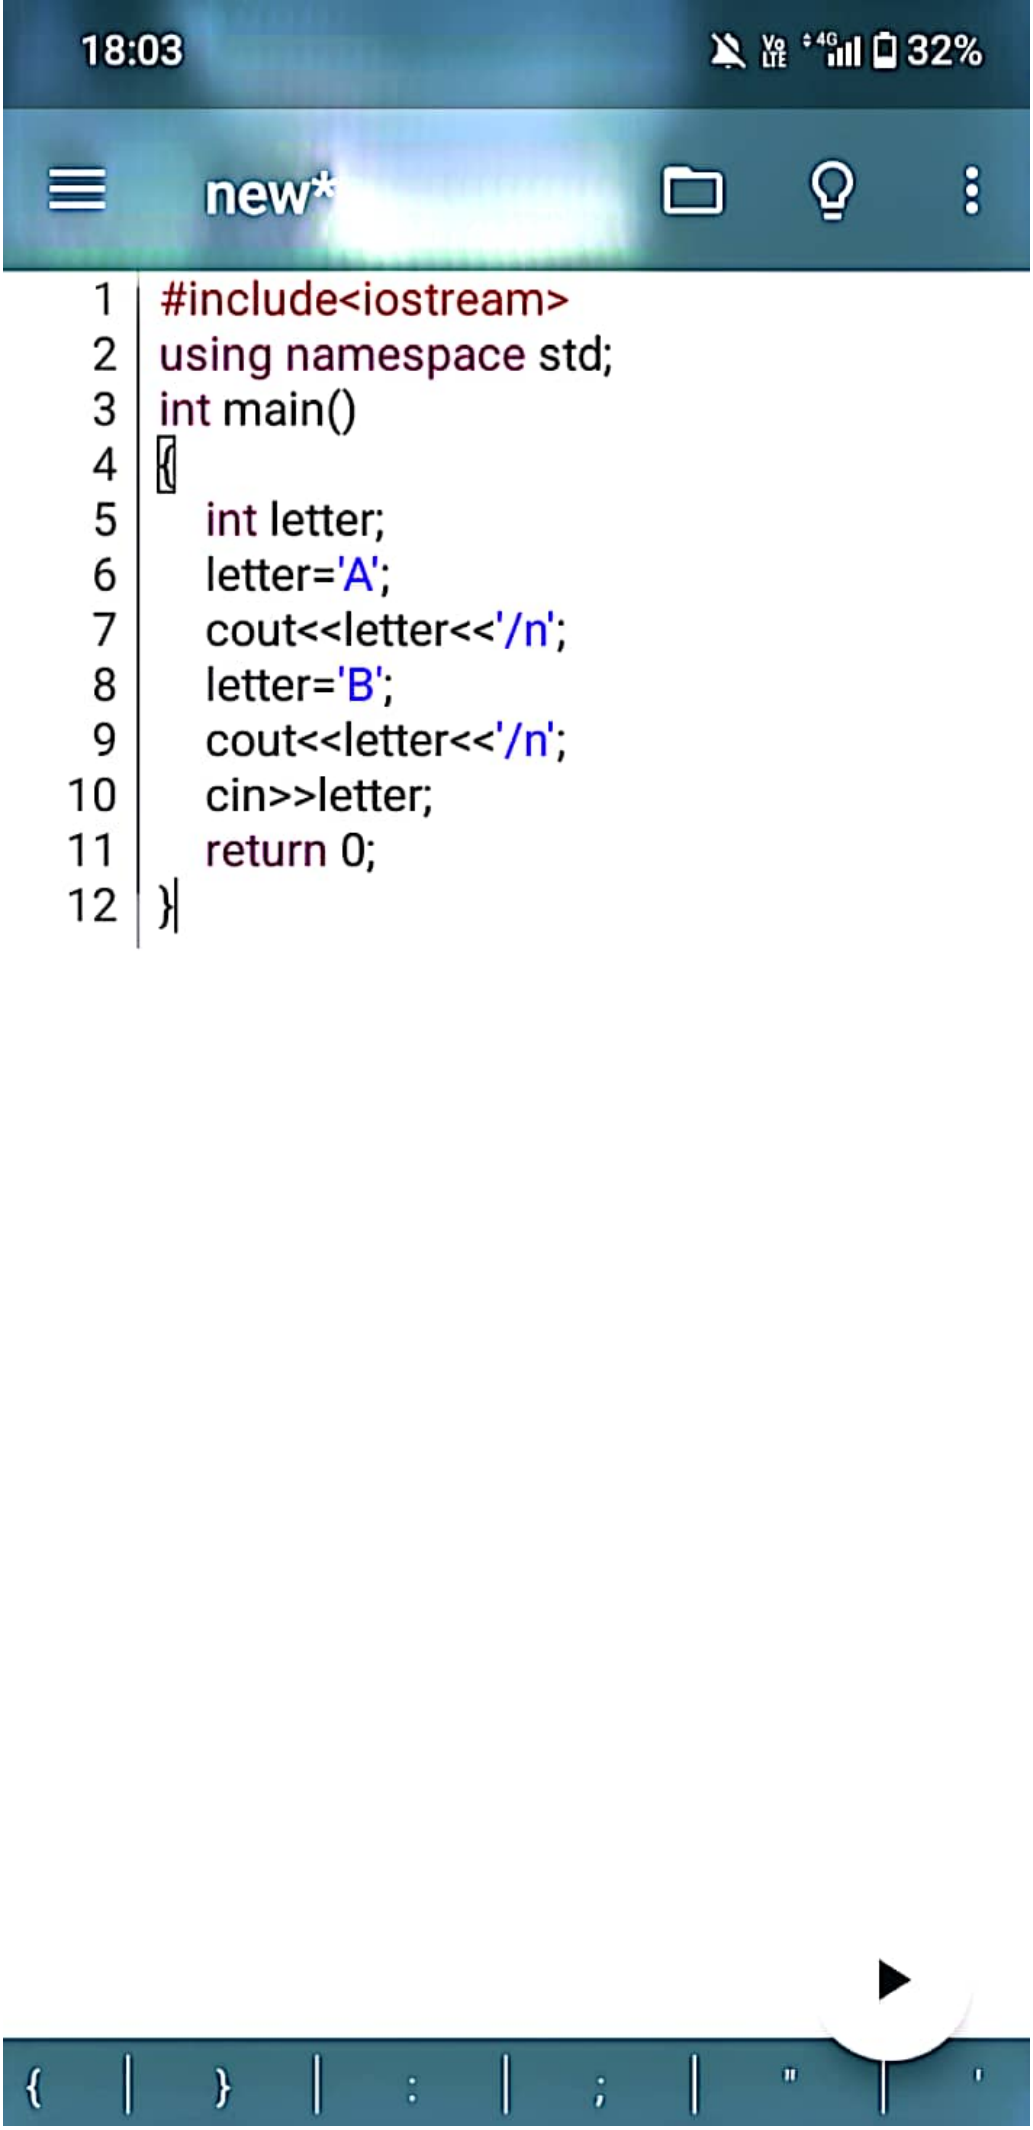


Scanned with CamScanner

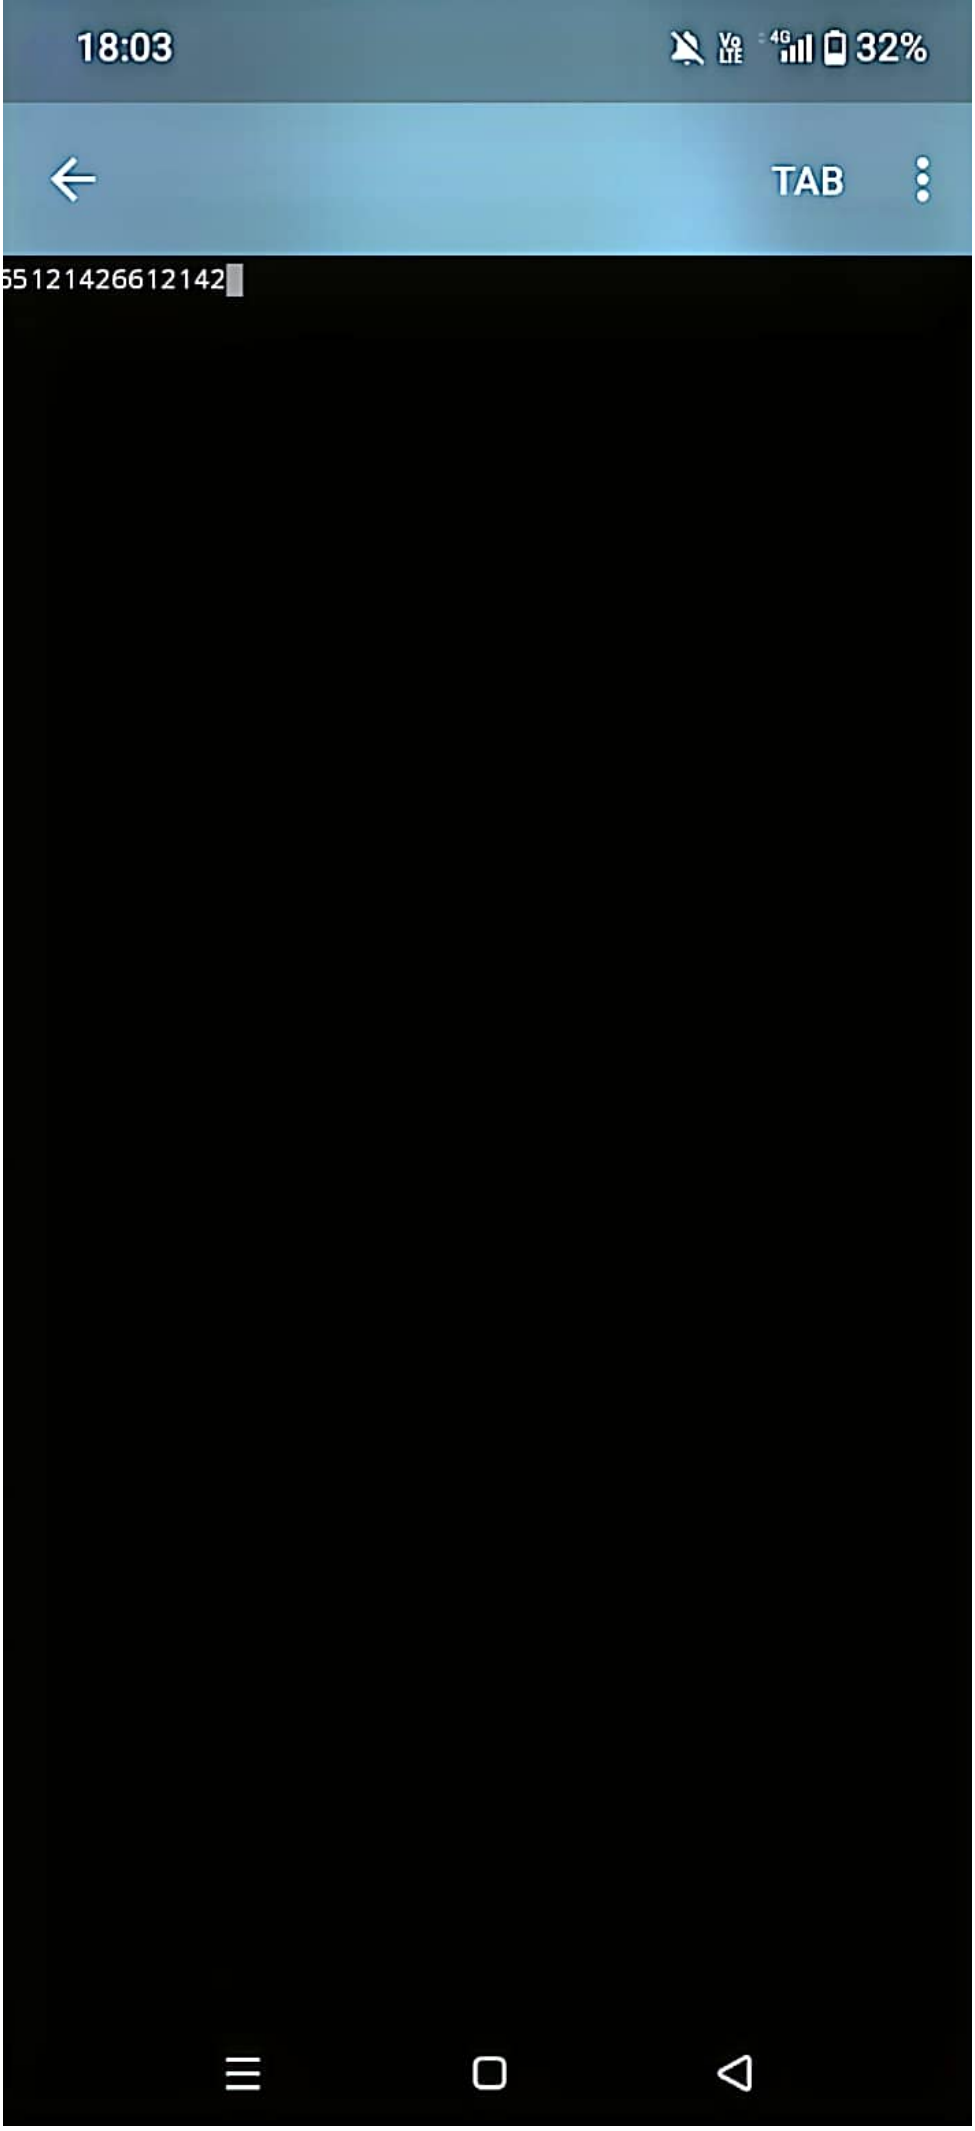


Scanned with CamScanner

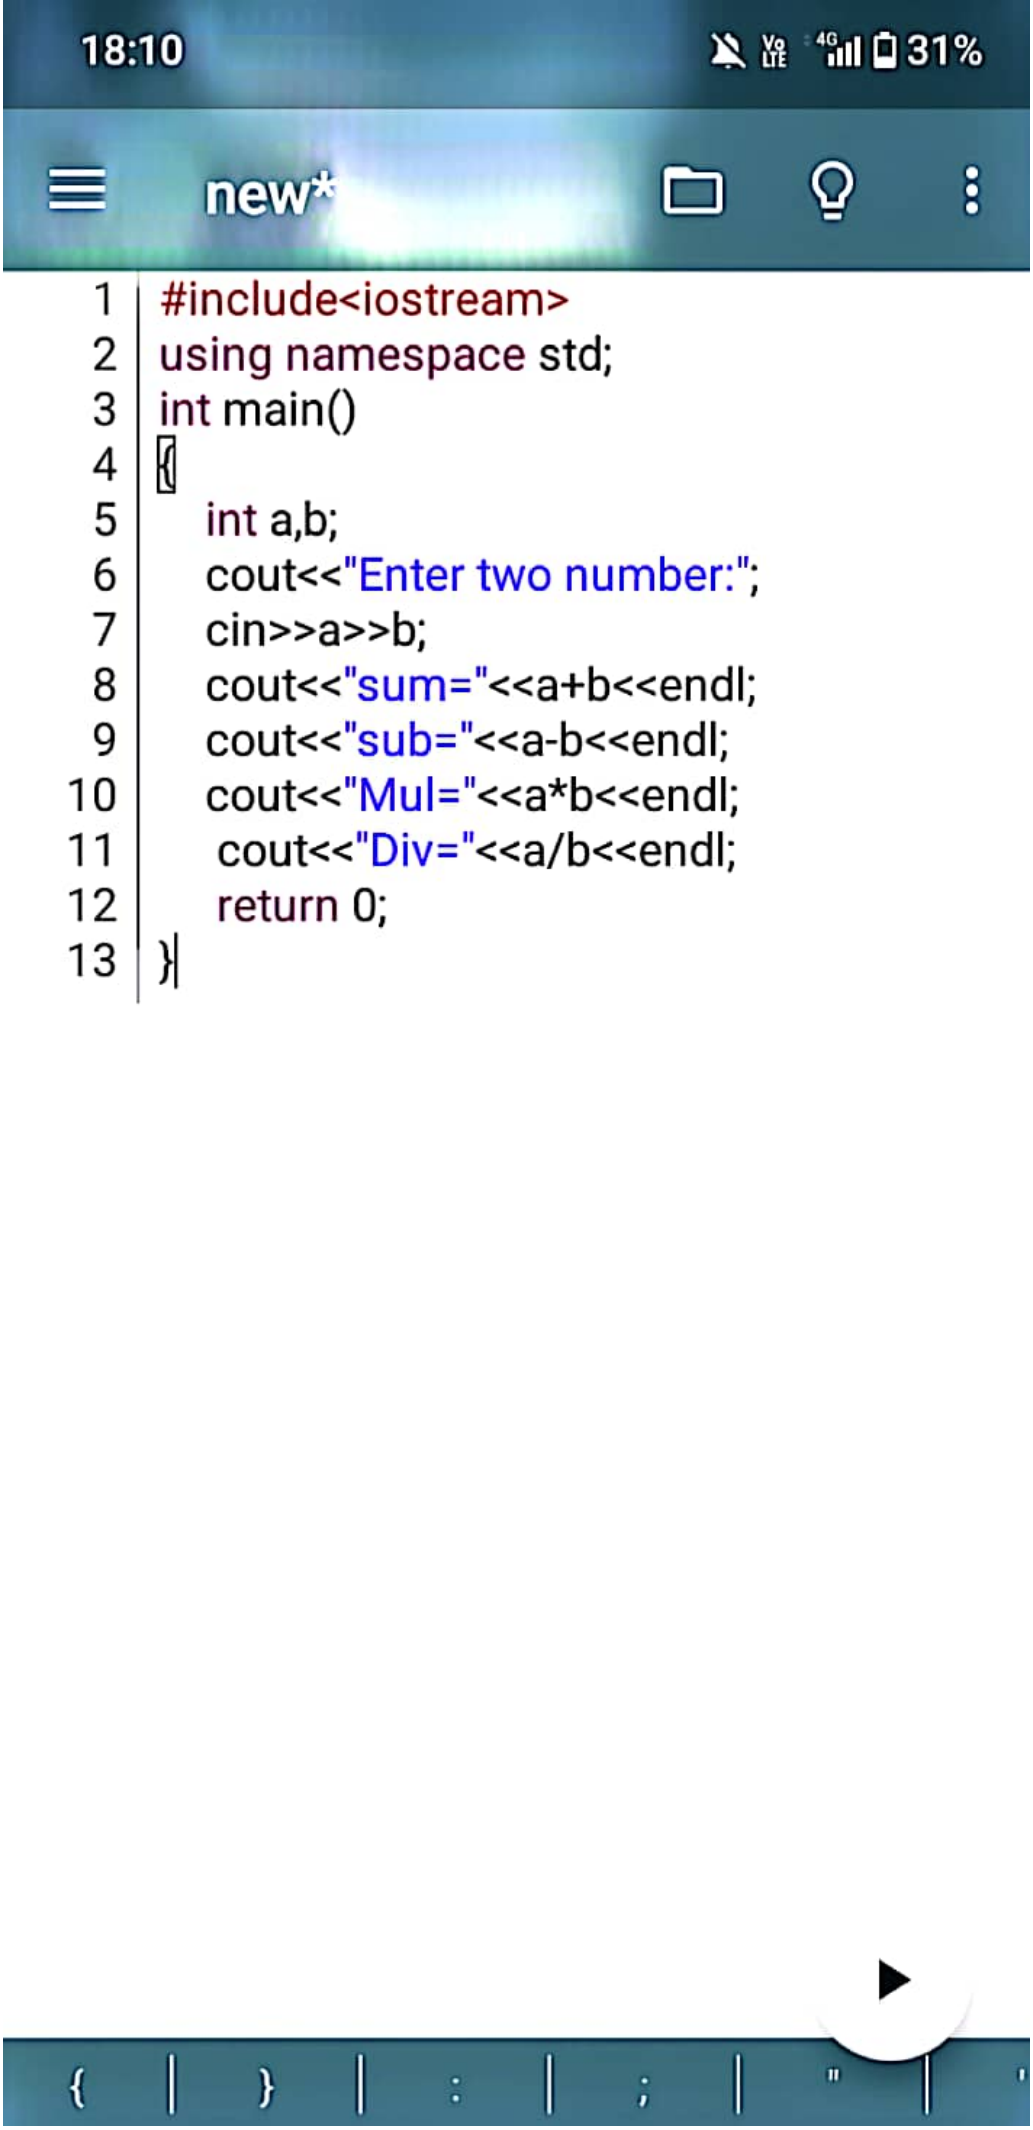


Scanned with CamScanner

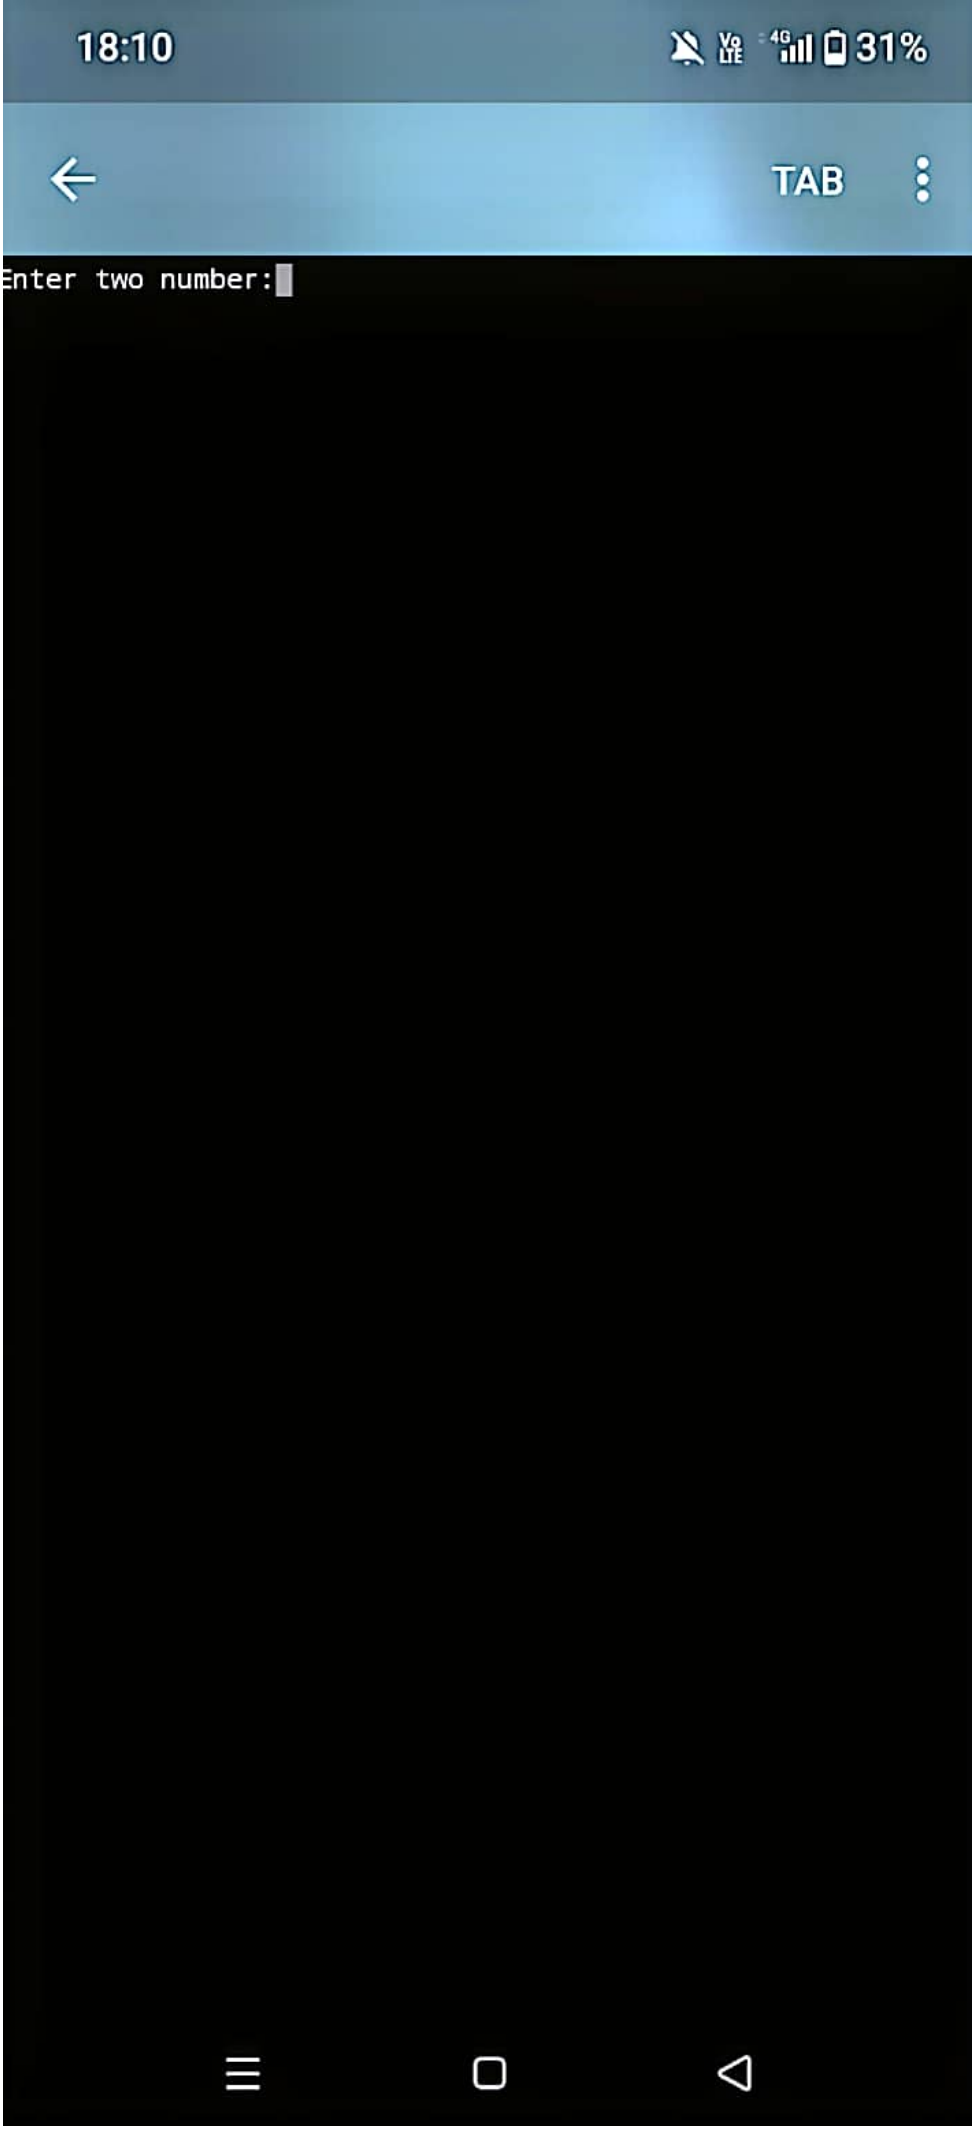


Scanned with CamScanner

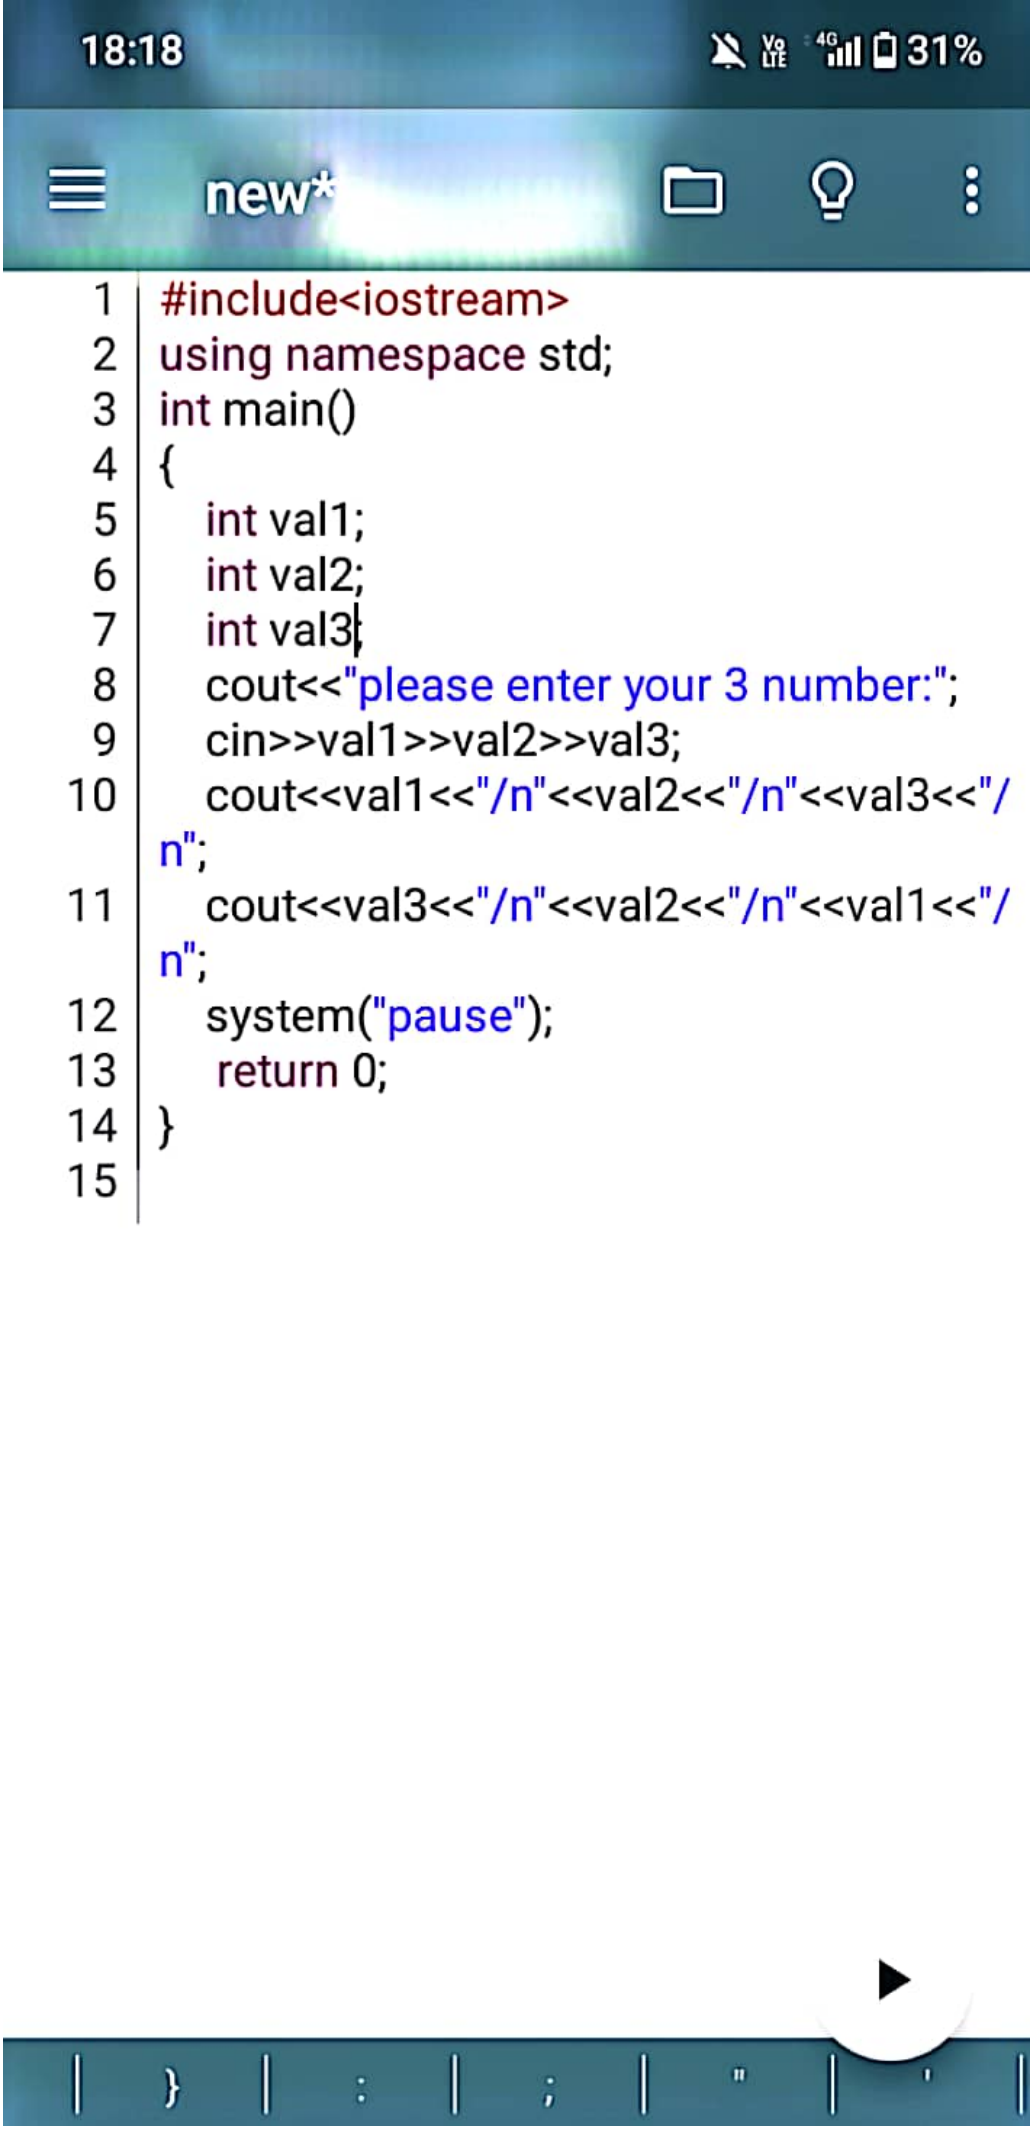


Scanned with CamScanner

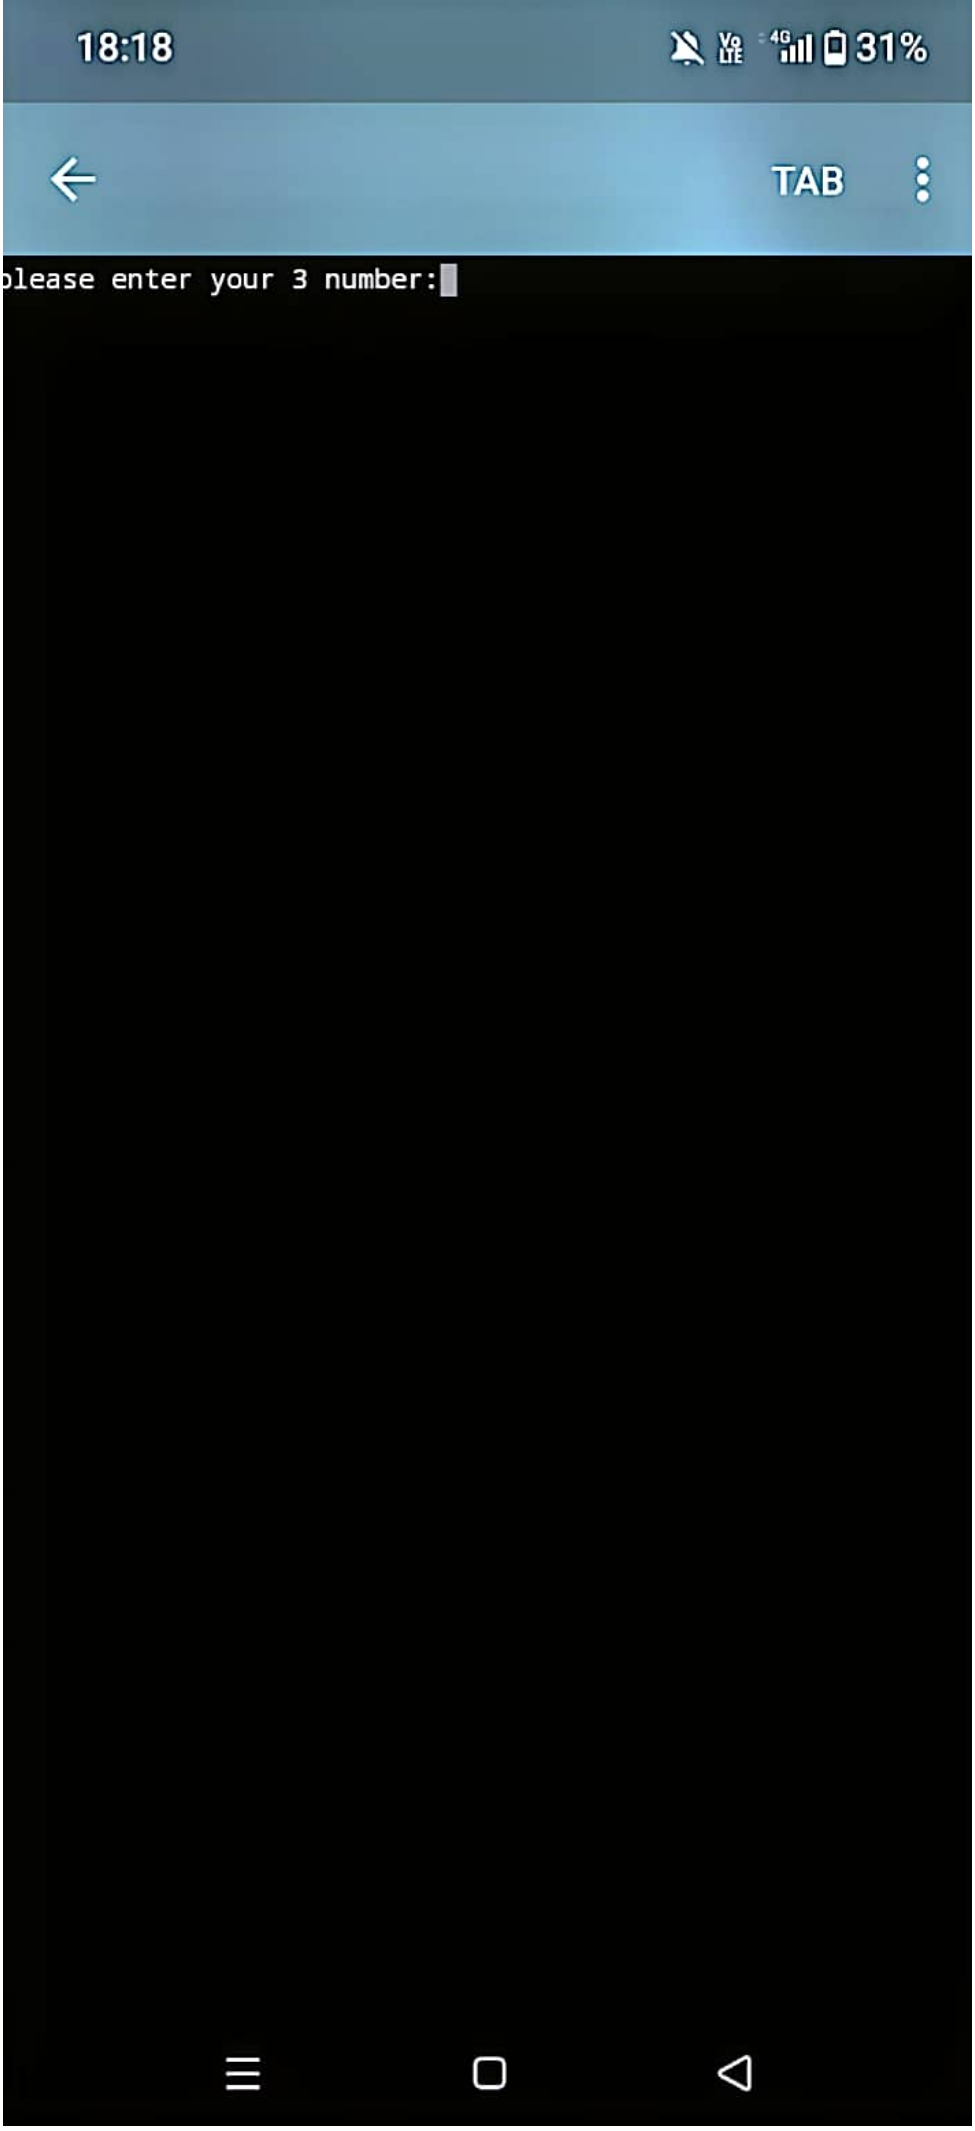


Scanned with CamScanner

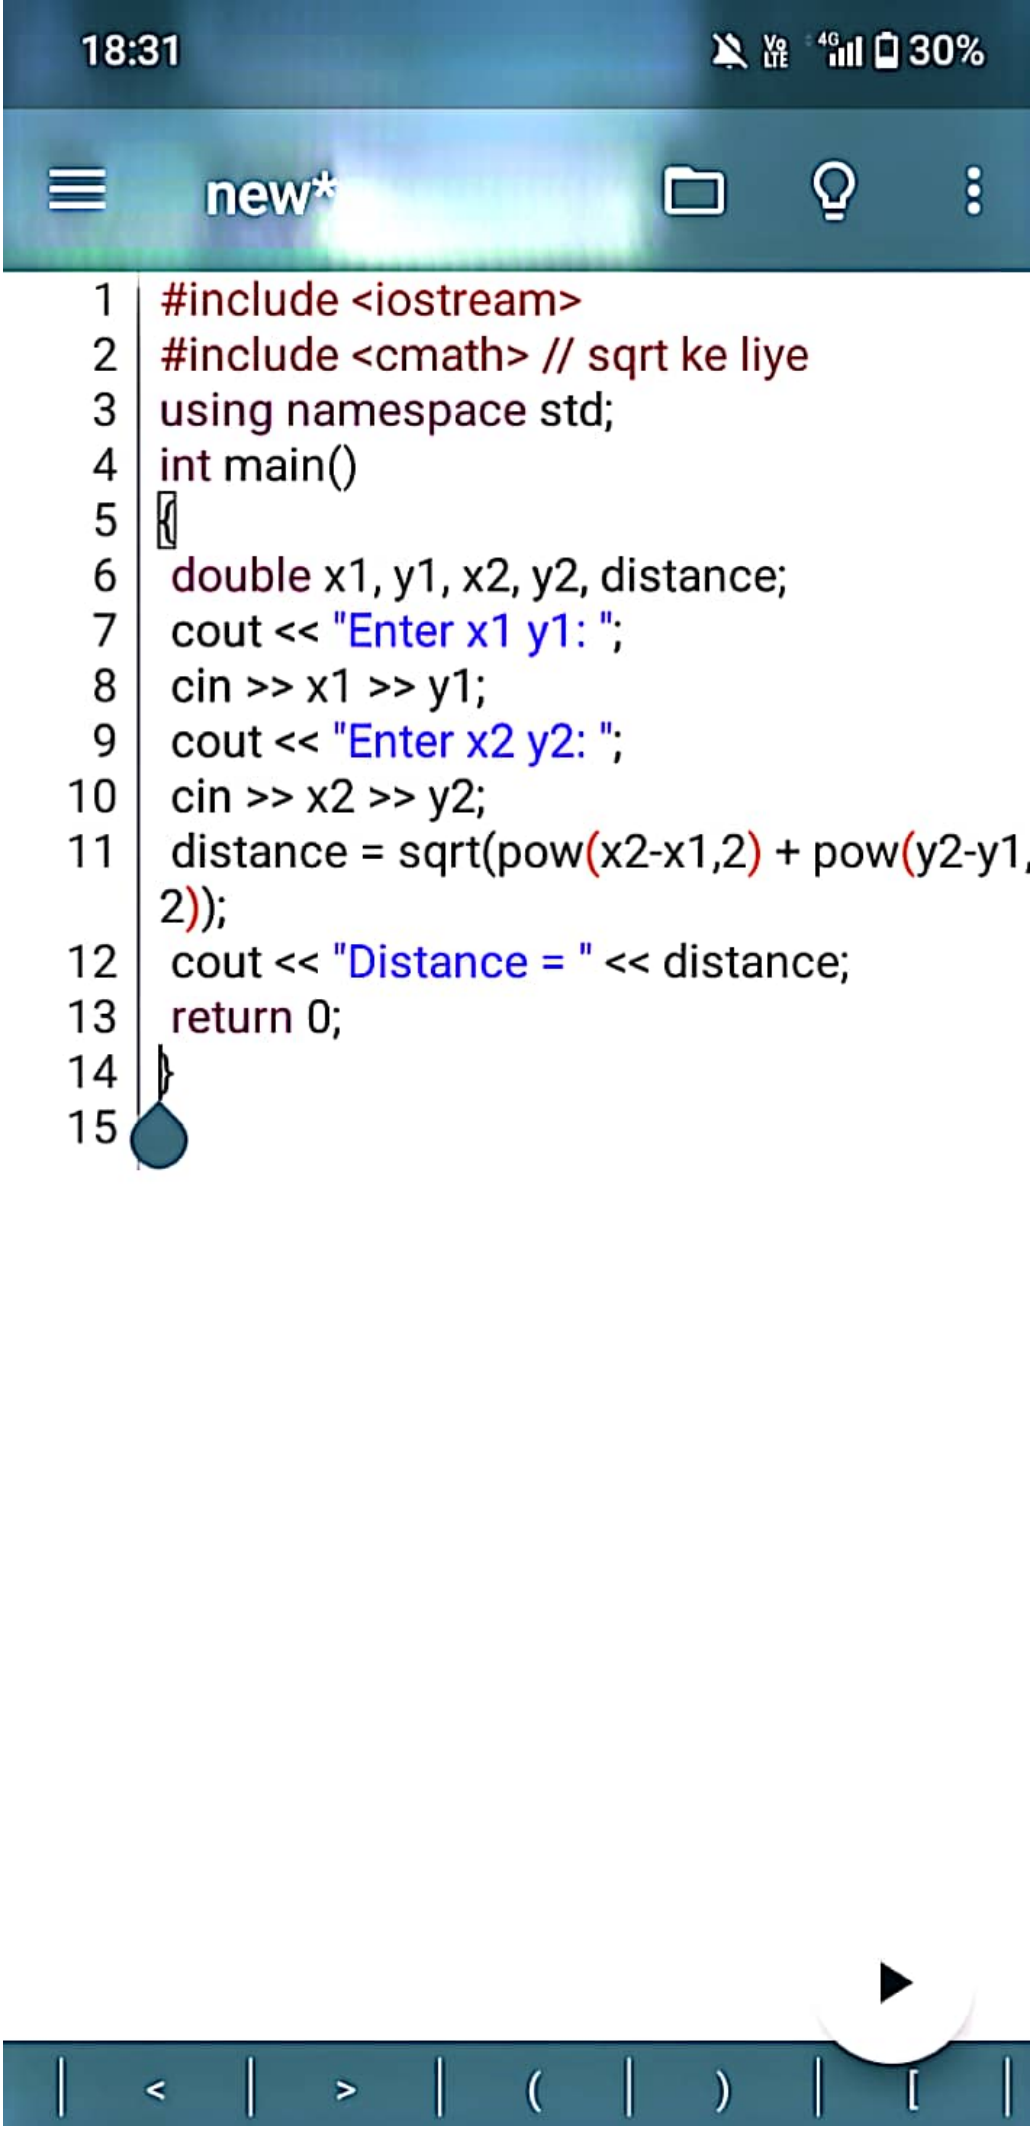


Scanned with CamScanner

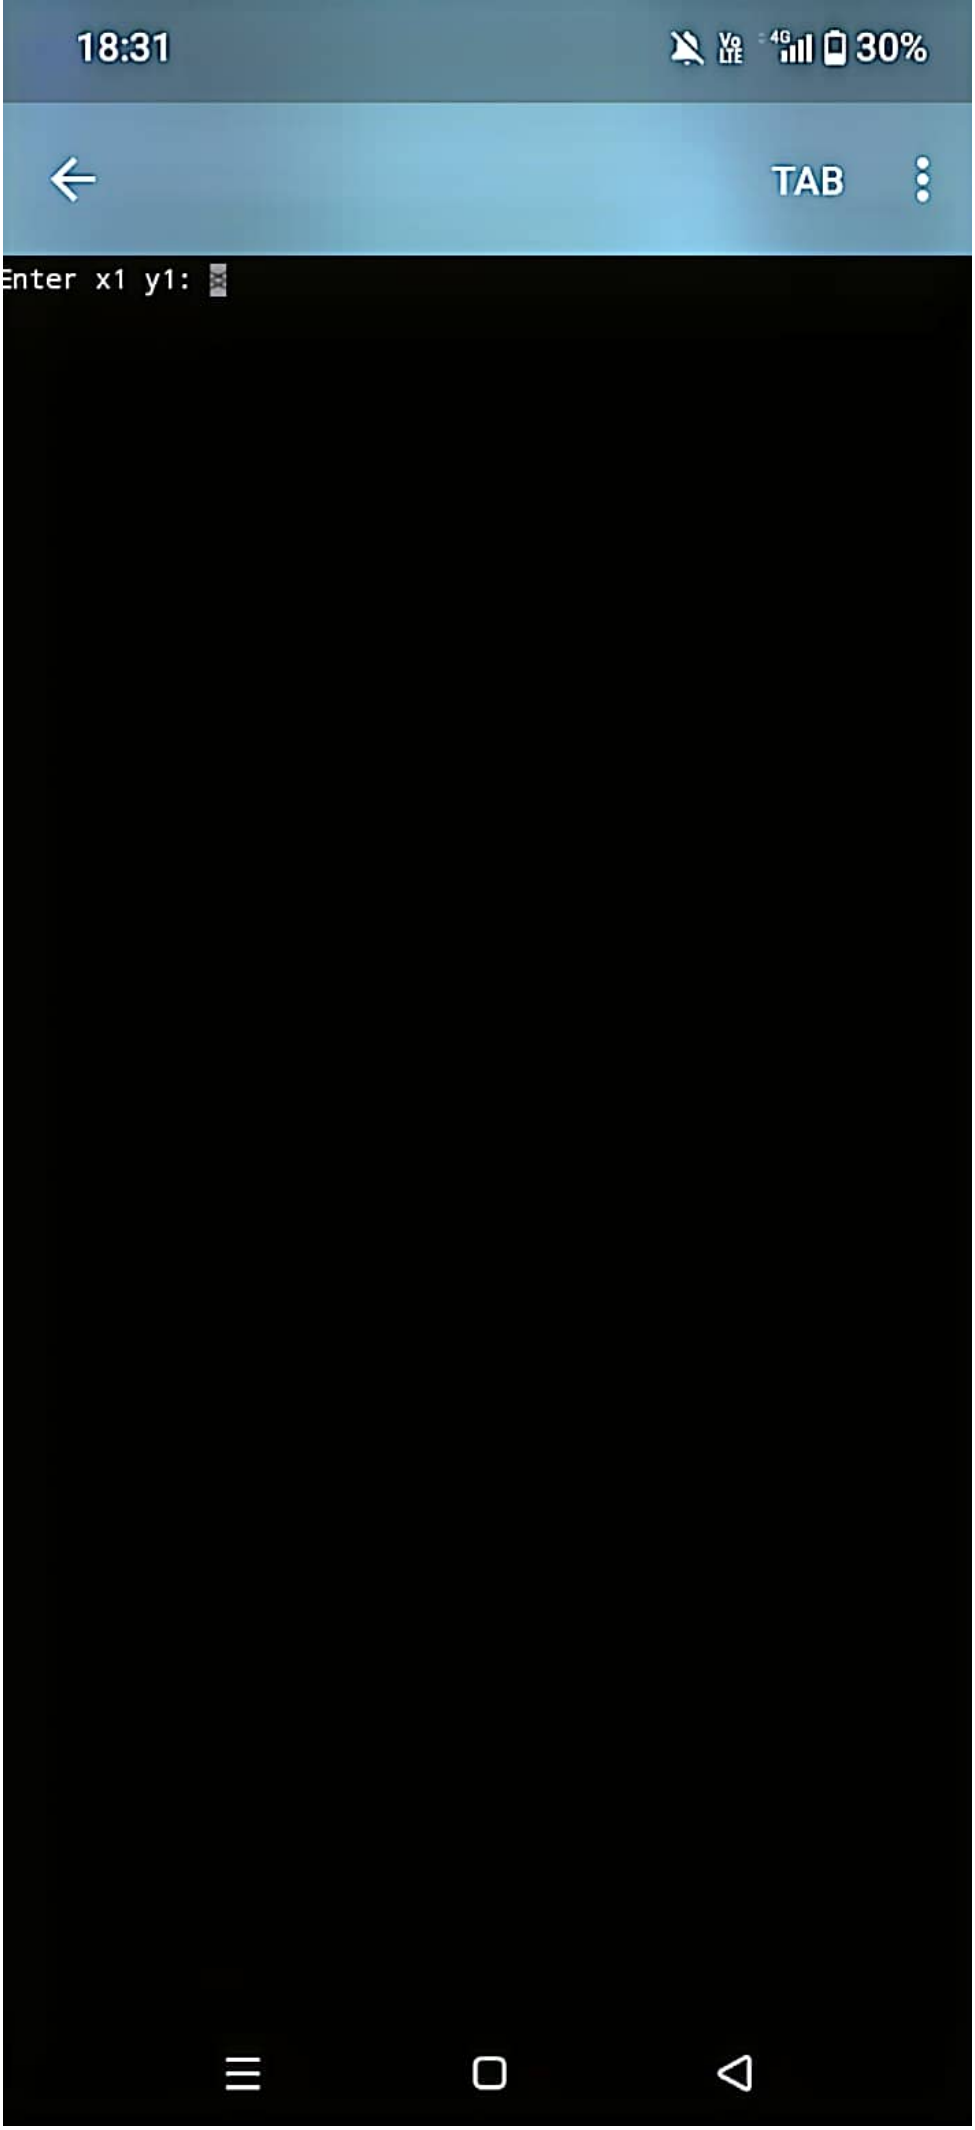


Scanned with CamScanner

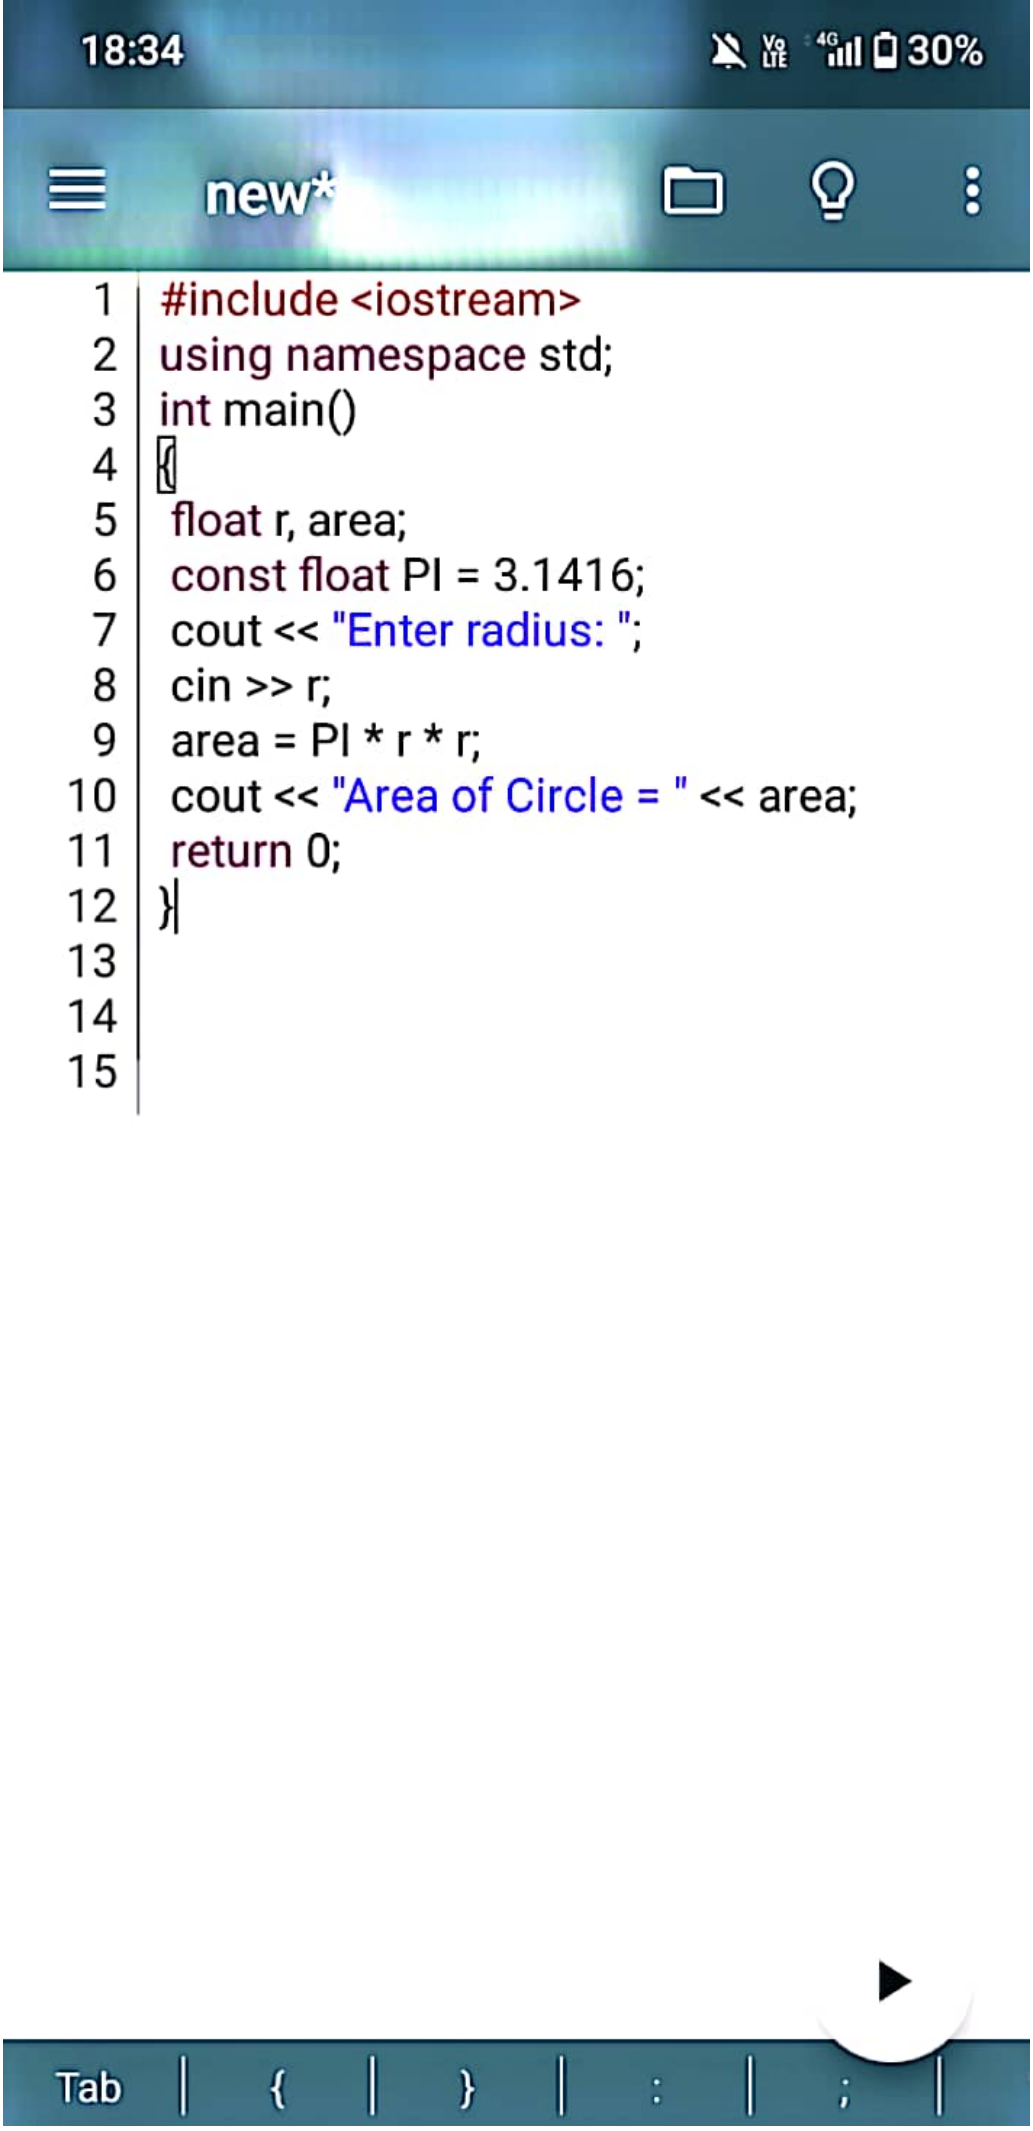


Scanned with CamScanner

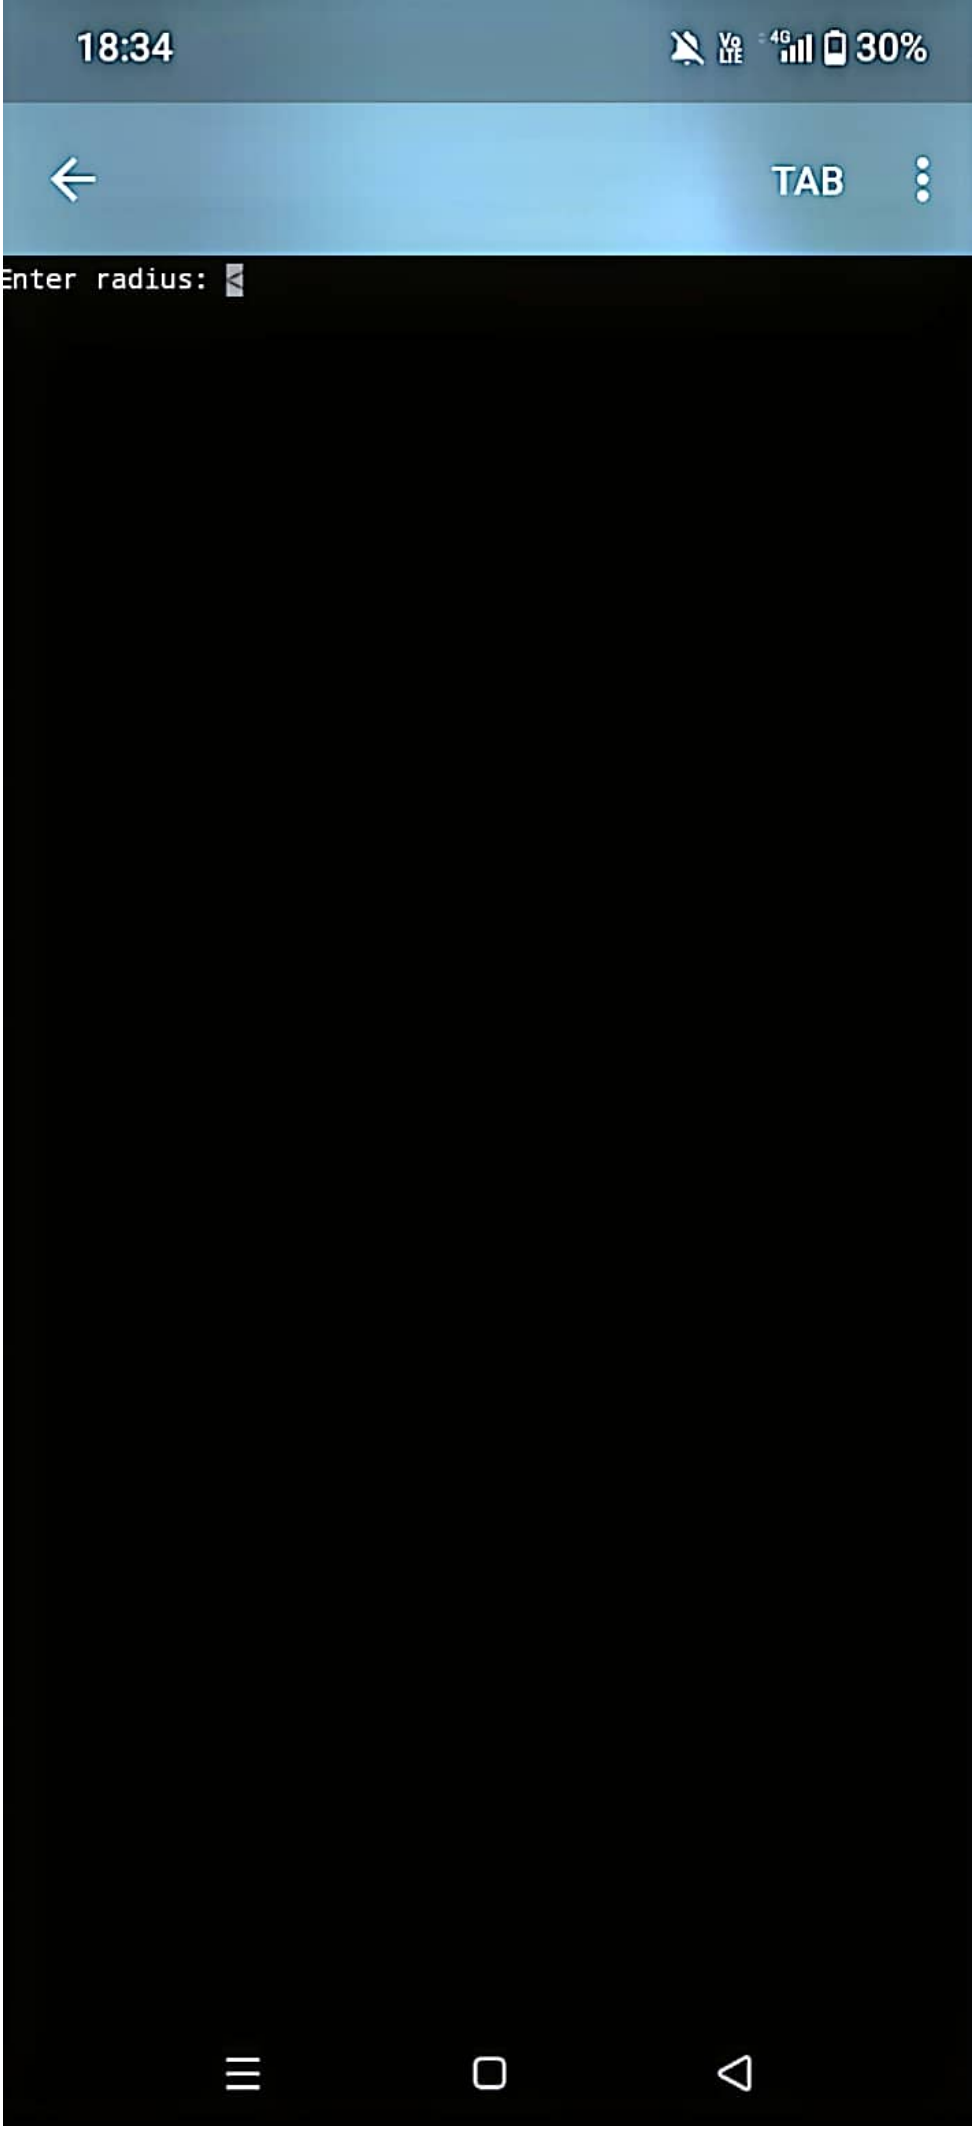


Scanned with CamScanner

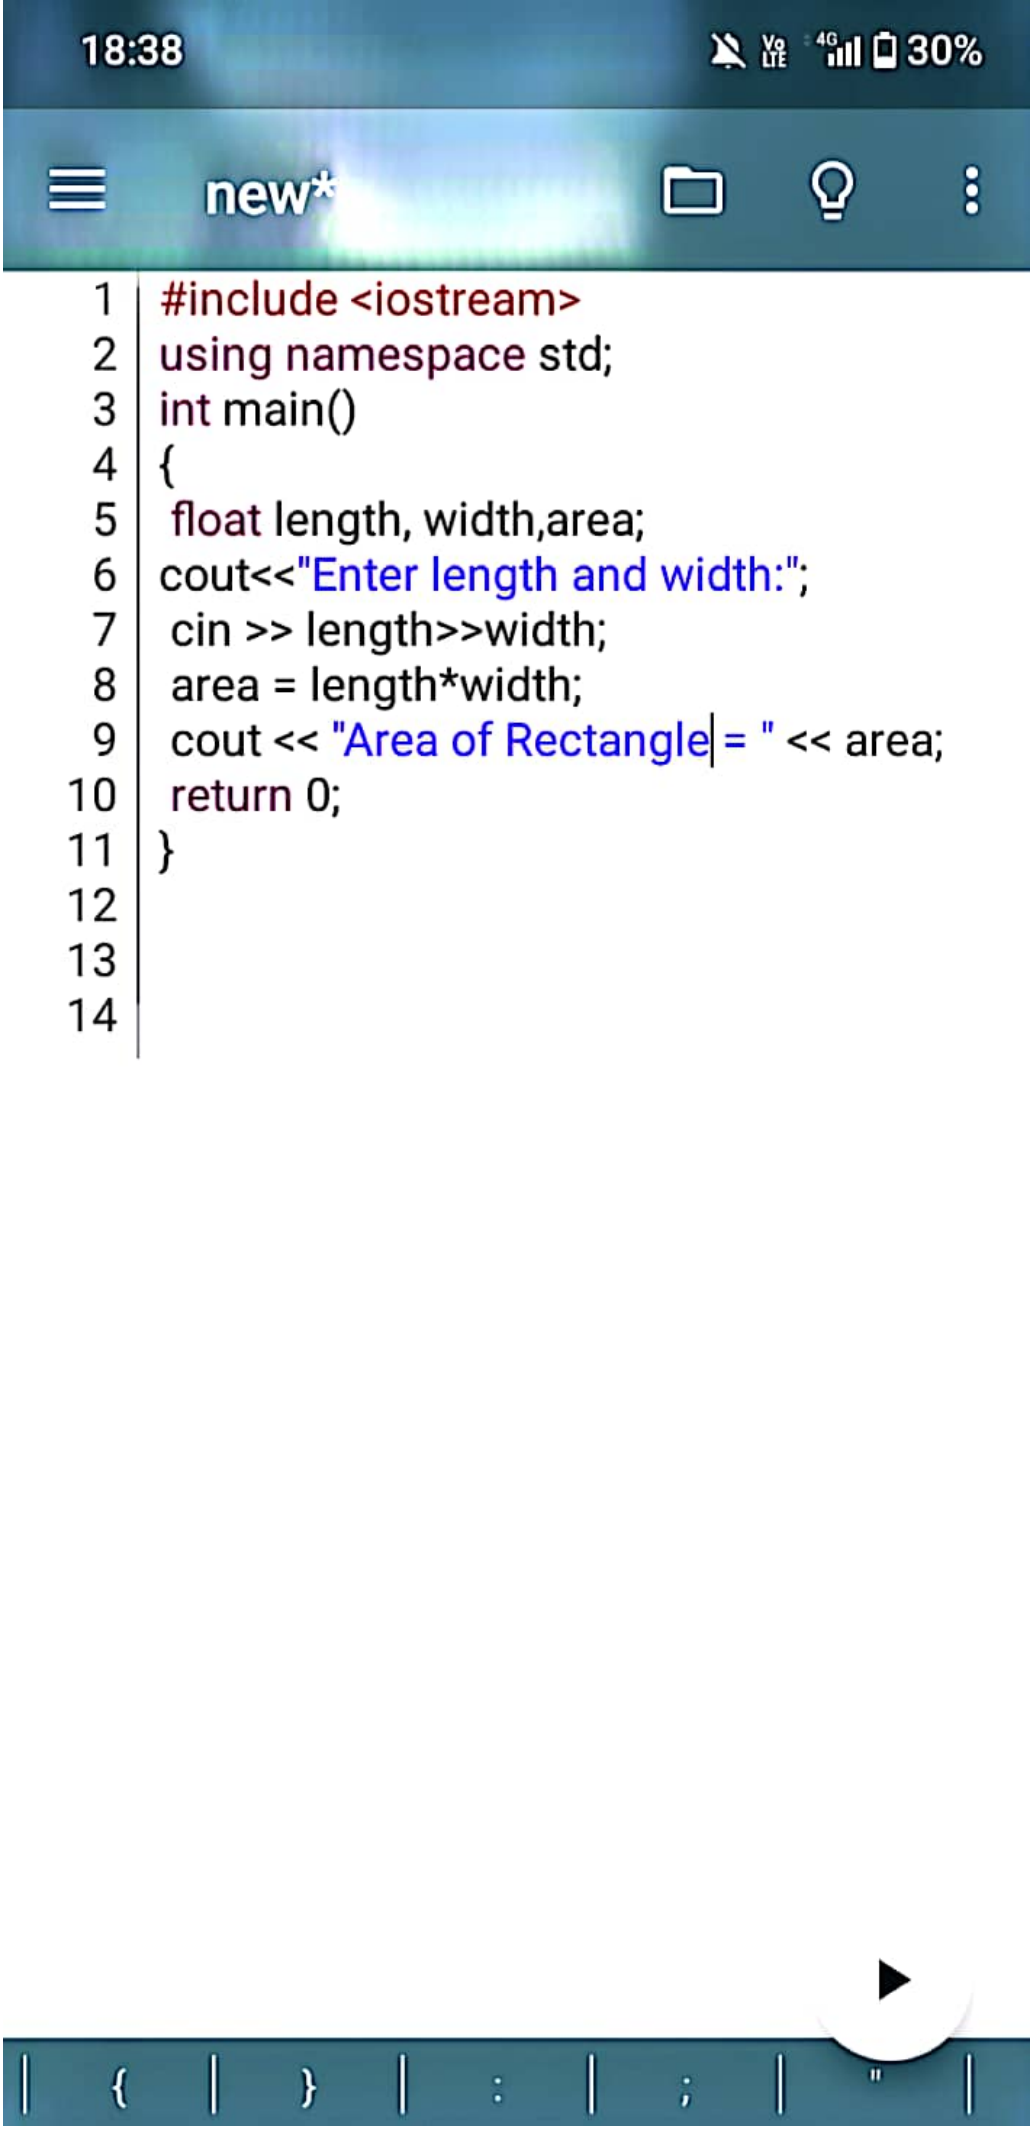


Scanned with CamScanner

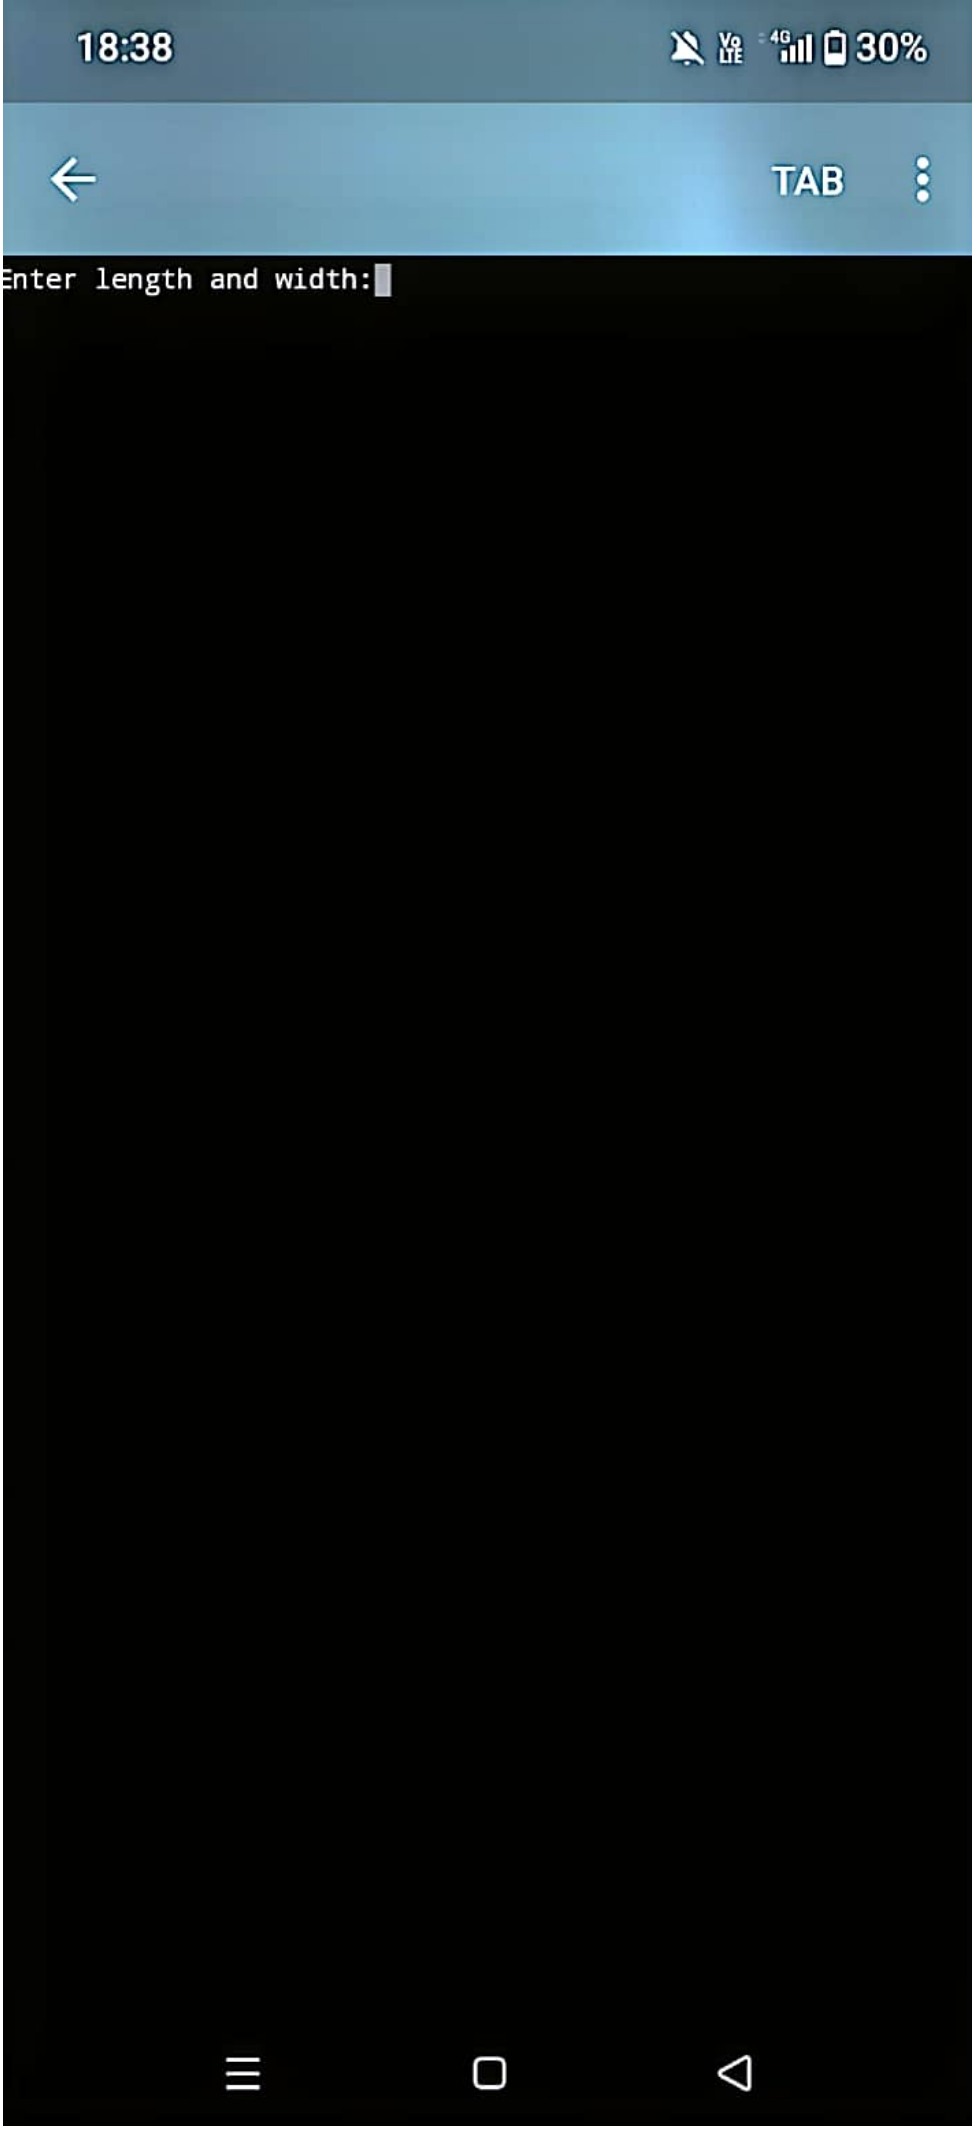

Scanned with CamScanner

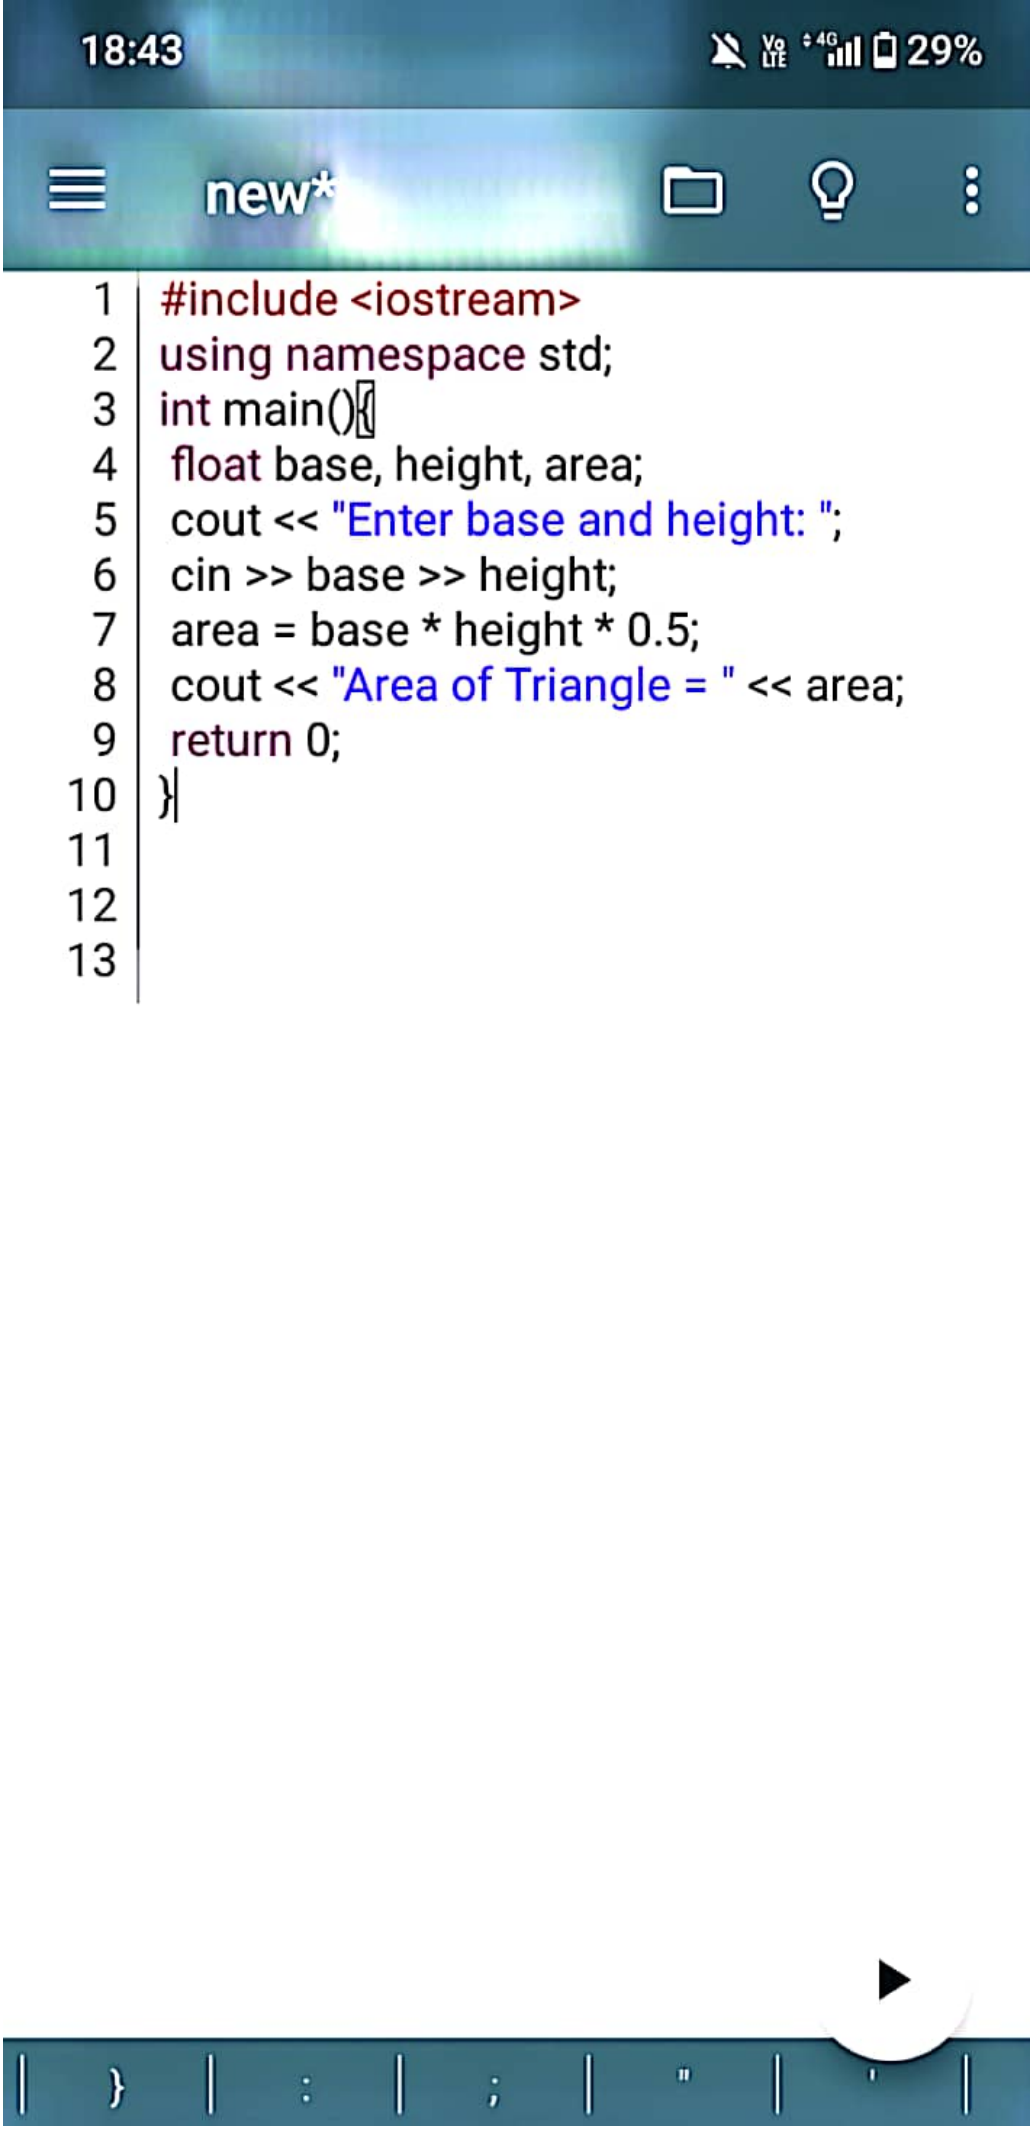

Scanned with CamScanner

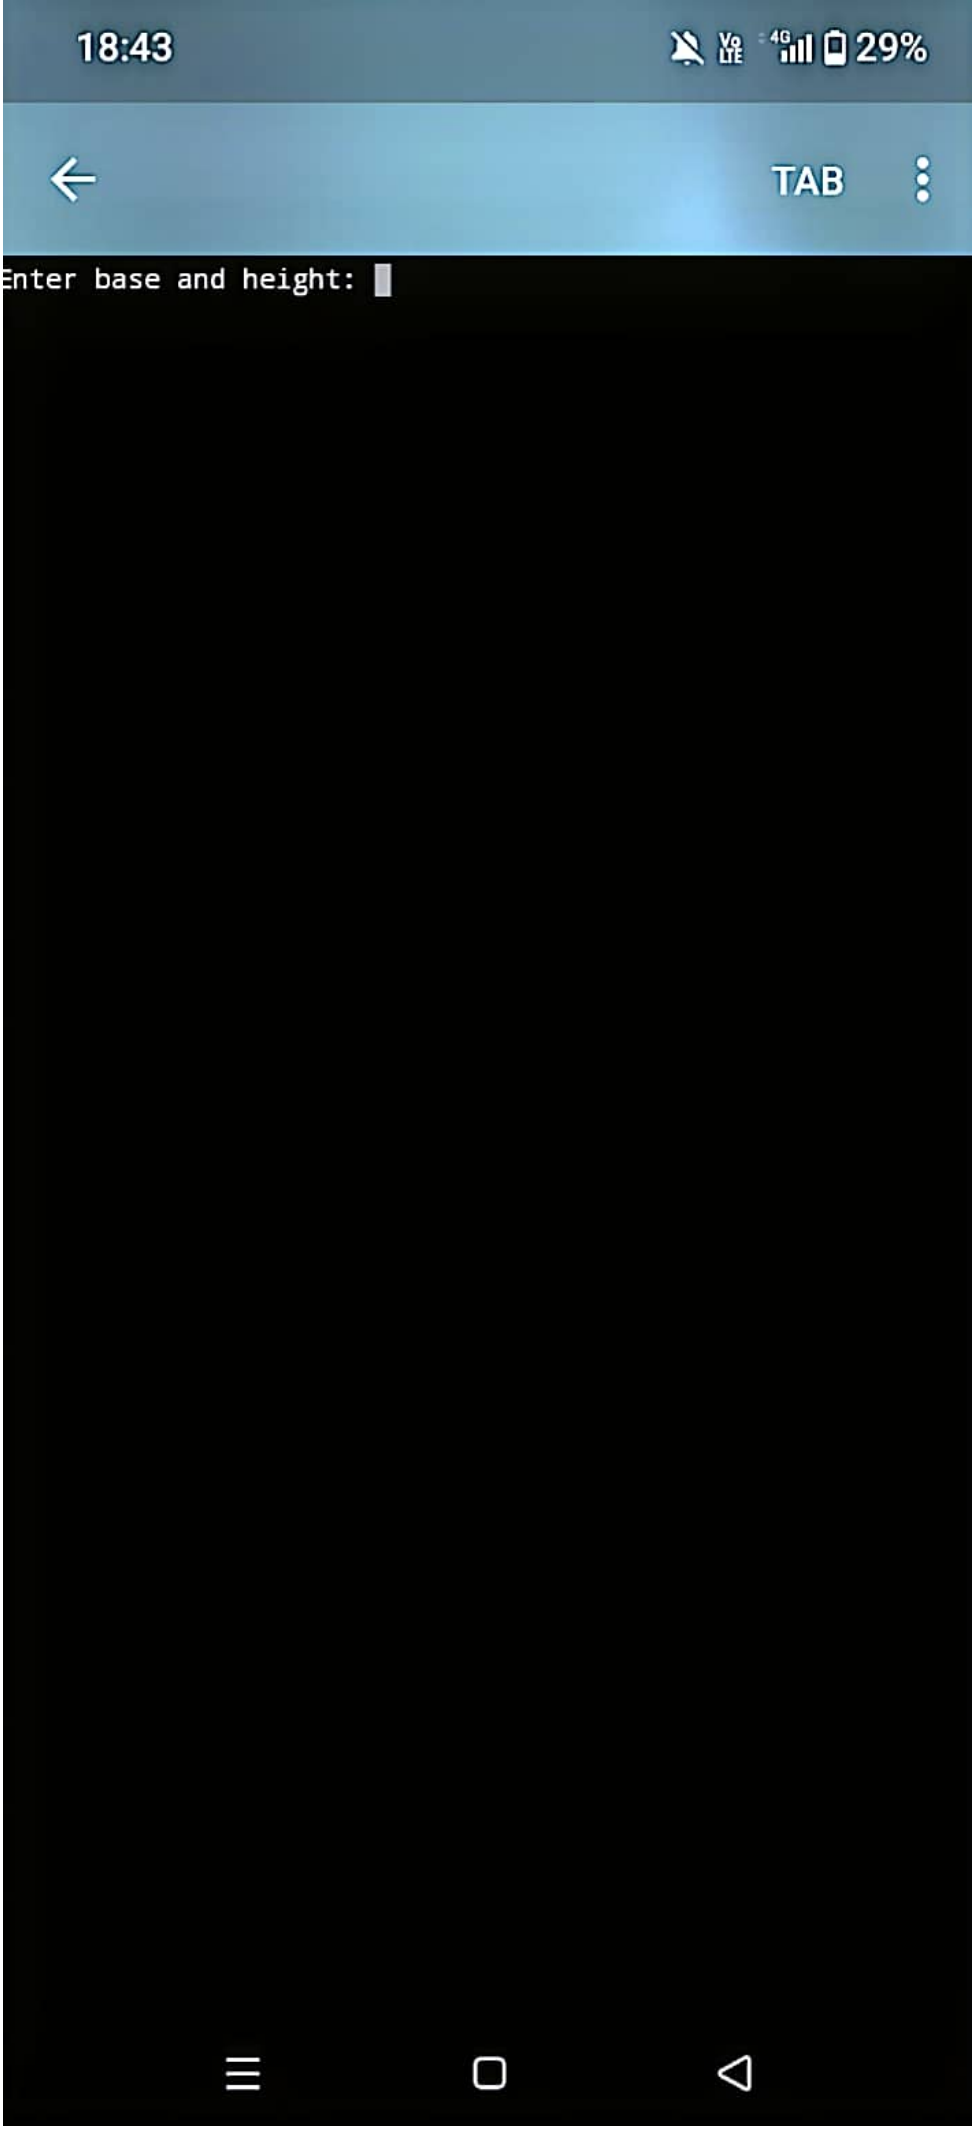


Scanned with CamScanner




```
1  #include <iostream>
2  using namespace std;
3  int main()
4   {
5   float item1=12.95, item2=24.95, item3=6.
   95, item4=14.95, item5=3.95;
6   float subtotal, tax, total;
7   subtotal = item1+item2+item3+item4+
   item5;
8   tax = subtotal * 0.06; // 6% tax
9   total = subtotal + tax;
10
11  cout << "Price of item 1 = $" << item1 <<
   endl;
12  cout << "Price of item 2 = $" << item2 <<
   endl;
13  cout << "Price of item 3 = $" << item3 <<
   endl;
14  cout << "Price of item 4 = $" << item4 <<
   endl;
15  cout << "Price of item 5 = $" << item5 <<
   endl;
16  cout << "Subtotal = $" << subtotal << endl;
17  cout << "Sales Tax (6%) = $" << tax << endl;


18  cout << "Total = $" << total << endl;
19  return 0;
20 }
21
22
23
```




Scanned with CamScanner




Scanned with CamScanner

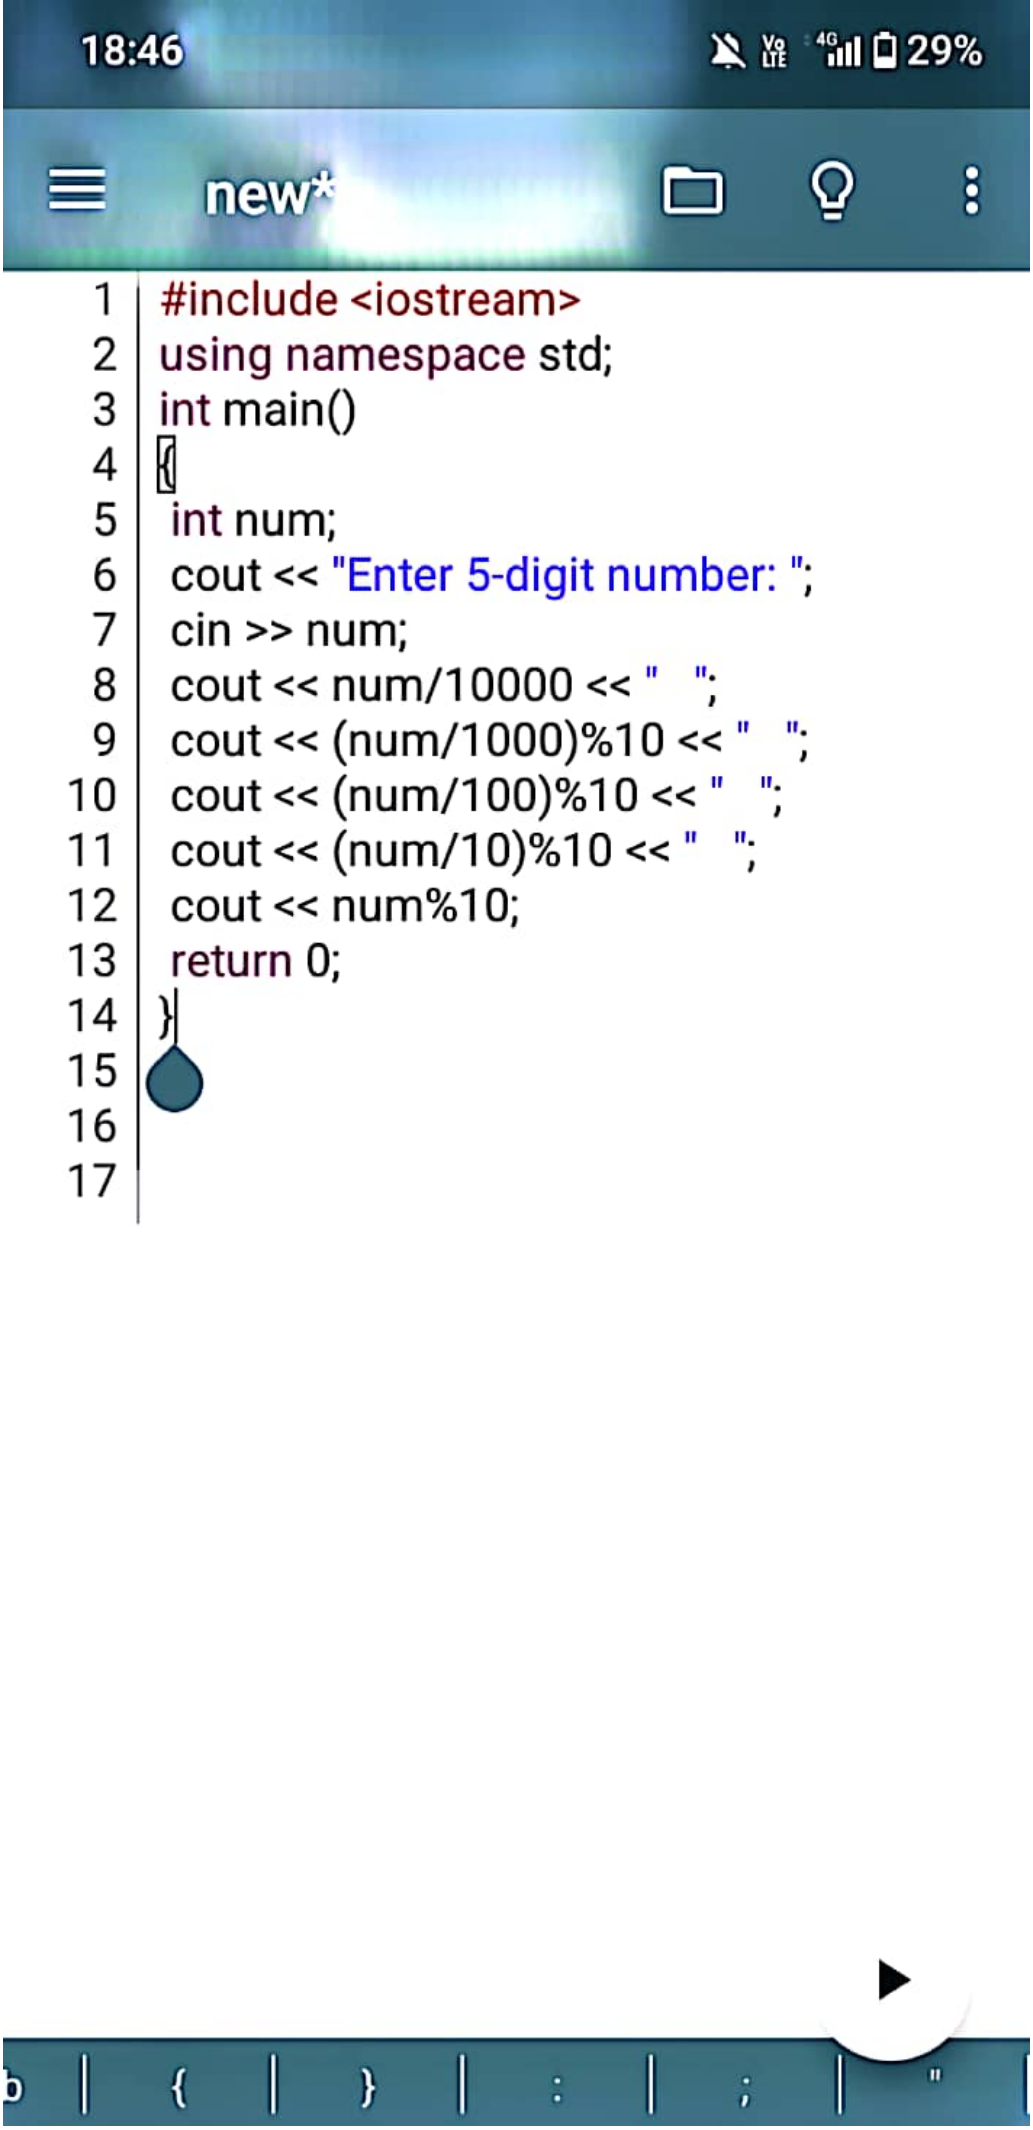


Scanned with CamScanner

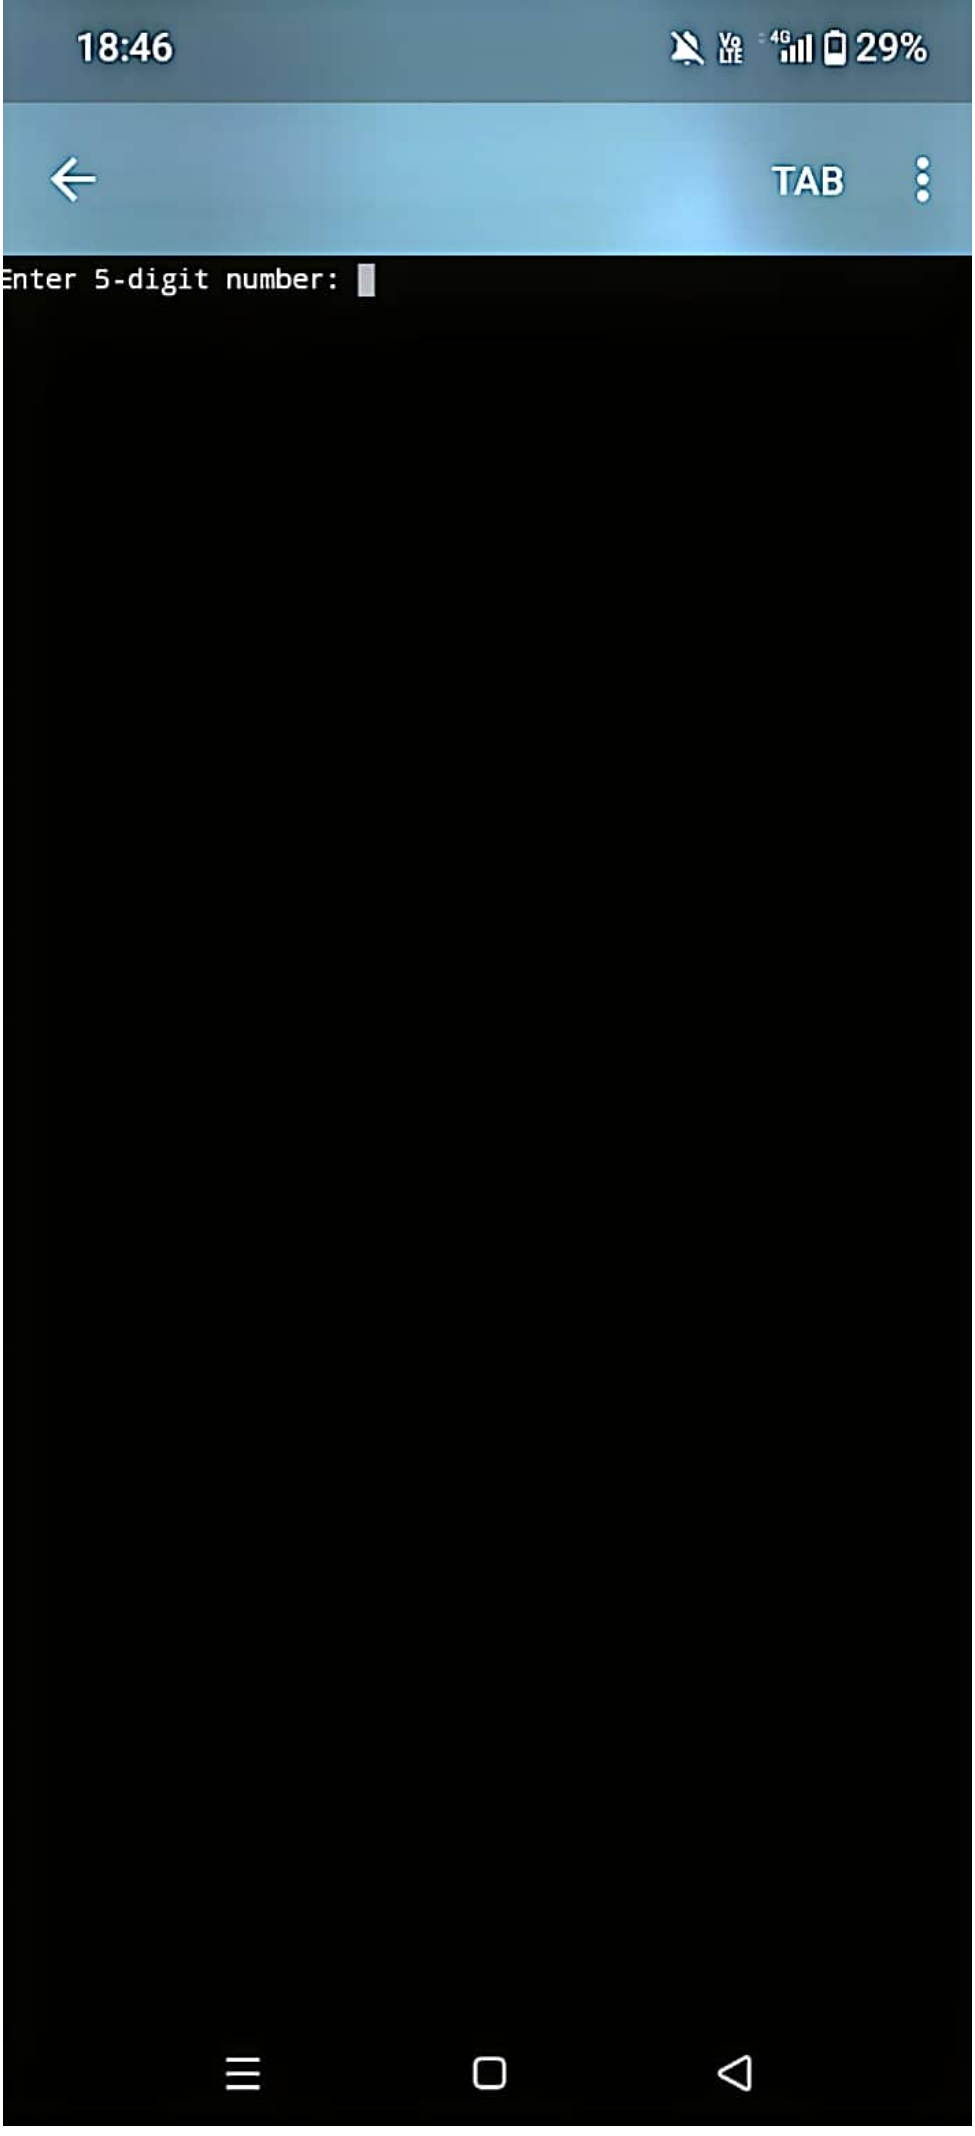


Scanned with CamScanner

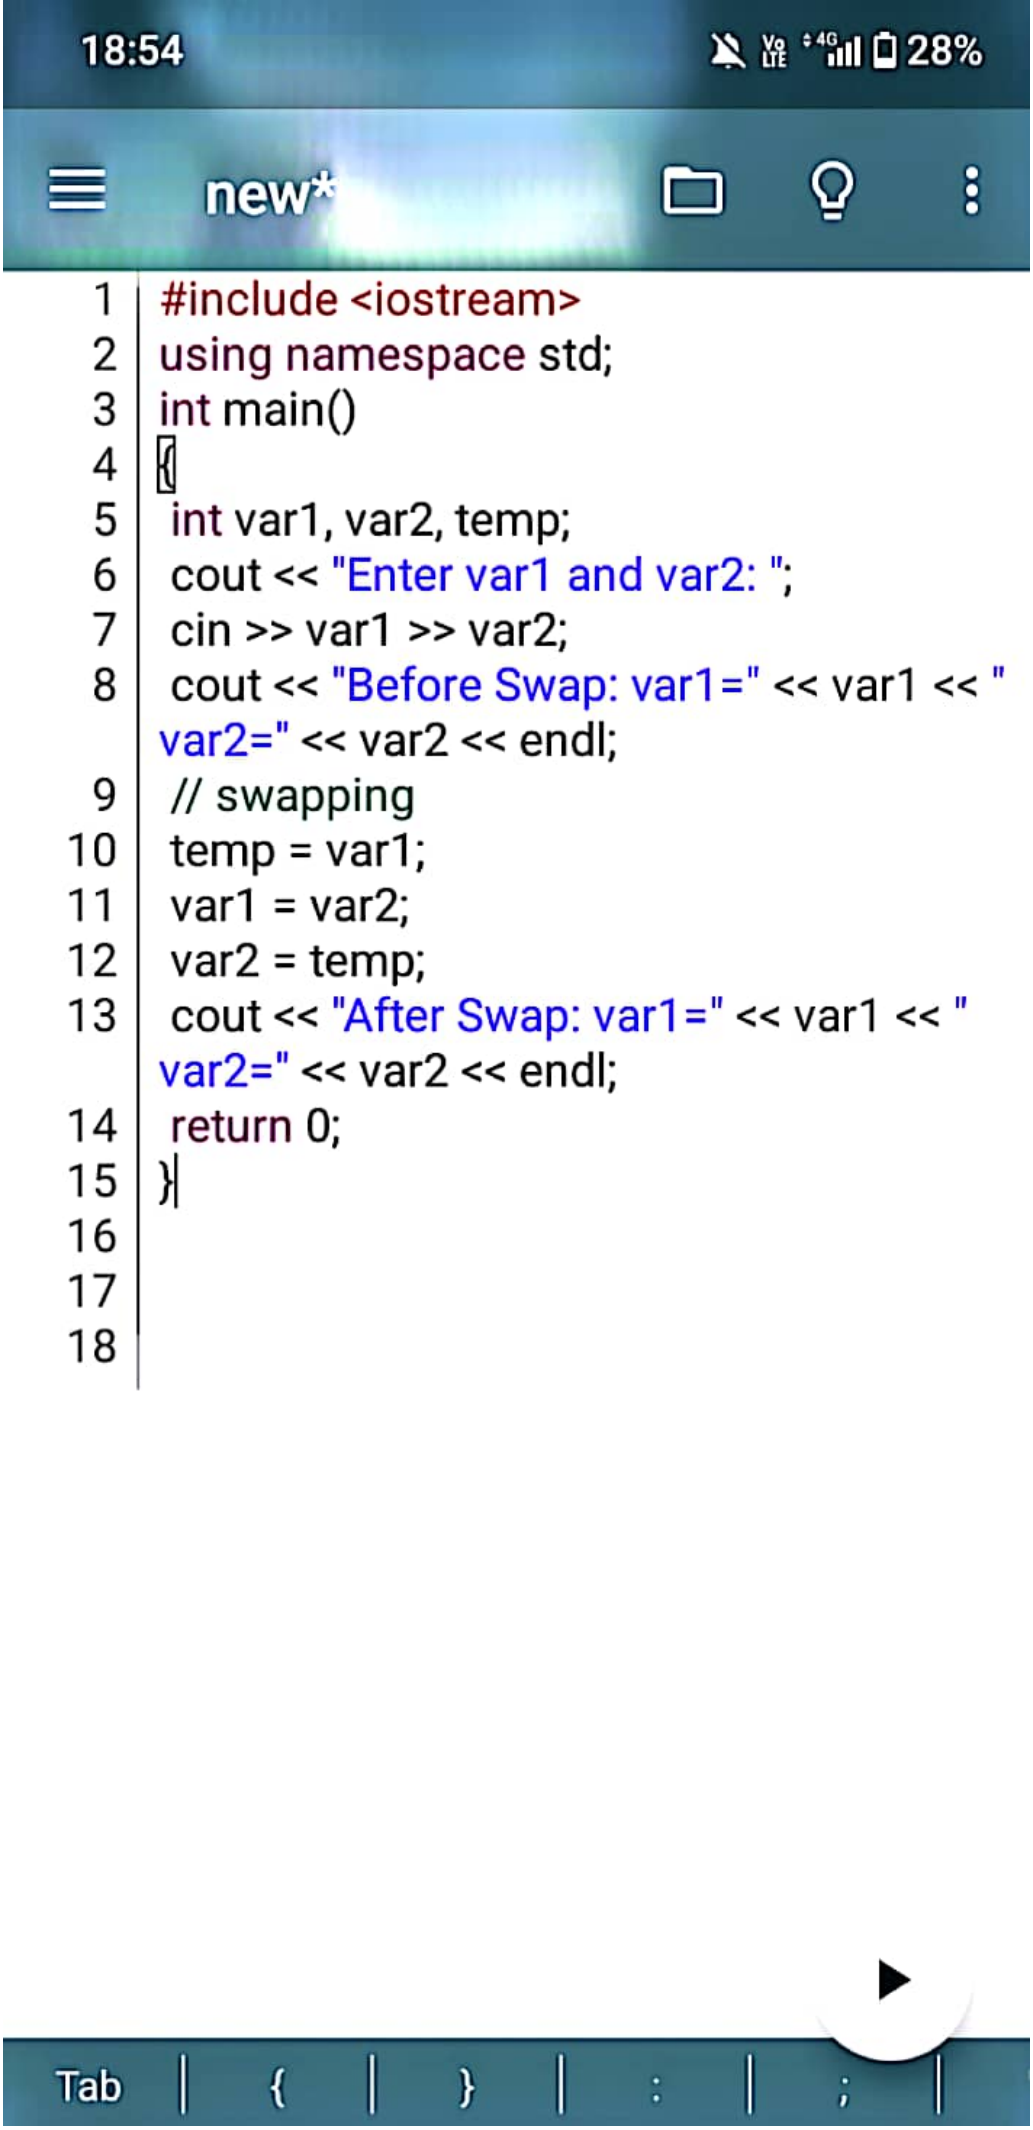


Scanned with CamScanner

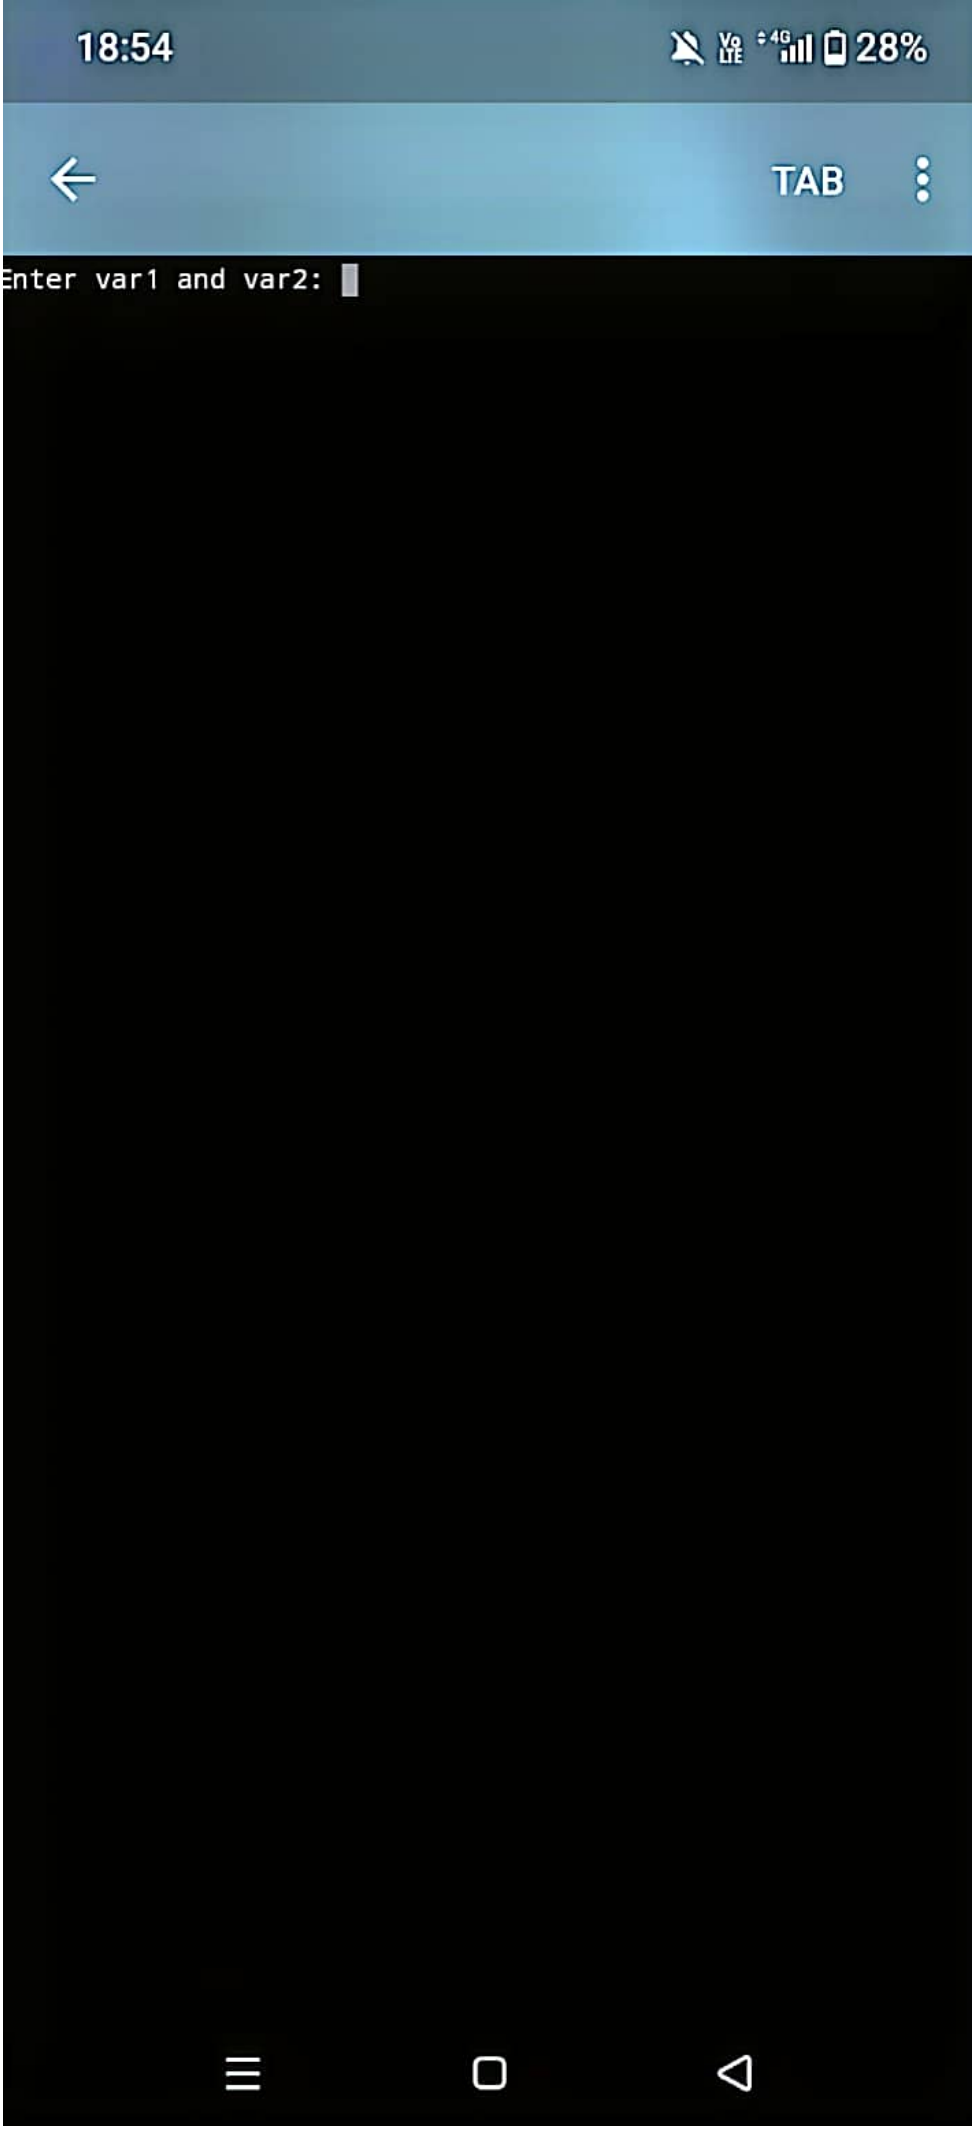

Scanned with CamScanner

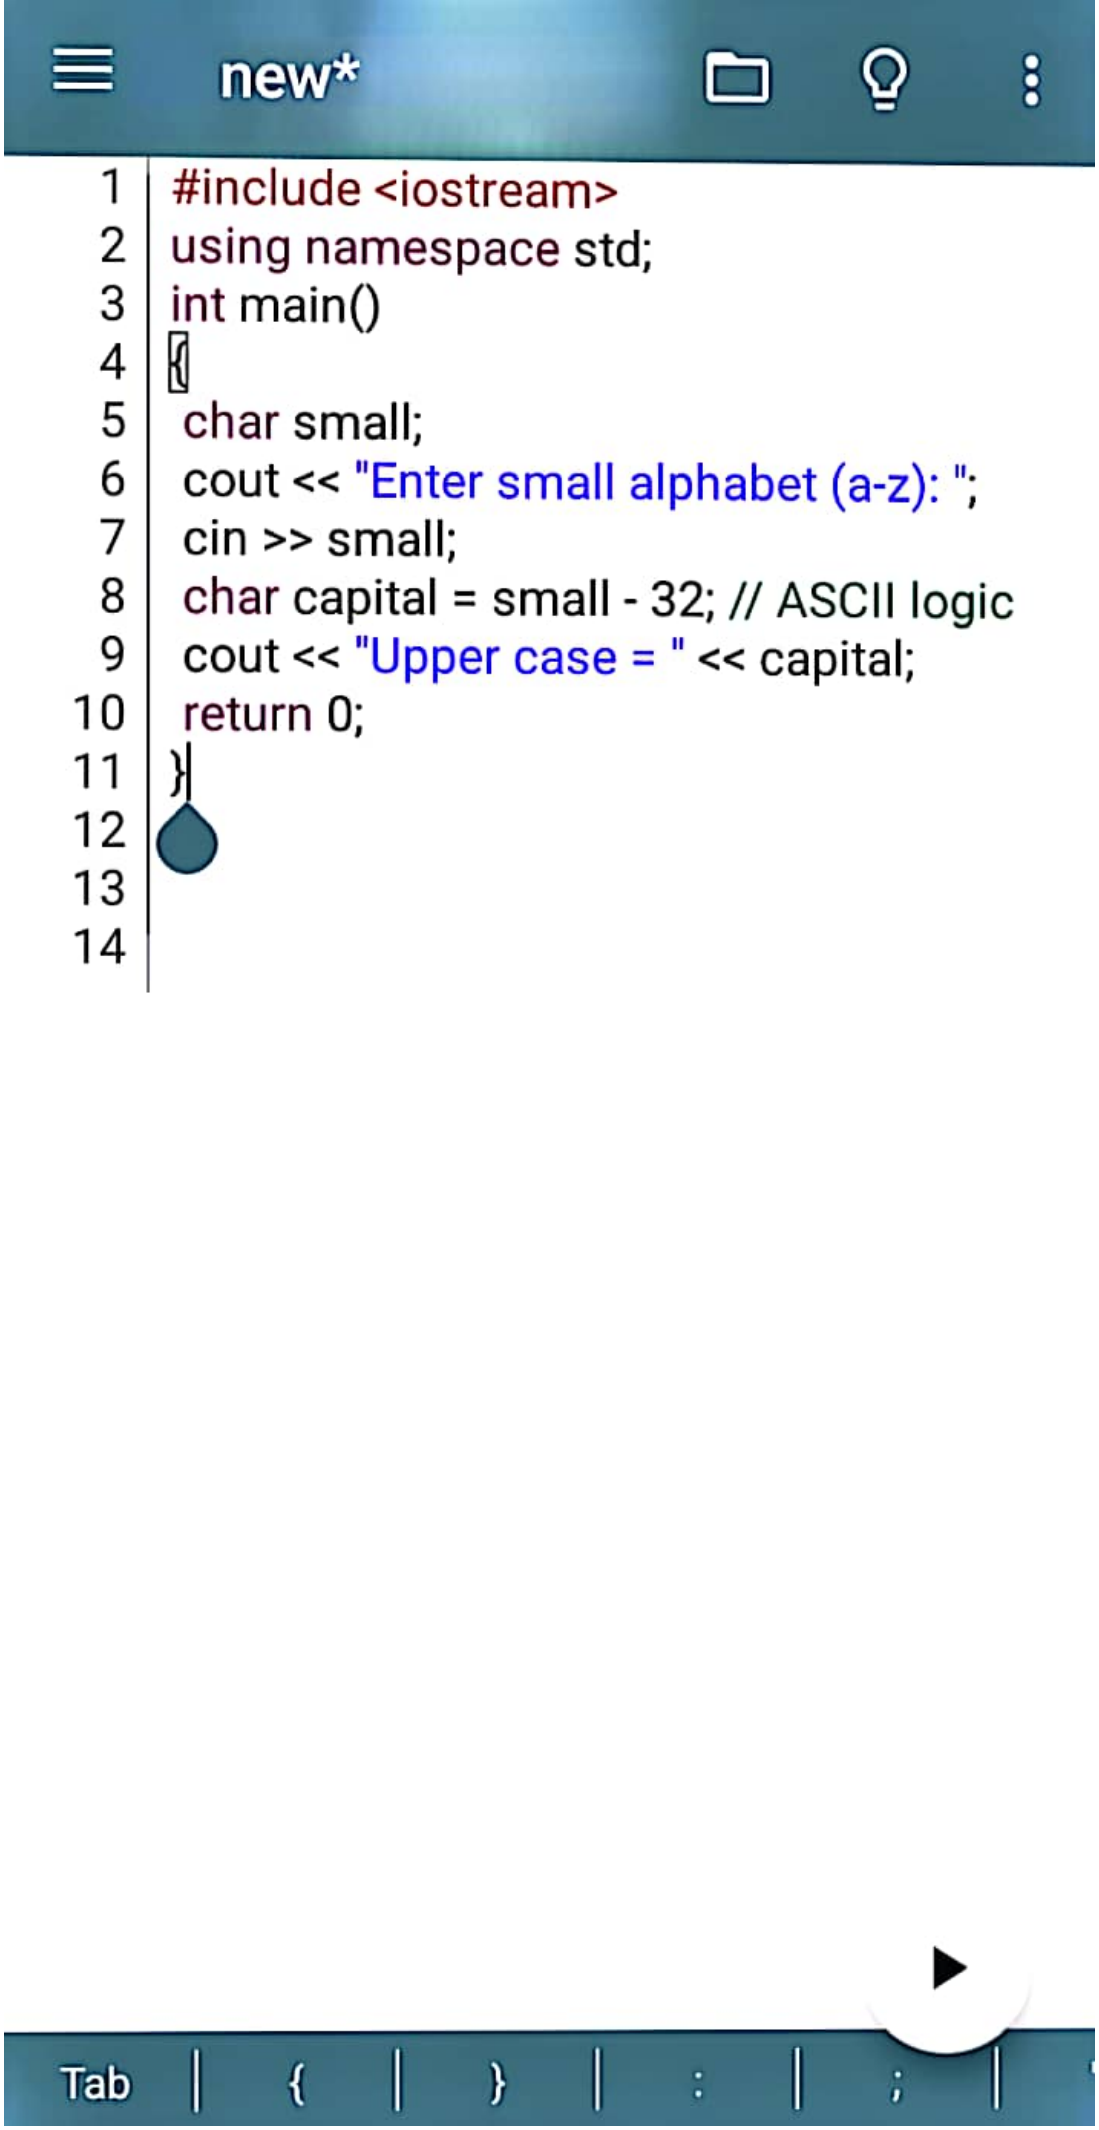

Scanned with CamScanner

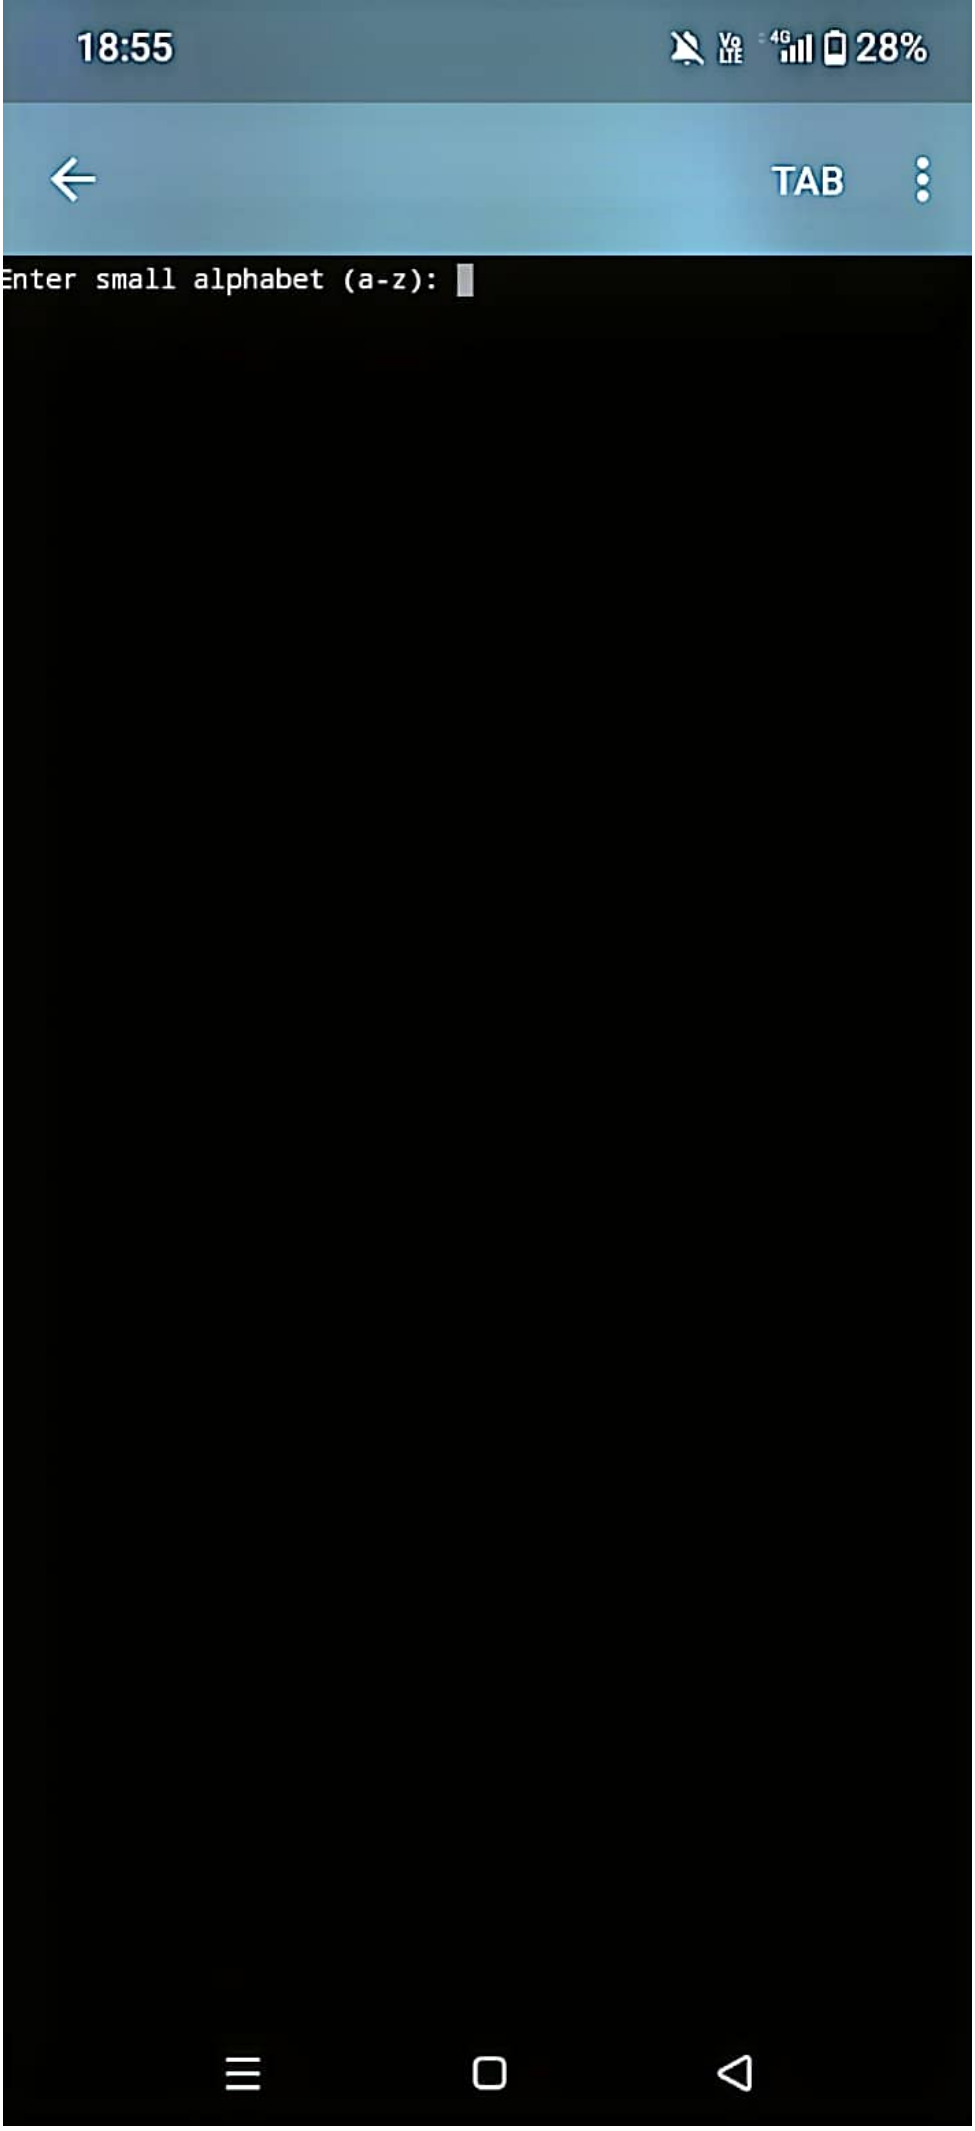

Scanned with CamScanner