



Shared User Interface (UI) Components (`app/components/`)

Coresight Research Portal — Technical Documentation

Document version: 1.0

Generated: June 29, 2026

Classification: Internal — Engineering Reference

CONFIDENTIAL — INTERNAL USE ONLY — DO NOT DISTRIBUTE

This document contains proprietary information belonging to Coresight Research. Unauthorized disclosure, copying, or distribution is strictly prohibited.

Table of Contents

Shared User Interface (UI) Components (app/components/)	1
Overview	3
Module Index	4
styles.py — Design System & Global CSS	5
navigation.py — Header, Footer, Company Selector	6
toolbar.py — Market Data Tab Bar	8
companyProfile.py — Company Profile Tab Content	10
loading.py — Branded Spinners & Overlays	11
tables.py — Reusable Data Tables (Library)	12
charts.py — Plotly Chart Builders (Library)	13
layout.py — Layout Primitives (Library)	14
auth_utils.py — Legacy Auth (Dead Code)	15
__init__.py	15
Cross-Cutting Patterns	15
Component → Page Consumer Matrix	16

Application: Market Data Portal (MDP)

Stack: Streamlit multipage app with custom HyperText Markup Language (HTML)/CSS branding


Scope: All modules under `app/components/` — navigation, styles, charts, tables, toolbar, loading, layout, company profile, auth utilities

Overview

The `app/components/` package provides reusable Streamlit UI primitives that give every page a consistent Coresight look and feel. Components hide Streamlit chrome (sidebar, default header), inject global CSS design tokens, render the branded site header/footer, and supply Market Data-specific building blocks (company header, tab bar, profile tables).

Shared UI modules sit between Streamlit pages and core infrastructure — pages import components; components call auth, Access Control List (ACL), and repositories as needed.

Shared UI modules sit between Streamlit pages and core infrastructure — pages import components; components call auth, Access Control List (ACL), and repositories as needed.

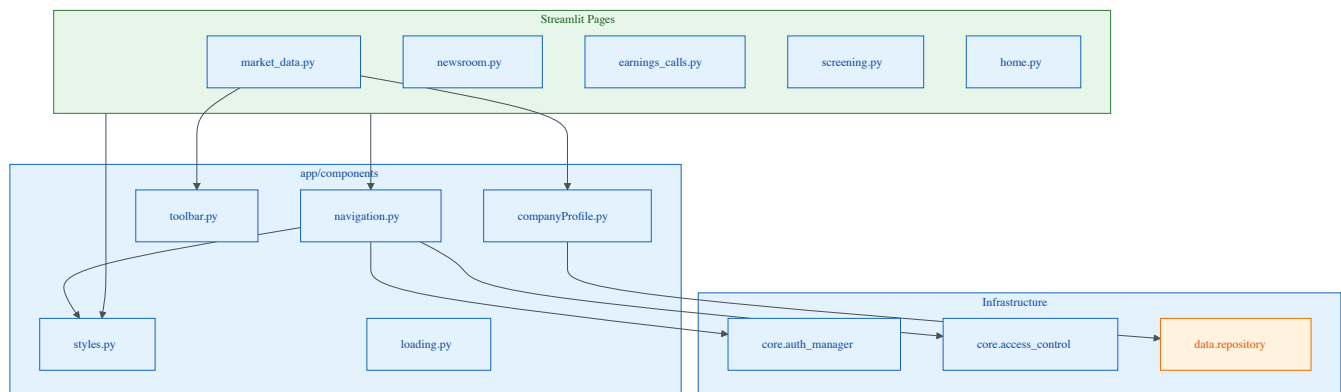

Typical page bootstrap sequence

Every authenticated page follows this pattern:

1. `hide_sidebar()` — immediately after `st.set_page_config()` (or at page top)
2. `render_styles()` + `set_page_layout()` — global CSS and content width
3. `render_header(current_page="...")` — sticky Coresight header
4. Page-specific content
5. `render_coresight_footer()` — four-column footer

Market Data adds: `render_company_header()` → `render_tabs()` → tab content.

Module Index

File	Lines (approx.)	Status	Primary consumers
<code>styles.py</code>	729	Active — core	17 pages, 2 utils
<code>navigation.py</code>	1,234	Active — core	15 pages, 2 utils
<code>toolbar.py</code>	218	Active	<code>market_data.py</code>
<code>companyProfile.py</code>	617	Active	<code>market_data.py</code>
<code>loading.py</code>	439	Active	<code>company_filings.py</code> , <code>forecasting*.py</code>
<code>tables.py</code>	446	Library (unused by pages)	—
<code>charts.py</code>	410	Library (unused by pages)	—
<code>layout.py</code>	313	Library (unused by pages)	—
<code>auth_utils.py</code>	517	Legacy / dead	—
<code>login_header.html</code>	—	Static asset	<code>login.py</code> only
<code>login_footer.html</code>	—	Static asset	<code>login.py</code> only
<code>login_layout.css</code>	—	Static asset	<code>login.py</code> only
<code>header_logout.html</code>	—	Static asset	Unused (legacy logout snippet)
<code>__init__.py</code>	2	Package marker	—

Login static assets are loaded via `Path.read_text()` in `login.py` and injected with `st.markdown(..., unsafe_allow_html=True)`. See [login.md](#) for the full login chrome layout.

styles.py — Design System & Global CSS

Purpose: Single source of truth for Coresight design tokens and global CSS injection. Hides Streamlit sidebar/header, applies card shadows, smooth content animations, and page layout constraints.

Design token exports

Constant	Contents
COLORS	Primary (#D62E2F), semantic (success/warning/danger/info), neutrals, chart palette
TYPOGRAPHY	Font families (Inter), sizes, weights, line heights
SPACING	space_0 ... space_16 rem scale
BORDER_RADIUS	rounded_sm ... rounded_full
SHADOWS	shadow_sm ... shadow_card

Public Application Programming Interface (API)

Function	Signature	Purpose
get_global_css	() -> str	Returns ~9KB global CSS string; cached in st.session_state
render_styles	()	Injects global CSS via st.markdown(unsafe_allow_html=True)
set_page_layout	(header_full_width=True, footer_full_width=True, body_padding="0 20px", max_content_width="1350px", remove_top_padding=True, footer_at_bottom=True)	Adjustable content width and padding CSS
hide_sidebar	()	Hides Streamlit sidebar and stHeader ; must run right after set_page_config()

Usage by pages

Page	Imports
<code>admin_iam.py</code> , <code>access_management.py</code> , <code>audit.py</code> , <code>reports.py</code> , <code>settings.py</code>	<code>hide_sidebar</code> , <code>render_styles</code> , <code>set_page_layout</code>
<code>company_filings.py</code> , <code>screening.py</code>	<code>hide_sidebar</code> , <code>set_page_layout</code> , <code>render_styles</code>
<code>earnings_calls.py</code> , <code>newsroom.py</code>	Above + <code>COLORS</code> , <code>TYPOGRAPHY</code> , <code>SPACING</code> for inline HTML
<code>market_data.py</code>	<code>hide_sidebar</code> , <code>render_styles</code> , <code>set_page_layout</code> , <code>COLORS</code>
<code>home.py</code> , <code>earnings_calendar.py</code>	<code>hide_sidebar</code> , <code>render_styles</code>
<code>login.py</code>	<code>hide_sidebar</code> only
<code>logs.py</code>	<code>hide_sidebar</code> , <code>render_styles</code> , <code>set_page_layout</code> (no header/footer)

Pages not using styles: `company_filings_add_files.py` , `retailer_adding.py` , `logout_bridge.py`

Dependencies

- `utils.server_logger.log_structured_error` only

`navigation.py` — Header, Footer, Company Selector

Purpose: Coresight-branded site header and footer, client-side page transitions, company selector header for Market Data, and legacy sidebar helpers.

Key exports

Name	Type	Description
<code>Page</code>	<code>Enum</code>	Legacy: <code>MARKET_DATA</code> , <code>NEWSROOM</code>
<code>PAGE_CONFIG</code>	<code>dict</code>	Labels/icons for <code>Page</code> enum


Public API

Function	Purpose
<code>render_header(full_width=True, current_page="market_data", ticker="M")</code>	Figma-matched sticky header; active nav highlighting; hidden <code>st.page_link</code> targets for client-side navigation; injects transition JS
<code>render_coresight_footer(full_width=True, stick_to_bottom=True)</code>	Four-column footer; staging-only admin links; Access Management for admins
<code>render_company_header(company_name, ticker, exchange="NYSE")</code>	"CORESIGHT MARKET DATA" title + invisible company <code>st.selectbox</code> + Company Documents link
<code>render_logo</code> , <code>render_user_state</code> , <code>render_divider</code> , <code>render_footer</code> , <code>render_top_bar</code>	Legacy sidebar helpers
<code>get_page_title(page: Page) -> str</code>	Icon + label for page enum

Client-side navigation flow

Header navigation uses parent-frame JavaScript to click hidden Streamlit page links while showing a branded transition overlay.

Header navigation uses parent-frame JavaScript to click hidden Streamlit page links while showing a branded transition overlay.

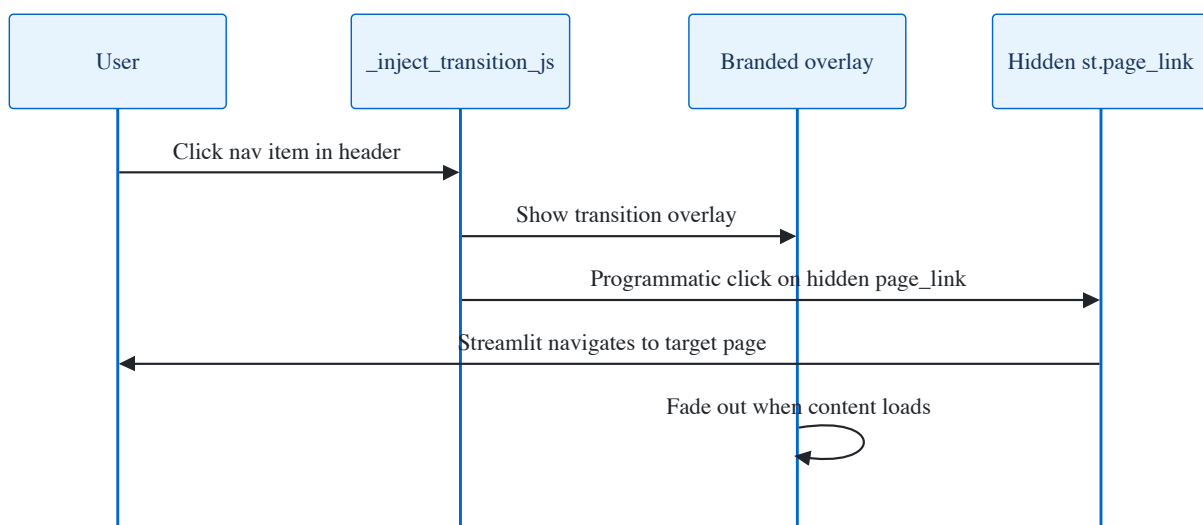

The transition overlay prevents the grey Streamlit skeleton flash during multipage navigation.

Navigation targets: `market_data` , `earnings_calls` , `earnings_calendar` , `screening` , `newsroom` .

ACL in footer

- **Staging links** (`APP_ENV=staging` + email allowlists): Retailer admin, Forecast admin
- **Access Management:** `_can_access_mgmt(user_email)` via `UserRolesManager.is_admin_or_super_user()` with hardcoded fallback admins

Session state side effects

- Sets `st.session_state["_active_page"]`
- Company selector updates `active_ticker` and `st.query_params["ticker"]`

Usage by pages

All authenticated pages except `login.py` , `logs.py` , `company_filings_add_files.py` , `retailer_adding.py` , `logout_bridge.py` import `render_header` + `render_coresight_footer` .
`market_data.py` also imports `render_company_header` .

Dependencies

- `components.styles` — design tokens
- `core.auth_manager` — `is_authenticated` , `get_current_user`
- `core.access_control.UserRolesManager` — footer ACL (lazy import)
- `data.forecast_admin_service.is_forecast_admin` — staging forecast admin link
- `data.repository.CompanyRepository` — company list for selector (lazy in `render_company_header`)

`toolbar.py` — Market Data Tab Bar

Purpose: Horizontal tab bar for the Market Data page (10 tabs). Active tab renders as a styled label; inactive tabs are `st.button` widgets that set `st.query_params["tab"]` .

Public API

Function	Purpose
<code>render_tabs(selected_tab: str) -> str</code>	Renders tab row; returns selected tab key

Tab keys

Key	Label	Notes
<code>company_profile</code>	Company Profile	
<code>key_stats</code>	Key Stats	
<code>income_statement</code>	Income Statement	
<code>balance_sheet</code>	Balance Sheet	
<code>cash_flow</code>	Cash Flow	
<code>ratios</code>	Ratios	
<code>estimates</code>	Estimates	
<code>forecasting</code>	Forecasting	"Testing in Progress" badge
<code>segment_data</code>	Segment Data	"Testing in Progress" badge
<code>ratings</code>	Ratings	"Testing in Progress" badge

Tab selection flow

Market Data tab changes persist in query params and local storage, then rerun the page to load the selected tab content.

Market Data tab changes persist in query params and local storage, then rerun the page to load the selected tab content.



Consumers

- `pages/market_data.py` — primary
- `utils/market_data.py` — deprecated duplicate

Dependencies

- `utils.local_storage.set_marketdata_tab`

companyProfile.py — Company Profile Tab Content

Purpose: Renders the Company Profile tab on Market Data — Figma-matched info table, business description, reference expander, and Excel export row builder.

Public API

Function	Purpose
<code>get_company_css() -> str</code>	Page-scoped CSS for profile tables
<code>render_info_table(company: CompanyOverview) -> str</code>	4-column HTML info table (hides sector/industry in main table)
<code>render_business_description(description) -> str</code>	Business description HTML block
<code>render_reference_table(company) -> str</code>	Sector/Industry reference table (in expander)
<code>get_profile_rows_for_excel(company) -> list</code>	<code>[(label, plain_value), ...]</code> for Excel export
<code>render_company_profile_content(company)</code>	Streamlit render: info + description + "For Reference" expander
<code>render_company_profile(ticker="M")</code>	Standalone page path (header + Database (DB) fetch)
<code>object_to_dict</code> , <code>company_to_label_value</code> , <code>format_market_cap</code> , <code>to_title_case</code>	Formatting helpers


Internal constants

- `HIDDEN_FIELDS` — sector, industry, CIK, etc. excluded from main table
- `LABEL_MAP` — display overrides (e.g. `"Pe Ratio"` → `"P/E Ratio"`)

Data flow

Company Profile loads overview data from the repository layer and renders HTML table blocks for the active ticker.

Company Profile loads overview data from the repository layer and renders HTML table blocks for the active ticker.

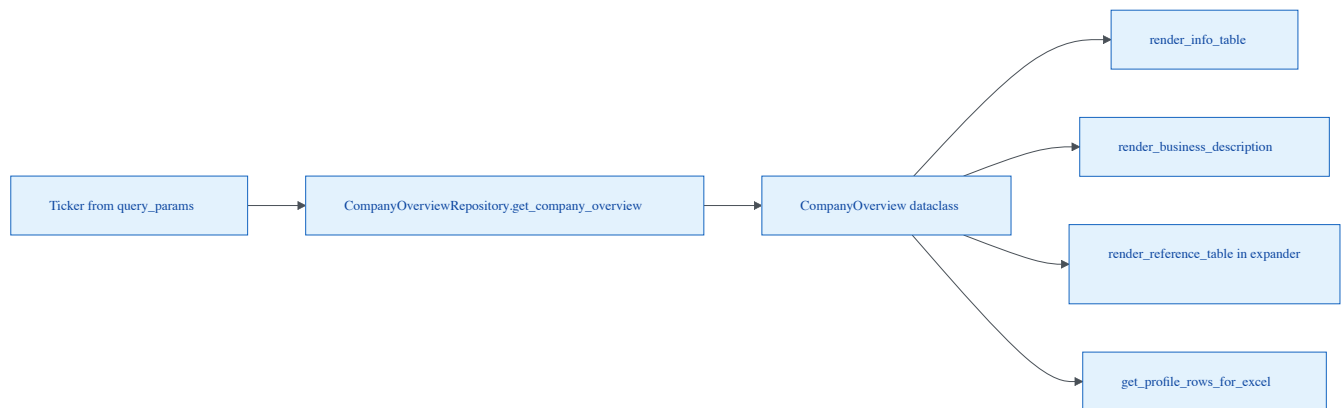

Consumers

- `pages/market_data.py` — primary integration hub
- `utils/market_data.py`, `utils/companyProfile.py` — legacy duplicates

Dependencies

- `data.models.CompanyOverview`
- `data.repository.CompanyOverviewRepository`
- `utils.constants` — currency, exchange, country formatters

`loading.py` — Branded Spinners & Overlays

Purpose: Coresight-red (`#D62E2F`) spinner CSS, full-screen overlays, skeleton placeholders, and Azure filing scan progress overlay.

Public API

Function	Purpose
<code>inject_red_spinner_css()</code>	Global CSS override for <code>stSpinner</code>
<code>show_loading_overlay(message, submessage, show_progress, progress_percent)</code>	Full-screen branded overlay
<code>hide_loading_overlay()</code>	No-op placeholder (overlay clears on rerun)
<code>show_inline_loading(message)</code>	Inline spinner row
<code>show_skeleton_card()</code> / <code>show_skeleton_text(lines)</code>	Placeholder skeletons
<code>show_progress_bar(label, percent, show_percent)</code>	Styled progress bar
<code>show_red_spinner(text)</code>	Context manager wrapping <code>st.spinner</code>
<code>render_scan_progress_overlay(progress: dict)</code>	Azure filing scan progress from <code>background_scanner</code>

Consumers

Page	Usage
<code>company_filings.py</code>	Lazy import; <code>inject_red_spinner_css()</code>
<code>forecasting.py</code>	<code>inject_red_spinner_css()</code>
<code>forecasting_admin.py</code>	<code>inject_red_spinner_css()</code> (2 call sites)

`tables.py` — Reusable Data Tables (Library)

Purpose: Typed `st.dataframe` wrappers with column formatting presets. **Not currently imported by any page** — pages build tables inline.

Formatters

Function	Output example
<code>format_currency(value, decimals=2)</code>	\$1,234.56
<code>format_percentage(value, decimals=2)</code>	Colored HTML <code>+/-X.XX%</code>
<code>format_number(value, decimals=0)</code>	Thousand separators
<code>format_volume(value)</code>	K/M/B suffix
<code>format_market_cap(value)</code>	<code>\$X.XXB/T/M</code>
<code>format_datetime</code> / <code>format_date</code>	Date formatting

Table builders

Function	Preset for
<code>create_data_table(data, columns_config, ...)</code>	Generic styled dataframe
<code>create_sec_filings_table(filings_data, ...)</code>	U.S. Securities and Exchange Commission (SEC) filings
<code>create_market_data_table(market_data, ...)</code>	Market data quotes
<code>create_news_table(articles, ...)</code>	News articles
<code>render_sortable_header(columns, sort_column, sort_order, on_sort)</code>	Clickable sort header row

`charts.py` — Plotly Chart Builders (Library)

Purpose: Plotly `go.Figure` factories with design-system colors. **Not currently imported by any page** — pages build Plotly charts inline.

Constants

- `CHART_CONFIG` — mode bar config (no logo, no lasso)
- `CHART_LAYOUT` — transparent bg, Inter font, margins

Public API

Function	Chart type
<code>create_candlestick_chart(metrics, title, height)</code>	OHLC + volume subplots
<code>create_line_chart(data, x_column, y_columns, ...)</code>	Multi-line
<code>create_bar_chart(...)</code>	Bar (horizontal option)
<code>create_pie_chart(...)</code>	Pie/donut (<code>hole=0.4</code>)
<code>create_area_chart(...)</code>	Area with gradient fill
<code>render_chart(fig, width, key)</code>	<code>st.plotly_chart</code> wrapper

Dependency: `data.models.MarketMetric`

`layout.py` — Layout Primitives (Library)

Purpose: Generic cards, metrics, badges, empty states, tabs, filters, pagination. **Not currently imported by any page.**

Function	Purpose
<code>render_card(content, title, ...)</code>	Styled HTML card
<code>render_metric_card(label, value, change, ...)</code>	KPI metric card
<code>render_badge(text, variant, icon)</code>	Pill badge
<code>render_empty_state(title, description, icon, action_label, action_callback)</code>	Centered empty state
<code>render_loading_skeleton(height)</code>	Pulsing placeholder
<code>render_tabs(tabs_config, default_tab)</code>	<code>st.tabs</code> with render callbacks (different from <code>toolbar.render_tabs</code>)
<code>render_filter_bar(filters, on_change)</code>	Filter bar shell
<code>render_pagination(current_page, total_pages, on_page_change)</code>	Prev/Next pagination

`auth_utils.py` — Legacy Auth (Dead Code)

Purpose: Pre-OpenID Connect (OIDC) cookie-based auth via `streamlit_cookies_controller`.

Superseded by `app/core/auth_manager.py`. No imports from `app/pages/` or `app/utils/`.

Function	Notes
<code>require_auth(redirect_to="login.py")</code>	Legacy guard
<code>login_user(...)</code> , <code>logout()</code>	Cookie + DB session
<code>restore_session_from_cookie()</code>	Cookie hydration
<code>create_db_connection()</code>	Direct <code>mysql.connector</code> (legacy env vars)

Do not use for new code. Uses stdlib `logging` (violates `server_logger` convention).

`__init__.py`

Package marker: `"""UI components module."""`

Cross-Cutting Patterns

1. Design tokens in inline HTML

Content-heavy pages (`newsroom`, `earnings_calls`, `market_data`) import `COLORS`, `TYPOGRAPHY`, `SPACING` directly for bespoke HTML blocks rather than using `layout.py`.

2. Market Data integration hub

Only `market_data.py` combines all three Market Data components:

```
render_company_header → render_tabs → render_company_profile_content (and other tab renderers)
```

3. Duplicate utility modules

`app/utils/market_data.py` and `app/utils/companyProfile.py` mirror page logic and import the same components. Treat as deprecated entry points.

4. Early skeleton suppression

`main.py` injects skeleton-hide CSS at the top of every run. `navigation._inject_transition_js()` adds the branded overlay. Together they eliminate Streamlit's grey loading flash.

Component → Page Consumer Matrix

Component	Pages using it
<code>styles.hide_sidebar</code>	17 pages
<code>styles.render_styles</code>	16 pages
<code>navigation.render_header</code>	15 pages
<code>navigation.render_coresight_footer</code>	15 pages
<code>toolbar.render_tabs</code>	<code>market_data</code>
<code>companyProfile.*</code>	<code>market_data</code>
<code>loading.inject_red_spinner_css</code>	<code>company_filings</code> , <code>forecasting</code> , <code>forecasting_admin</code>
<code>tables.*</code>	—
<code>charts.*</code>	—
<code>layout.*</code>	—
<code>auth_utils.*</code>	—