



Home Page — Technical Documentation

Coresight Research Portal — Technical Documentation

Document version: 1.0

Generated: June 29, 2026

Classification: Internal — Engineering Reference

CONFIDENTIAL — INTERNAL USE ONLY — DO NOT DISTRIBUTE

This document contains proprietary information belonging to Coresight Research. Unauthorized disclosure, copying, or distribution is strictly prohibited.

Table of Contents

Home Page — Technical Documentation	1
Overview	3
URL / Route	3
Dependencies	4
UI Components	6
Session State Keys	8
Data Layer	9
Business Logic	12
Error Handling	13
ACL / Permissions	13
Flowcharts	13

Source: `app/pages/home.py`

URL: `/home`

Purpose: Post-login landing dashboard — company/sector entry points to the Market Data portal. Primary navigation hub with "View by Company" (active) and "View by Sector" (coming soon).

Overview

The home page presents the **CORESIGHT MARKET DATA** title and two side-by-side cards:

1. **View by Company** — selectbox of all companies from `coreiq_companies` ; navigates to Market Data → Company Profile tab.
2. **View by Sector** — User Interface (UI) placeholder only; selectbox and button are **disabled** with "Coming Soon" tooltip.

On module load, the page also triggers **intelligent background filings scan** initialization (non-blocking) and loads the company list from the database (cached 5 minutes).

Auth note: Authentication is enforced via `main.py` central bootstrap (`is_authenticated()` hydrates session from cookie) and the user's journey through login. Page-level `require_auth()` may be enabled for direct-route protection.

URL / Route

Route	Parameters	Behavior
<code>/home</code>	—	Render home dashboard
<code>/home</code>	<code>login_handoff=1</code>	Handled by <code>main.py</code> before page runs; params stripped after cookie verify

Registered in `main.py` : `st.Page("pages/home.py", title="Home", url_path="home", default=False)`

Dependencies

Python modules

Import	Role
<code>components.styles.hide_sidebar</code>	Hide Streamlit sidebar
<code>components.styles.render_styles</code>	Inject global design-token CSS
<code>components.navigation.render_header</code>	Coresight nav header (<code>current_page="home"</code>)
<code>components.navigation.render_coresight_footer</code>	Full-width footer with staging/admin links
<code>core.auth_manager.require_auth</code>	Available for page-level enforcement
<code>data.repository.CompanyRepository</code>	<code>get_companies()</code> for selectbox
<code>utils.local_storage.set_marketdata_tab</code>	Persist selected Market Data tab
<code>utils.local_storage_manager.set_persistent_state</code>	Imported (available for cross-session state)
<code>utils.local_storage_manager.save_market_data_state</code>	Sync session → local storage
<code>utils.server_logger</code>	<code>log_structured_error</code> , <code>log_error</code> , <code>error_boundary</code>
<code>utils.background_scanner</code>	<code>init_background_scanner</code> , <code>get_cache_audit</code> , <code>ensure_cache_purge</code>

Component deep-dive: `components/styles.py`

Function	Used on home?	Behavior
<code>hide_sidebar()</code>	Yes (module level)	Cached CSS hides <code>[data-testid="stSidebar"]</code> , removes top padding
<code>render_styles()</code>	Yes (<code>main()</code>)	Injects <code>get_global_css()</code> once per session (<code>_cached_global_css</code>)
<code>COLORS</code> , <code>TYPOGRAPHY</code> , etc.	Indirect	Design tokens in global CSS

Component deep-dive: `components/navigation.py`

Function	Parameters on home	Behavior
<code>render_header</code>	<code>full_width=True</code> , <code>current_page="home"</code>	80px sticky header, logo, nav links (Market Data, Earnings Calls, Earnings Calendar, Screening, News), Logout (<code>?action=logout</code>)
<code>render_coresight_footer</code>	<code>full_width=True</code> , <code>stick_to_bottom=True</code>	4-column footer; staging-only links (Azure File Storage, Add Retailers); Access Management for admins

Header side effects:

- Sets `st.session_state["_active_page"] = "home"`
- Injects `_inject_transition_js()` for client-side nav overlay (parent document)
- Renders hidden `st.page_link` widgets for SPA-style navigation

Footer Access Control List (ACL) (conditional links):

Link	Condition
Azure File Storage	<code>APP_ENV=staging</code>
Add Retailers	Staging + email in retailer allowlist
Access Management	<code>_can_access_mgmt(user_email)</code> — admin/super_user role

UI Components

Page structure

```

hide_sidebar()                [module init]
Background scanner init       [module init, try/except]
_load_companies() → COMPANIES [module init, @st.cache_data 300s]

main():
  |— Inline page-specific CSS (Montserrat/Roboto, cards, selectboxes)
  |— render_styles()
  |— render_header(current_page="home")
  |— H1 "CORESIGHT MARKET DATA"
  |— st.columns [1, 2, 2, 1]
  |   |— col1: View by Company card
  |   |— col2: View by Sector card (disabled)
  |— Spacer 100px
  |— render_coresight_footer(stick_to_bottom=True)

```

Card 1 — View by Company

Element	Widget / HyperText Markup Language (HTML)	Key / ID
Card title	HTML <code><p></code>	"View by Company"
Company select	<code>st.selectbox</code>	<code>company_select</code>
Options	<code>[ticker for (ticker, name) in COMPANIES]</code>	<code>format_func</code> shows <code>name</code>
Placeholder	"Select a Company"	<code>index=None</code>
View button	<code>st.button("View ↗")</code>	<code>view_company_btn</code> — only if company selected
Disabled View	HTML grey button + SVG	Shown when no company selected

Selectbox styling: White background, 40px height, red focus border `#D62E2F`.

Button styling: Red `#D62E2F`, Montserrat 700, 41px height, full width.

Card 2 — View by Sector

Element	State
Sector select	<code>disabled=True</code> , <code>key="sector_select"</code>
Options	<code>SECTORS</code> constant (4 retail sectors)
View button	Static HTML grey + "Coming Soon" hover tooltip

SECTORS constant:

```
["Apparel & Footwear", "Department Stores", "Discount Stores", "Luxury Goods"]
```

Typography / layout CSS (inline in `main()`)

- Title: Montserrat 700, 39px, `#D62E2F`, centered, 96px top margin

- Cards: columns 2 & 3 get #EBEBEB background, 357px width, 8px radius
- Fonts loaded: Google Fonts Roboto + Montserrat

Session State Keys

Key	Set by	Purpose
home_company	Selectbox change	Last selected company ticker (or None)
home_sector	Module init in main()	Default SECTORS[0] (sector UI unused)
active_ticker	When company selected	Cross-page ticker sync for header/nav
selected_tab_market_data	View button click	Set to "company_profile" before navigation
company_select	Streamlit widget state	Selectbox value
sector_select	Streamlit widget state	Disabled selectbox
_active_page	render_header	"home"
_cached_global_css	render_styles	Cached global CSS string
_cached_sidebar_css	hide_sidebar	Cached sidebar hide CSS

Local storage (browser)

Function	Key / effect
set_marketdata_tab("company_profile")	StorageKey.MARKETDATA_SELECTED_TAB via utils.local_storage
save_market_data_state()	Persists market data related session fields to local storage manager

Ticker is **not** saved to local storage on home — comment notes it is passed via query params on navigation (`market_data.py` reads session `active_ticker`).

Data Layer

Primary query path

Figure 1 Part A — Repository call chain

Figure 1 Part A — Repository call chain


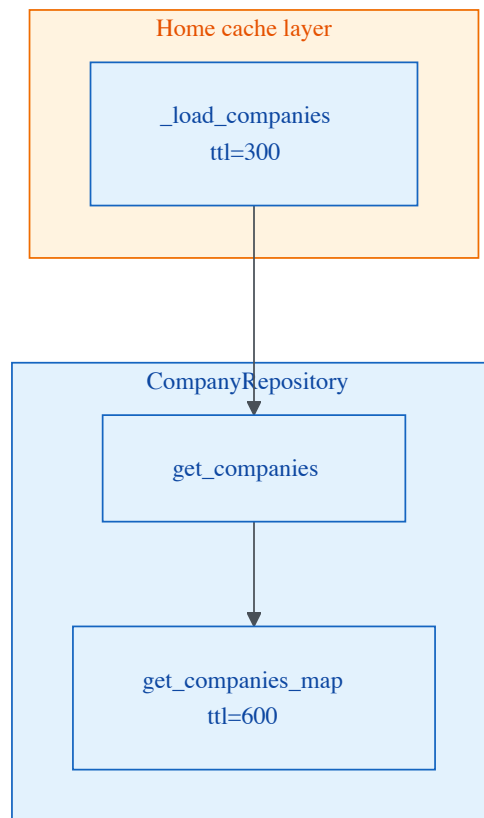


Figure 1 Part B — Database read

Figure 1 Part B — Database read

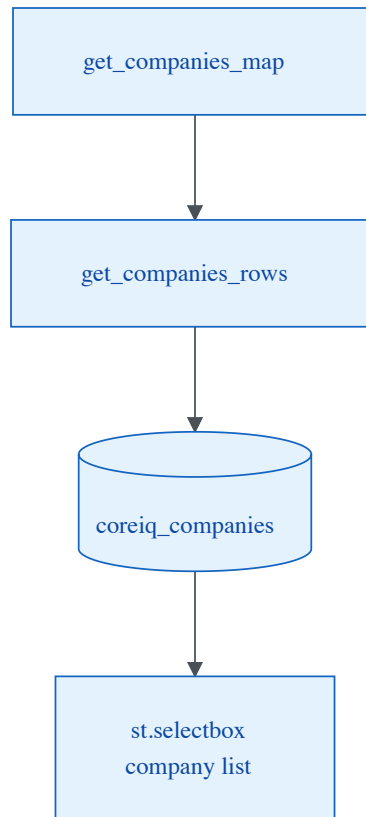

`CompanyRepository.get_companies()`

- **Cache:** `@st.cache_data(ttl=600)` on `get_companies_map` / rows (home wraps with own `@st.cache_data(ttl=300)` on `_load_companies`)
- **Returns:** `List[Dict[str, str]]` with `ticker` and `name` (display = `name_coresight`)
- **Deduplication:** Skips base-ticker duplicates when composite ticker exists (e.g. prefers `ADS.DE` over `ADS`)
- **Sort:** Alphabetical by display name (case-insensitive)

Underlying Structured Query Language (SQL) (`get_companies_rows`)

```
SELECT ticker,  
       name,  
       name_coresight,  
       exchange,  
       source,  
       exchange_acronym,  
       primary_industry_coresight,  
       country_of_incorporation  
FROM coreiq_companies;
```

Table: `coreiq_companies`

Access: `db_manager.execute_query_readonly` (read engine, AUTOCOMMIT, 1 RTT)

Home-level cache


```
@st.cache_data(ttl=300)  
def _load_companies():  
    rows = CompanyRepository.get_companies()  
    return [(r['ticker'], r['name']) for r in rows]
```

On Database (DB) failure: logs error, returns `[]` (empty selectbox).

Business Logic

Module init — background filings scanner

Module init — background filings scanner

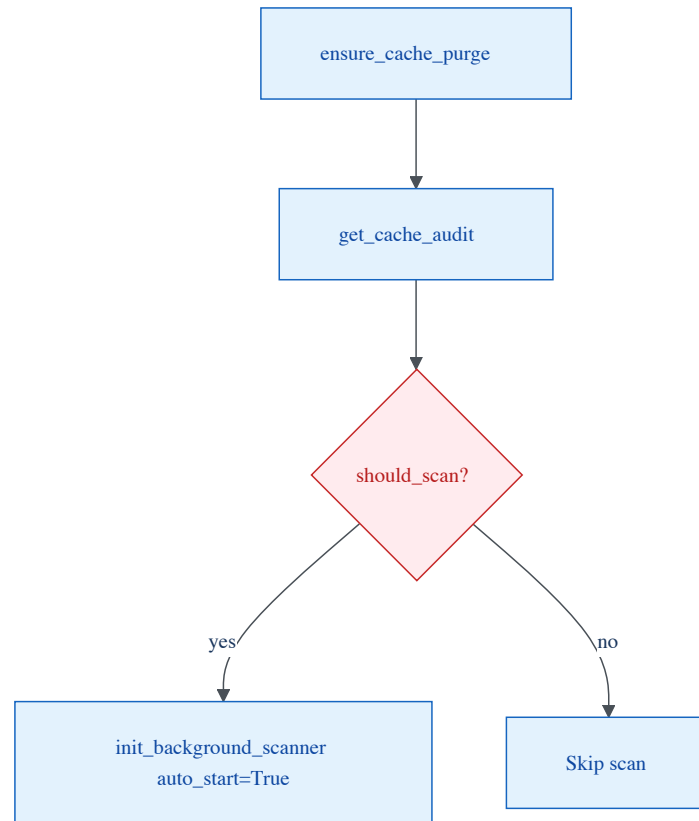

- **ensure_cache_purge** : One-time stale cache purge (marker file `.cache_purge_v1_done`)
- **get_cache_audit** : Checks local blob/metadata cache health
- **Non-blocking**: Runs in try/except; failure logged, page still renders

Also started from `main.py` when authenticated (`APP_BG_SCANNER_STARTED` guard) — home init is a **second intelligent entry point** for users landing here first.

View by Company navigation

View by Company navigation



Sector card

No business logic — purely presentational placeholder for future sector-level dashboards.

Error Handling

Location	Failure	User impact
<code>bg_scan_init</code>	Exception	Logged; page continues
<code>_load_companies</code>	DB error	Empty company list
Module <code>COMPANIES</code> load	Exception	<code>COMPANIES = []</code>
<code>main()</code>	Exception	<code>st.error</code> "An unexpected error occurred" + <code>st.stop()</code>
Outer <code>main()</code> call	Exception	<code>st.error</code> "Something went wrong"

All errors use `log_structured_error` with `page="home"` and component/operation tags.

ACL / Permissions

Page-level: Identity via `main.py` cookie hydrate; `require_auth()` optional at page level.

Footer / header: Conditional admin/staging links per `navigation.py` (see above).


Data: Company list is not filtered per-user on home — full `coreiq_companies` universe. Page-level ACL on other routes may restrict features after navigation.

Flowcharts

Page load sequence

Visual reference for cross-module authentication and request lifecycle flows.

Visual reference for cross-module authentication and request lifecycle flows.

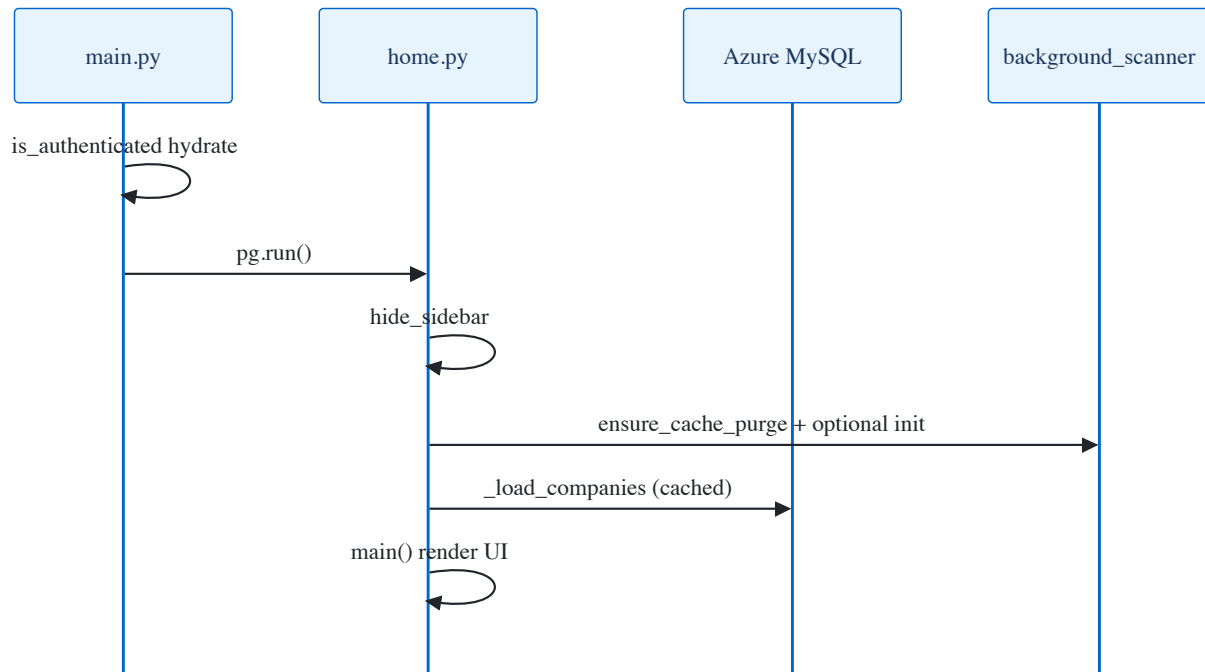

User interaction — company → market data

Figure 2 Part A — Company selection

Figure 2 Part A — Company selection


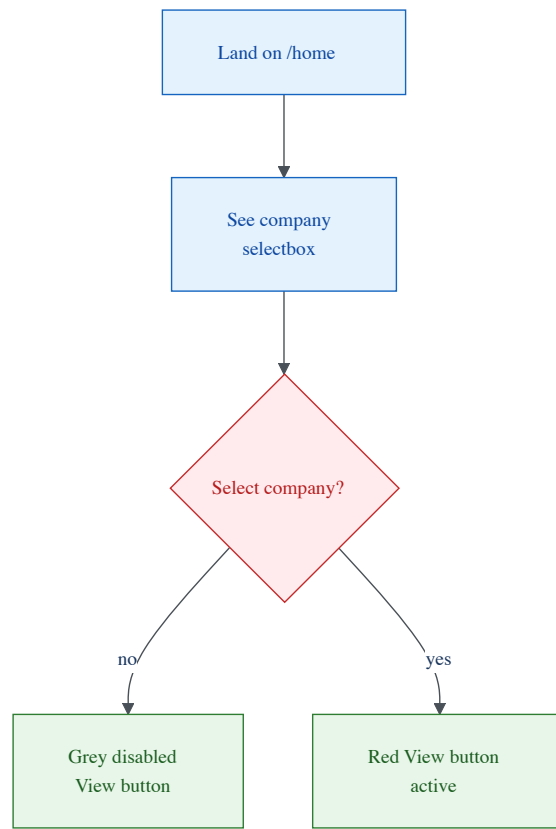


Figure 2 Part B — Navigate to market data


Figure 2 Part B — Navigate to market data

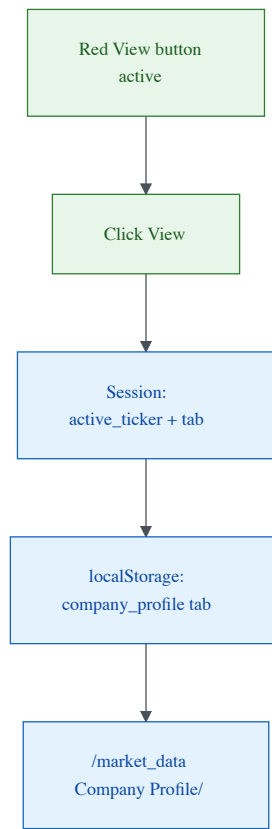

Data flow

Company Profile loads overview data from the repository layer and renders HTML table blocks for the active ticker.

Company Profile loads overview data from the repository layer and renders HTML table blocks for the active ticker.

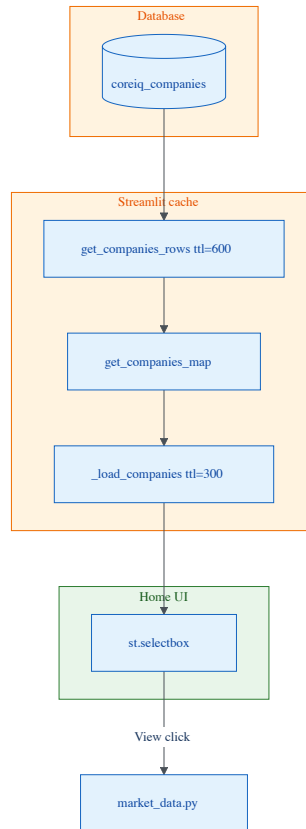

Key code references

Concern	Lines (approx.)
Module imports and auth setup	1–14
Background scanner init	16–41
<code>_load_companies</code> + COMPANIES	43–58
<code>main()</code> UI + navigation	60–248
Sector placeholder	198–241
Error wrappers	245–254

Environment variables

Variable	Effect on home
<code>APP_ENV=staging</code>	Footer shows staging-only links
<code>ENABLE_BG_SCANNER</code>	Also gates scanner in <code>main.py</code> (redundant with home init)

Related pages

Page	Relationship
<code>login.py</code>	Redirect target after auth (<code>/home</code>)
<code>market_data.py</code>	Destination on "View" click
<code>main.py</code>	Auth bootstrap, scanner warmup when authenticated

Generated from source analysis of `app/pages/home.py` and traced components.