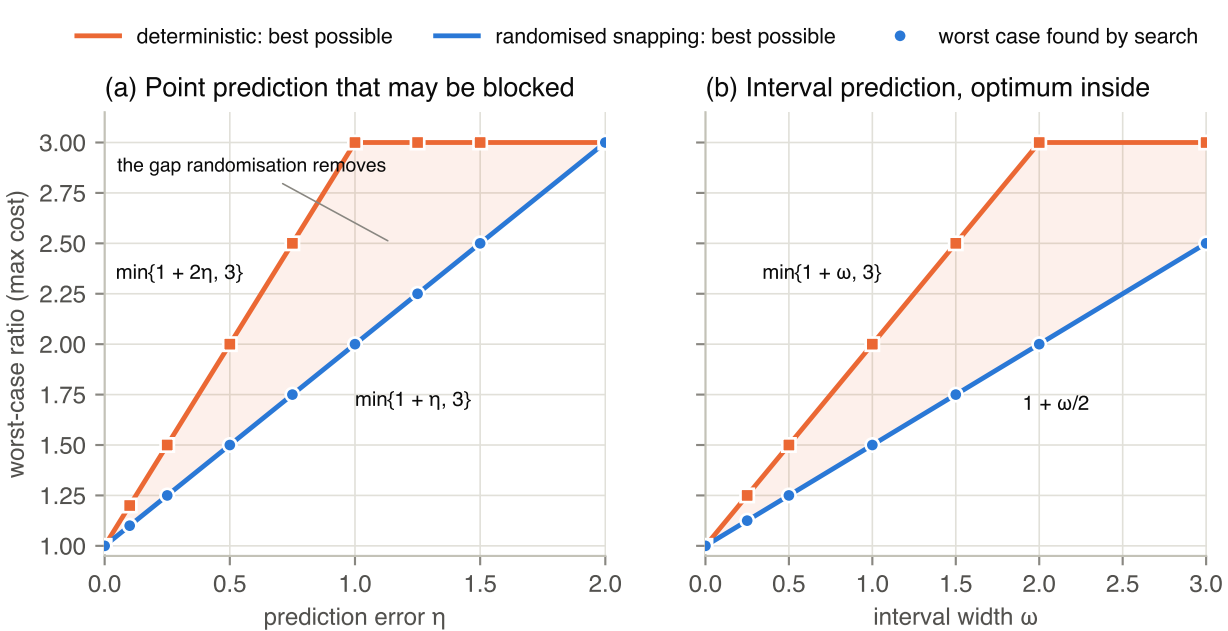
deterministic: best possible
randomised snapping: best possible
worst case found by search
(a) Point prediction that may be blocked
(b) Interval prediction, optimum inside
the gap randomisation removes
min{1 + 2η, 3}
min{1 + η, 3}
min{1 + ω, 3}
1 + ω/2
worst-case ratio (max cost)
prediction error η
interval width ω
1.00
1.25
1.50
1.75
2.00
2.25
2.50
2.75
3.00
0.0
0.5
1.0
1.5
2.0
2.5
3.0