# LIBSPACE

## Project Title

**LIBSPACE**-ARobust Backend For Library Operations

**Team ID :** SWTID-2026-8399

**Team Size :** 4

**Team Leader :** SAFRIN FATHIMA A safrinmubina@gmail.com

**Team member :** RAJESHWARI K vijaysha07102001@gmail.com

**Team member :** PREETHIKA SREE K preethikasree6@gmail.com

**Team member :** RAASHMICA A araashmica@gmail.com

1. Project Overview

LibSpace is a microweb-basedlibrarymanagement system that provides secure user authentication andbasic book management features. The application allows users to register, log in, log out, and delete their accounts. Once authenticated, users can perform CRUD (Create, Read, Update, Delete) operations on books, including adding new books, viewing the list of books, updating book details, and deleting books.

The main goal of LibSpace is to demonstrate authentication flow and CRUD operations while backend, and database functionalities in a structured manner.

2. Project Instructions – LibSpace

1. Registera new useraccountusingthe registration form.
2. Log in with the registered credentials to access the dashboard.

3. After successful login, perform book management operations:

    - Add a new book.
    - View the list of available books.
    - Get book by ID
    - Update book details.
    - Delete a book.

4. Users can log out securely after completing operations.
5. Users also have the option to delete their account permanently from the system.

Thesei nstructions describe how the system should be used once it is running.

## Pre-requisites

Before running or developing LibSpace, ensure the following:

- Basic knowledge of:
    - JavaScript
    - Backend concepts (e.g., Node.js / Express)
    - Database fundamentals (CRUD operations)
- Software Requirements:
    - Node.js and npm installed
    - Database setup (MongoDB / MySQL)
    - Code editor (e.g., VS Code)
    - Web browser (Chrome/Firefox)

- Basic understanding of:
    - REST APIs
    - Authentication (sessions or JWT)
    - Environment variables configuration

3. Project Architecture

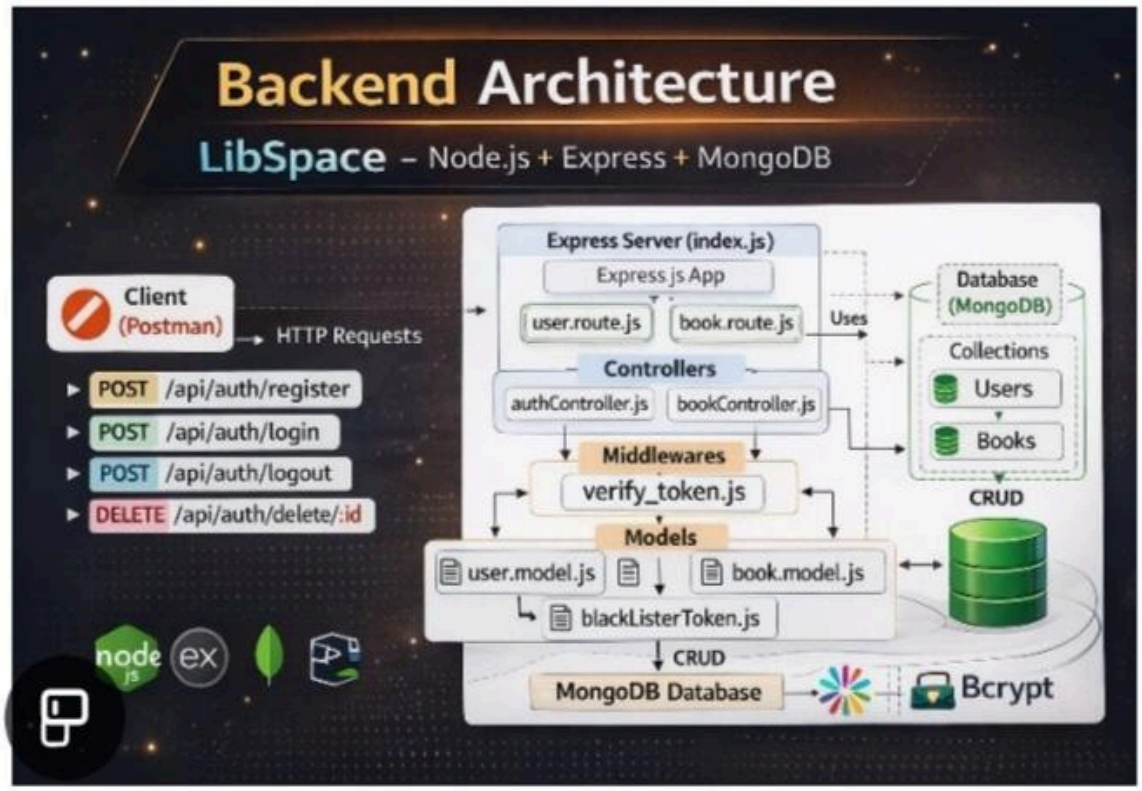

## Technical Architecture

LibSpace follows a Layered Backend Architecture consisting of:

1. API Layer (Routes)
2. Business Logic Layer (Controllers)
3. Data Access Layer (Models / Database)

This structure ensures clean code organization, scalability, and maintainability.

1. API Layer (Routes):

The API layer handles incoming HTTP requests and defines application endpoints.

- Built using: Node.js + Express.js
- Responsible for:
  - Defining routes (e.g., /register, /login, /books)
  - Mapping routes to controllers
  - Handling HTTP methods (GET, POST, PUT, DELETE)
  - Applying middleware (authentication, validation)

Example Endpoints:

- POST Register User
- POST Login User
- DELETE Delete User
- POST Add Book
- GET Fetch Books
- PUT Update Book
- DELETE Delete Book

2. Business Logic Layer (Controllers):

The controller layer contains the core application logic.

Responsibilities:

- Processing user registration and login
- Password hashing (e.g., bcrypt)
- Token generation (JWT) / session handling
- Implementing CRUD operations for books
- Validating request data
- Handling errors and sending responses

This layer acts as a bridge between routes and database.

3. Data Access Layer (Models / Database):

The data layer manages persistent storage.

- Database: MongoDB / MySQL
- Models define schema structure for:
    - Users (username, email, password)
    - Books (title, author, published_date, etc.)

Responsibilities:

- Executing database queries
- Storing and retrieving data
- Maintaining data integrity

4. Request Flow:

1. Client sends HTTP request to API endpoint.
2. Route receives the request and forwards it to the controller.
3. Controller processes business logic.
4. Controller interacts with the database via models.
5. Database returns data to controller.
6. Controller sends structured JSON response back to client.

## ER Diagram:

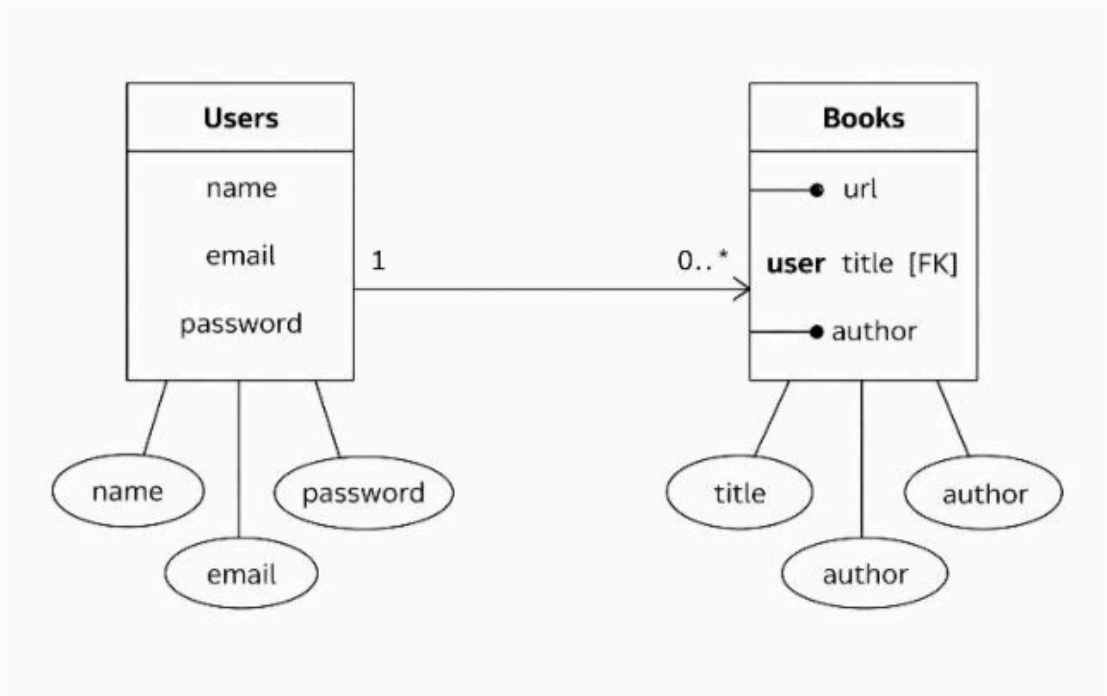

## Features:

1. User Authentication

- User Registration (name, email, password)
- Secure password storage (hashed password)
- User Login with credential verification
- Token-based authentication (JWT)
- Delete User Account
- Automatic timestamps (createdAt, updatedAt)

2. Book Management (CRUD Operations)

Each book is linked to a specific user using a reference (user: ObjectId).

- Add a new book (url, title, author)
- Get all books of a specific user
- Get book by ID
- Update book details
- Delete a book
- Books are protected and accessible only to the authenticated user

3. User–Book Relationship

- One-to-Many Relationship:
  - One User Can have multiple Books
  - Each Book Belongs to one User (via ObjectId reference)
- Maintains data integrity using MongoDB references

4. Security & Validation

- Input validationforrequired fields
- Protected routesusing authentication middleware
- Error handlingforinvalid requests
- Unauthorizedaccess prevention

5. RESTful API Design

- Follows REST principles
- Uses standard HTTP methods:
  - POST
  - GET
  - PUT
  - DELETE
- Returns structured JSON responses

## Roles and Responsibilities:

Requirement Analysis

- Understanding project requirements (authentication + book CRUD).
- Designing database schema for Users and Books.
- Defining relationship between User and Book (One-to-Many).

Database Design

- Creating Mongoose schemas:
  - User Schema (name, email, password, timestamps)
  - Book Schema (url, title, author, user reference)
- Establishing ObjectId reference between Book and User.
- Ensuring data consistency and integrity.

API Development

- Developing RESTful API endpoints.
- Implementing:
  - User Registration
  - User Login
  - Delete User
  - Add Book
  - Get Books
  - Update Book
  - Delete Book

- Structuring routes andcontrollers properly.

## Authentication & Security

- Implementing password hashing (bcrypt).
- Generating JWT tokens for authentication.
- Protecting private routes using middleware.
- Handling unauthorized access and validation errors.

Error Handling & Validation

- Validating required fields.
- Handling invalid credentials.
- Managing database errors.
- Returning structured JSON responses.

Testing & Debugging

- Testing APIs using Postman.
- Verifying CRUD operations.

- Fixing bugs and ensuring proper response status codes.

# User Flow – LibSpace Backend

The user flow describes how a user interacts with the system APIs step-by-step.

## 1 User Registration

- User sends aPOST request to /api/auth/register
- System validates input fields (name, email, password)
- Password is hashed using bcrypt
- User data is stored in the database
- Success response is returned

## 2 User Login

- Usersends a POST request to /api/auth/login
- System verifies email and password
- If valid, a JWT token is generated
- Token is sent back in the response
- User is now authenticated

## 3 Access Protected Routes

User sends requests with:

Authorization: Bearer <token>

- 
- Middleware verifies JWT
- If valid request proceeds
- If invalid access denied

## 4 Book Operations (After Login)

Authenticated user can:

- Add Book POST /api/book/add
- Get Books GET /api/book
- Update Book PUT /api/book/:id
- Delete Book DELETE /api/book/:id Each book is linked to the logged-in user.

## 5 Logout

- User sends request to /api/auth/logout
- Token is stored in blacklist
- User session becomes invalid

6 Delete User (Optional)

- User sends DELETErequest with userId
- Account is removed from database

## Overall Flow Summary

Register Login Receive Token Access Protected Routes Perform CRUD Logout

Authorization: Bearer <token>

## Project Setup and Configuration:

Folder Structure:

MY-LIBSPACE-MAIN/

Config/

db.js

controller/

authController.js

bookController.js

middlewares/

verify_token.js

models/

blackListerToken.js

book.model.js user.model.js

routes/

book.route.js

user.route.js

node_modules/

.gitignore index.js

package.json

package-lock.json

README.md

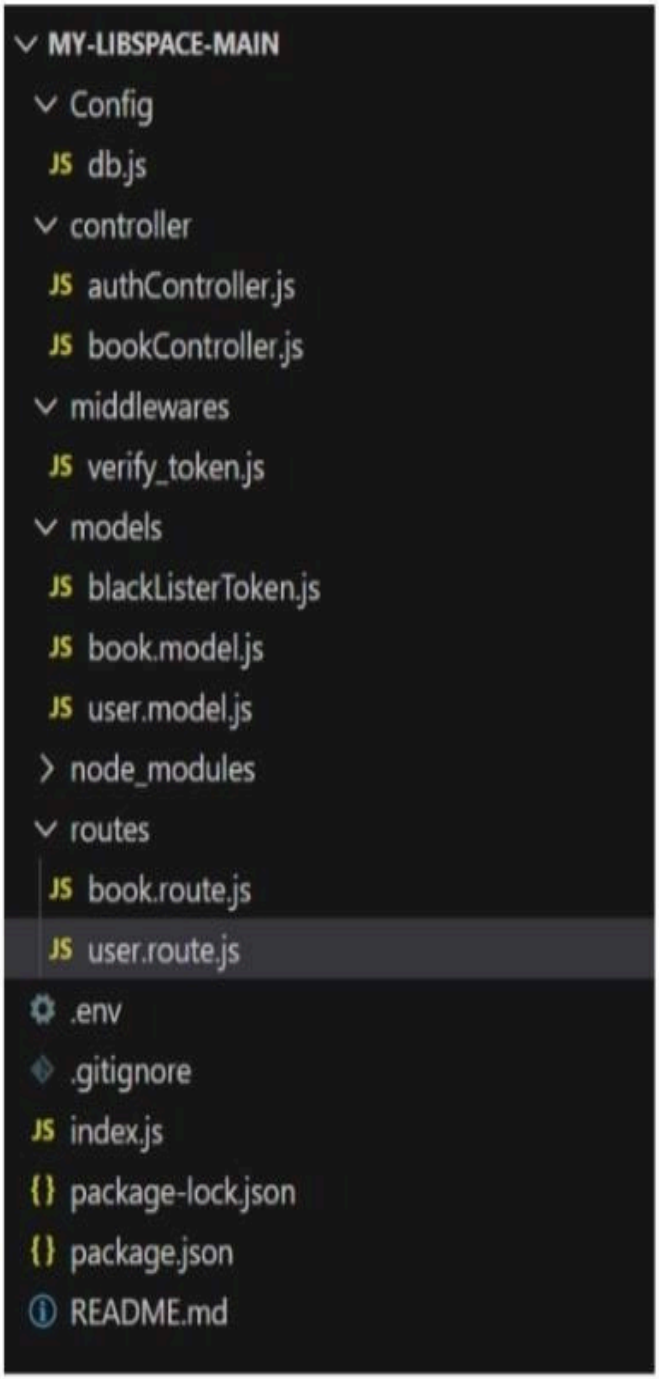
MY-LIBSPACE-MAIN
Config
db.js
controller
authController.js
bookController.js
middlewares
verify_token.js
models
blackListerToken.js
book.model.js
user.model.js
node_modules
routes
book.route.js
user.route.js
.env
.gitignore
index.js
package-lock.json
package.json
README.md

Project setup:

1.Install Dependecies

Install all required npm packages:

```
npm install
```

2. Configure Environment Variables

Create a .env file in the root directory and add the following:

```
PORT=5000

MONGO_URI=your_database_connection_string

JWT_SECRET=your_secret_key
```

- Replace your_database_connection_string with your MongoDB/MySQL connection string.
- Replace your_secret_key with any secure random string.

3. Start the Database

- Make sure MongoDB/MySQL is installed and running on your system. ● Verify the connection string matches your database configuration.

4. Run the Server

Start the application using:

```
npm

start
```

Or (if using nodemon):

```
npm

run dev
```

6 . Access the Application

Open your browser and navigate to: http://localhost:5000

The LibSpace application should now be running successfully.

## Backend Development

The backend of LibSpace is developed using Node.js and Express.js, following RESTful architecture principles. It handles authentication, business logic, database operations, and API responses. The backend ensures secure data handling, structured routing, and efficient communication with MongoDB.

1 API Development & Routing

The backend APIs are built using Express.js. Routes are structured into separate files for user and book operations to maintain modularity.

- User Routes handle:
  - Registration
  - Login
  - Logout
  - Delete User
- Book Routes handle:
  - Add Book

- Get Books
- Update Book
- Delete Book

Each route forwards requests to corresponding controllers where business logic is implemented.

2 Database Integration & Authentication

MongoDB is used as the database, integrated using Mongoose for schema modeling and data management.

- User passwords are securely hashed using bcrypt.
- JWT (JSON Web Token) is generated during login for authentication.
- Protected routes use middleware to verify tokens.
- A blacklist collection is maintained to invalidate tokens during logout.

This ensures secure access control and efficient data management within the backend system.

## DATABASE DEVELOPMENT:

The database for LibSpace is developed using MongoDB, a NoSQL documentbased database.

The application stores two main collections:

1. Users
2. Books

A one-to-many relationship is maintained:

- One User Can have multiple Books
- Each Book Belongs to one User (via ObjectId reference)

MongoDB stores data in JSON-like documents, making it flexible and scalable.

CONFIGURE MongoDB:

MongoDB is configured using Mongoose, an ODM (Object Data Modeling) library for Node.js.
Steps:

- Install mongoose:

```
npm install mongoose
```

- Create a database connection file inside Config/db.js
- Connect using MongoDB URI

Environment variable (.env):

```
MONGO_URI=mongodb://127.0.0.1:27017/libspace
```

CREATE DATABASE CONNECTION

File: Config/db.js

```
constmongoose=require("mongoose"); const

connection = mongoose.connect(process.env.MONGO_URI);

module.exports = { connection,
```

```
};
```

In index.js: const { connectionDB } = require("./Config/db");

```
app.listen(5000, async () => {
  try {
    await connectionDB;
console.log("Connected to Database");
  } catch (err) {    console.log("Database
connection failed");
  }
});
```

This ensures the server starts only after a successful database connection.

CREATE SCHEMA AND MODELS:

Schemas define the structure of documents inside MongoDB collections.

## User Schema

File: models/user.model.js

```
const mongoose = require("mongoose");

const userSchema = new mongoose.Schema(
  {
```

```
 name: { type: String, required: true },
email: { type: String, required: true },
password: { type: String, required: true },
  },
  { versionKey: false, timestamps: true }
);

const UserModel = mongoose.model("User", userSchema);

module.exports = UserModel;
```

Book Schema: File: models/book.model.js

```
const mongoose = require("mongoose");

const bookSchema = new mongoose.Schema({
  url: { type: String, required: true }, user:
{
    type: mongoose.Schema.Types.ObjectId,
    ref: "User",
required: true,
  },
```

```
title: { type: String, required: true },    author:

{ type: String, required: true },

});


const BookModel = mongoose.model("Book", bookSchema);


module.exports = BookModel;
```

Project Execution:

Project execution steps:

1.Install Dependencies

Open terminal inside the projectfolder and run: npm

install

This installs all required packages from package.json.

2. Start the Server

Run the following command: npm

start

OR (if using nodemon): npm

run dev

4 . Database Connection

When the server starts:

- connectDb() connects to MongoDB.

- If successful, the console displays:

Connected to Database

Our server is working at PORT :5000

5 .Test API Endpoints

Use Postman or any API testing tool to test the endpoints:

User Routes

- POST /api/auth/register

- POST /api/auth/login

- DELETE /api/auth/delete

Book Routes

- POST /api/book/add
- GET /api/book/
- PUT /api/book/:id
- DELETE /api/book/:id

Base URL: http://localhost:5000

Output Screenshots:

Outputonterminalonceserver starts:

## Output Screenshots:

Output on terminal once server starts:

```
> my-libspace-main@1.0.0 dev
  > node index.js

  Connected to Database

 [9:13:26 PM] Our server is working at PORT :5000

> @ imeJs/js:'node

                                          ⚑ node ✓
```

# User registration output:

libspace / **userRegister**

POST http://localhost:5000/api/authuser/register

Docs Params Authorization Headers (8) Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2     "name":"Sri Chandana",
3     "email": "chandana3@gmail.com",
4     "password": "123456"
5
6 }
```

Body Cookies Headers (7) Test Results 200 OK 851 ms 293 B

{} JSON Preview Visualize

```
1 {
2     "success": true,
3     "message": "User registered successfully!"
4 }
```

User Login output:

POST http://localhost:5000/api/authuser/login

Docs Params Authorization Headers (8) Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2     "email": "chandana3@gmail.com",
3     "password": "123456"
4 }
```

Body Cookies Headers (7) Test Results 200 OK 209 ms 739 B

{} JSON Preview Visualize


```
1 {
2     "msg": "Logged In Successfully",
3     "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.
          eyJpZCI6IjY5OTZiMDBhODZmMWE3MzQyYjlkMDYwNSIsImVtYWlsIjoiY2hhbmRhbmEzQGdtYWlsLmN
          3MTQ4MzQxMiwiZXhwIjoxNzcxNDg3MDEyfQ.MUTwlsM7iGGeZyEZmU3chsMBfOJhLHlpKCaccdRTZQs
4     "user": [
5         {
6             "_id": "6996b00a86f1a7342b9d0605",
7             "name": "Sri Chandana",
8             "email": "chandana3@gmail.com",
9             "password": "$2b$10$9OBW1X/3Q/.kqmjyFCLAoOq/Q2Z9RHg6fCQVhMZf80..z5wkVDydm",
10            "createdAt": "2026-02-19T06:39:07.014Z",
```

## Adding book:

libspace / **addBook**

POST http://localhost:5000/api/book/addbook

Docs Params Authorization Headers (9) Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2     "url":"www.libspacebook.com",
3     "title": "think like a monk",
4     "author": "jay shetty"
5 }
```

Body Cookies Headers (7) Test Results 200 OK 83 ms 268 B

{} JSON Preview Visualize

```
1 {
2     "msg": "Book added successfully"
3 }
```

## Get All books:

libspace / **getallBooks**

GET http://localhost:5000/api/book/getBooks

Docs Params Authorization Headers (7) Body Scripts Settings

Auth Type

Be...

Token

The authorization header will be automatically generated when you send the request. Learn more

Body Cookies Headers (7) Test Results 200 OK 38 ms 393 B

{} JSON Preview Visualize


```
[
    {
        "_id": "6996b28486f1a7342b9d060c",
        "url": "www.libspacebook.com",
        "user": "6996b00a86f1a7342b9d0605",
        "title": "think like a monk",
        "author": "jay shetty",
        "__v": 0
    }
]
```


Get book by ID:

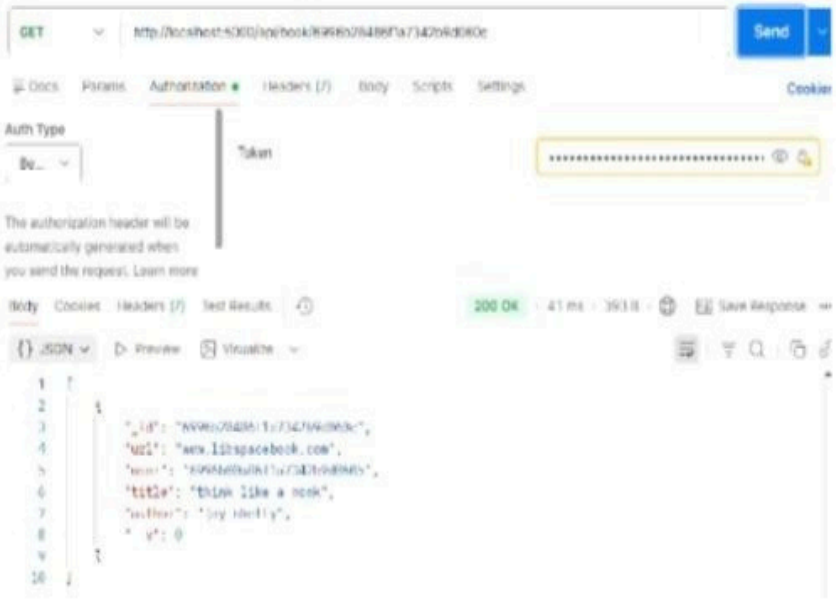
GET
Send
Docs
Params
Authorization
Headers (7)
Body
Scripts
Settings
Cookies
Auth Type
Token
The authorization header will be automatically generated when you send the request. Learn more
Body
Cookies
Headers (7)
Test Results
200 OK
Save Response
JSON
Preview
Visualize
"title": "think like a nook",

Update book:

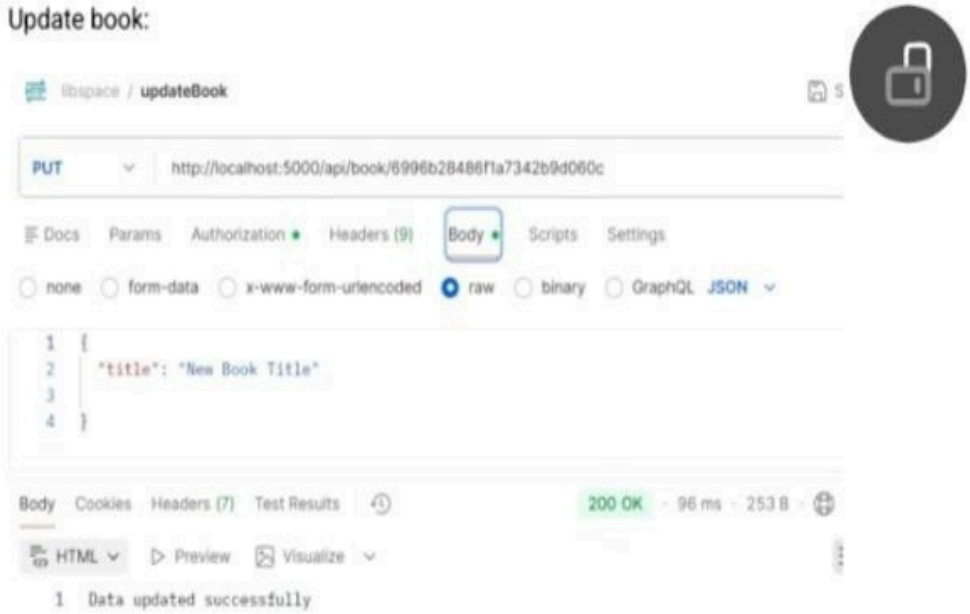
libspace / updateBook
PUT
http://localhost:5000/api/book/6996b28486f1a7342b9d060c
Docs
Params
Authorization
Headers (9)
Body
Scripts
Settings
none
form-data
x-www-form-urlencoded
raw
binary
GraphQL
JSON
{
"title": "New Book Title"
}
Body
Cookies
Headers (7)
Test Results
200 OK
96 ms
253 B
HTML
Preview
Visualize
Data updated successfully

Delete book:

User Logout:

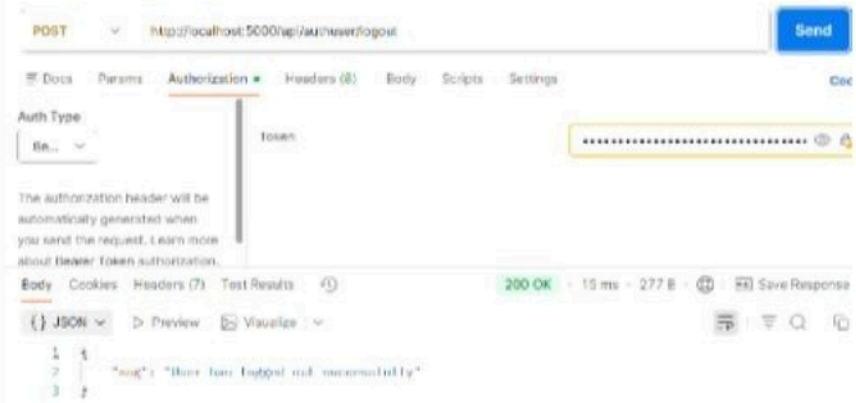


Demo link: https://drive.google.com/file/d/1XyZocuksZCRJY7FcOe4-k1zFTd6TC8gy/view?usp=drivesdk