Experiment 3

AIM: Create a GitHub/GitLab repository and upload sample code.

```
C:\Users\asus>mkdir  OST
A subdirectory or file OST already exists.

C:\Users\asus>cd  OST

C:\Users\asus\OST>git  init
Reinitialized existing Git repository in C:/Users/fsarg/OST/.git/

C:\Users\asus\OST>echo  print("Hello,Github!")  >  demo.py

C:\Users\asus\OST>dir
 Volume in drive C is OS
 Volume Serial Number is DED8-0765

 Directory of C:\Users\asus\OST

22-02-2026  15:56     <DIR>          .
22-02-2026  15:35     <DIR>          ..
22-02-2026  15:56                 25  demo.py
```

```
22-02-2026  15:15                 23 sample.txt
               2 File(s)                48 bytes
               2 Dir(s)   22,211,182,592 bytes free

C:\Users\asus\OST>git  add  demo.py

C:\Users\asus\OST>git commit -m "Added sample Python code"
[main 0f96044] Added sample Python code
 1 file changed, 1 insertion(+)
 create mode 100644 demo.py

C:\Users\asus\OST>git push -u origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 333 bytes | 333.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Hyphenat/OST.git
   ffae240..0f96044  main -> main
branch 'main' set up to track 'origin/main'.

C:\Users\asus\OST>git pull origin main --rebase
From https://github.com/sagar6273H/OST_PRACTICAL
 * branch            main       -> FETCH_HEAD
```
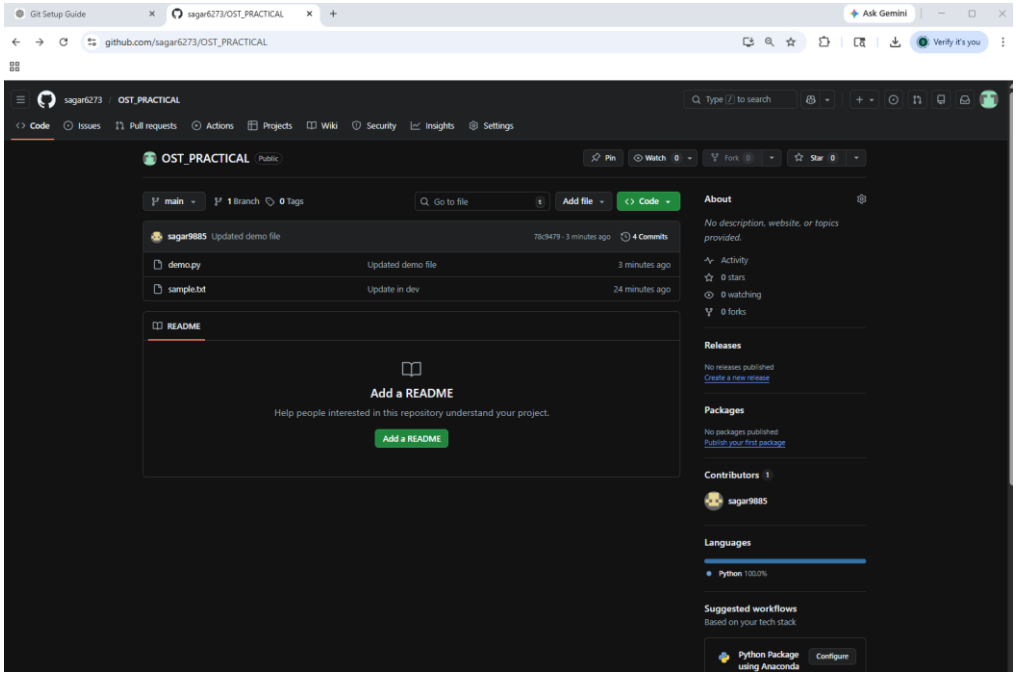
```
Already up to date.

C:\Users\asus\OST>git push -u origin main

branch "main" set up to track "origin/main".

Everything up-to-date
```