

Getting Start with Git and GitHub for R Users

Saghir Bashir

24th May 2019




Relax

Experiment

Make Mistakes

Learn

Enjoy

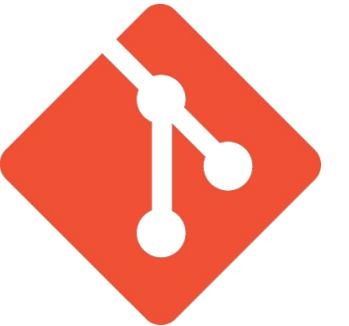

Outline

Motivation

Discover GitHub

Git to GitHub

Summary



Motivation

Why?

Developing an R Program



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...
```

Processing R Program

1. Save as "**thesis-data.R**"

Developing an R Program



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...

# ... some more data cleaning code here ...
```

Processing R Program

1. Save as "thesis-data.R"
2. Overwrite "**thesis-data.R**"

Developing an R Program



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...
# ... some more data cleaning code here ...

# ... summary statistics to check data ...
```

Processing R Program

1. Save as "thesis-data.R"
2. Overwrite "thesis-data.R"
3. Overwrite "**thesis-data.R**" again

Developing an R Program



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...

# ... MODIFY data cleaning code here ...

# ... summary statistics to check data ...
```

Processing R Program

1. Save as "thesis-data.R"
2. Overwrite "thesis-data.R"
3. Overwrite "thesis-data.R" again
4. Overwrite "**thesis-data.R**" with modification

Developing an R Program



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...

# ... MODIFY data cleaning code here ...

# ... summary statistics to check data ...

# !!! Modified code messed up summary statistics !!!

# !!! Previous code worked better !!!
```

Processing R Program

1. Save as "thesis-data.R"
2. Overwrite "thesis-data.R"
3. Overwrite "thesis-data.R" again
4. Overwrite "thesis-data.R" with modification
5. Redo work that you did before



R Program - Saving Versions



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...
```

Processing R Program

1. Save as "**thesis-data-01.R**"

R Program - Saving Versions



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...

# ... some more data cleaning code here ...
```

Processing R Program

1. Save as "thesis-data-01.R"
2. Save as "**thesis-data-02.R**"

R Program - Saving Versions



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...
# ... some more data cleaning code here ...
# ... summary statistics to check data ...
```

Processing R Program

1. Save as "thesis-data-01.R"
2. Save as "thesis-data-02.R"
3. Save as "**thesis-data-03.R**"

R Program - Saving Versions



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...

# ... MODIFY data cleaning code here ...

# ... summary statistics to check data ...
```

Processing R Program

1. Save as "thesis-data-01.R"
2. Save as "thesis-data-02.R"
3. Save as "thesis-data-03.R"
4. Save as "**thesis-data-04.R**"

R Program - Saving Versions



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...
# ... MODIFY data cleaning code here ...
# ... summary statistics to check data ...

# !!! Modified code messed up summary statistics !!!
# ... I remember I can go back version 03 !!!
# ... Fixed, send final version to supervisor, ...
```

Processing R Program

1. Save as "thesis-data-01.R"
2. Save as "thesis-data-02.R"
3. Save as "thesis-data-03.R"
4. Save as "thesis-data-04.R"
5. Save as "**thesis-data-Final.R**"
 - Send to supervisor

R Program - Saving Versions



R Program

```
# Thesis Project Data Cleaning
library(data.table)
library(here)

tdata <- fread(here("mydata.csv"))

# ... some data cleaning code here ...
# ... MODIFY data cleaning code here ...
# ... summary statistics to check data ...
# !!! Modified code messed up summary statistics !!!
# ... Fixed, send final version to supervisor, ...
# ... and real life continues ...
```

Processing R Program

1. Save as "thesis-data-01.R"
2. Save as "thesis-data-02.R"
3. Save as "thesis-data-03.R"
4. Save as "thesis-data-04.R"
5. Save as "thesis-data-Final.R"
6. ... "**thesis-data-Final-Sup.R**"
 - o Received from supervisor
7. ... "**thesis-data-Final-Sup-ME.R**"
8. ...

Six months later...

The FUTURE YOU



Continues on the project.

Project needs updating.

Receive updated data.

Discover an error.

...

Continue from where?

- thesis-data-01.R
- thesis-data-02.R
- thesis-data-03.R
- thesis-data-04.R
- thesis-data-Final-Final.R
- thesis-data-Final-Last.R
- thesis-data-Final-Sup-ME-minor.R
- thesis-data-Final-Sup-ME.R
- thesis-data-Final-Sup.R
- thesis-data-Final.R
- thesis-data-Final2.R
- ...



Danger of Using File Date & Time



They are not reliable

What do they really represent? Modified? Opened?

Did you modify the wrong file before?

Was the true latest file deleted?

Other Problems

What changed between files?


What needs to be done?

What issues are there?

How can multiple people collaborate?

...



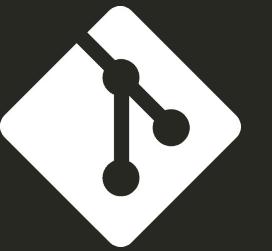

Git & GitHub

Track changes

Share your work

Collaborate

Track issues



Exercise

Learn GitHub through observation.

What do you observe?

What do you understand?

It is not about being right.

<https://github.com/saghirb/Getting-Started-in-R>



saghirb / Getting-Started-in-R

Code Issues 2 Pull requests 0 Projects 0 Insights

Watch 5 Star 57 Fork 20

An 8 page guide to starting with R - Tidyverse Edition

34 commits 1 branch 0 releases 1 contributor GPL-3.0

Branch: master New pull request Find File Clone or download ▾

saghirb Resolved issue 2: _make.R Completely delete Share directory and rebuild Latest commit e0bf843 26 days ago

File	Description	Time
Share	Resolved issue 2: _make.R Completely delete Share directory and rebuild	26 days ago
images	Added an image to README.md	2 months ago
.gitignore	Major changes: Created a new make file, updated pinp files, updated l...	3 months ago
ChickWeight.csv	Pre-draft version released for reviews	9 months ago
Contributors.md	Update post Jordi's comments	8 months ago
ExamplesAndExercises.R	Major changes: Created a new make file, updated pinp files, updated l...	3 months ago
Getting-Started-in-R.Rmd	Major changes: Created a new make file, updated pinp files, updated l...	3 months ago
Getting-Started-in-R.Rproj	Pre-draft version released for reviews	9 months ago
Getting-Started-in-R.pdf	Resolved issue 2: _make.R Completely delete Share directory and rebuild	26 days ago
LICENSE	Initial commit	9 months ago
README.md	Cosmetic changes to README.md	2 months ago
RStudio-Screenshot.png	Pre-draft version released for reviews	9 months ago
_make.R	Resolved issue 2: _make.R Completely delete Share directory and rebuild	26 days ago

GitHub Questions



General

- What file types do you recognise?
- What is at the end of the main page?
 - How is "README.md" linked?

Click on "Commit"


- When was the repository created?
- When was the last "commit"?
- When were all the R chunks labelled?
 - Click on the link. What do you see?
- What do you think a "commit" is?

Issues

- How many issues are open? Closed?
- Click on one open and one closed issue.
 - What is the difference?

Forks



- How many forks are there?
- What is a "fork"?
 - Hint: click on one of the forks.

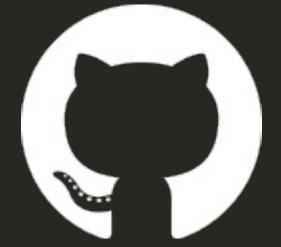

Sign up to GitHub*

<https://github.com/>

* If you do not agree with the terms and conditions let me know.

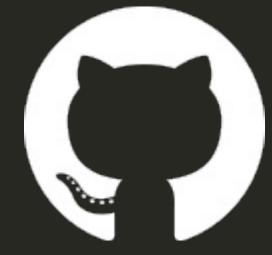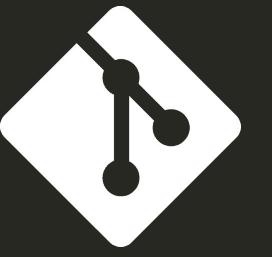


Git, GitHub & RStudio



GitHub is built on Git.

Let's start by using Git in RStudio.

Then we will link back to GitHub.




Install git from:



<https://git-scm.com/downloads>

Accept default installation options.



IMPORTANT: R Set-up

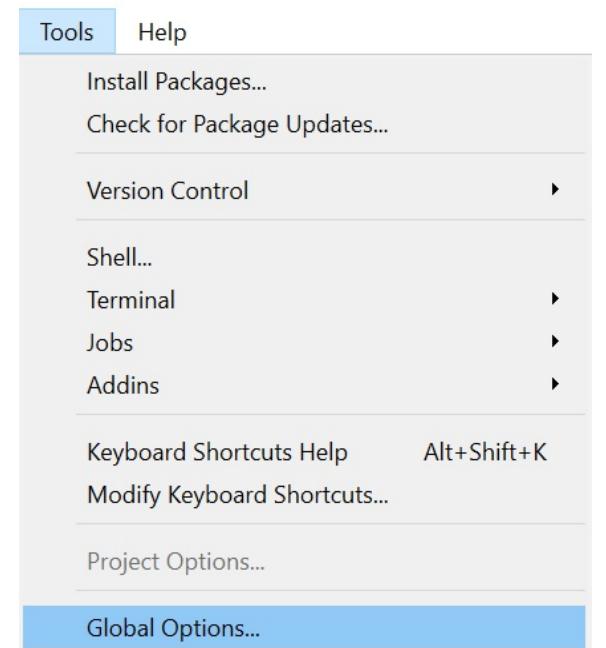

RStudio Git Set-up

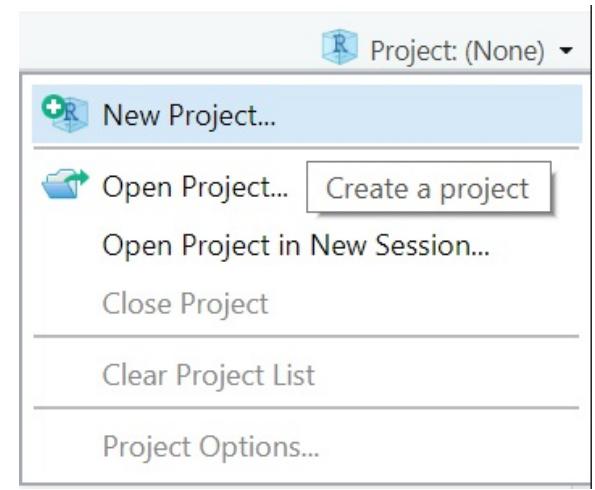

Git User Settings - Only Do Once

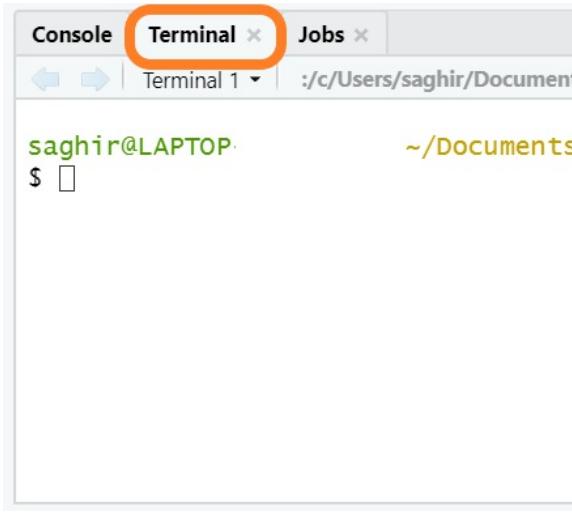

```
sagehir@LAPTOP: ~$
```


Switch to the terminal tab & type:

```
git config --global user.name "Your Name"  
git config --global user.email "email@example.com"
```

Note: Use the same email address as for GitHub

Check Settings


```
git config --global
```

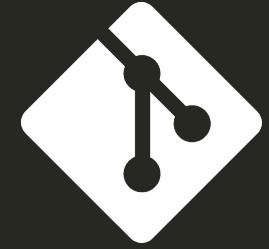

We are ready to use Git with RStudio.

Let's start a new project.

New RStudio Project (i)



Tools Help

Install Packages...
Check for Package Updates...

Version Control >

Shell...
Terminal
Jobs
Addins >

Keyboard Shortcuts Help Alt+Shift+K
Modify Keyboard Shortcuts...

Project Options...
Global Options... Global Options...

New Project

Create Project


 **New Directory**
Start a project in a brand new working directory >

 **Existing Directory**
Associate a project with an existing working directory >

 **Version Control**
Checkout a project from a version control repository >

Cancel

New RStudio Project (ii)




New Project

Back Project Type

-  New Project >
-  R Package > Create a new project in an empty directory
-  Shiny Web Application >
- R Package using Rcpp >
- R Package using RcppArmadillo >
- R Package using RcppEigen >
- R Package using devtools >

Cancel

New RStudio Project (iii)

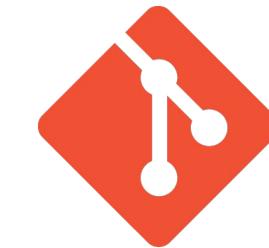

New Project

[Back](#) **Create New Project**


Directory name:

Create project as subdirectory of:
 [Browse...](#)

Create a git repository

Open in new session [Create Project](#) [Cancel](#)

New RStudio Project (iv)

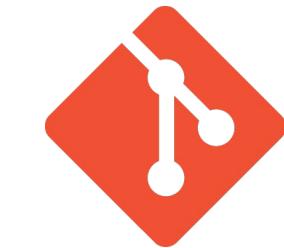

The screenshot shows the RStudio interface with two main panes. The top pane is the 'Git' pane, which displays a list of files in the current repository. The bottom pane is the 'Files' pane, showing the local file system structure. Both panes have their respective tabs selected ('Git' and 'Files').


Git Pane:

- Project Name: GitHub-R-Demo
- Branch: (no branch)
- Staged Status Path:
 - .gitignore
 - GitHub-R-Demo.Rproj

Files Pane:

- Path: Home > Projects > GitHub-R-Demo
- Content:


Name	Size	Modified
.gitignore	44 B	May 22, 2019, 11:29 AM
GitHub-R-Demo.Rproj	218 B	May 22, 2019, 11:29 AM

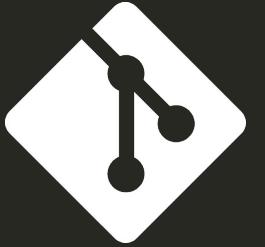

Working with Git in RStudio

- 1. Create an R file.**
- 2. Save ("commit") it using git.**
- 3. Modify the file and "commit" again.**
- 4. Save to your on-line GitHub account.**


Create New R Markdown Document

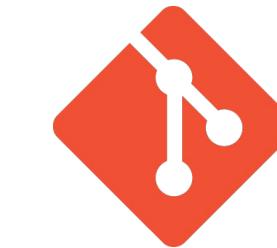



The screenshot shows the RStudio interface. On the left, the file tree displays a project named "GitHub-R-Demo". In the center, a file named "19-04-26 - The R Found" is open. A context menu is visible over this file, with the option "Create a new R Markdown document" highlighted. To the right, a "New R Markdown" dialog box is open. It shows the following settings:


- Title:** Learning About Github
- Author:** Saghir Bashir
- Default Output Format:**
 - HTML
Recommended format for authoring (you can switch to PDF or Word output anytime).
 - PDF
PDF output requires TeX (MiKTeX on Windows, MacTeX 2013+ on OS X, TeX Live 2013+ on Linux).
 - Word
Previewing Word documents requires an installation of MS Word (or Libre/Open Office on Linux).


At the bottom of the dialog are "OK" and "Cancel" buttons.

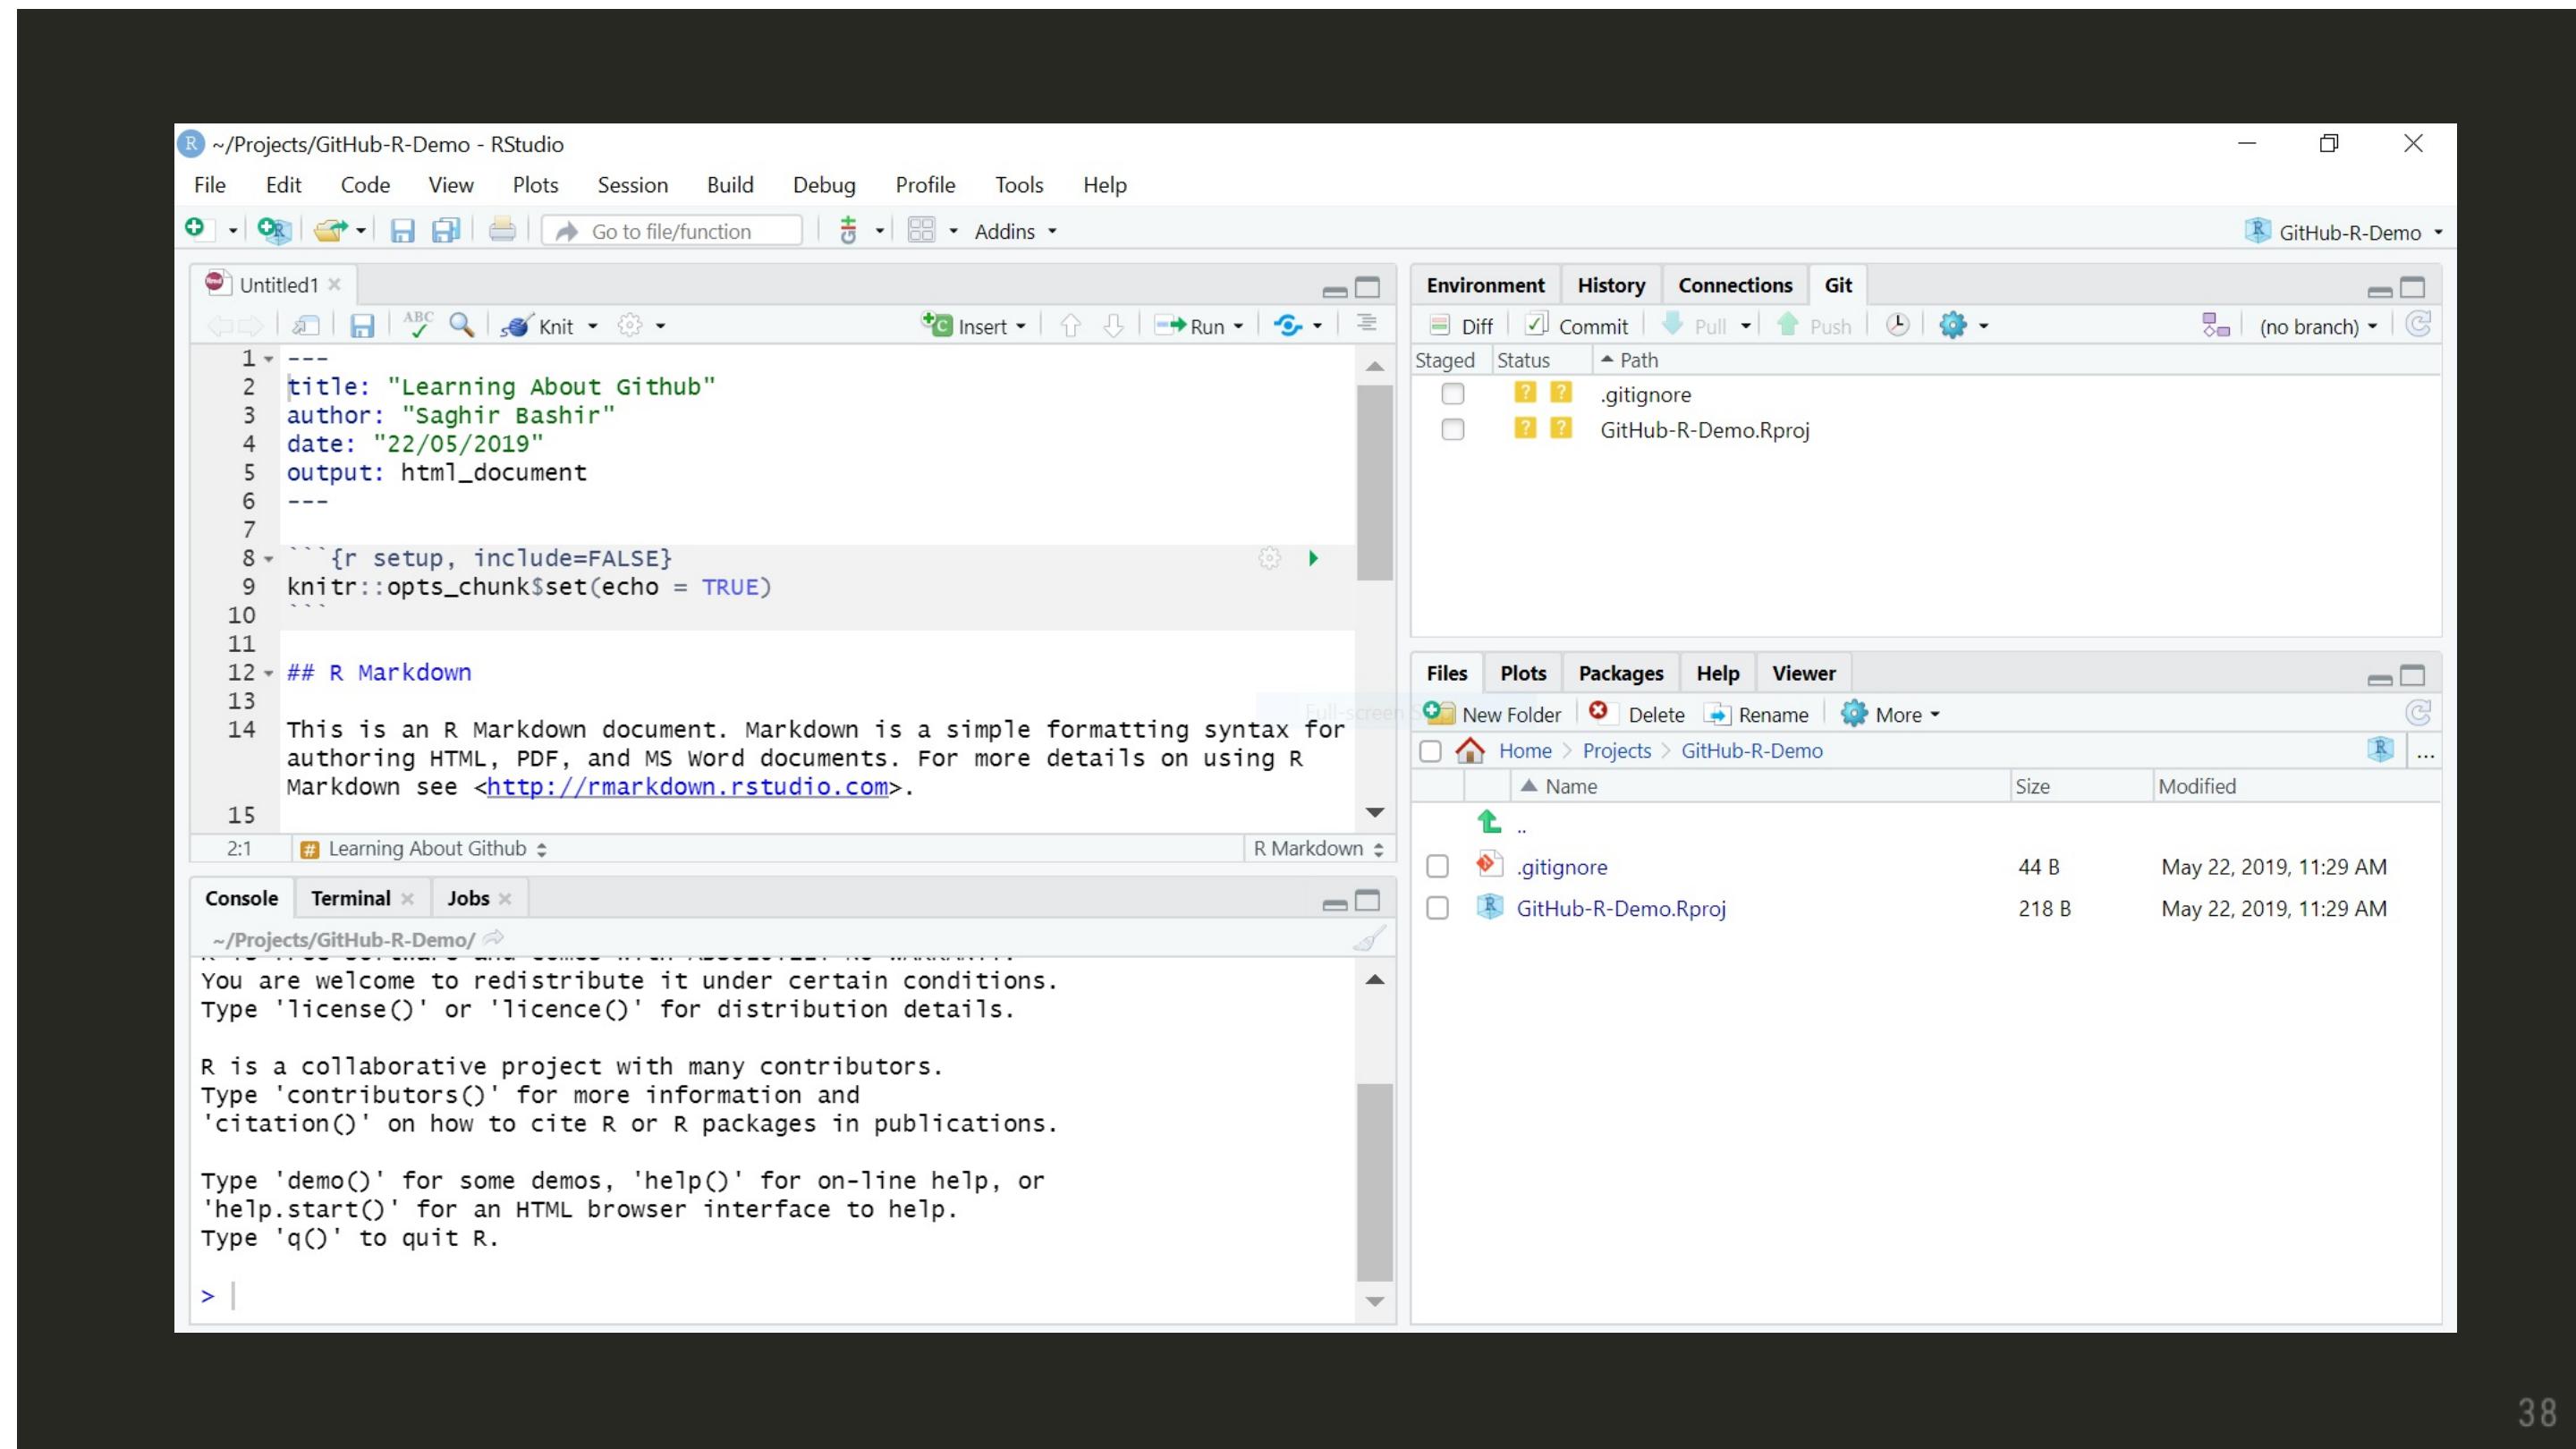

Save R Markdown File

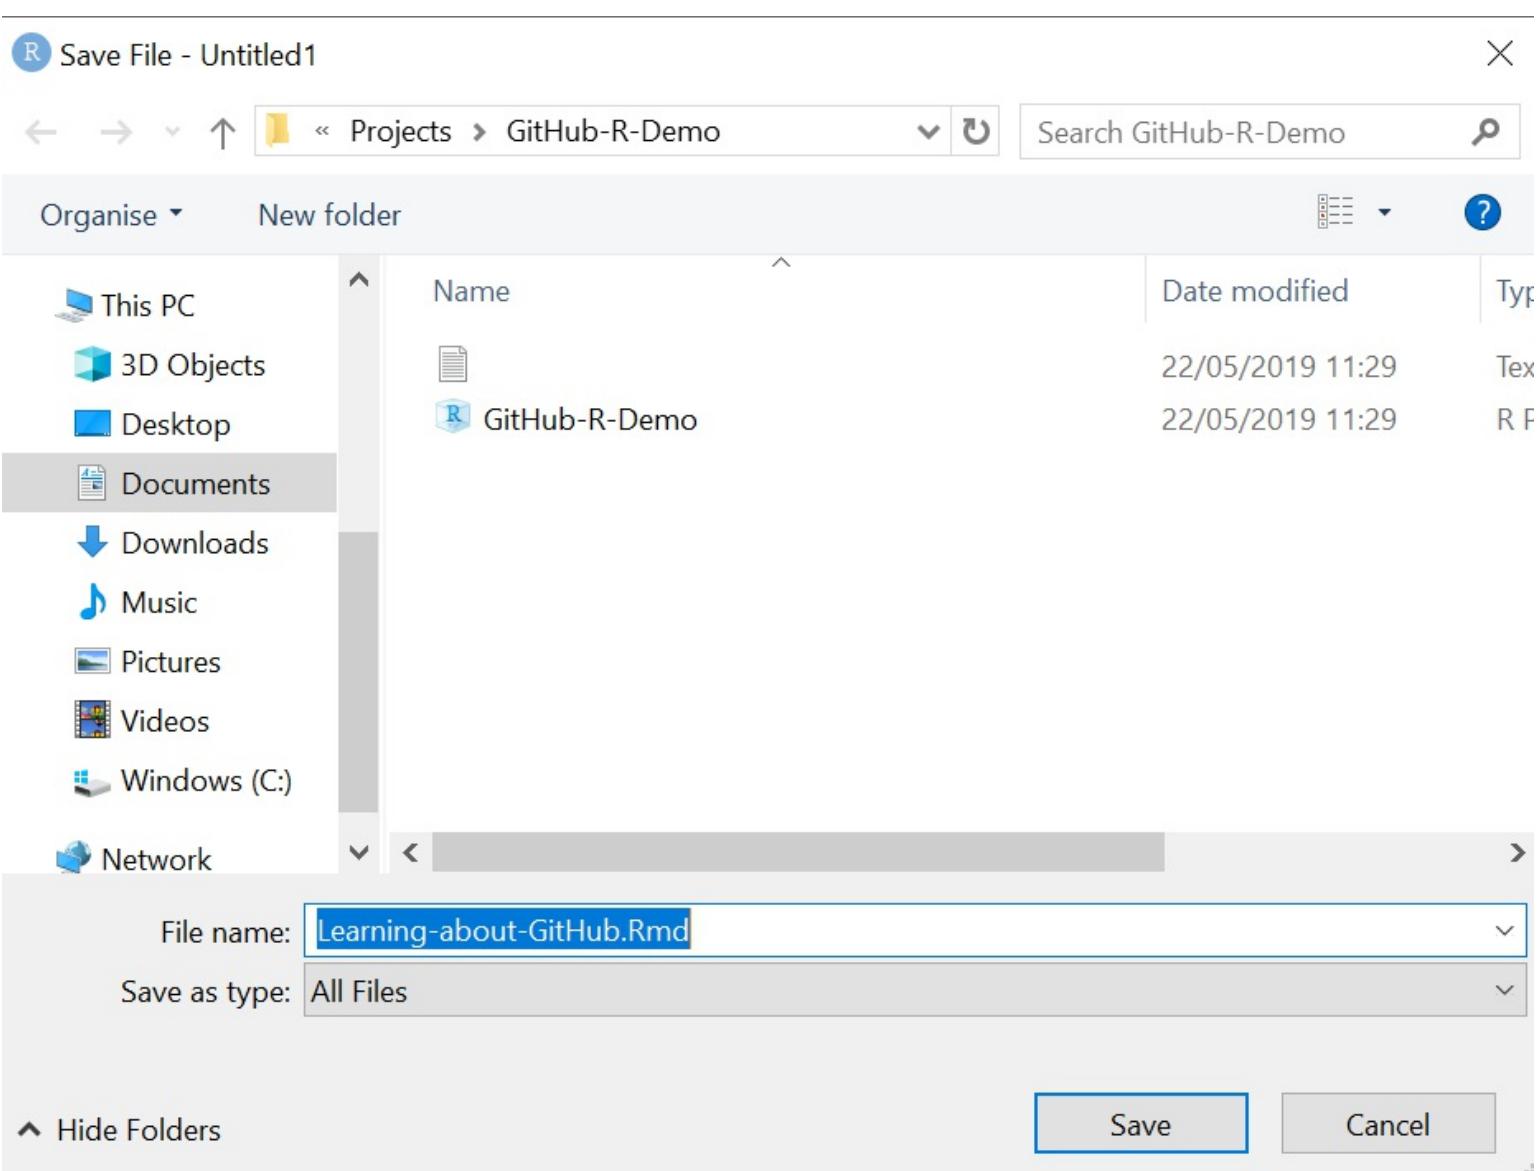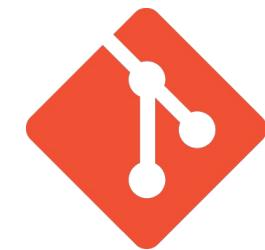

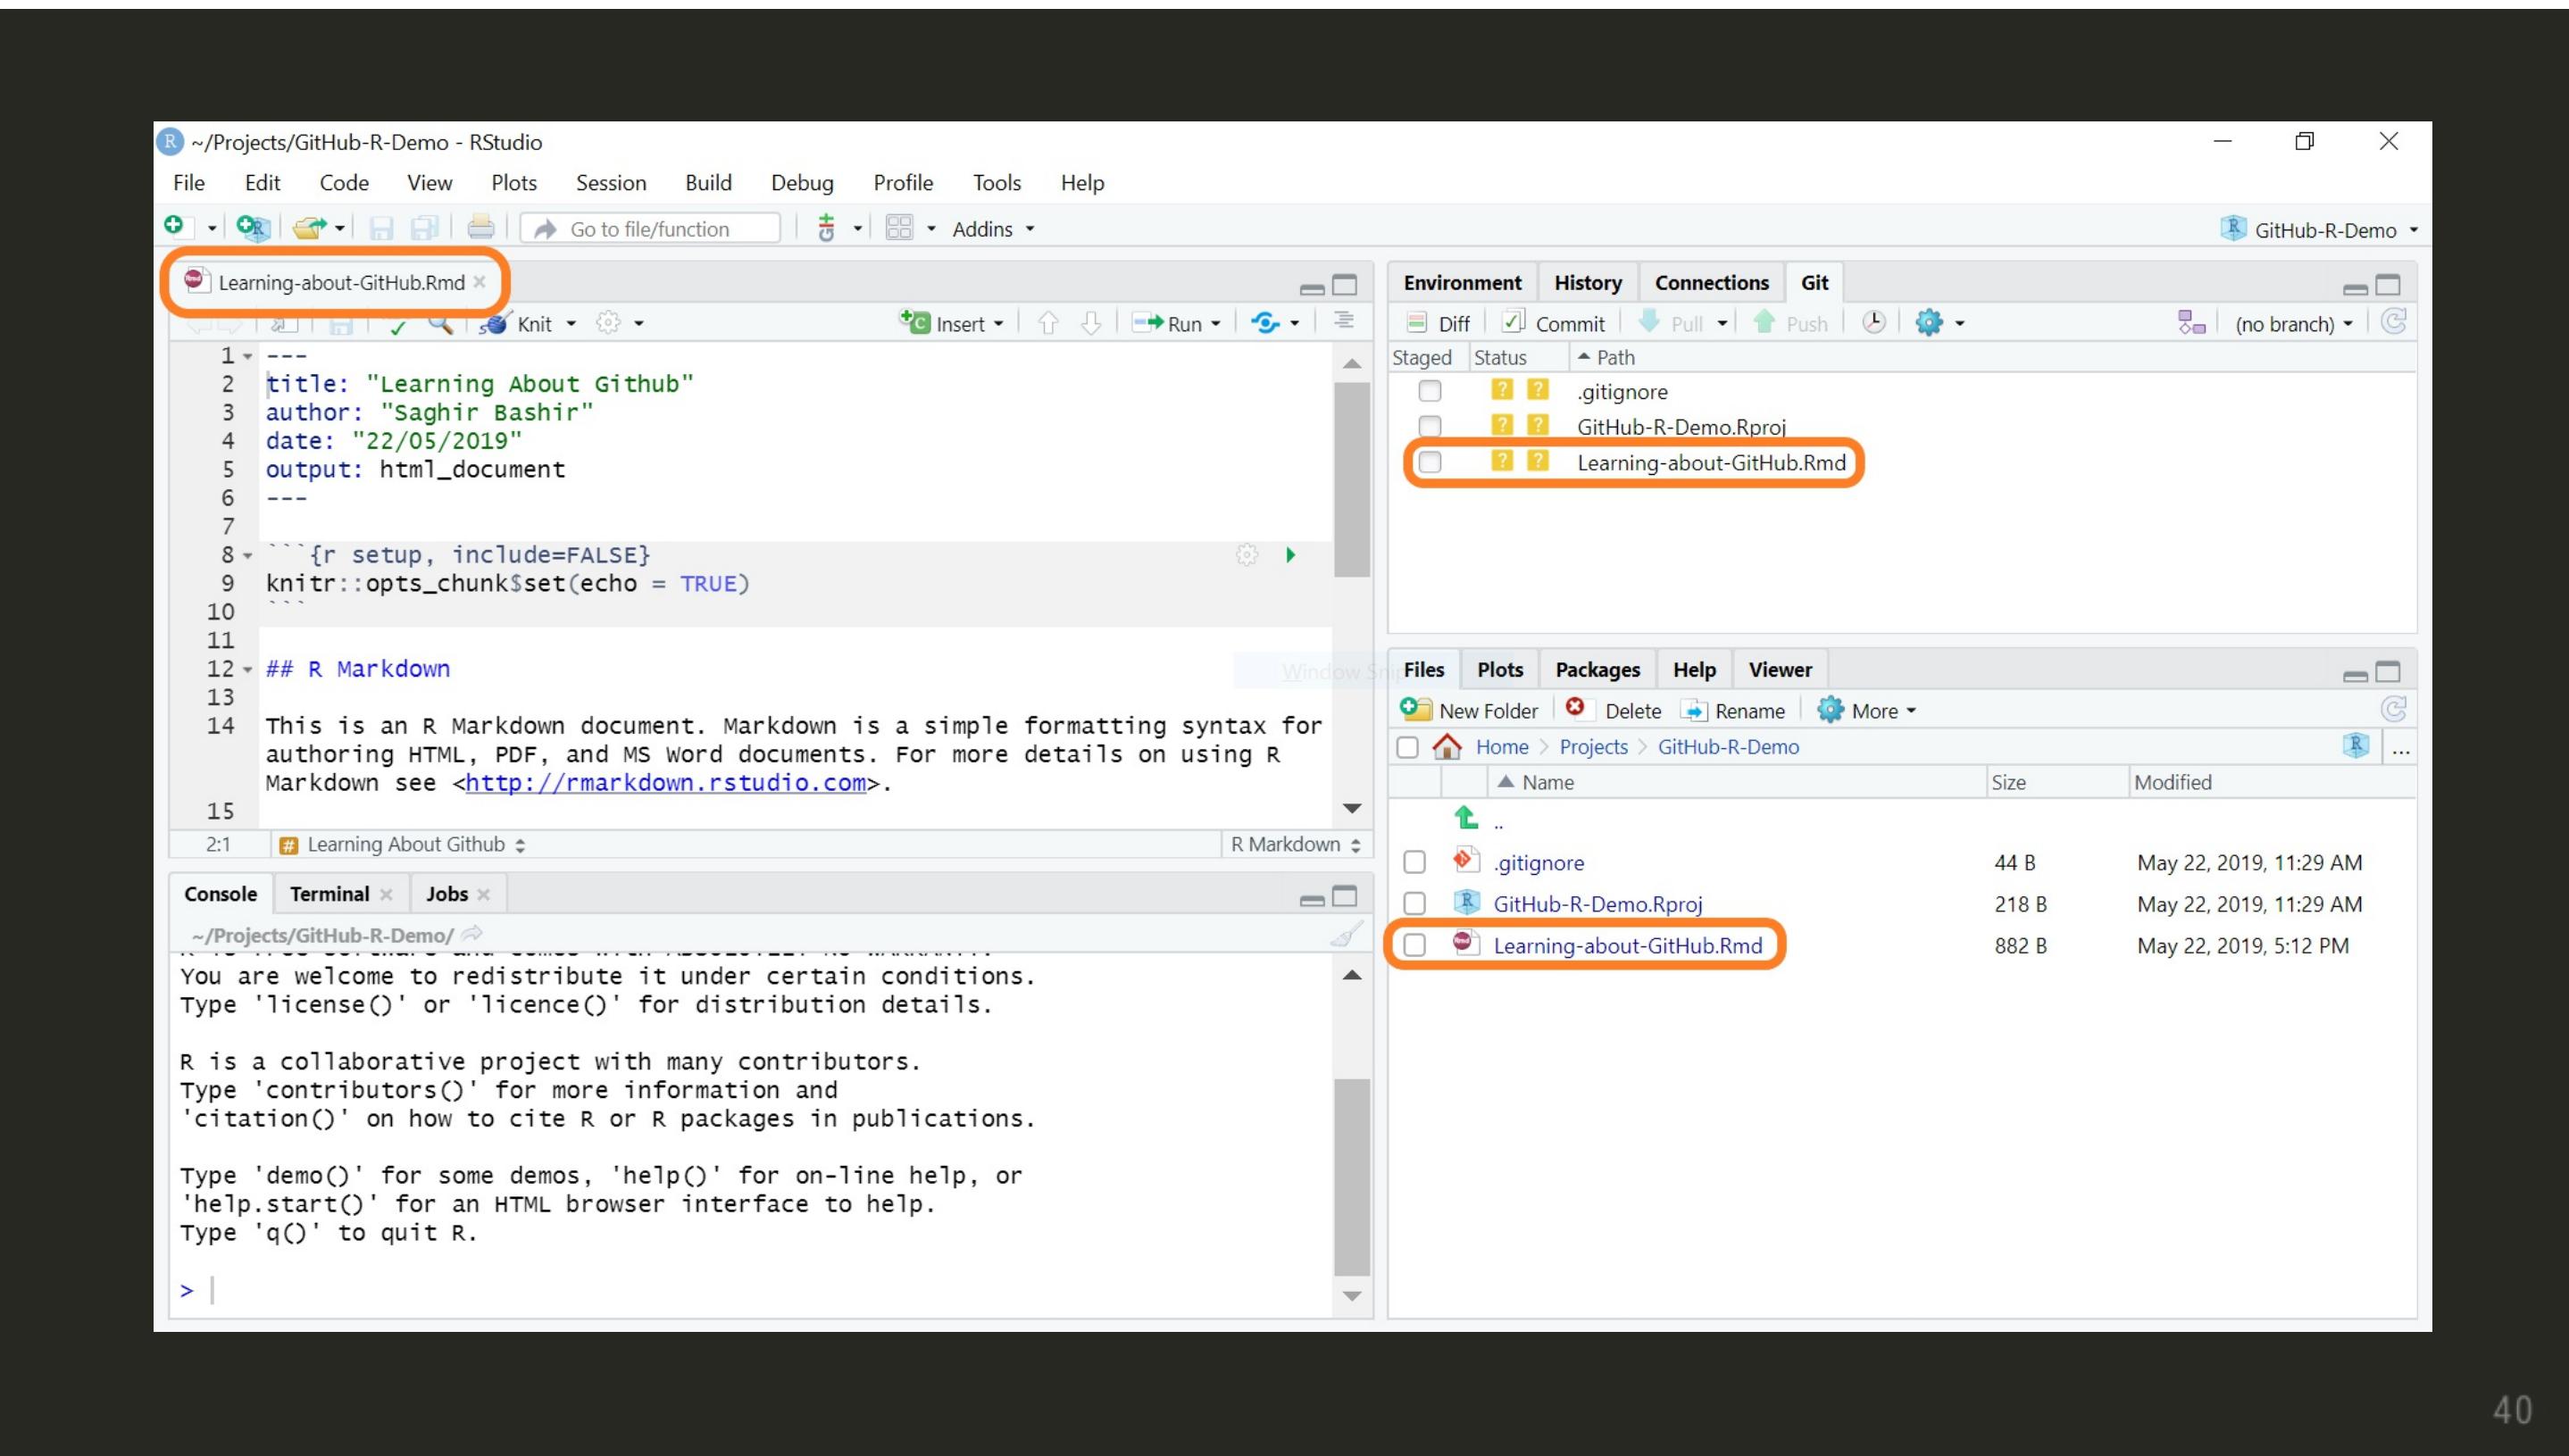


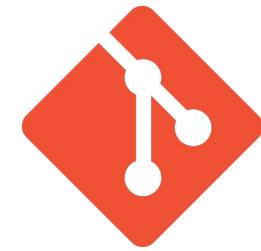

"Commit" Untracked Files

The screenshot shows the RStudio interface with the Git tab selected. In the top-left window, three untracked files are listed: '.gitignore', 'GitHub-R-Demo.Rproj', and 'Learning-about-GitHub.Rmd'. An orange box highlights these files. In the bottom-left window, the 'Commit' button is highlighted with an orange box, and a tooltip says 'Commit pending changes (Ctrl+Alt+M)'. The right-hand window is titled 'RStudio: Review Changes' and shows the same three files now with a green 'A' status, indicating they are staged for commit. The 'Commit message' field contains 'My first commit'. Below the message, there's an 'Amend previous commit' checkbox and a 'Commit' button. At the bottom, a diff viewer shows the contents of 'Learning-about-GitHub.Rmd':

```
@@ -0,0 +1,30 @@
1 ---
2 title: "Learning About Github"
3 author: "Saghir Bashir"
4 date: "22/05/2019"
5 output: html_document
6 ---
7
```

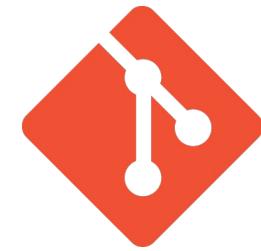


Successful First Commit

Git Commit Close

```
>>> C:/Program Files/Git/bin/git.exe commit -F C:/Users/saghir/AppData/I  
[master (root-commit) e70674b] My first commit  
 3 files changed, 47 insertions(+)  
  create mode 100644 .gitignore  
  create mode 100644 GitHub-R-Demo.Rproj  
  create mode 100644 Learning-about-GitHub.Rmd
```

◀ ▶

Git Panel Should be Empty

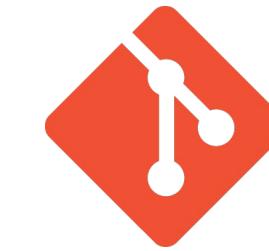


Screenshot of the RStudio IDE interface showing the Git and Files panes.

Git Panel:

- Header: Environment, History, Connections, Git.
- Buttons: Diff, Commit, Pull, Push, Log, Gear.
- Status: master.


Files Panel:

- Header: Files, Plots, Packages, Help, Viewer.
- Buttons: New Folder, Delete, Rename, More.
- Path: Home > Projects > GitHub-R-Demo.
- Table:
| | Name | Size | Modified |
| --- | --- | --- | --- |
| | .. | | |
| | .gitignore | 44 B | May 22, 2019, 11:29 AM |
| | GitHub-R-Demo.Rproj | 218 B | May 22, 2019, 11:29 AM |
| | Learning-about-GitHub.Rmd | 882 B | May 22, 2019, 5:12 PM |

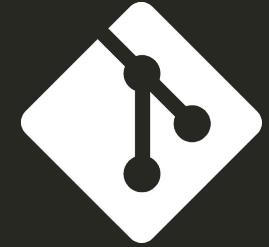

Commit

**Your files are now a part of the
git history of this project.**

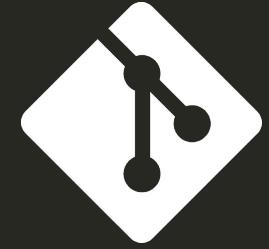

Modify Learning-about-GitHub.Rmd

Then commit the changes.

The screenshot shows the RStudio interface with a dark theme. The top bar displays the path `~/Projects/GitHub-R-Demo - master - RStudio`. The menu bar includes File, Edit, Code, View, Plots, Session, Build, Debug, Profile, Tools, and Help. The toolbar contains icons for New File, Open, Save, Go to file/function, and Addins. The main workspace shows an R Markdown file named `Learning-about-Github.Rmd` with the following content:

```
1 ---  
2 title: "Learning About Github"  
3 author: "Saghir Bashir"  
4 date: "22/05/2019"  
5 output: html_document  
---  
8 ```{r setup, include=FALSE}  
9 knitr::opts_chunk$set(echo = TRUE)  
10  
11  
12 # Chick Weight Data  
13  
14 Summary of Chick Weight Data  
15  
16 ```{r Cwsum}  
17 summary(Chickweight)  
18  
19  
20 # Chick weight Plot  
21  
22 ```{r Cwplot}  
23 with(ChickWeight, plot(Time, weight, col=Diet))  
24  
25  
26
```


The status bar at the bottom indicates line 25:1, Chick Weight Plot, R Markdown, and Console.

The right side of the interface features a Git panel titled "GitHub-R-Demo" with tabs for Environment, History, Connections, and Git. The Git tab shows a commit for `Learning-about-Github.Rmd` on the master branch. Below the Git panel is a Files browser showing the project structure:


Name	Size	Modified
..		
.gitignore	44 B	May 22, 2019, 11:29 AM
GitHub-R-Demo.Rproj	218 B	May 22, 2019, 11:29 AM
Learning-about-Github.Rmd	376 B	May 22, 2019, 6:15 PM

A small number "46" is located in the bottom right corner of the image.

Knit the R Markdown File



Rmd Modified & Untracked Files

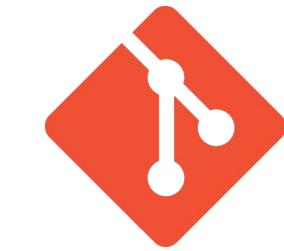

R ~/Projects/GitHub-R-Demo - master - RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Learning-about-GitHub.Rmd x Go to file/function Addins GitHub-R-Demo

```
1 ---  
2 title: "Learning About GitHub"  
3 author: "Saghir Bashir"  
4 date: "22/05/2019"  
5 output: html_document  
6 ---  
7  
8 ```{r setup, include=FALSE}  
9 knitr::opts_chunk$set(echo = TRUE)  
10  
11  
12 # Chick Weight Data  
13  
14 Summary of Chick Weight Data  
15  
16 ```{r CWSum}  
17 summary(ChickWeight)  
18  
19  
20 # Chick Weight Plot  
21  
22 ```{r Cwplot}  
23 with(ChickWeight, plot(Time, weight, col=Diet))  
24  
25  
26
```

Environment History Connections Git

Diff Commit Staged Status Path master

Learning-about-GitHub.Rmd
Learning-about-GitHub.html
Learning-about-GitHub_files/

Files Plots Packages Help Viewer

New Folder Delete Rename More


Home > Projects > GitHub-R-Demo

Name	Size	Modified
..		
.gitignore	44 B	May 22, 2019, 11:29 AM
GitHub-R-Demo.Rproj	218 B	May 22, 2019, 11:29 AM
Learning-about-GitHub.Rmd	376 B	May 22, 2019, 6:15 PM
Learning-about-GitHub_files		
Learning-about-GitHub.html	639 KB	May 22, 2019, 6:17 PM

25:1 # Chick Weight Plot R Markdown

Console

Performing Another Commit

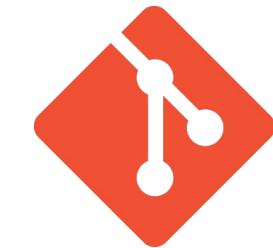

RStudio: Review Changes

Changes History master Stage Revert Ignore Pull Push

Staged Status Path

- M Learning-about-GitHub.Rmd
- A Learning-about-GitHub.html
- A Learning-about-GitHub_files/figure-html/CWplot-1.png


Commit message
Added |chick weight summary and plot.

Amend previous commit Commit


Show Staged Unstaged Context 5 line Ignore Whitespace Unstage All

```
@@ -7,24 +7,19 @@ output: html_document
7 7
8 8 ````{r setup, include=FALSE}
9 9 knitr::opts_chunk$set(echo = TRUE)
10 10
11 11
12 ## R Markdown
12 # Chick Weight Data
13 13
14 This is an R Markdown document. Markdown is a simple formatting
syntax for authoring HTML, PDF, and MS Word documents. For more
details on using R Markdown see <http://rmarkdown.rstudio.com>.
14 Summary of Chick Weight Data
15 15
16 When you click the **Knit** button a document will be generated that
includes both content as well as the output of any embedded R code
chunks within the document. You can embed an R code chunk like this.
```

Git Status Explain

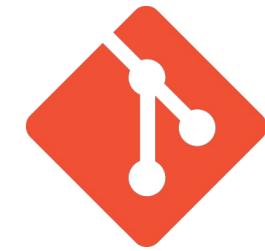

A	File Added
D	File Deleted
M	File Modified
R	File Renamed
?	File Untracked by Git

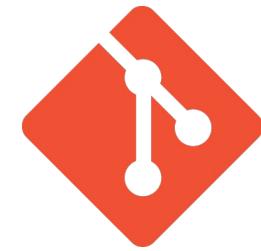


Second Commit Successful

Git Commit Close


```
>>> C:/Program Files/Git/bin/git.exe commit -F C:/Users/saghir/AppD
[master b4ddc89] Added chick weight summary and plot.
 3 files changed, 457 insertions(+), 30 deletions(-)
 rewrite Learning-about-GitHub.Rmd (78%)
 create mode 100644 Learning-about-GitHub.html
 create mode 100644 Learning-about-GitHub_files/figure-html/cwplot-
```


◀ ▶

Exercise

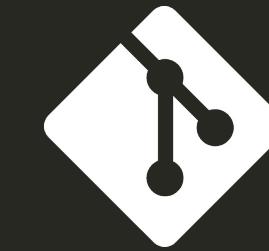


Look at your commit history in RStudio

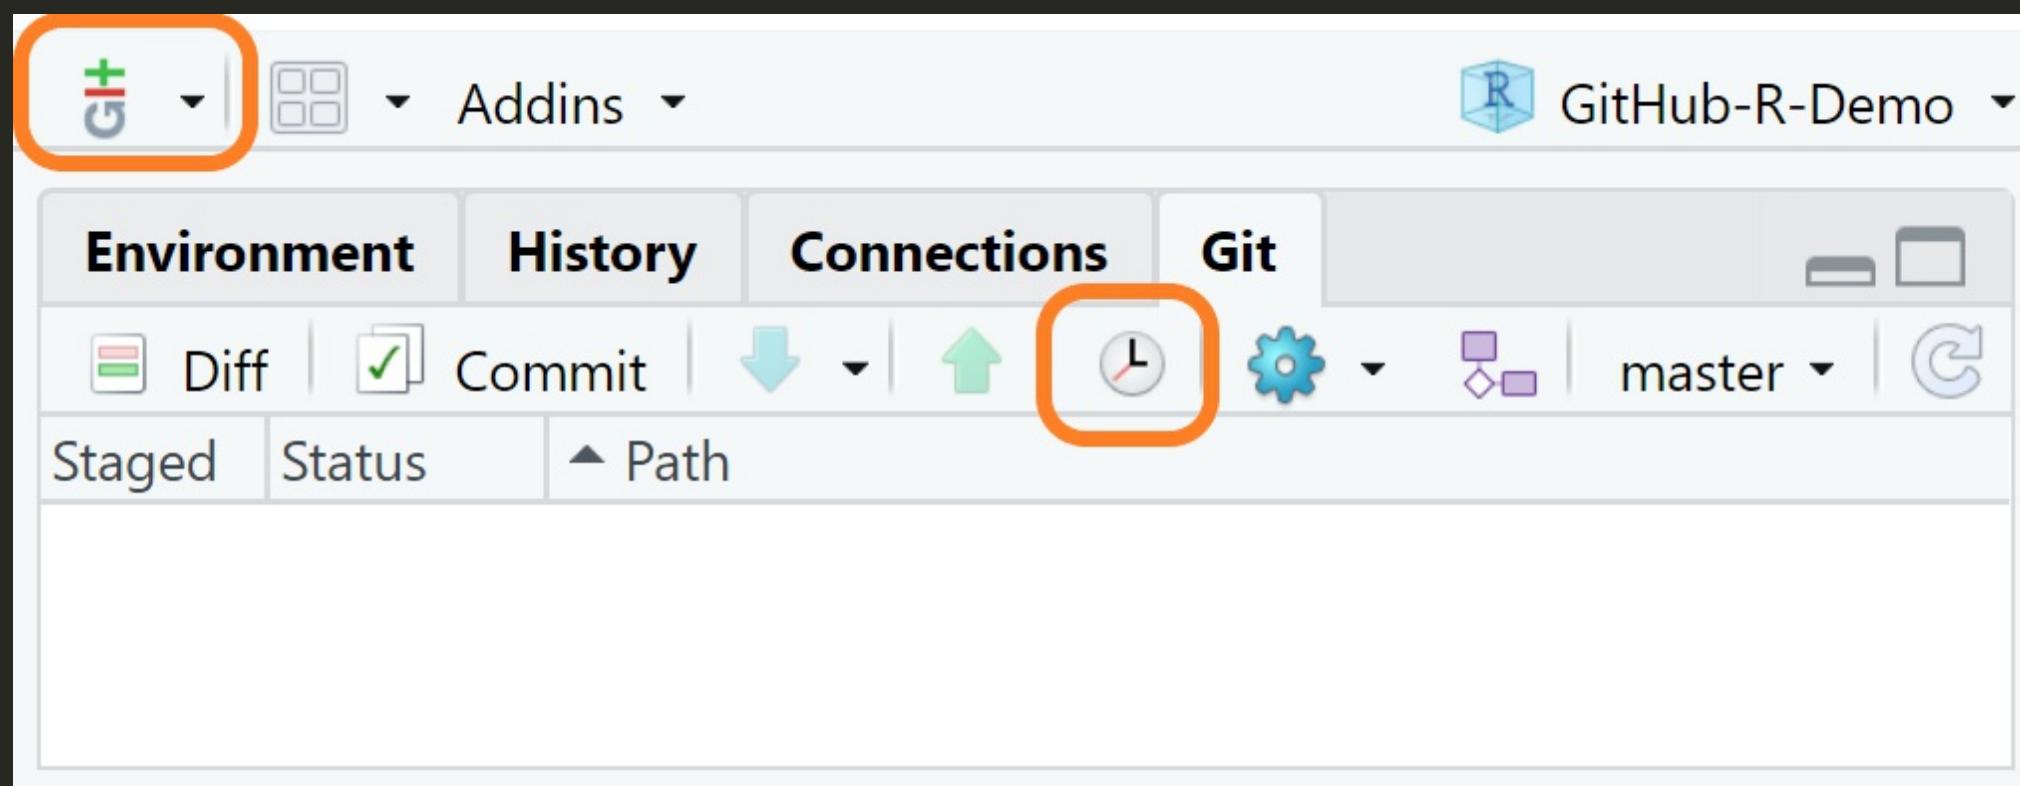

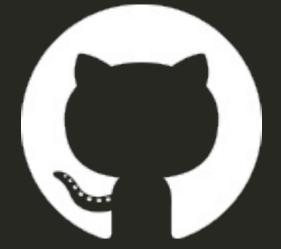

Synchronising with GitHub

Synchronising with GitHub

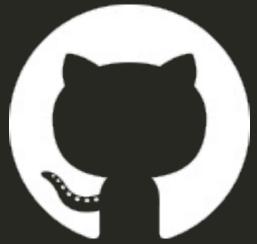

- 1. Create new GitHub repository.**
 - Must be the same name as your RStudio project.
- 2. Link the local version of your project to your GitHub repository.**
- 3. Push (upload) your work to your GitHub repository.**

Login to GitHub



Sign in to GitHub

Username or email address

Password

[Forgot password?](#)


[Sign in](#)

New to GitHub? [Create an account.](#)

Create New Repository



Use RStudio project name

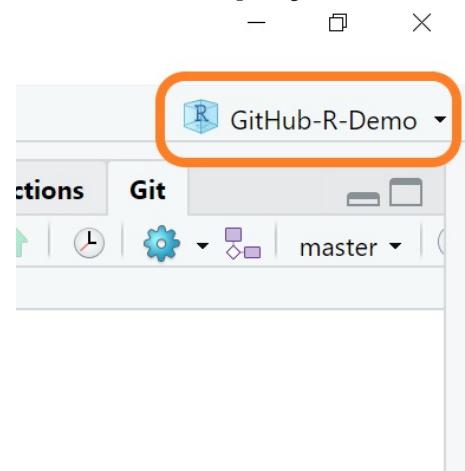

Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere?
[Import a repository.](#)

Owner  saghirb / **Repository name *** 1
GitHub-R-Demo

Great repository names are short and memorable. Need inspiration? How about [ubiquitous-tribble](#)?

Description (optional)


 **Public**
Anyone can see this repository. You choose who can commit.

 **Private**
You choose who can see and commit to this repository.

Initialize this repository with a README
This will let you immediately clone the repository to your computer. Skip this step if you're importing an existing repository.

Add .gitignore: **None** ▾ Add a license: **None** ▾

Create repository 2

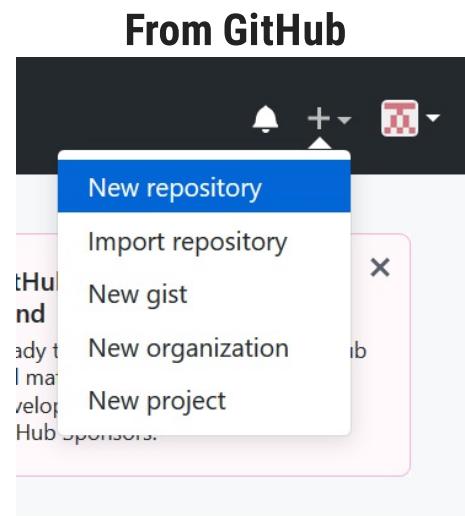

New Repository Created



saghirb / GitHub-R-Demo Watch 0 Star 0 Fork 0

Code Issues 0 Pull requests 0 Projects 0 Wiki Security Insights Settings

Quick setup — if you've done this kind of thing before

[Set up in Desktop](#) or [HTTPS](#) [SSH](#) <https://github.com/saghirb/GitHub-R-Demo.git>

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# GitHub-R-Demo" >> README.md  
git init  
git add README.md  
git commit -m "first commit"  
git remote add origin https://github.com/saghirb/GitHub-R-Demo.git  
git push -u origin master
```

...or push an existing repository from the command line

```
git remote add origin https://github.com/saghirb/GitHub-R-Demo.git  
git push -u origin master
```




Copy Commands to link Git ("via RStudio") to GitHub

...or push an existing repository from the command line

```
git remote add origin https://github.com/saghirb/GitHub-R-Demo.git  
git push -u origin master
```



Paste into RStudio "Terminal" Tab

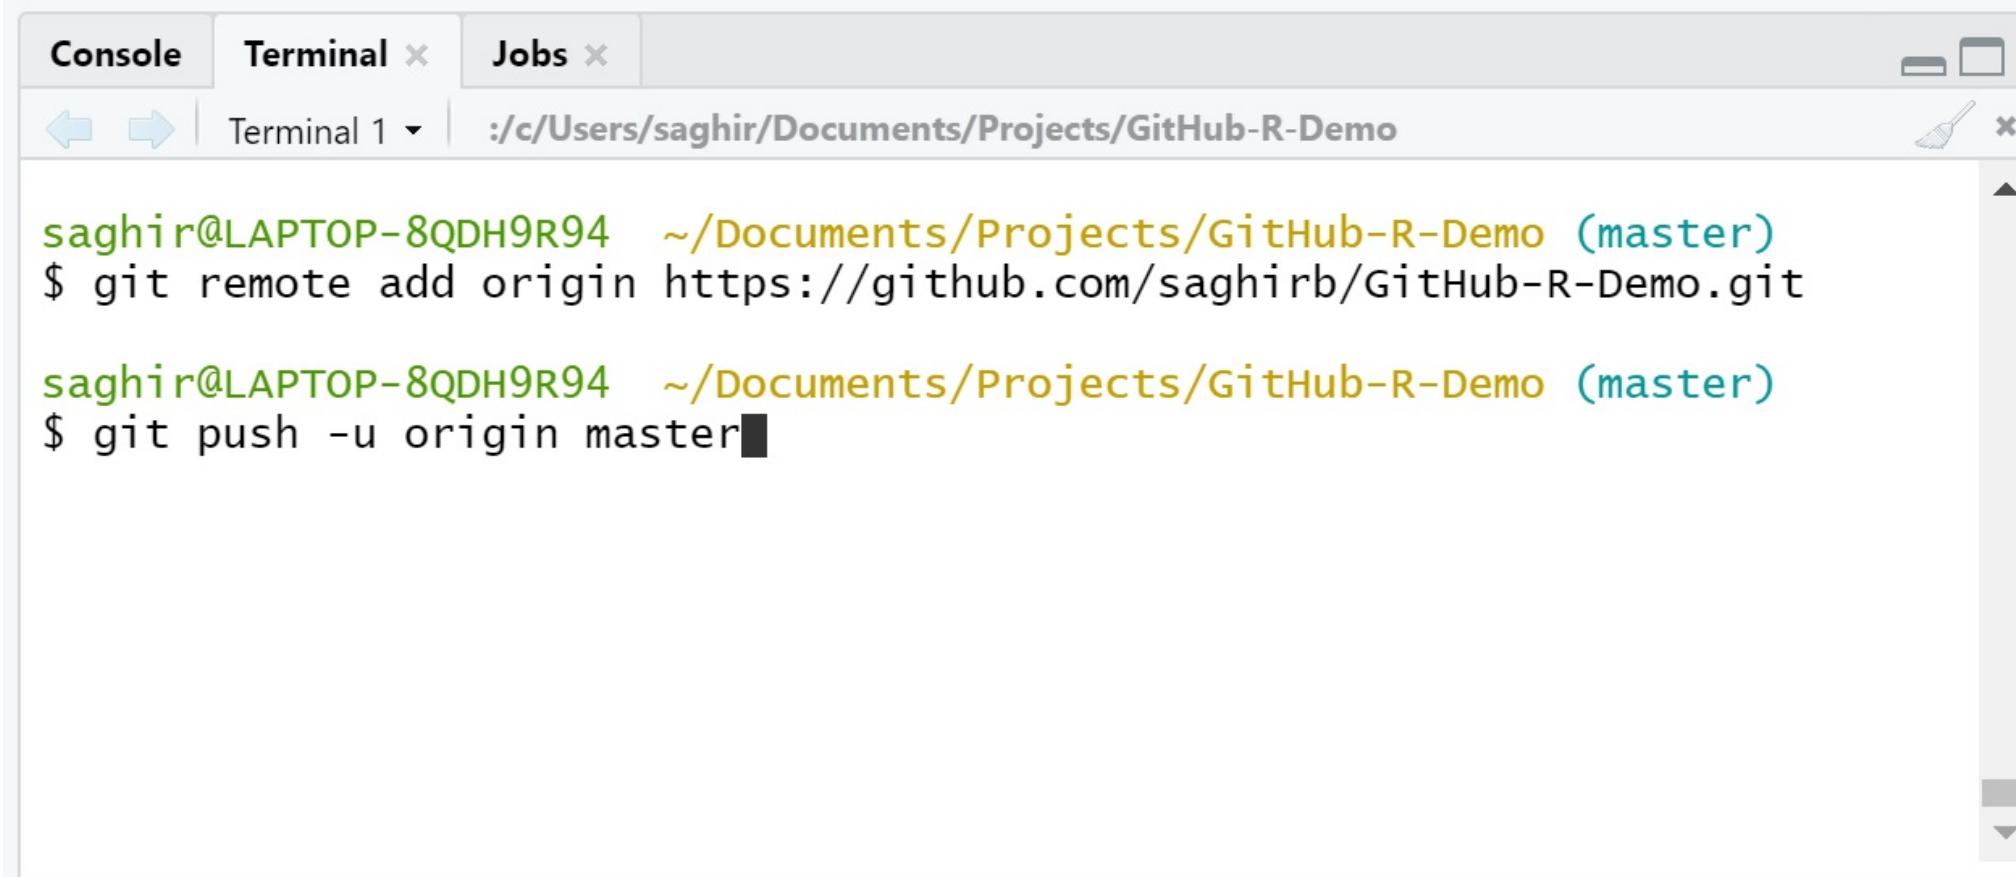A screenshot of the RStudio interface showing the Terminal tab. The tab bar shows 'Console', 'Terminal', and 'Jobs'. The terminal window has a title bar 'Terminal 1' and path ':/c/Users/saghir/Documents/Projects/GitHub-R-Demo'. The terminal window contains the following text:

```
saghir@LAPTOP-8QDH9R94 ~/Documents/Projects/GitHub-R-Demo (master)  
$ git remote add origin https://github.com/saghirb/GitHub-R-Demo.git  
  
saghir@LAPTOP-8QDH9R94 ~/Documents/Projects/GitHub-R-Demo (master)  
$ git push -u origin master
```

The last line of the command is highlighted with a black rectangle.

Push local git repository to GitHub



A screenshot of a terminal window titled "Terminal 1 (busy)". The terminal shows two commands:

```
saghir@...: ~
$ git remote add origin https://github.com/saghir/R-Demo.git
$ git push -u origin master
```

Overlaid on the terminal is a "GitHub Login" dialog box. The "Username" and "Password" fields are highlighted with a red border. At the bottom of the dialog are "Login" and "Cancel" buttons, along with links for "Don't have an account? Sign up" and "Forgot your password?".

To the right of the terminal, there is a sidebar showing the repository structure:

- (master) R-Demo.git
- (master)



"Pushed" to "origin" (on GitHub)

```
Console Terminal x Jobs x
Terminal 1 :/c/Users/saghir/Documents/Projects/GitHub-R-Demo
saghir@ ~/Documents/Projects/GitHub-R-Demo (master)
$ git remote add origin https://github.com/saghirb/GitHub-R-Demo.git

saghir@ ~/Documents/Projects/GitHub-R-Demo (master)
$ git push -u origin master
Enumerating objects: 12, done.
Counting objects: 100% (12/12), done.
Delta compression using up to 8 threads
Compressing objects: 100% (9/9), done.
Writing objects: 100% (12/12), 243.00 KiB | 2.70 MiB/s, done.
Total 12 (delta 1), reused 0 (delta 0)
remote: Resolving deltas: 100% (1/1), done.
To https://github.com/saghirb/GitHub-R-Demo.git
 * [new branch] master -> master
Branch 'master' set up to track remote branch 'master' from 'origin'.

saghir@ ~/Documents/Projects/GitHub-R-Demo (master)
$ █
```



Check GitHub Repository



saghirb / GitHub-R-Demo

Watch 0 Star 0 Fork 0

Code Issues 0 Pull requests 0 Projects 0 Wiki Security Insights Settings

No description, website, or topics provided. Edit

Manage topics

2 commits 1 branch 0 releases 1 contributor


Branch: master ▾ New pull request Create new file Upload files Find File Clone or download ▾

		Latest commit b4ddc89 20 hours ago
	saghirb Added chick weight summary and plot.	
	Learning-about-GitHub_files/figure-html	Added chick weight summary and plot.
	.gitignore	My first commit
	GitHub-R-Demo.Rproj	My first commit
	Learning-about-GitHub.Rmd	Added chick weight summary and plot.
	Learning-about-GitHub.html	Added chick weight summary and plot.

Help people interested in this repository understand your project by adding a README. Add a README



Exercise: Git, RStudio & GitHub

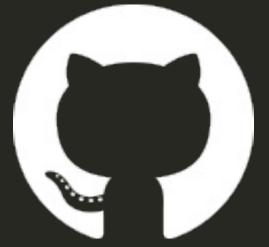


- 1. Create a README .md file.**
 - See next slide for contents.
- 2. Modify Learning-about-GitHub.Rmd.**
 - See following slide.
- 3. Commit changes locally.**
- 4. Push to GitHub from RStudio.**

README.md Contents



```
# GitHub R Demo  
  
## Chick Weight Data  
  
The `ChickWeight` are analysed as follows:  
  
+ Summary statistics for weight by Diet and Time  
+ Box whisker plots by Diet over Time for weight  
  
## Further information  
  
Please see https://ilustat.com/shared/Getting-Started-in-R.pdf
```

Note: Create an "R Script" and save as "README.md". Click on "Yes" if you get the following message:

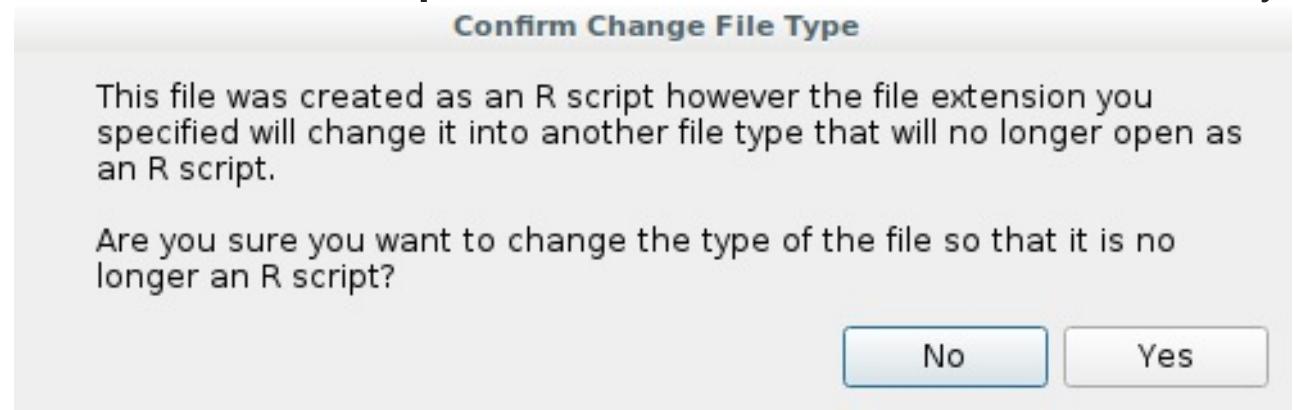

Modify Learning-about-GitHub.Rmd



Replace the code in CWplot chunk with:

```
library(ggplot2)
library(dplyr)

ChickWeight %>%
  ggplot(aes(Time, weight, colour=Diet)) +
  geom_point() +
  facet_wrap(~Diet) +
  stat_summary(fun.y="mean", geom="line", colour="black") +
  theme(legend.position = "none") +
  ggtitle("Chick Weight over Time by Diet") +
  xlab("Time (days)") +
  ylab("Weight (grams)")
```

Knit the file to HTML

Commit & Push



Commit changes using git from RStudio.


- **Don't forget to write a commit message.**

Synchronise to GitHub by clicking on the "Push" button.

Check your repository on GitHub

- **Check the Commit history**

Creating a Pull Request



1. From your GitHub account fork:

- <https://github.com/saghirb/Comments-about-R>

2. Edit the file 20190524-Comments.Rmd.


- Add your Name and three comments.

3. Create a "New Pull Request" with comments.

- Then submit it by clicking "Create Pull Request."

4. Then the owner (saghirb) will receive it.

Summary




Git, GitHub and RStudio

- Great combination for tracking your work
- Revert back to past work
- Collaborate with others

Git/GitHub can be frustrating at times

- The rewards and benefits are far greater!



**This work is licensed under the
Creative Commons Attribution-Non Commercial 4.0
International License.**

To view a copy of this license, visit

<http://creativecommons.org/licenses/by-nc/4.0/>