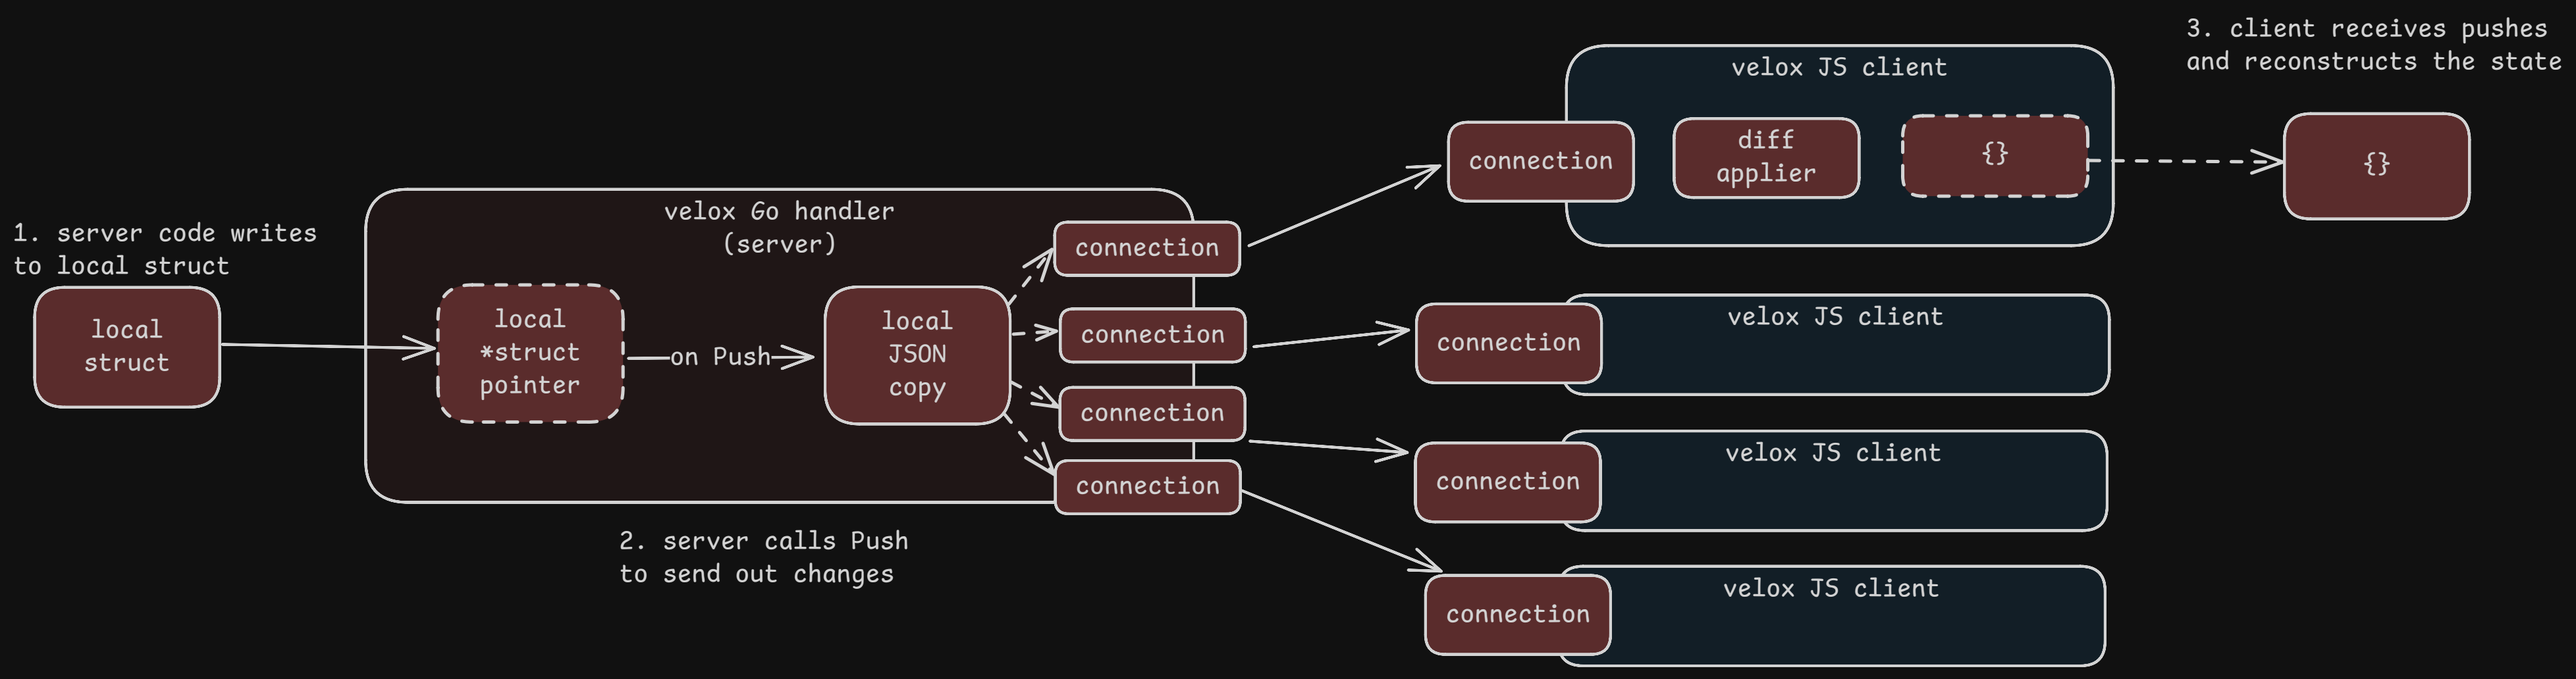
1. server code writes
to local struct
local
struct
velox Go handler
(server)
local
*struct
pointer
on Push
local
JSON
copy
connection
connection
connection
connection
2. server calls Push
to send out changes
velox JS client
connection
diff
applier
{}
3. client receives pushes
and reconstructs the state
{}
velox JS client
connection
velox JS client
connection
velox JS client
connection