# Untitled

2022-06-11

Contents

1   R plots

```
> library(magrittr)
>
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
```

```
> library(magrittr)
>
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
```

(a) 1

(b) 2

(c) 3

(d) 4

(e) 5

(f) 6

(g) 7

(h) 8

(i) 9

Figure 1: some plot again

(a) 1   (b) 2   (c) 3

(d) 4   (e) 5   (f) 6

(g) 7   (h) 8   (i) 9

Figure 2: some plot

(a) Figure 1 of EviewsR page   (b) Figure 2 of EviewsR page   (c) Figure 3 of EviewsR page

(d) Figure 1 of Page1 page   (e) Figure 2 of Page1 page   (f) Figure 3 of Page1 page

(g) Figure 1 of Page2 page   (h) Figure 2 of Page2 page   (i) Figure 3 of Page2 page
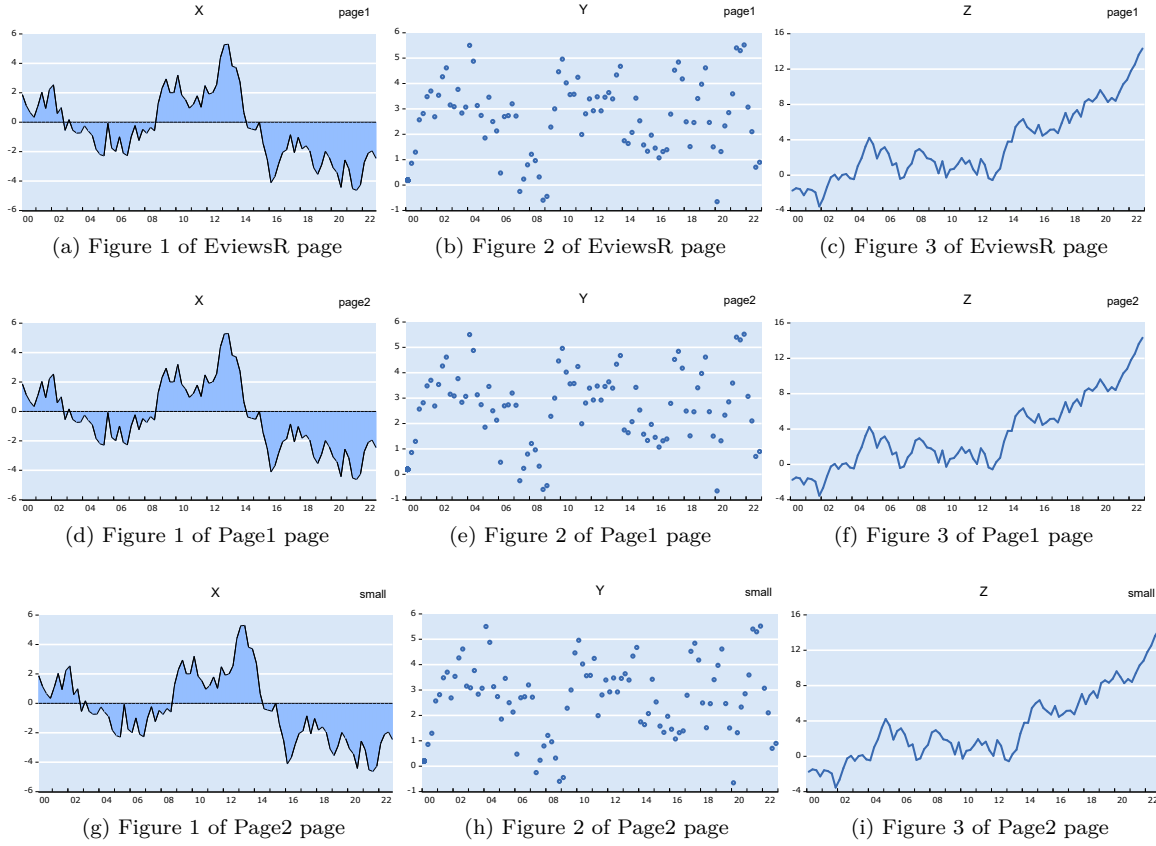
Figure 3: Figures automatically imported by eviews chunk (page=T, fig.keep="new")