

Untitled

2022-06-11

Contents

1 R plots

1

1 R plots

```
> library(magrittr)
>
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
```

```
> library(magrittr)
>
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
> a=runif(100) %>% plot
```

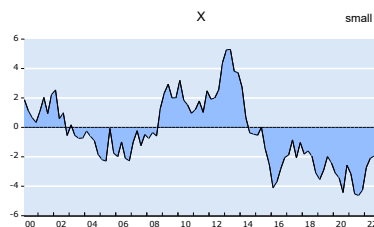


Figure 6: Figures automatically imported by evIEWS chunk (page=T, fig.keep="new")

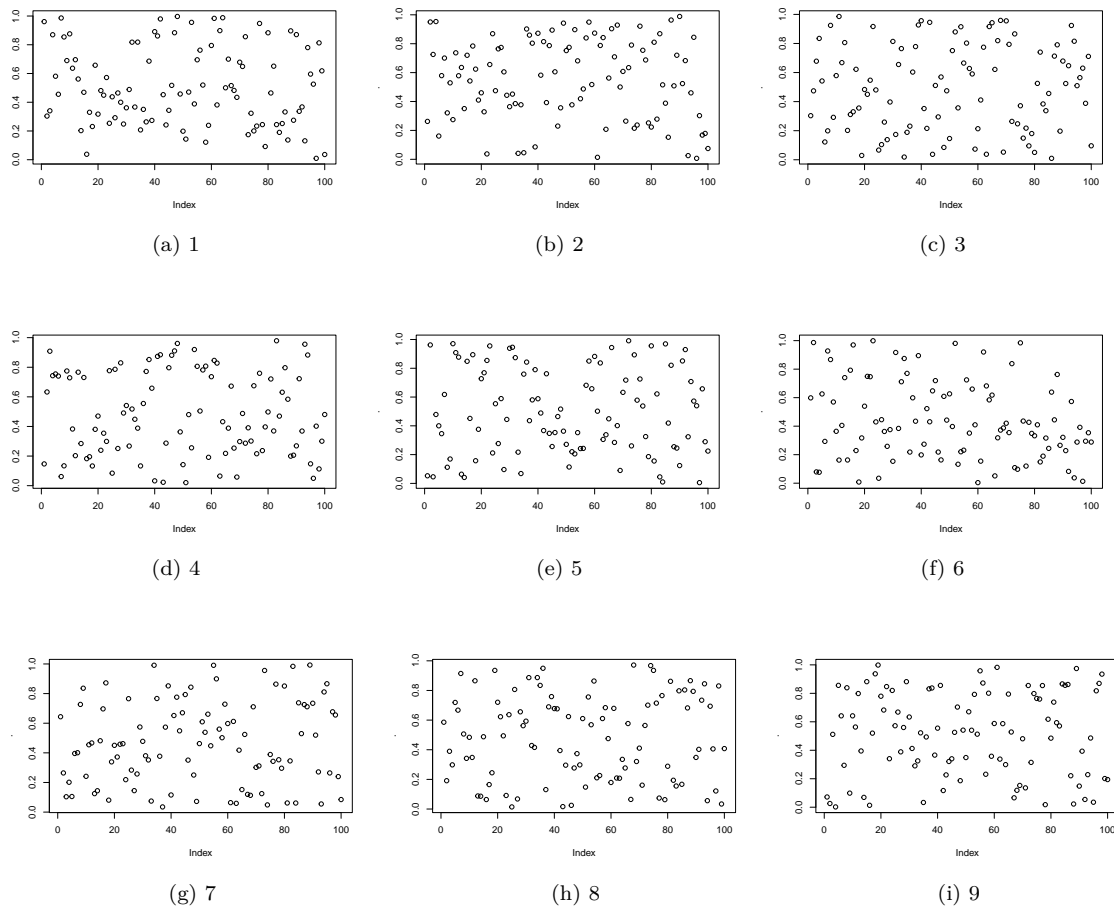


Figure 1: some plot again

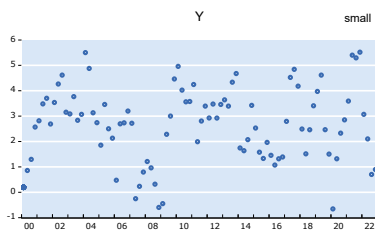


Figure 7: Figures automatically imported by eviews chunk (page=T, fig.keep="new")

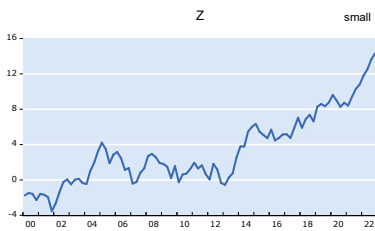


Figure 8: Figures automatically imported by eviews chunk (page=T, fig.keep="new")

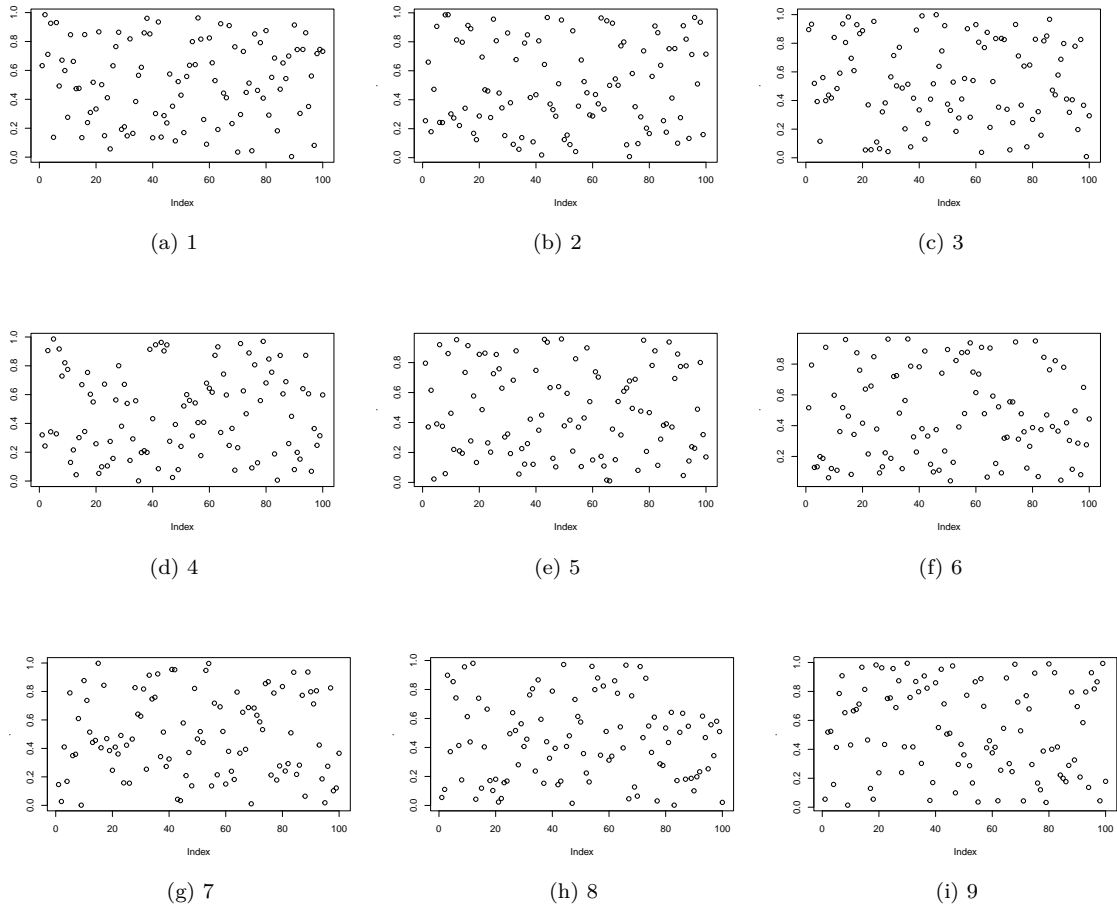


Figure 2: some plot

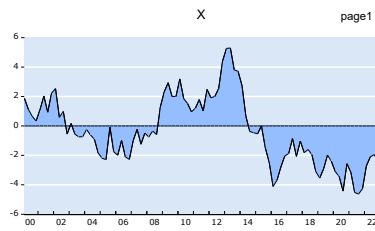


Figure 3: Figures automatically imported by eviews chunk (page=T, fig.keep="high")

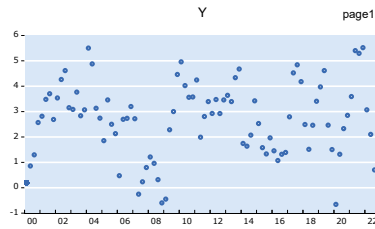


Figure 4: Figures automatically imported by eviews chunk (page=T, fig.keep="high")

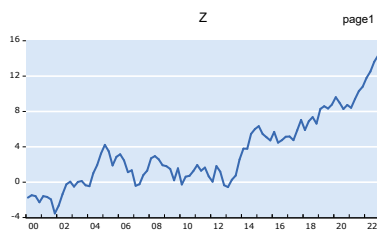


Figure 5: Figures automatically imported by evIEWS chunk (page=T, fig.keep="high")