Untitled

2022-06-11

\mathbf{C}	'n	n	t.	ρ	n	ŀ.	S
\sim	v	11	U'	C.	LL	υ	D

0.1 R Markdown	1
1 R plots	2
0.1 R Markdown	
<pre>EViews> wfcreate(wf=sagiru,page=mati) q 2000 2025 + 'open mychunk + for !i=1 to 100 + %page="page"+0STR(!i) if @pageexist(%page) then + pagedelete page!i + endif + next + for %y page1 page2 page3 + pagecreate(page={%y}) a 2020 2025 + next + %pagelist="page1 page2 page3" + for %y {%pagelist} + pageselect {%y} + delete(noerr) grap + genr y=@cumsum(nrnd) + genr x=@cumsum(nrnd) + genr z=@cumsum(nrnd) + genr date=@date + ' graph grap3.line z + ' graph grap3.line z + ' freeze(grap,mode=overwrite) x.line + equation ols.ls y c x + freeze(mode=overwrite,tab) ols + next + 'wfsave mychunk</pre>	
<pre>EViews> library(magrittr) EViews> EViews> mychunk\$page3 %>% head EViews> EViews> mychunk\$ols</pre>	
EViews>	

```
EViews> mychunk$tab
EViews>
EViews> mychunk$mati %>% head
```

1 R plots

```
EViews> print(knitr::opts_current$get("sagir"))
EViews> print(knitr::opts_current$get("fig.show"))
EViews> y=cumsum(rnorm(100))
EViews> x=cumsum(rnorm(100))
EViews>
EViews> plot(x,y)
EViews> data=data.frame(y=runif(100),x=runif(100))
EViews> eviews_graph(data, save_path = "", frequency = "m", start_date = 1990, group = F, options = "m", graph
EViews> rwalk("x y z",num_observations = 100,frequency = "7",start_date = "1")
EViews>
EViews> eviews$xyz %>% head
EViews>
EViews> eviews_graph(eviews$xyz,group = T,graph_procs = "template midnight",graph_command = "line")
EViews > 'This is some comment in EViews program, feel free to write anything
+ wfcreate(page=EviewsR_page,wf=EviewsR_workfile) m 2000 2022
+ for %y sam package page1 page2
+ pagecreate(page={%y}) sam m 2000 2022
+ next
+ pageselect sam
+ rndseed 123456
+ genr y=@cumsum(nrnd)
+ genr x=@cumsum(nrnd)
+ equation OLS_EQUATION.ls y c x
+ freeze(OLS_EQUATION_TABLE, mode=overwrite) OLS_EQUATION
+ freeze(EviewsR_GRAPH, mode=overwrite) y.line
+ delete(noerr) EviewsR_GRAPH1
+ graph GRAPH1.line x y
+ save mygraph
EViews> import_graph("*","mygraph","sam",graph_procs = "template magazine")
                                          20
```



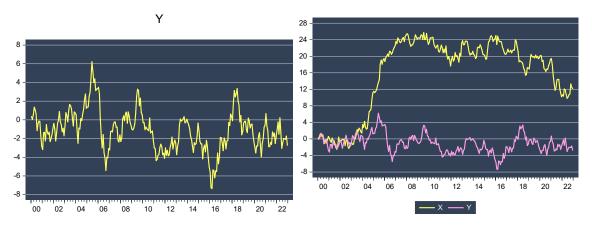


Figure 1: Dynamic figure

```
EViews> 'This is some comment in EViews program, feel free to write anything
+
+ wfcreate(page=EviewsR_page,wf=EviewsR_workfile) m 2000 2022
+ for %y EviewsR package page1 page2
+ pagecreate(page={%y}) EviewsR m 2000 2022
+ next
+ pageselect EviewsR
+ rndseed 123456
+ genr y=@cumsum(nrnd)
+ genr x=@cumsum(nrnd)
+ equation OLS_EQUATION.ls y c x
+ freeze(OLS_EQUATION_TABLE,mode=overwrite) OLS_EQUATION
+ freeze(EviewsR_GRAPH,mode=overwrite) y.line
+ delete(noerr) EviewsR_GRAPH1
+ graph EviewsR_GRAPH1.line x y
```

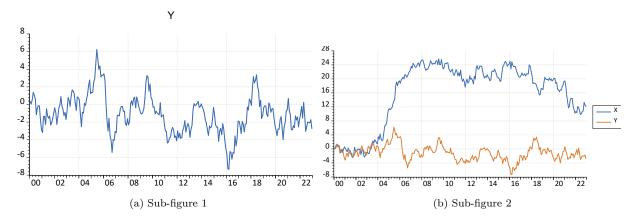


Figure 2: Dynamic figure automatically imported by eviews chunk

The \mathbb{R}^2 of the ols equation object is 0.044951