
org.apache.commons.csv.QuoteMode:35: $stack1 = new org.apache.commons.csv.QuoteMode
org.apache.commons.csv.QuoteMode:46: $stack3 = new org.apache.commons.csv.QuoteMode

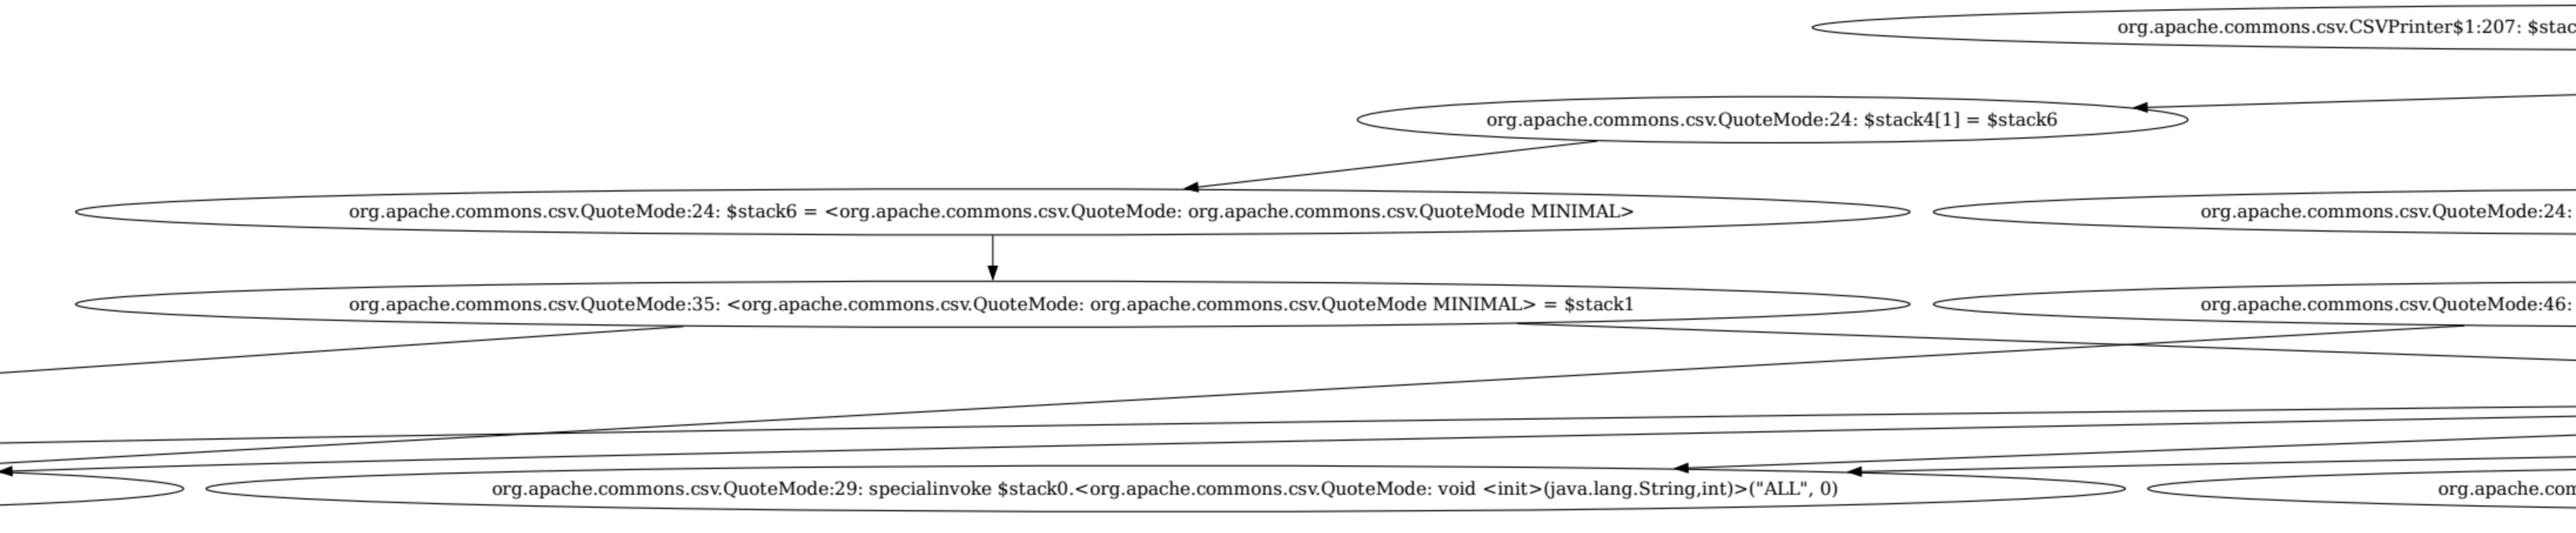
org.apache.commons.csv.CSVPrinter$1:207: $stac
org.apache.commons.csv.QuoteMode:24: $stack4[1] = $stack6
org.apache.commons.csv.QuoteMode:24: $stack6 = <org.apache.commons.csv.QuoteMode: org.apache.commons.csv.QuoteMode MINIMAL>
org.apache.commons.csv.QuoteMode:24:
org.apache.commons.csv.QuoteMode:35: <org.apache.commons.csv.QuoteMode: org.apache.commons.csv.QuoteMode MINIMAL> = $stack1
org.apache.commons.csv.QuoteMode:46:
org.apache.commons.csv.QuoteMode:29: specialinvoke $stack0.<org.apache.commons.csv.QuoteMode: void <init>(java.lang.String,int)>("ALL", 0)
org.apache.com

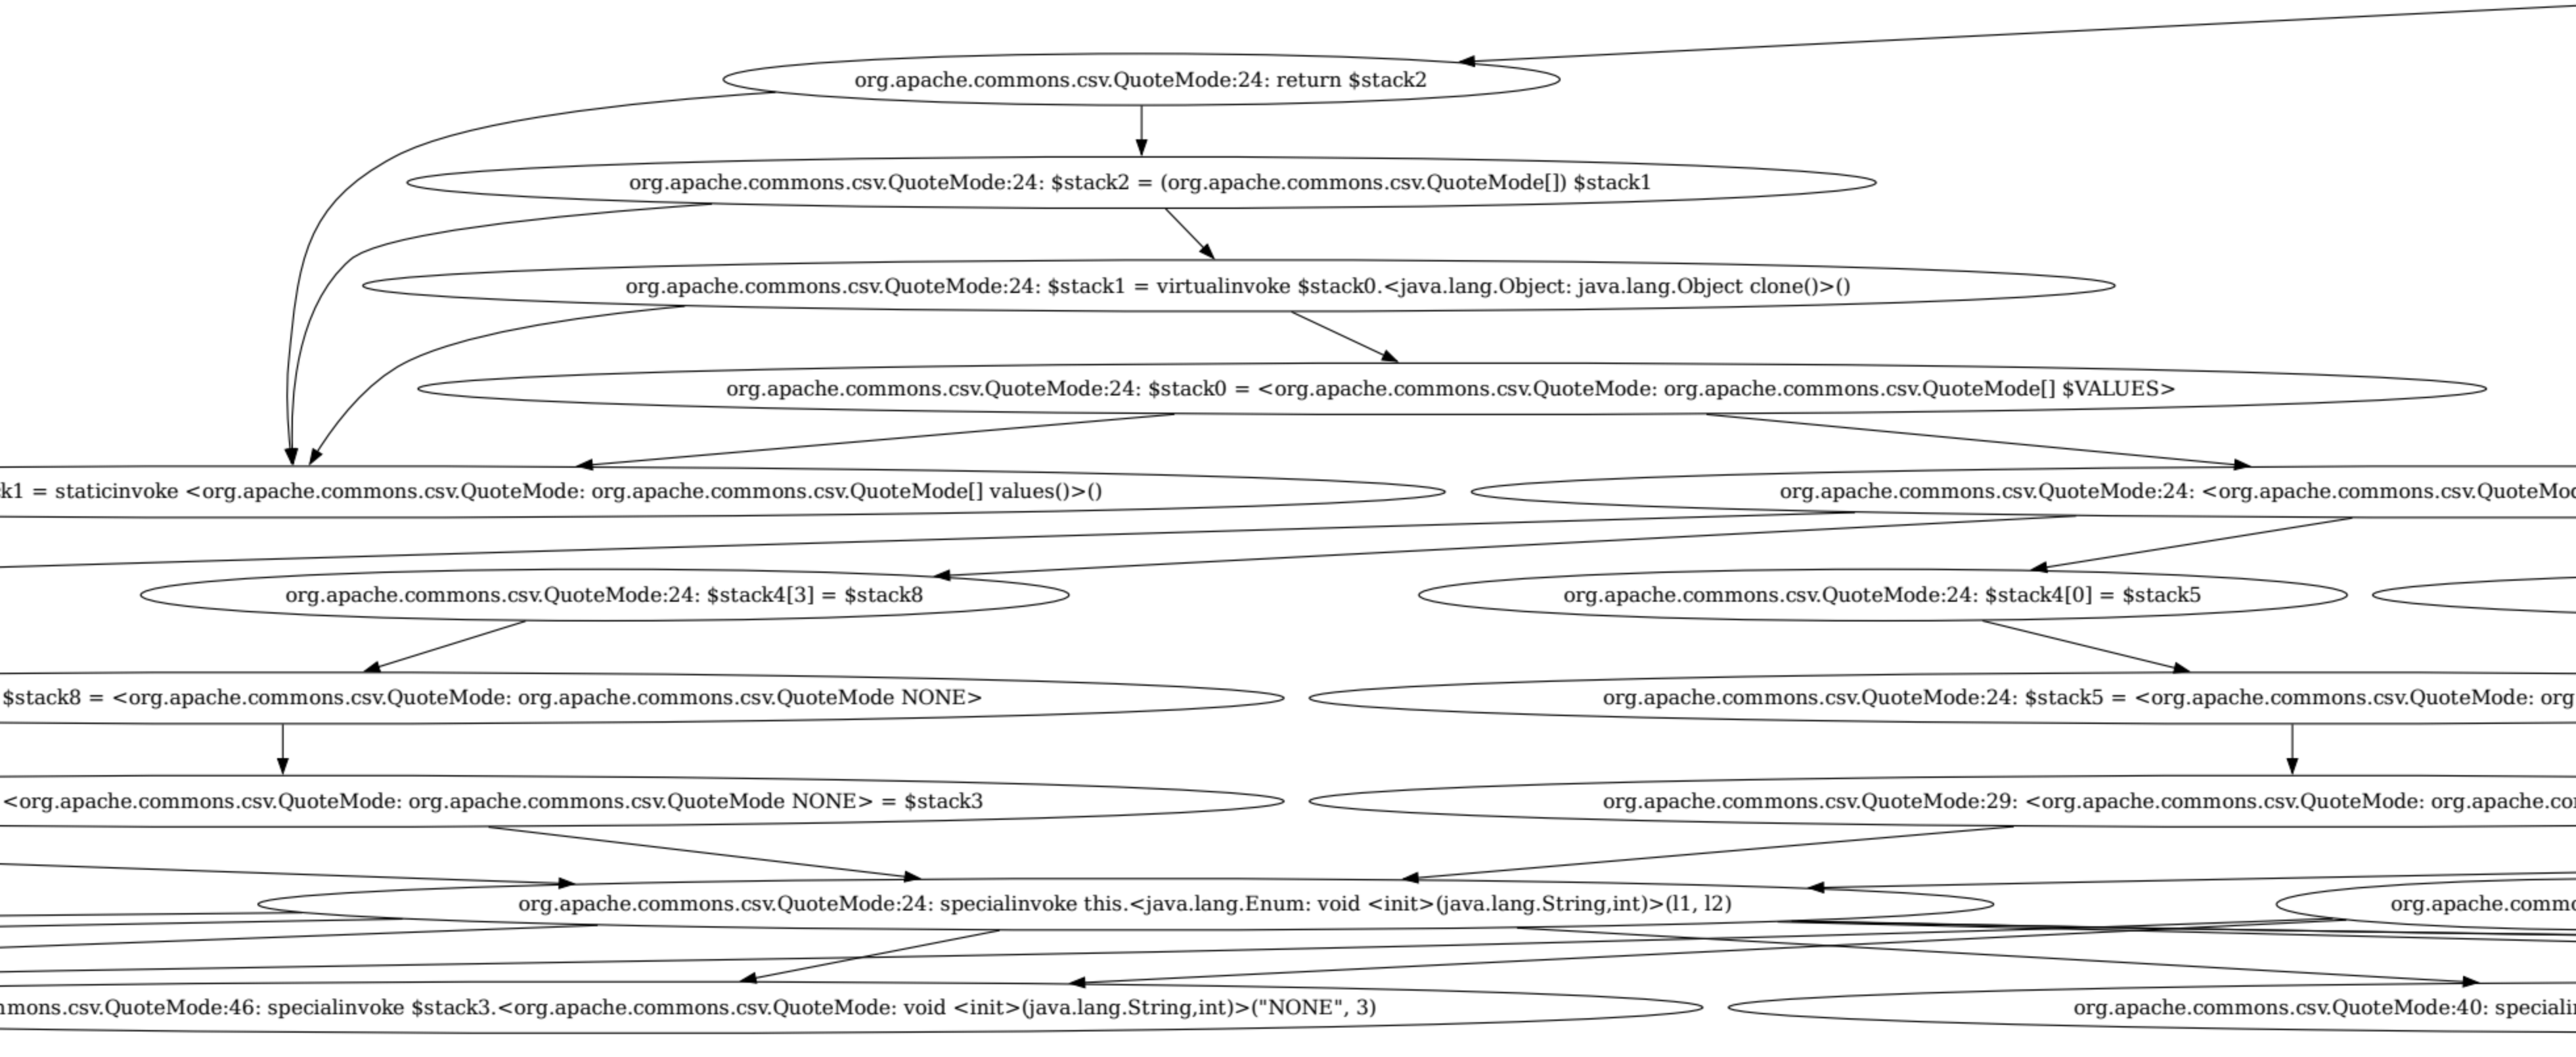
org.apache.commons.csv.QuoteMode:24: return $stack2
org.apache.commons.csv.QuoteMode:24: $stack2 = (org.apache.commons.csv.QuoteMode[]) $stack1
org.apache.commons.csv.QuoteMode:24: $stack1 = virtualinvoke $stack0.<java.lang.Object: java.lang.Object clone()>()
org.apache.commons.csv.QuoteMode:24: $stack0 = <org.apache.commons.csv.QuoteMode: org.apache.commons.csv.QuoteMode[] $VALUES>
k1 = staticinvoke <org.apache.commons.csv.QuoteMode: org.apache.commons.csv.QuoteMode[] values()>()
org.apache.commons.csv.QuoteMode:24: <org.apache.commons.csv.QuoteMo
org.apache.commons.csv.QuoteMode:24: $stack4[3] = $stack8
org.apache.commons.csv.QuoteMode:24: $stack4[0] = $stack5
$stack8 = <org.apache.commons.csv.QuoteMode: org.apache.commons.csv.QuoteMode NONE>
org.apache.commons.csv.QuoteMode:24: $stack5 = <org.apache.commons.csv.QuoteMode: org
<org.apache.commons.csv.QuoteMode: org.apache.commons.csv.QuoteMode NONE> = $stack3
org.apache.commons.csv.QuoteMode:29: <org.apache.commons.csv.QuoteMode: org.apache.co
org.apache.commons.csv.QuoteMode:24: specialinvoke this.<java.lang.Enum: void <init>(java.lang.String,int)>(l1, l2)
org.apache.comm
mons.csv.QuoteMode:46: specialinvoke $stack3.<org.apache.commons.csv.QuoteMode: void <init>(java.lang.String,int)>("NONE", 3)
org.apache.commons.csv.QuoteMode:40: speciali

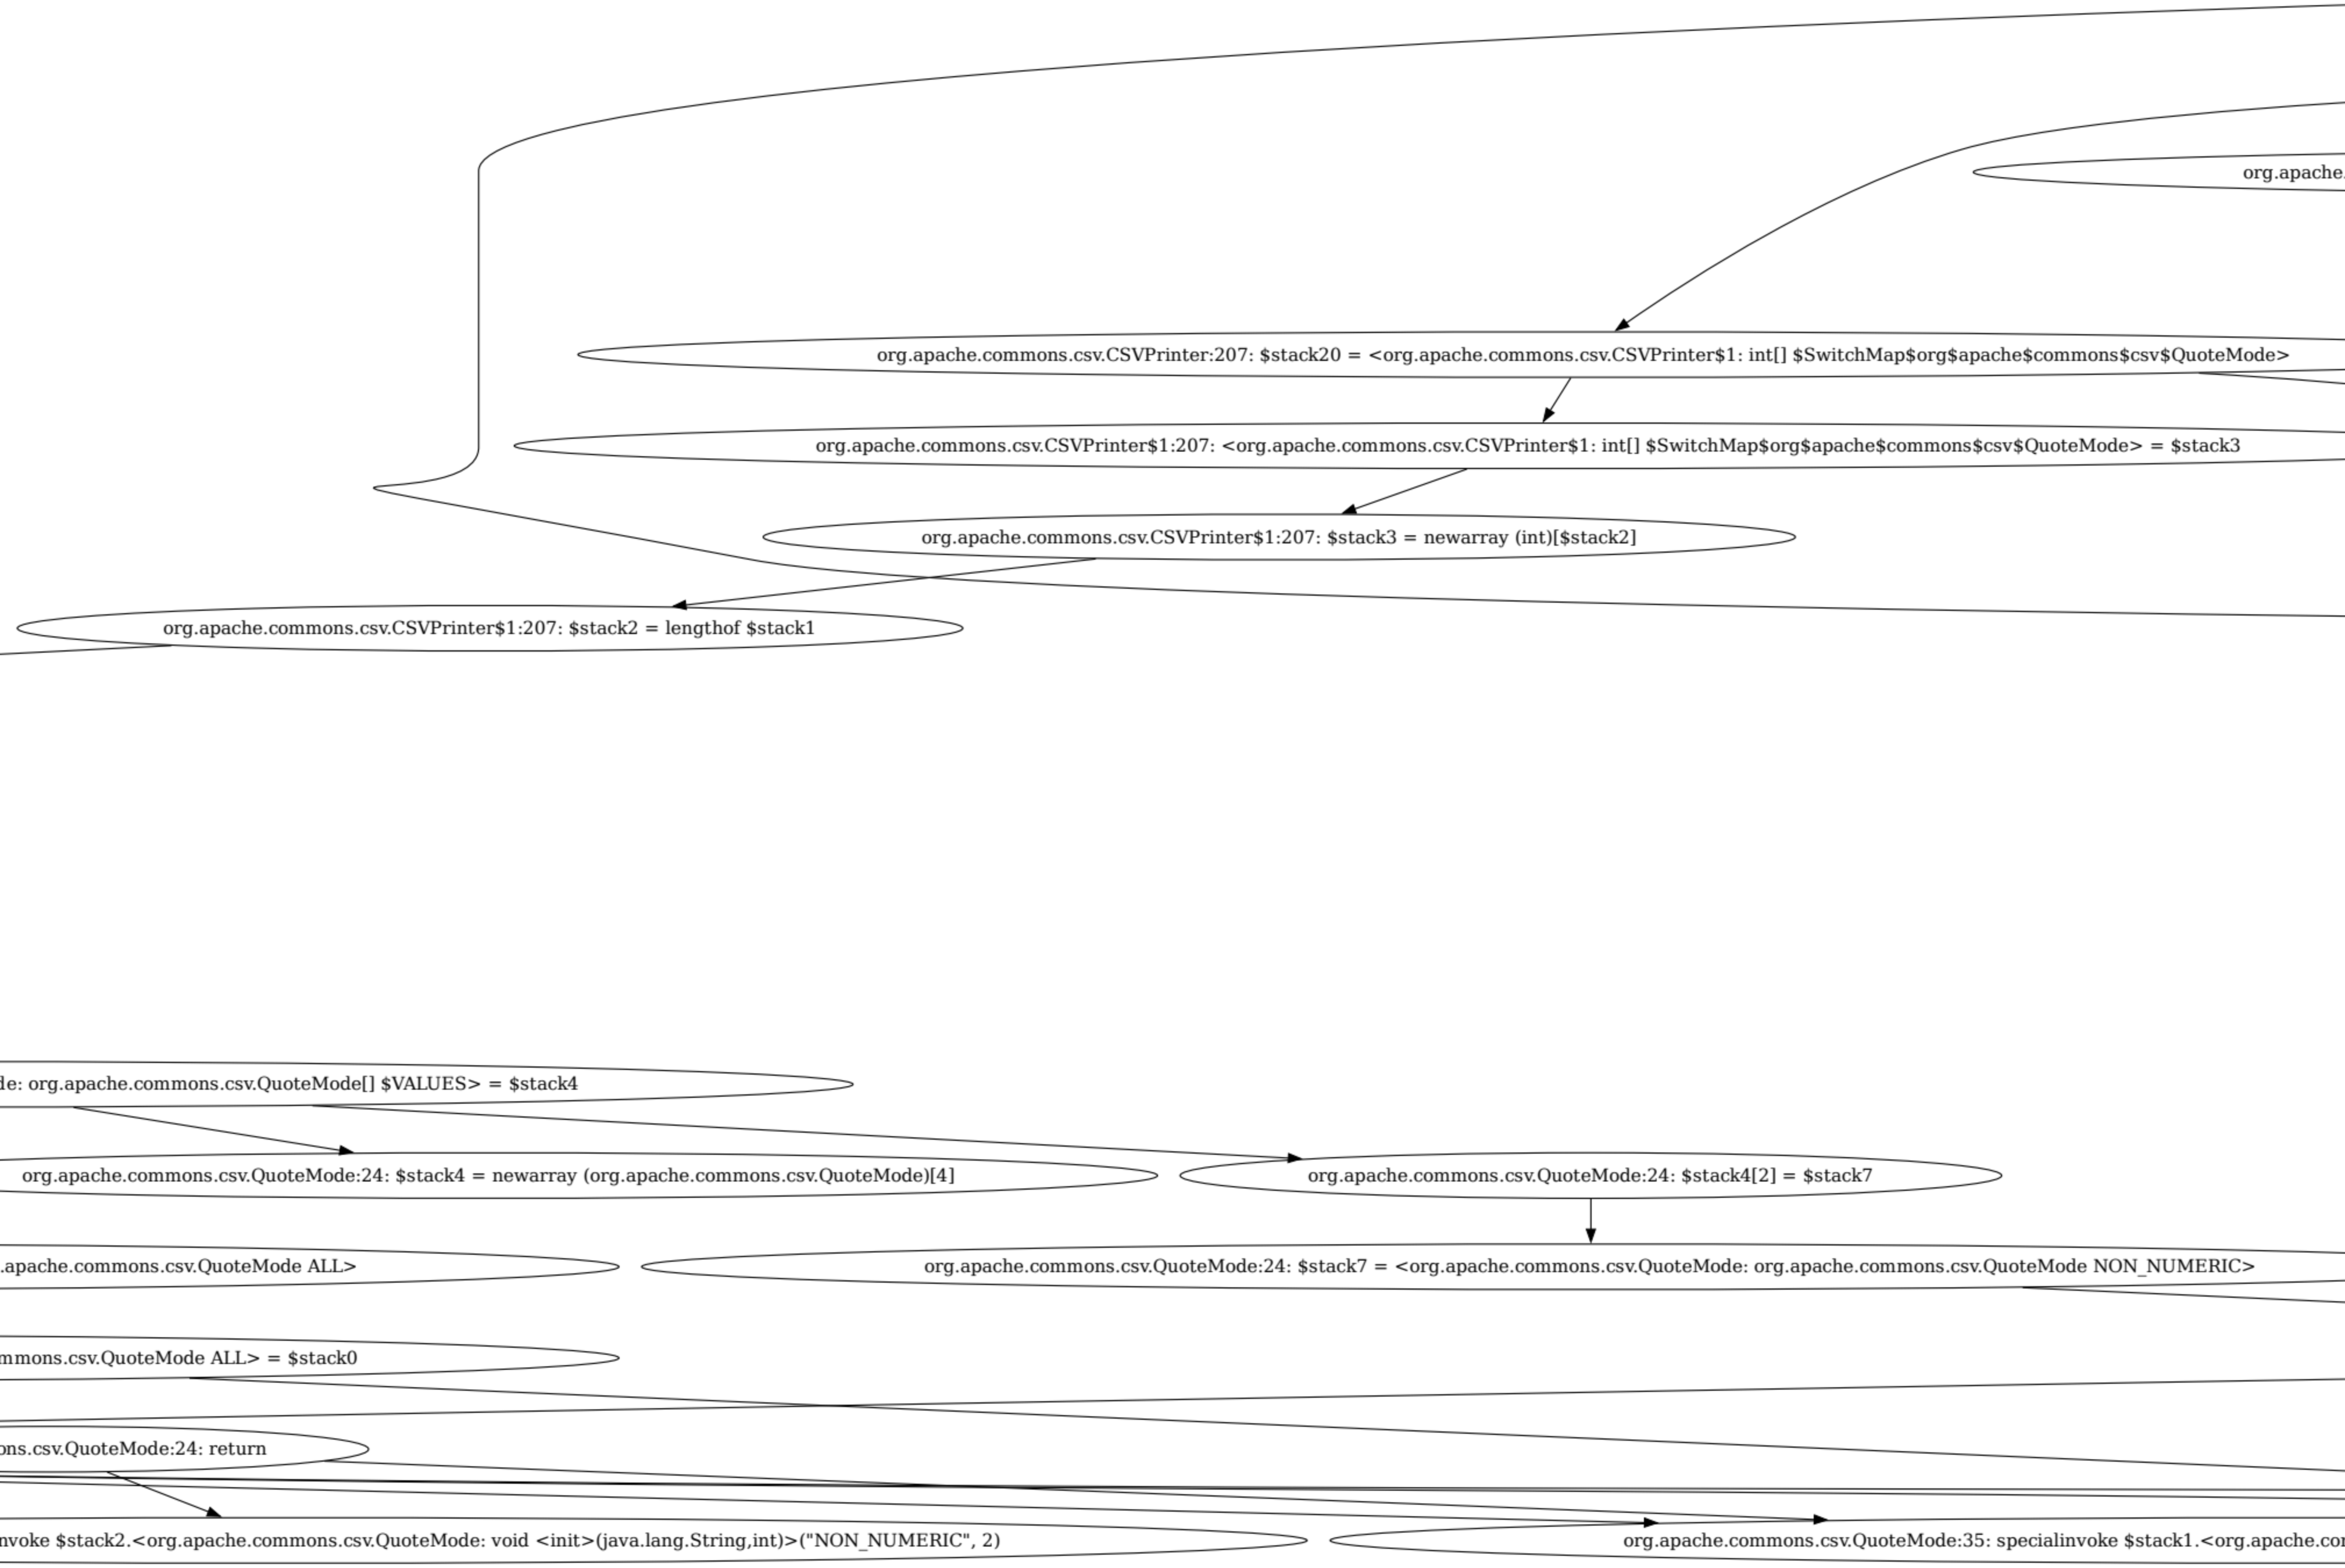
org.apache.
org.apache.commons.csv.CSVPrinter:207: $stack20 = <org.apache.commons.csv.CSVPrinter$1: int[] $SwitchMap$org$apache$commons$csv$QuoteMode>
org.apache.commons.csv.CSVPrinter$1:207: <org.apache.commons.csv.CSVPrinter$1: int[] $SwitchMap$org$apache$commons$csv$QuoteMode> = $stack3
org.apache.commons.csv.CSVPrinter$1:207: $stack3 = newarray (int)[$stack2]
org.apache.commons.csv.CSVPrinter$1:207: $stack2 = lengthof $stack1
de: org.apache.commons.csv.QuoteMode[] $VALUES> = $stack4
org.apache.commons.csv.QuoteMode:24: $stack4 = newarray (org.apache.commons.csv.QuoteMode)[4]
org.apache.commons.csv.QuoteMode:24: $stack4[2] = $stack7
.apache.commons.csv.QuoteMode ALL>
org.apache.commons.csv.QuoteMode:24: $stack7 = <org.apache.commons.csv.QuoteMode: org.apache.commons.csv.QuoteMode NON_NUMERIC>
mmons.csv.QuoteMode ALL> = $stack0
ons.csv.QuoteMode:24: return
nvoke $stack2.<org.apache.commons.csv.QuoteMode: void <init>(java.lang.String,int)>("NON_NUMERIC", 2)
org.apache.commons.csv.QuoteMode:35: specialinvoke $stack1.<org.apache.co

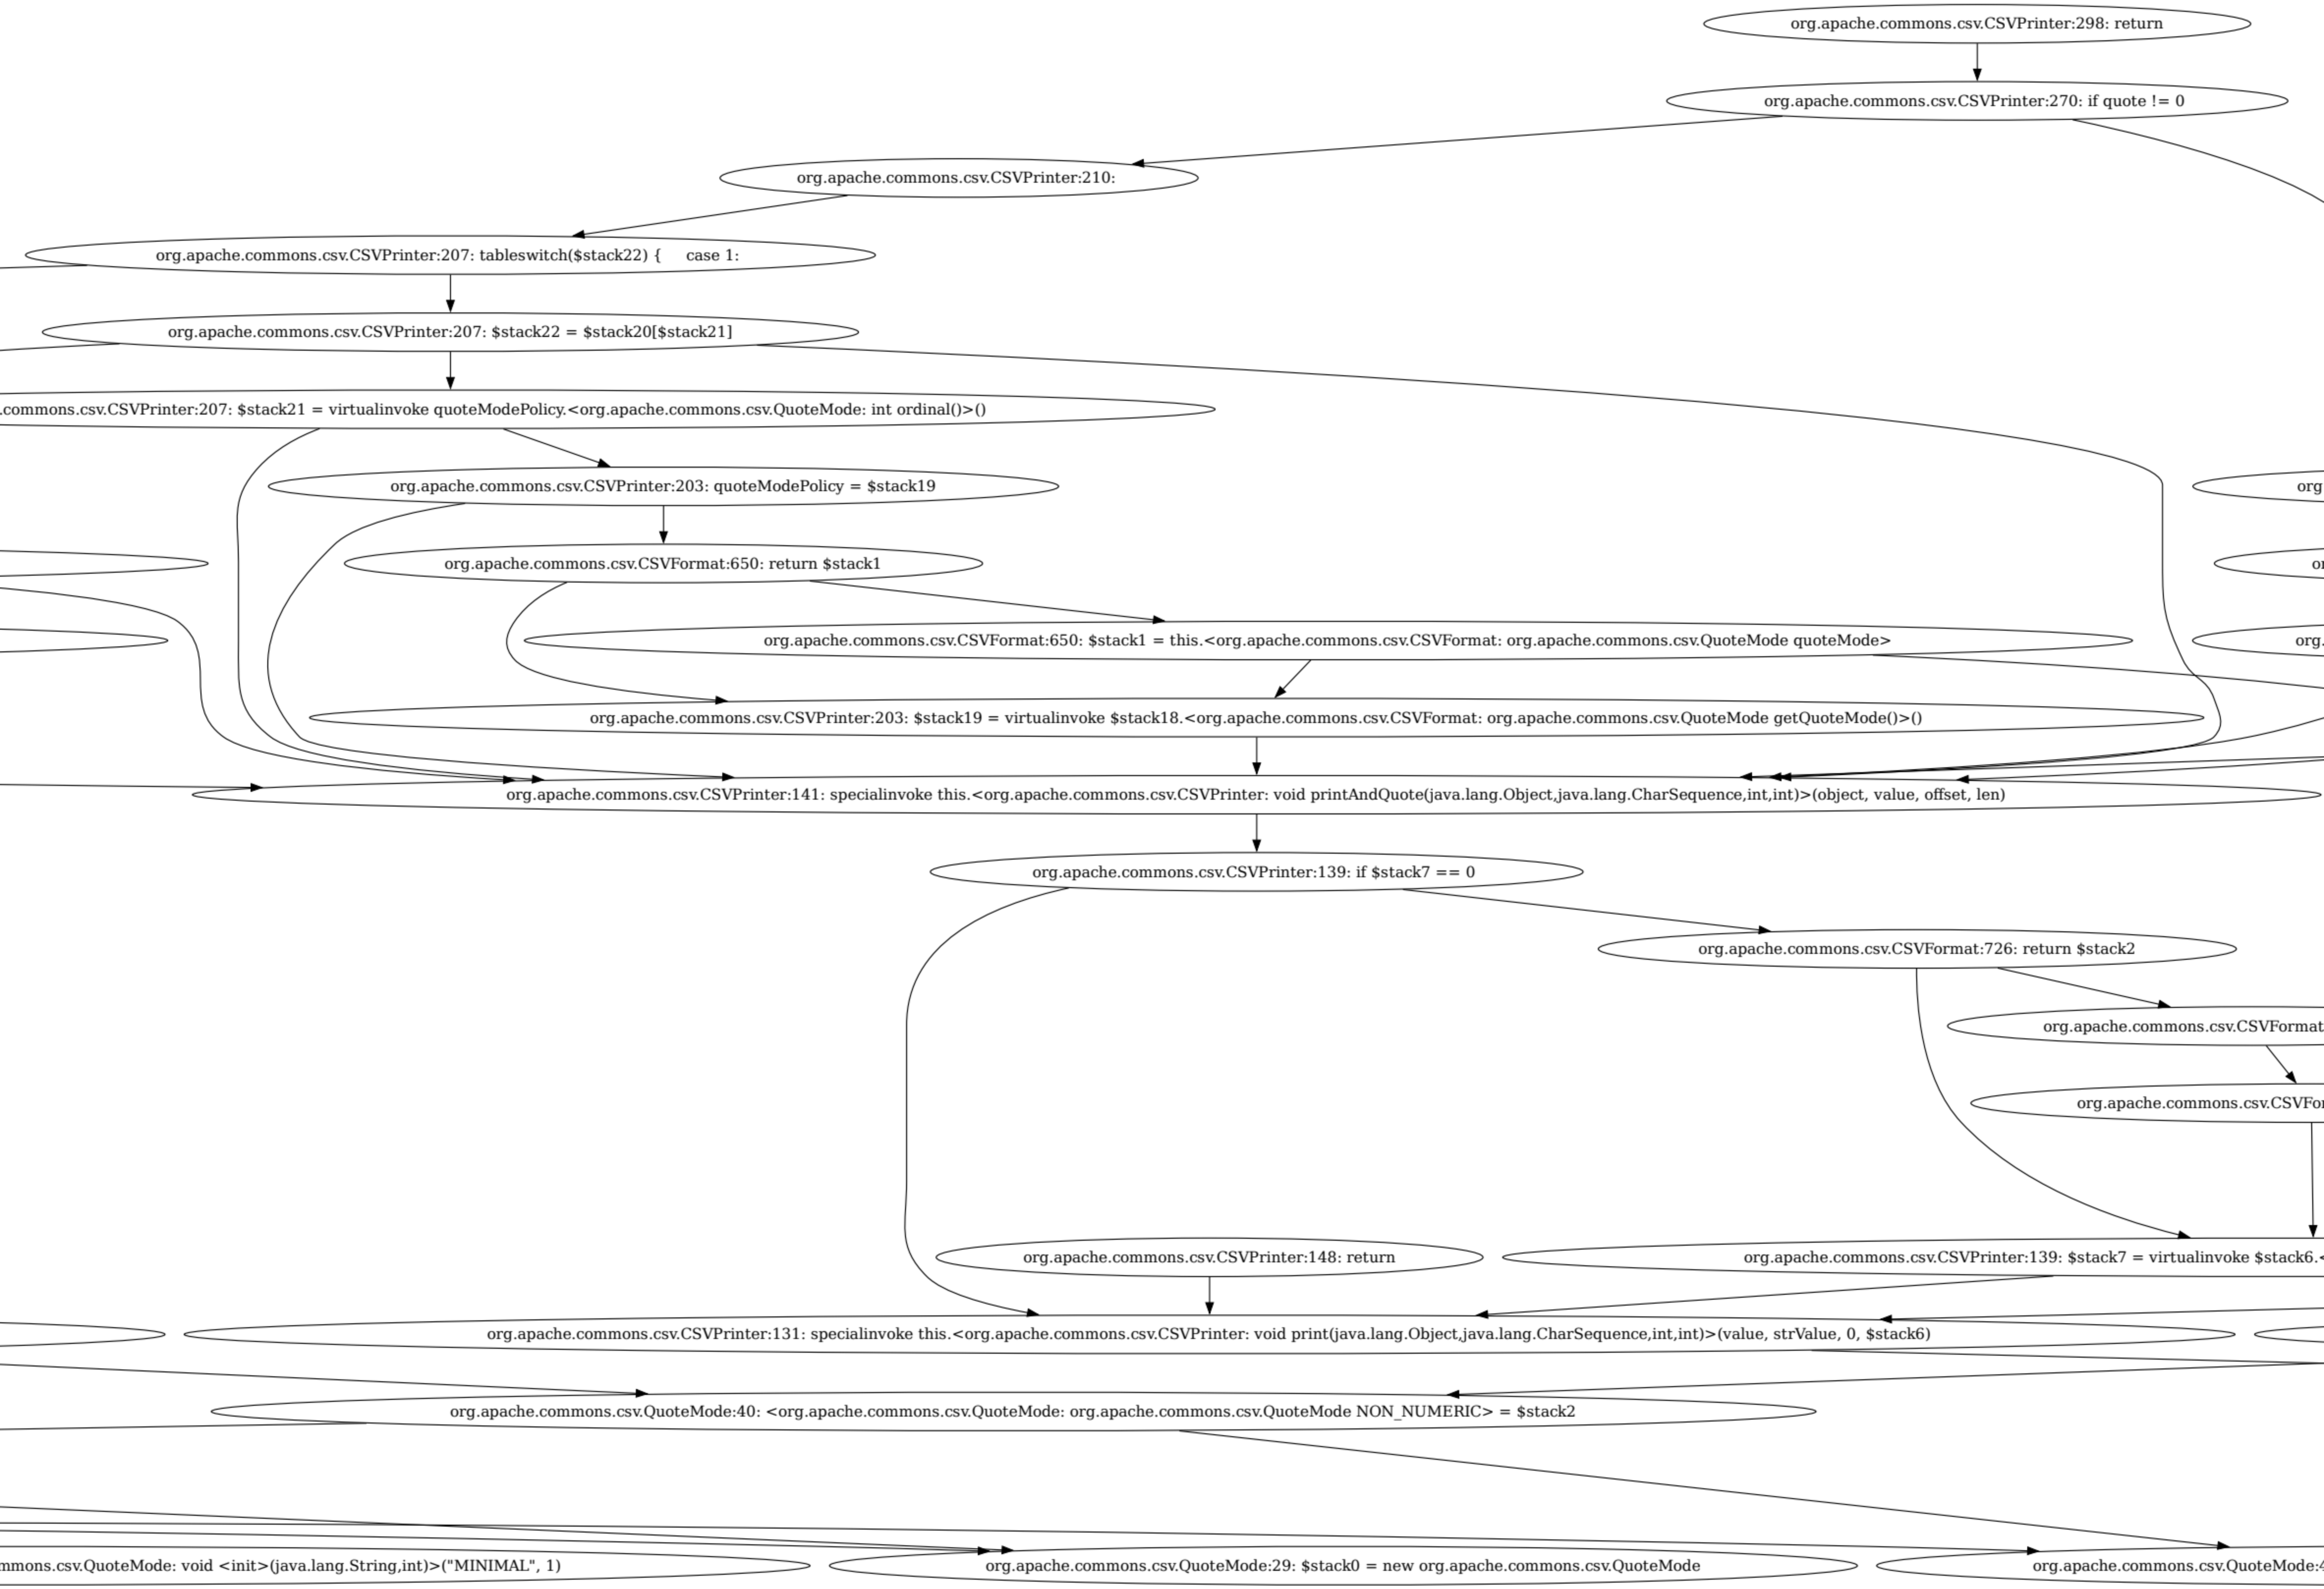
org.apache.commons.csv.CSVPrinter:298: return
org.apache.commons.csv.CSVPrinter:270: if quote != 0
org.apache.commons.csv.CSVPrinter:210:
org.apache.commons.csv.CSVPrinter:207: tableswitch($stack22) { case 1:
org.apache.commons.csv.CSVPrinter:207: $stack22 = $stack20[$stack21]
.commons.csv.CSVPrinter:207: $stack21 = virtualinvoke quoteModePolicy.<org.apache.commons.csv.QuoteMode: int ordinal()>()
org.apache.commons.csv.CSVPrinter:203: quoteModePolicy = $stack19
org
org.apache.commons.csv.CSVFormat:650: return $stack1
or
org.apache.commons.csv.CSVFormat:650: $stack1 = this.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.QuoteMode quoteMode>
org.
org.apache.commons.csv.CSVPrinter:203: $stack19 = virtualinvoke $stack18.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.QuoteMode getQuoteMode()>()
org.apache.commons.csv.CSVPrinter:141: specialinvoke this.<org.apache.commons.csv.CSVPrinter: void printAndQuote(java.lang.Object,java.lang.CharSequence,int,int)>(object, value, offset, len)
org.apache.commons.csv.CSVPrinter:139: if $stack7 == 0
org.apache.commons.csv.CSVFormat:726: return $stack2
org.apache.commons.csv.CSVFormat
org.apache.commons.csv.CSVFor
org.apache.commons.csv.CSVPrinter:148: return
org.apache.commons.csv.CSVPrinter:139: $stack7 = virtualinvoke $stack6.<
org.apache.commons.csv.CSVPrinter:131: specialinvoke this.<org.apache.commons.csv.CSVPrinter: void print(java.lang.Object,java.lang.CharSequence,int,int)>(value, strValue, 0, $stack6)
org.apache.commons.csv.QuoteMode:40: <org.apache.commons.csv.QuoteMode: org.apache.commons.csv.QuoteMode NON_NUMERIC> = $stack2
mmons.csv.QuoteMode: void <init>(java.lang.String,int)>("MINIMAL", 1)
org.apache.commons.csv.QuoteMode:29: $stack0 = new org.apache.commons.csv.QuoteMode
org.apache.commons.csv.QuoteMode:4

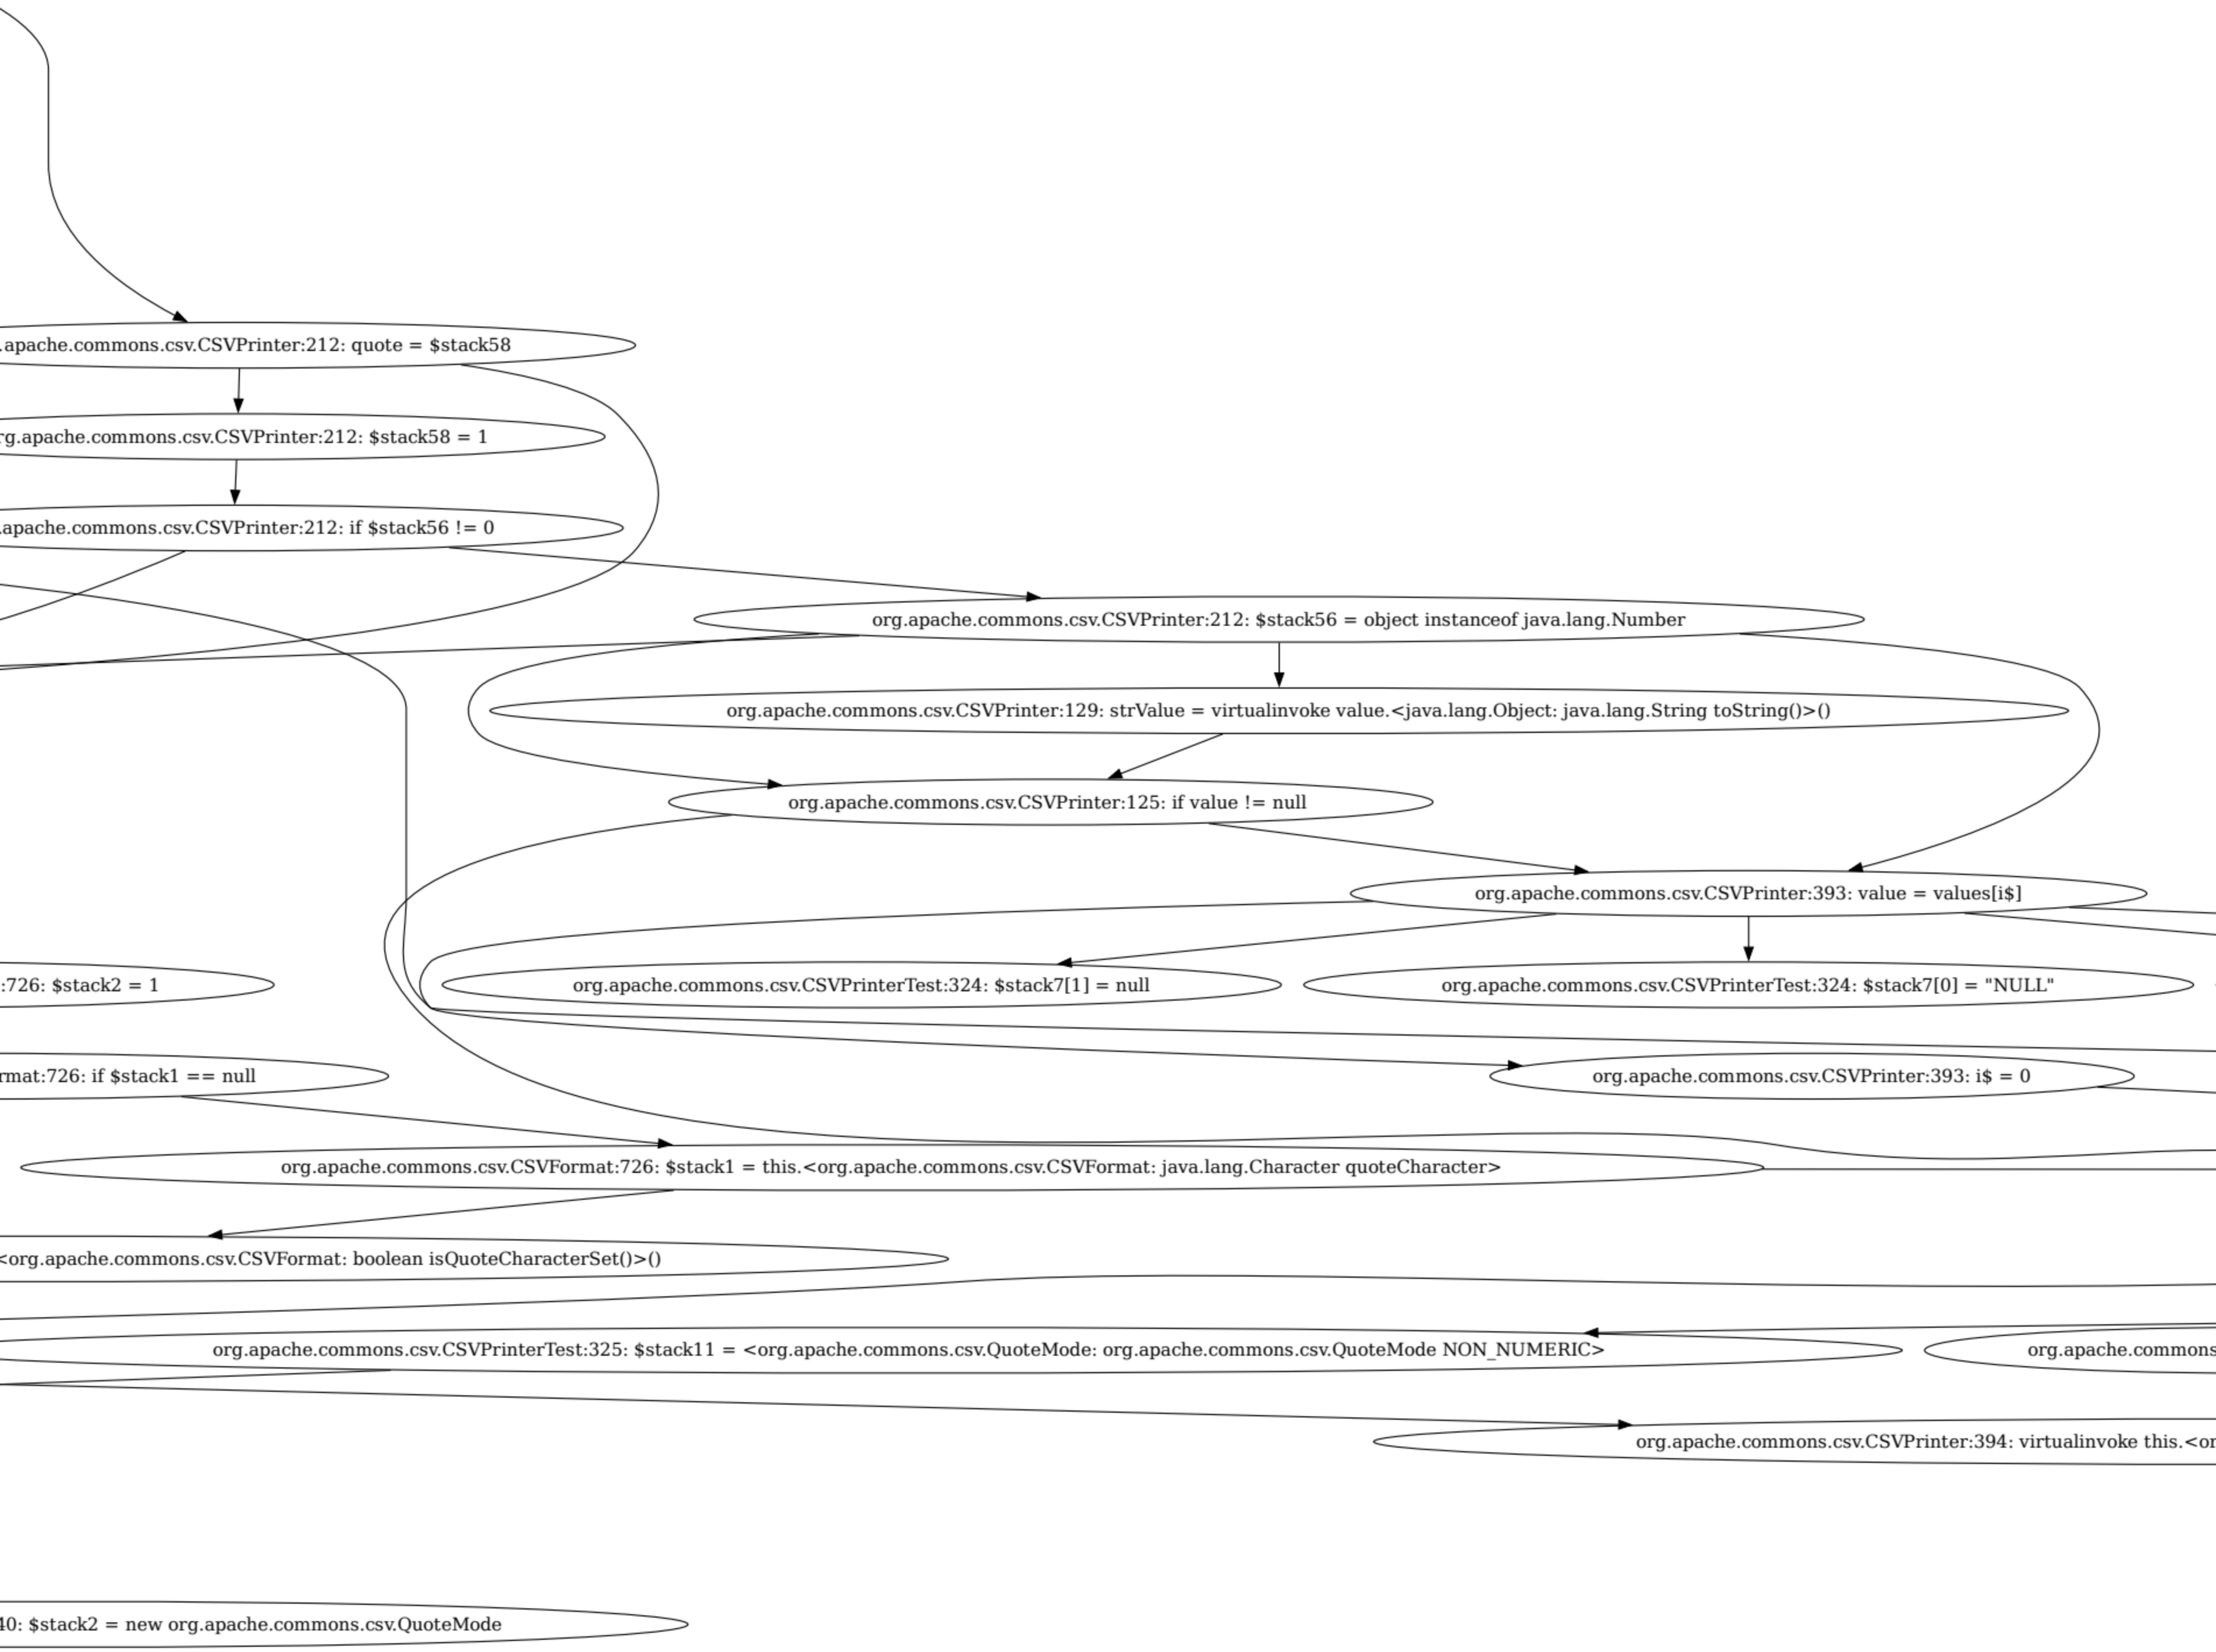
.apache.commons.csv.CSVPrinter:212: quote = $stack58
rg.apache.commons.csv.CSVPrinter:212: $stack58 = 1
.apache.commons.csv.CSVPrinter:212: if $stack56 != 0
org.apache.commons.csv.CSVPrinter:212: $stack56 = object instanceof java.lang.Number
org.apache.commons.csv.CSVPrinter:129: strValue = virtualinvoke value.<java.lang.Object: java.lang.String toString()>()
org.apache.commons.csv.CSVPrinter:125: if value != null
org.apache.commons.csv.CSVPrinter:393: value = values[i$]
:726: $stack2 = 1
org.apache.commons.csv.CSVPrinterTest:324: $stack7[1] = null
org.apache.commons.csv.CSVPrinterTest:324: $stack7[0] = "NULL"
rmat:726: if $stack1 == null
org.apache.commons.csv.CSVPrinter:393: i$ = 0
org.apache.commons.csv.CSVFormat:726: $stack1 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character quoteCharacter>
<org.apache.commons.csv.CSVFormat: boolean isQuoteCharacterSet()>()
org.apache.commons.csv.CSVPrinterTest:325: $stack11 = <org.apache.commons.csv.QuoteMode: org.apache.commons.csv.QuoteMode NON_NUMERIC>
org.apache.commons
org.apache.commons.csv.CSVPrinter:394: virtualinvoke this.<or
40: $stack2 = new org.apache.commons.csv.QuoteMode

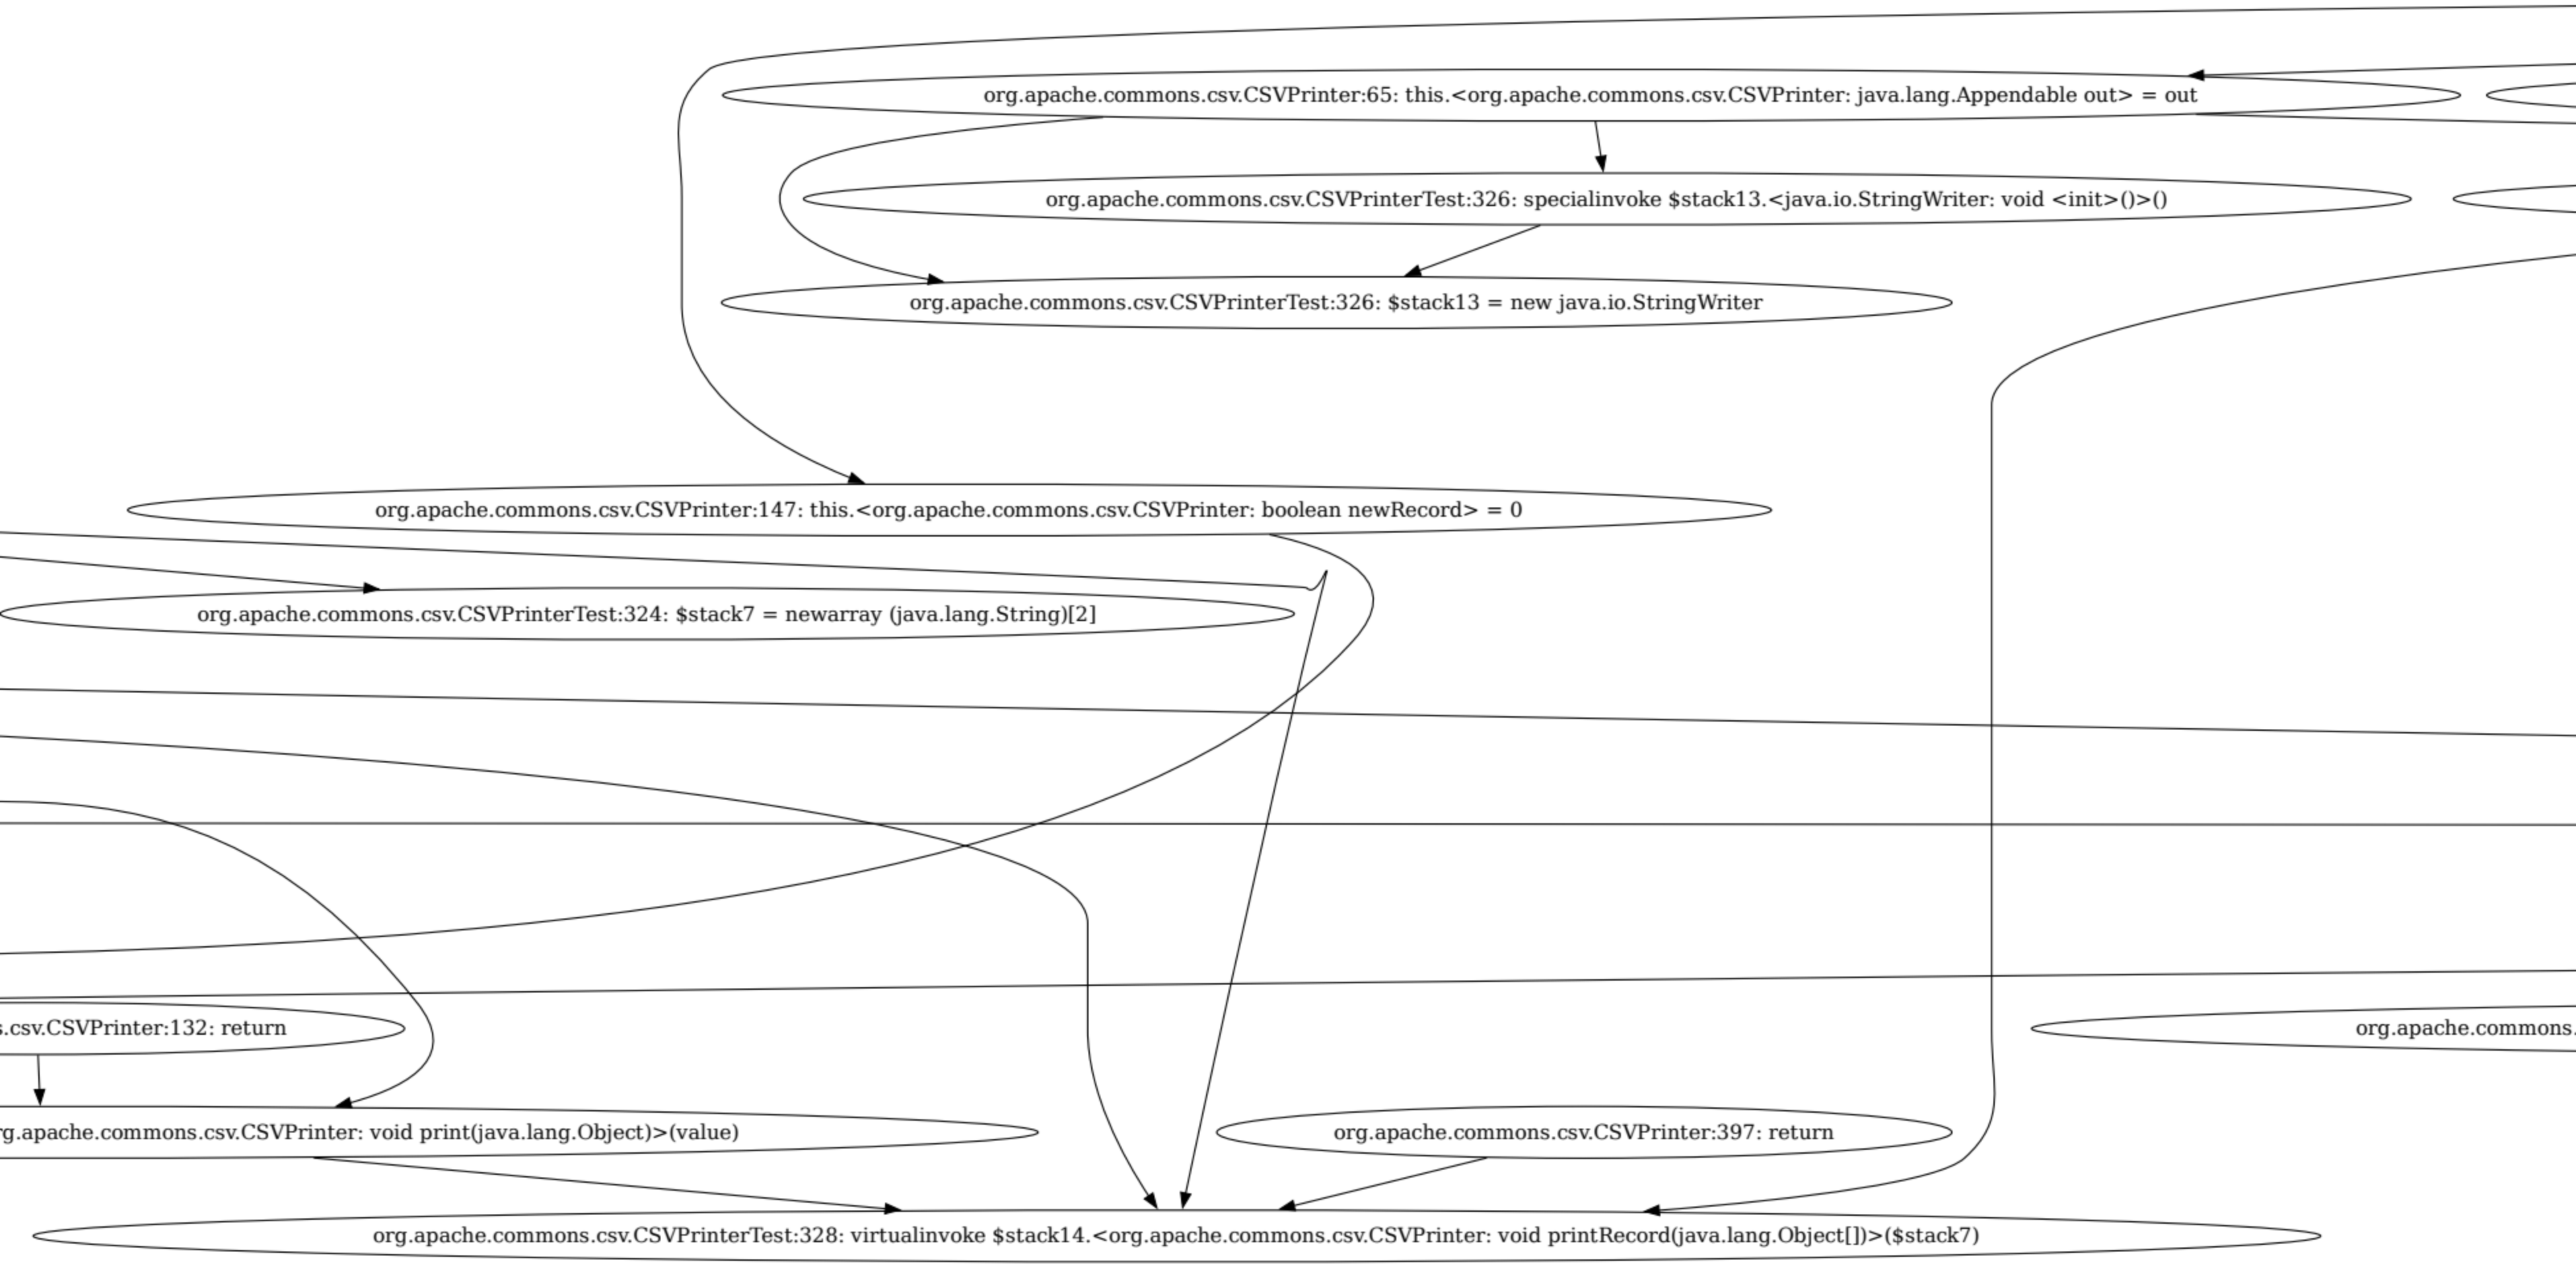
org.apache.commons.csv.CSVPrinter:65: this.<org.apache.commons.csv.CSVPrinter: java.lang.Appendable out> = out
org.apache.commons.csv.CSVPrinterTest:326: specialinvoke $stack13.<java.io.StringWriter: void <init>()>()
org.apache.commons.csv.CSVPrinterTest:326: $stack13 = new java.io.StringWriter
org.apache.commons.csv.CSVPrinter:147: this.<org.apache.commons.csv.CSVPrinter: boolean newRecord> = 0
org.apache.commons.csv.CSVPrinterTest:324: $stack7 = newarray (java.lang.String)[2]
s.csv.CSVPrinter:132: return
org.apache.commons.
rg.apache.commons.csv.CSVPrinter: void print(java.lang.Object)>(value)
org.apache.commons.csv.CSVPrinter:397: return
org.apache.commons.csv.CSVPrinterTest:328: virtualinvoke $stack14.<org.apache.commons.csv.CSVPrinter: void printRecord(java.lang.Object[])>($stack7)

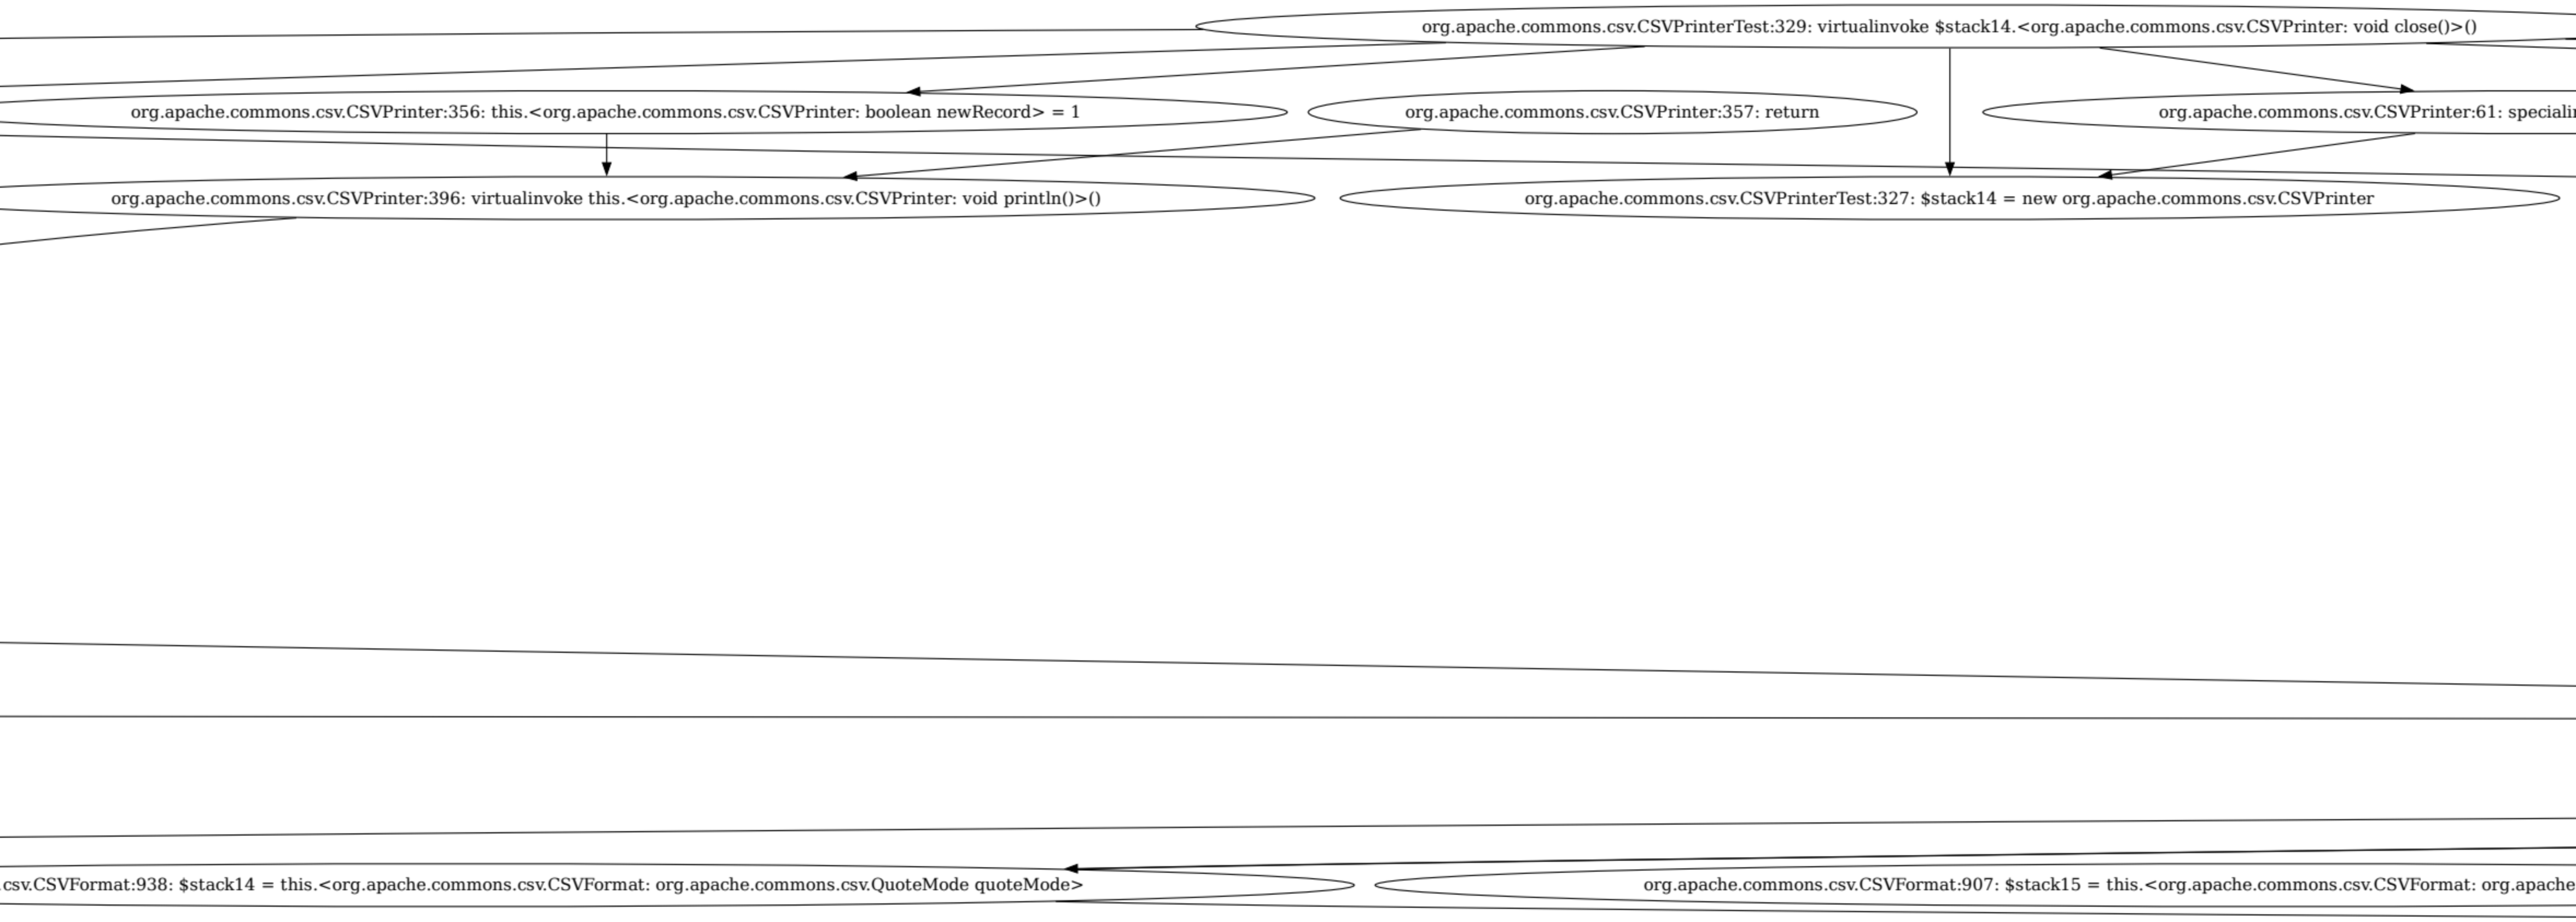
org.apache.commons.csv.CSVPrinterTest:329: virtualinvoke $stack14.<org.apache.commons.csv.CSVPrinter: void close()>()
org.apache.commons.csv.CSVPrinter:356: this.<org.apache.commons.csv.CSVPrinter: boolean newRecord> = 1
org.apache.commons.csv.CSVPrinter:357: return
org.apache.commons.csv.CSVPrinter:61: speciali
org.apache.commons.csv.CSVPrinter:396: virtualinvoke this.<org.apache.commons.csv.CSVPrinter: void println()>()
org.apache.commons.csv.CSVPrinterTest:327: $stack14 = new org.apache.commons.csv.CSVPrinter
csv.CSVFormat:938: $stack14 = this.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.QuoteMode quoteMode>
org.apache.commons.csv.CSVFormat:907: $stack15 = this.<org.apache.commons.csv.CSVFormat: org.apache

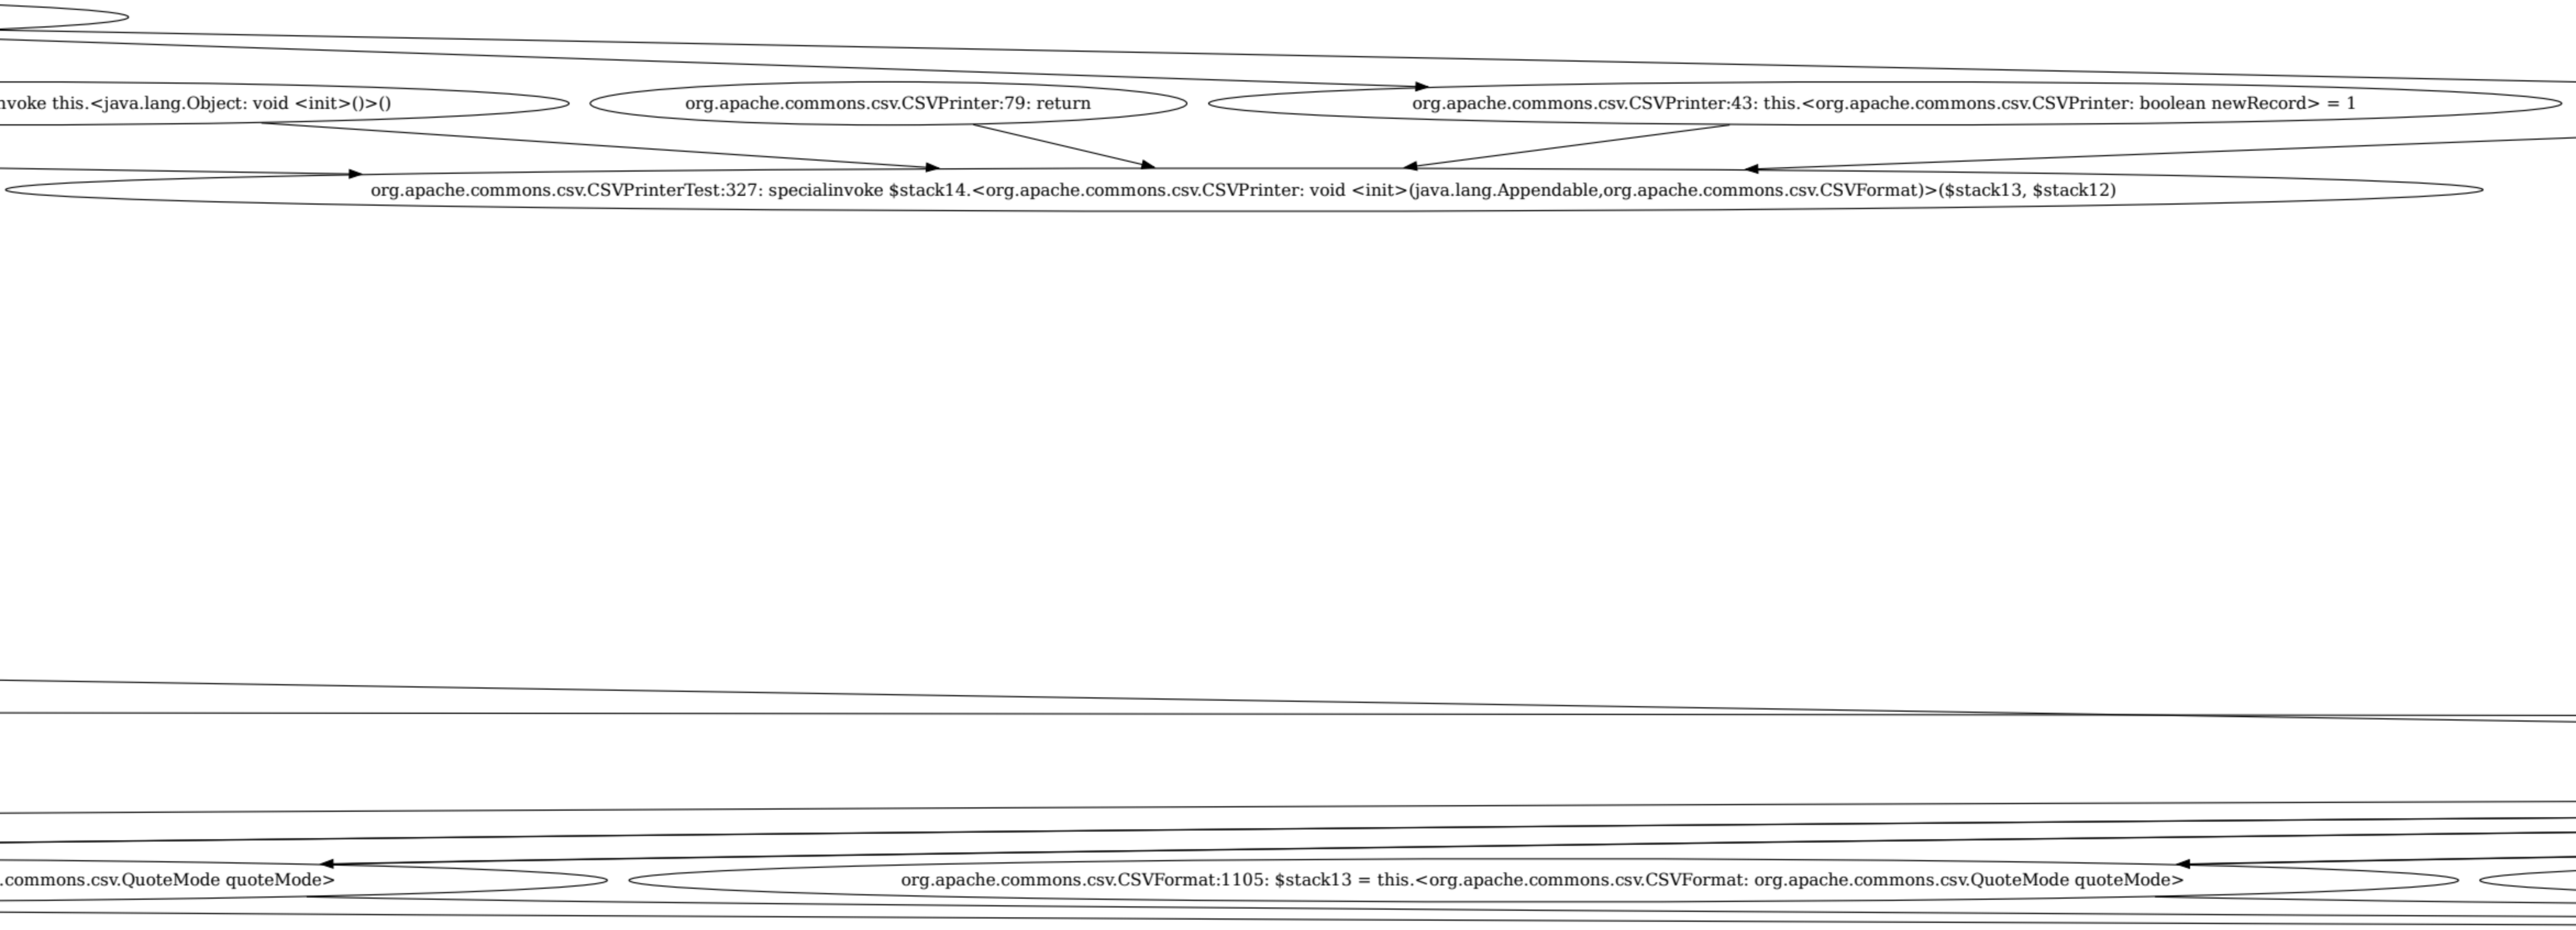
nvoke this.<java.lang.Object: void <init>()>()
org.apache.commons.csv.CSVPrinter:79: return
org.apache.commons.csv.CSVPrinter:43: this.<org.apache.commons.csv.CSVPrinter: boolean newRecord> = 1
org.apache.commons.csv.CSVPrinterTest:327: specialinvoke $stack14.<org.apache.commons.csv.CSVPrinter: void <init>(java.lang.Appendable,org.apache.commons.csv.CSVFormat)>($stack13, $stack12)
.commons.csv.QuoteMode quoteMode>
org.apache.commons.csv.CSVFormat:1105: $stack13 = this.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.QuoteMode quoteMode>

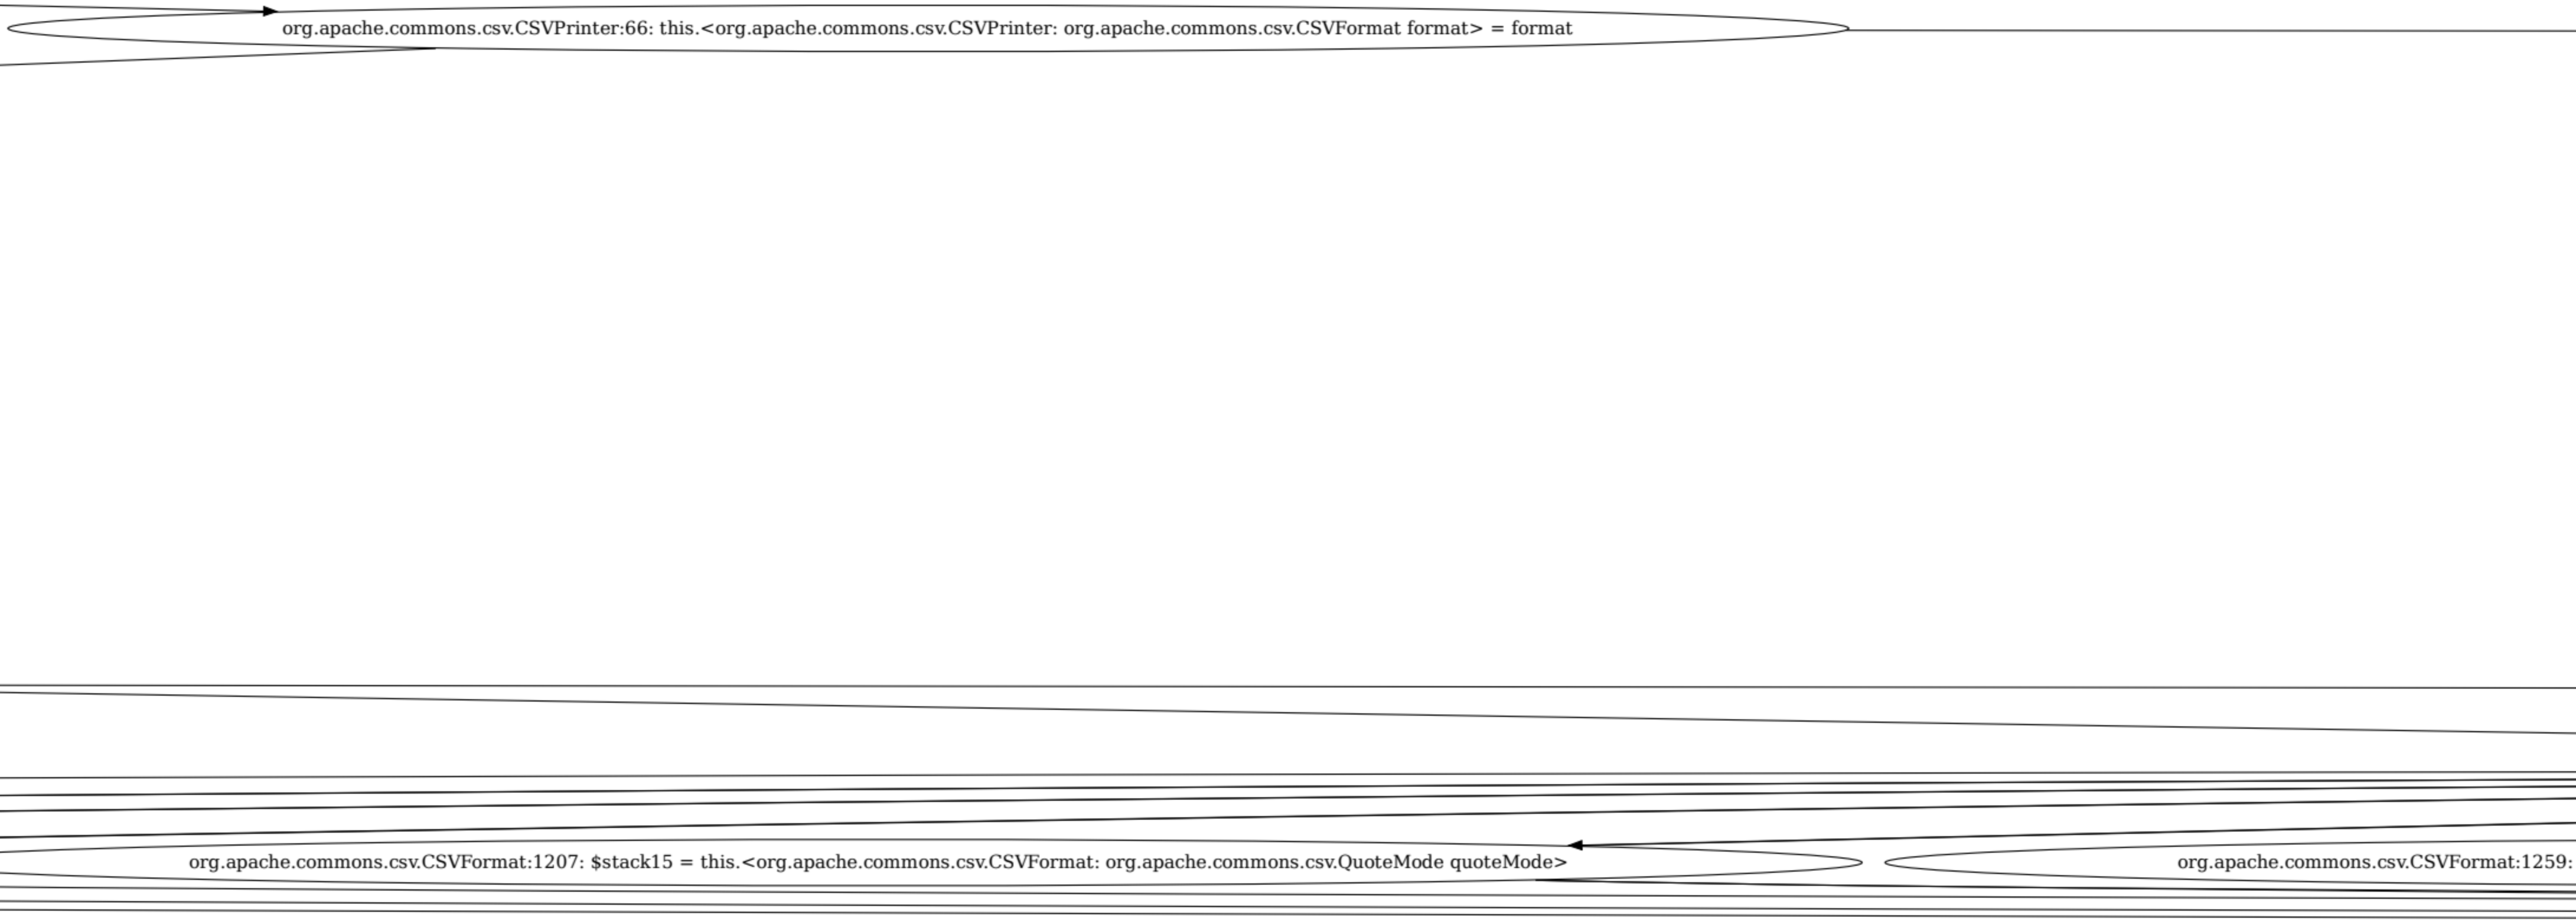
org.apache.commons.csv.CSVPrinter:66: this.<org.apache.commons.csv.CSVPrinter: org.apache.commons.csv.CSVFormat format> = format
org.apache.commons.csv.CSVFormat:1207: $stack15 = this.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.QuoteMode quoteMode>
org.apache.commons.csv.CSVFormat:1259:

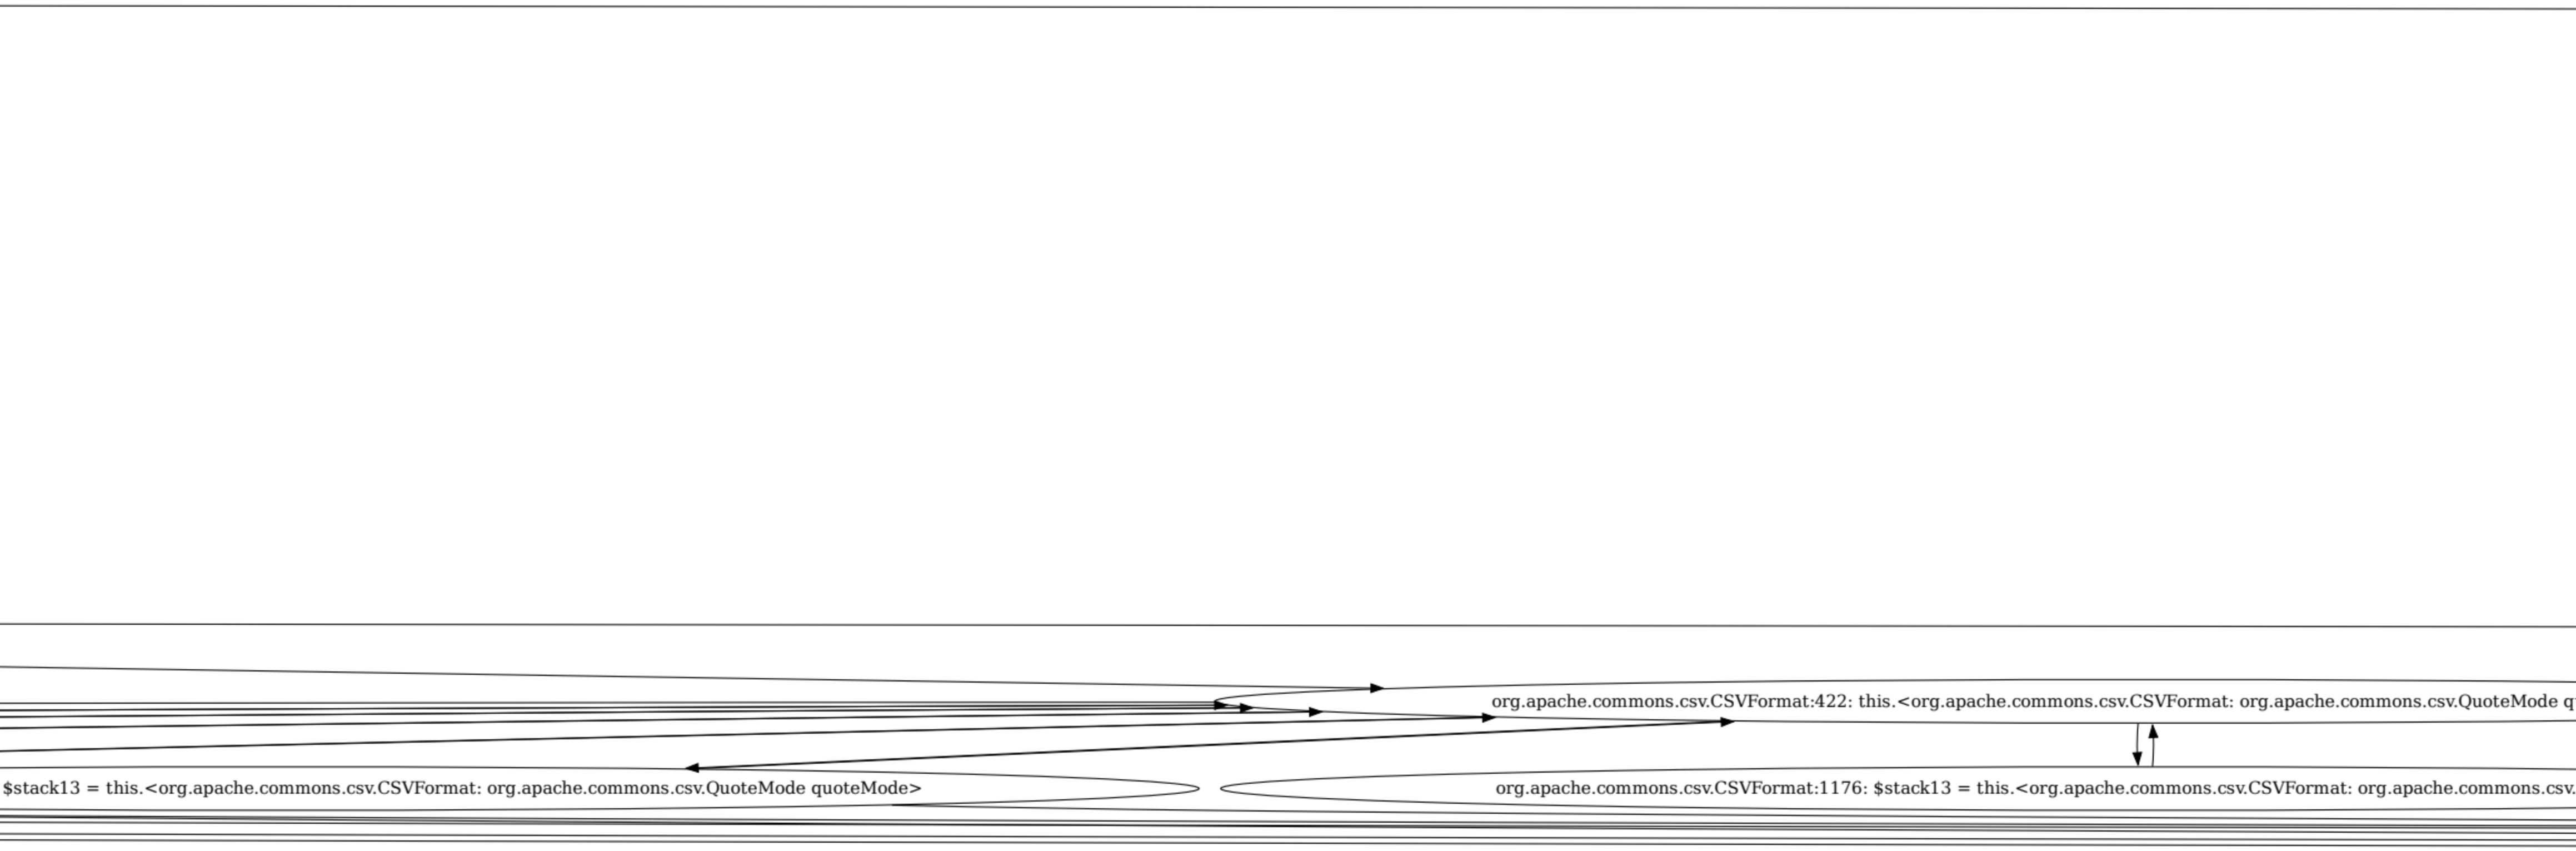
org.apache.commons.csv.CSVFormat:422: this.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.QuoteMode q
$stack13 = this.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.QuoteMode quoteMode>
org.apache.commons.csv.CSVFormat:1176: $stack13 = this.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.

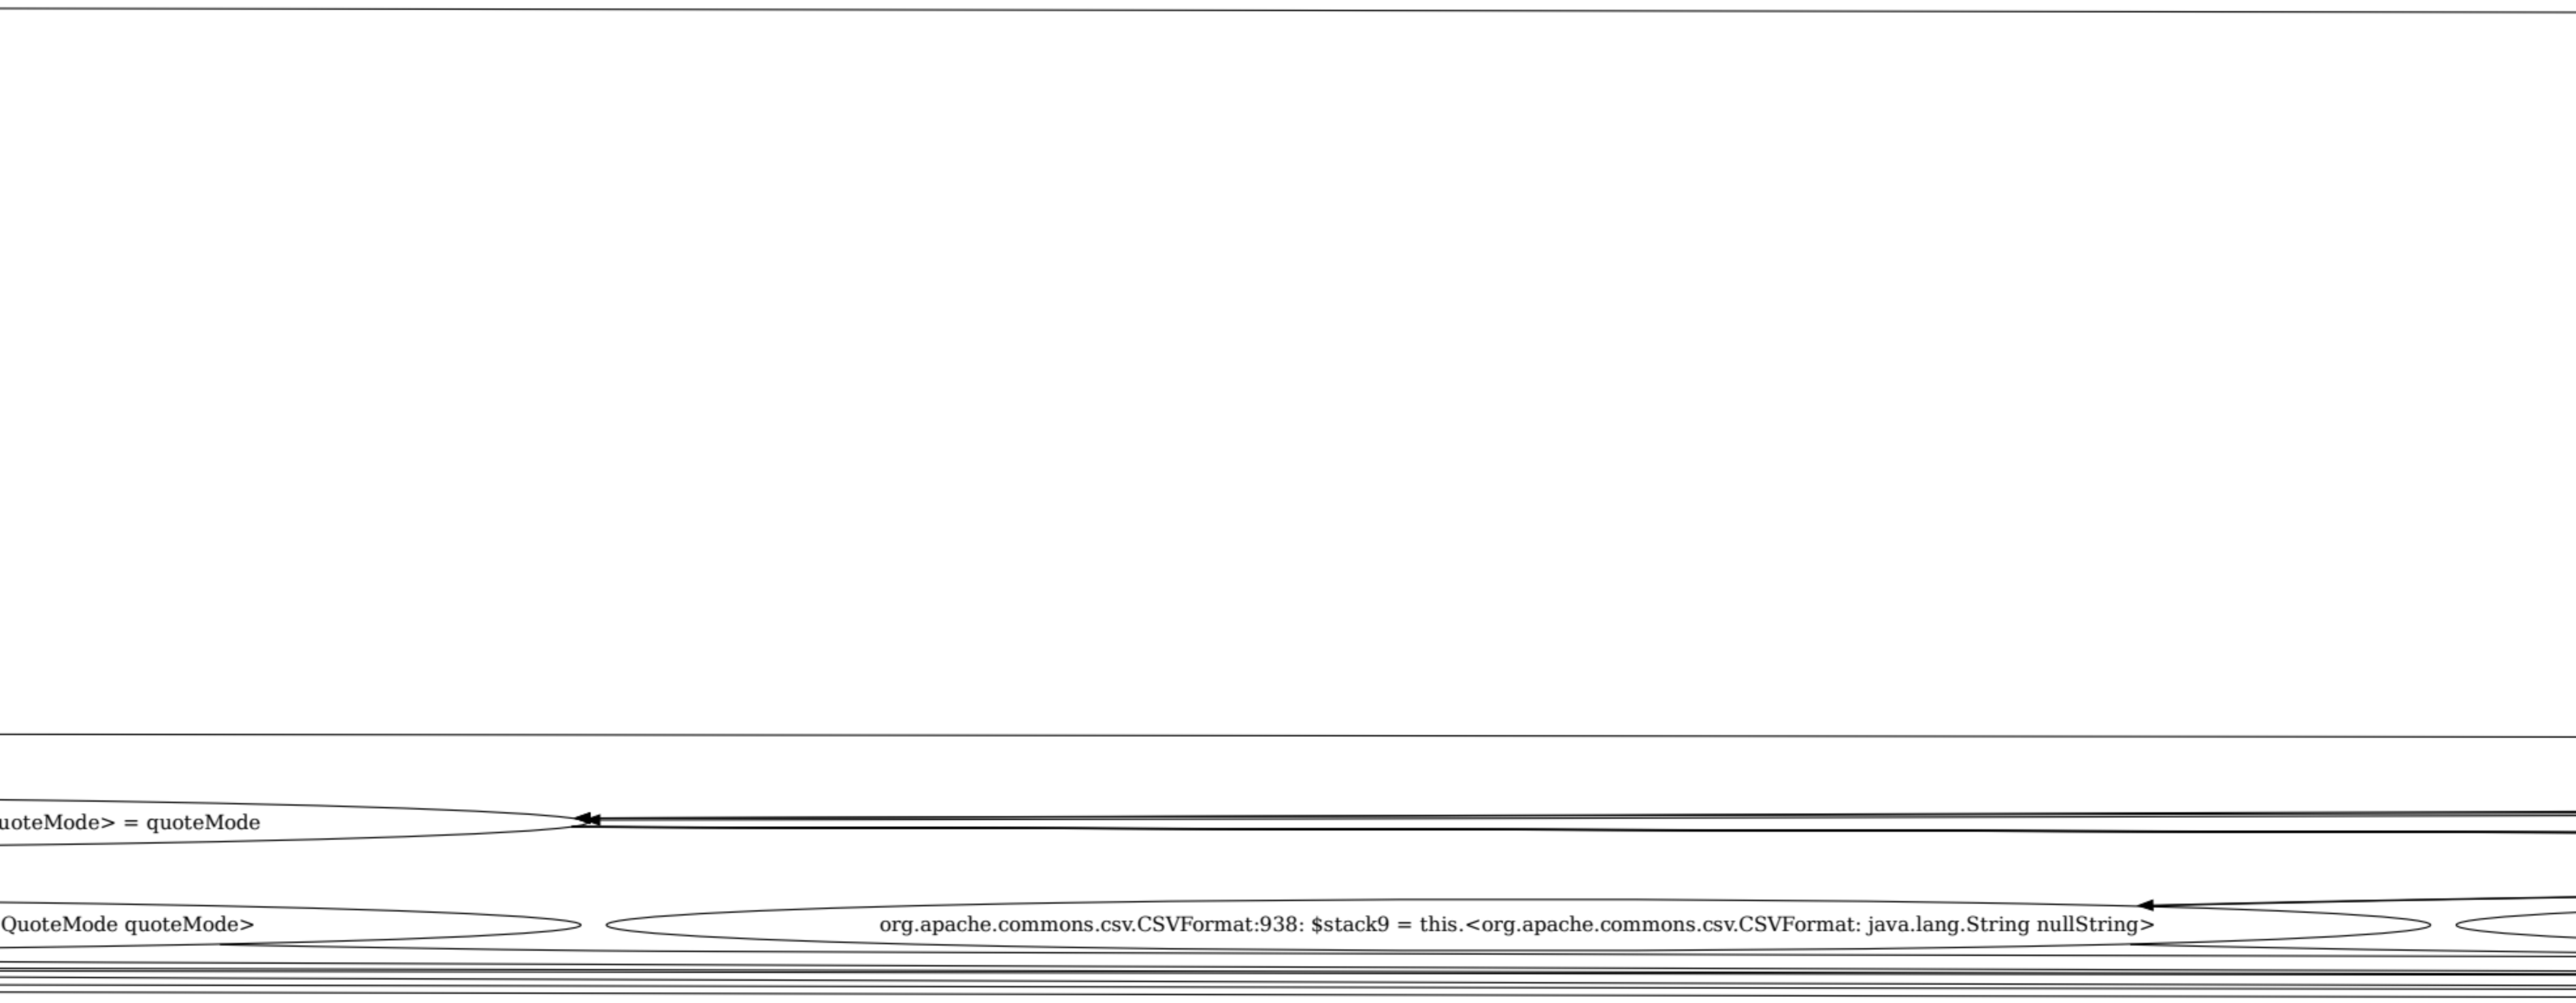
uoteMode> = quoteMode
QuoteMode quoteMode>
org.apache.commons.csv.CSVFormat:938: $stack9 = this.<org.apache.commons.csv.CSVFormat: java.lang.String nullString>

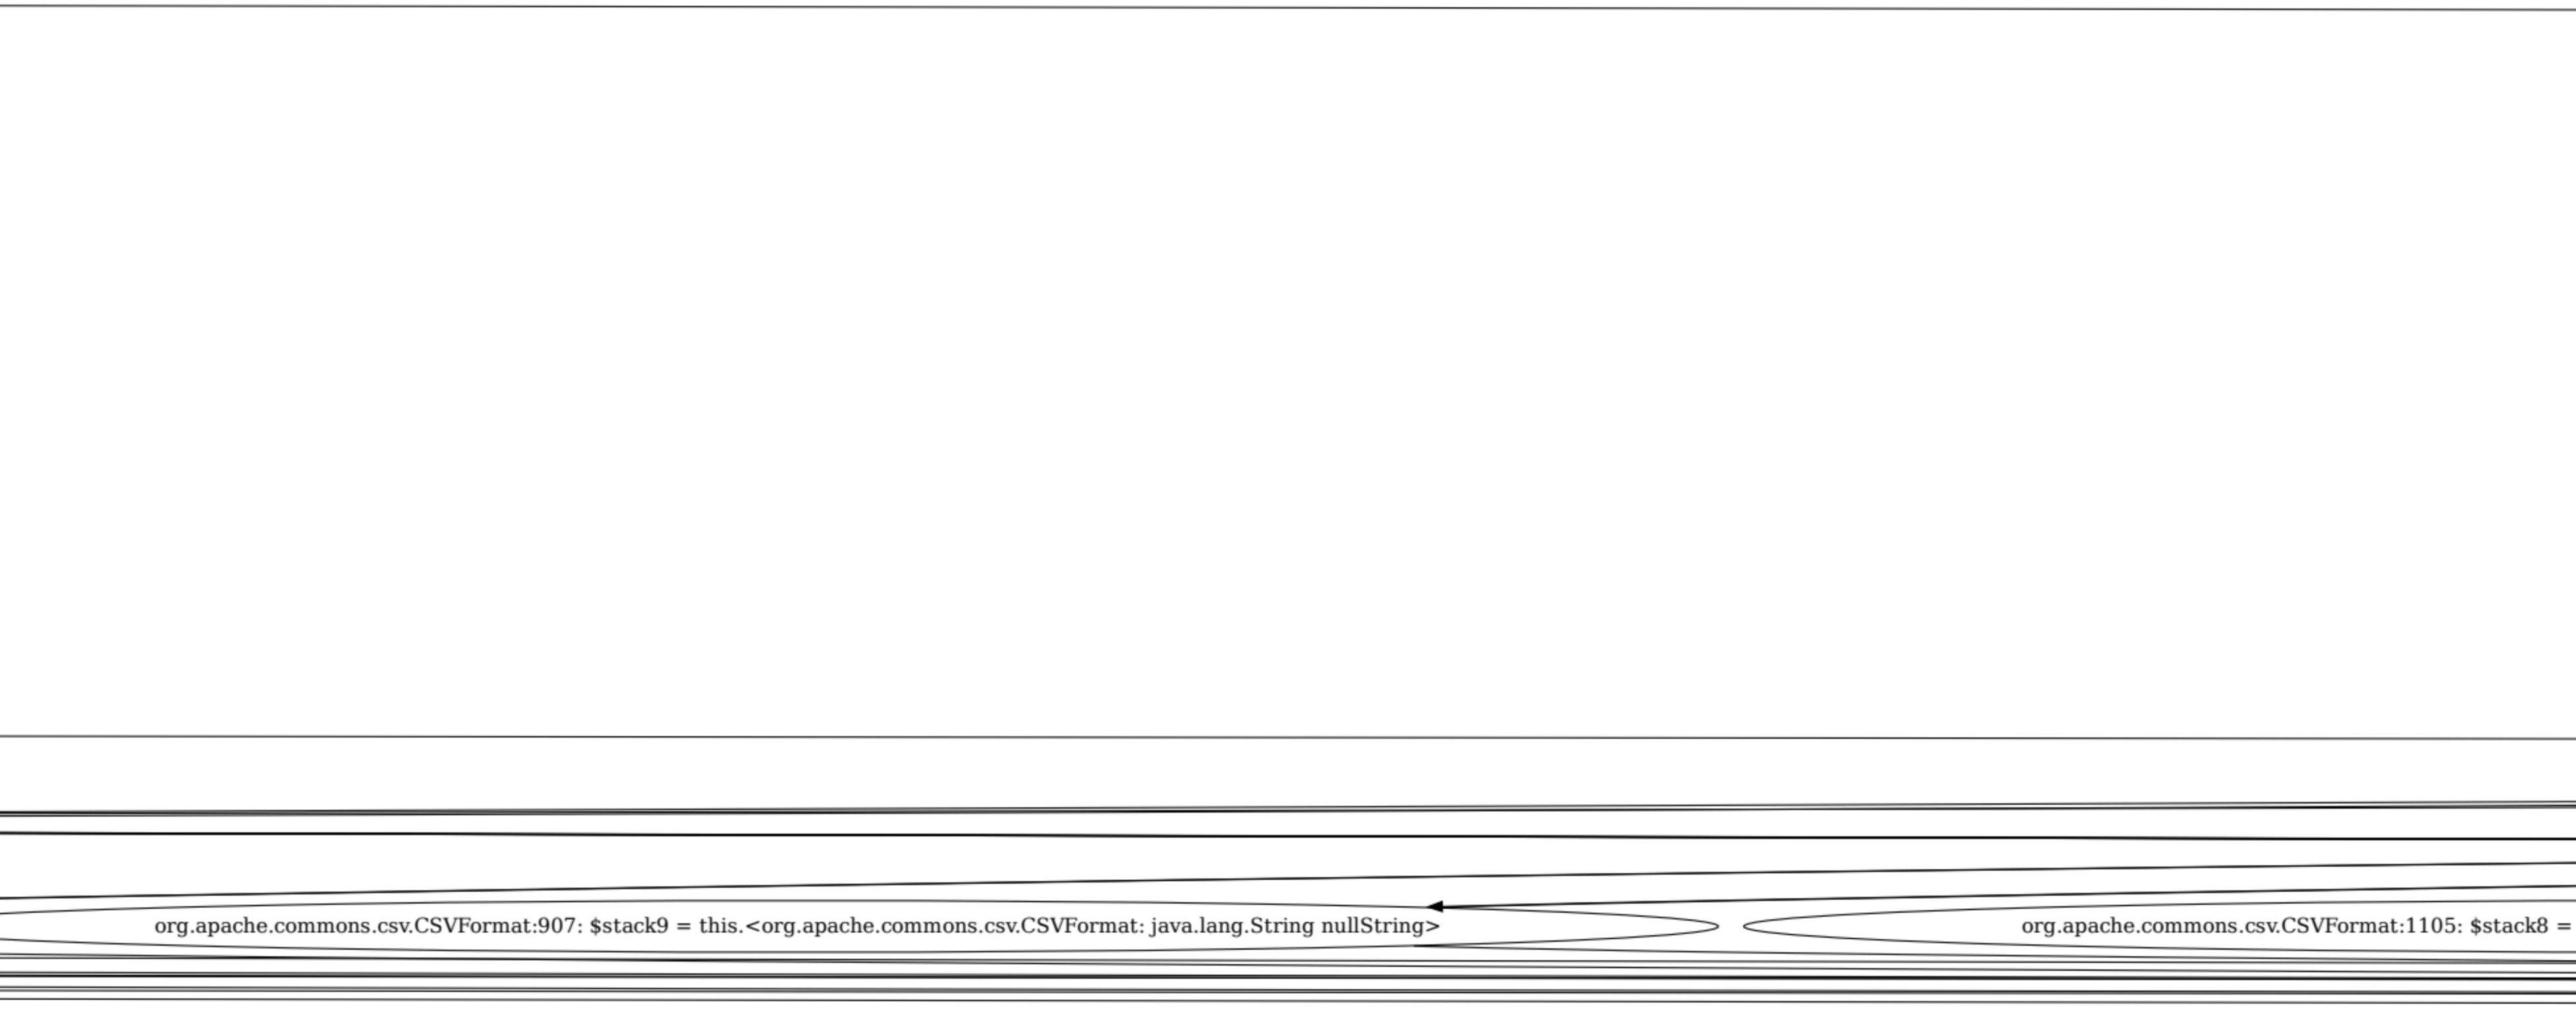
org.apache.commons.csv.CSVFormat:907: $stack9 = this.<org.apache.commons.csv.CSVFormat: java.lang.String nullString>
org.apache.commons.csv.CSVFormat:1105: $stack8 =

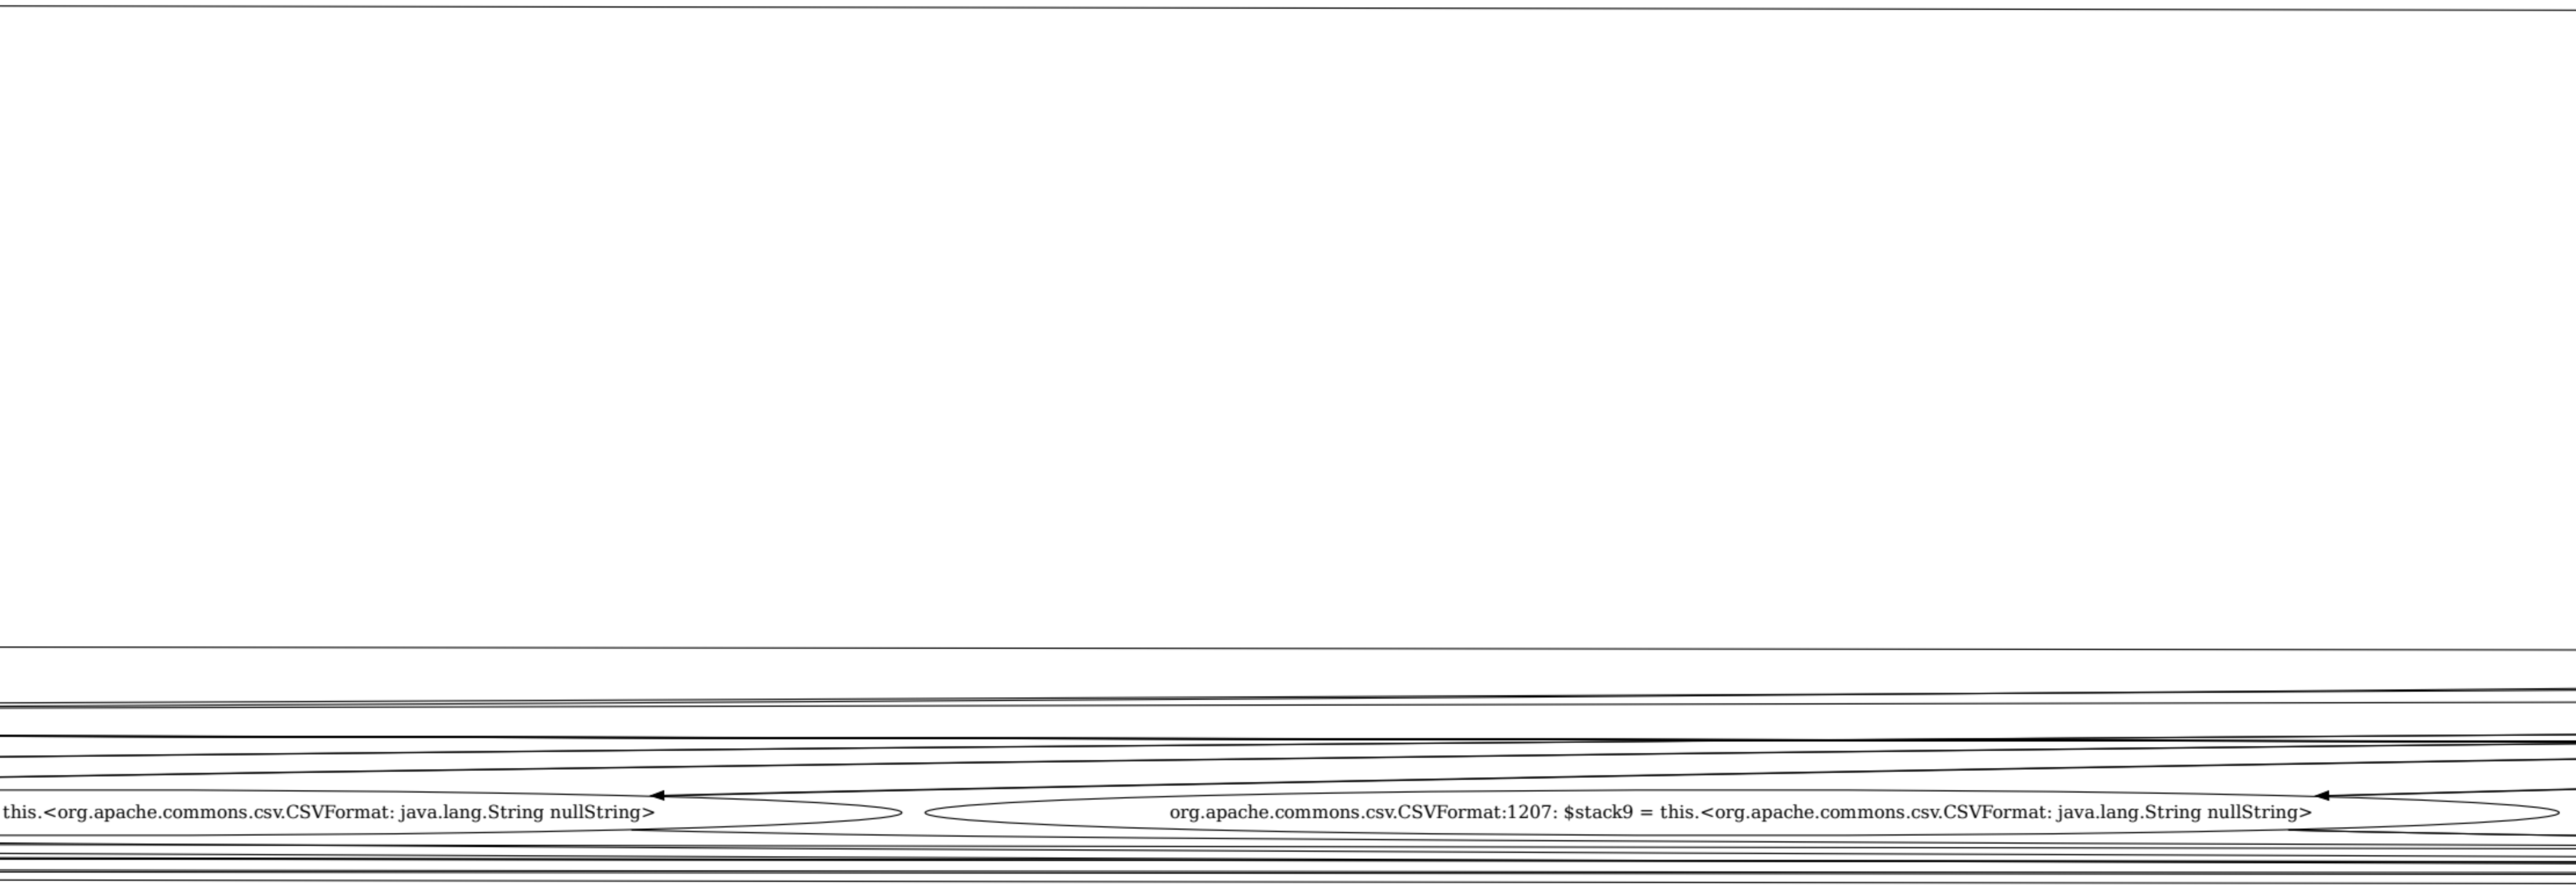
this.<org.apache.commons.csv.CSVFormat: java.lang.String nullString>
org.apache.commons.csv.CSVFormat:1207: $stack9 = this.<org.apache.commons.csv.CSVFormat: java.lang.String nullString>

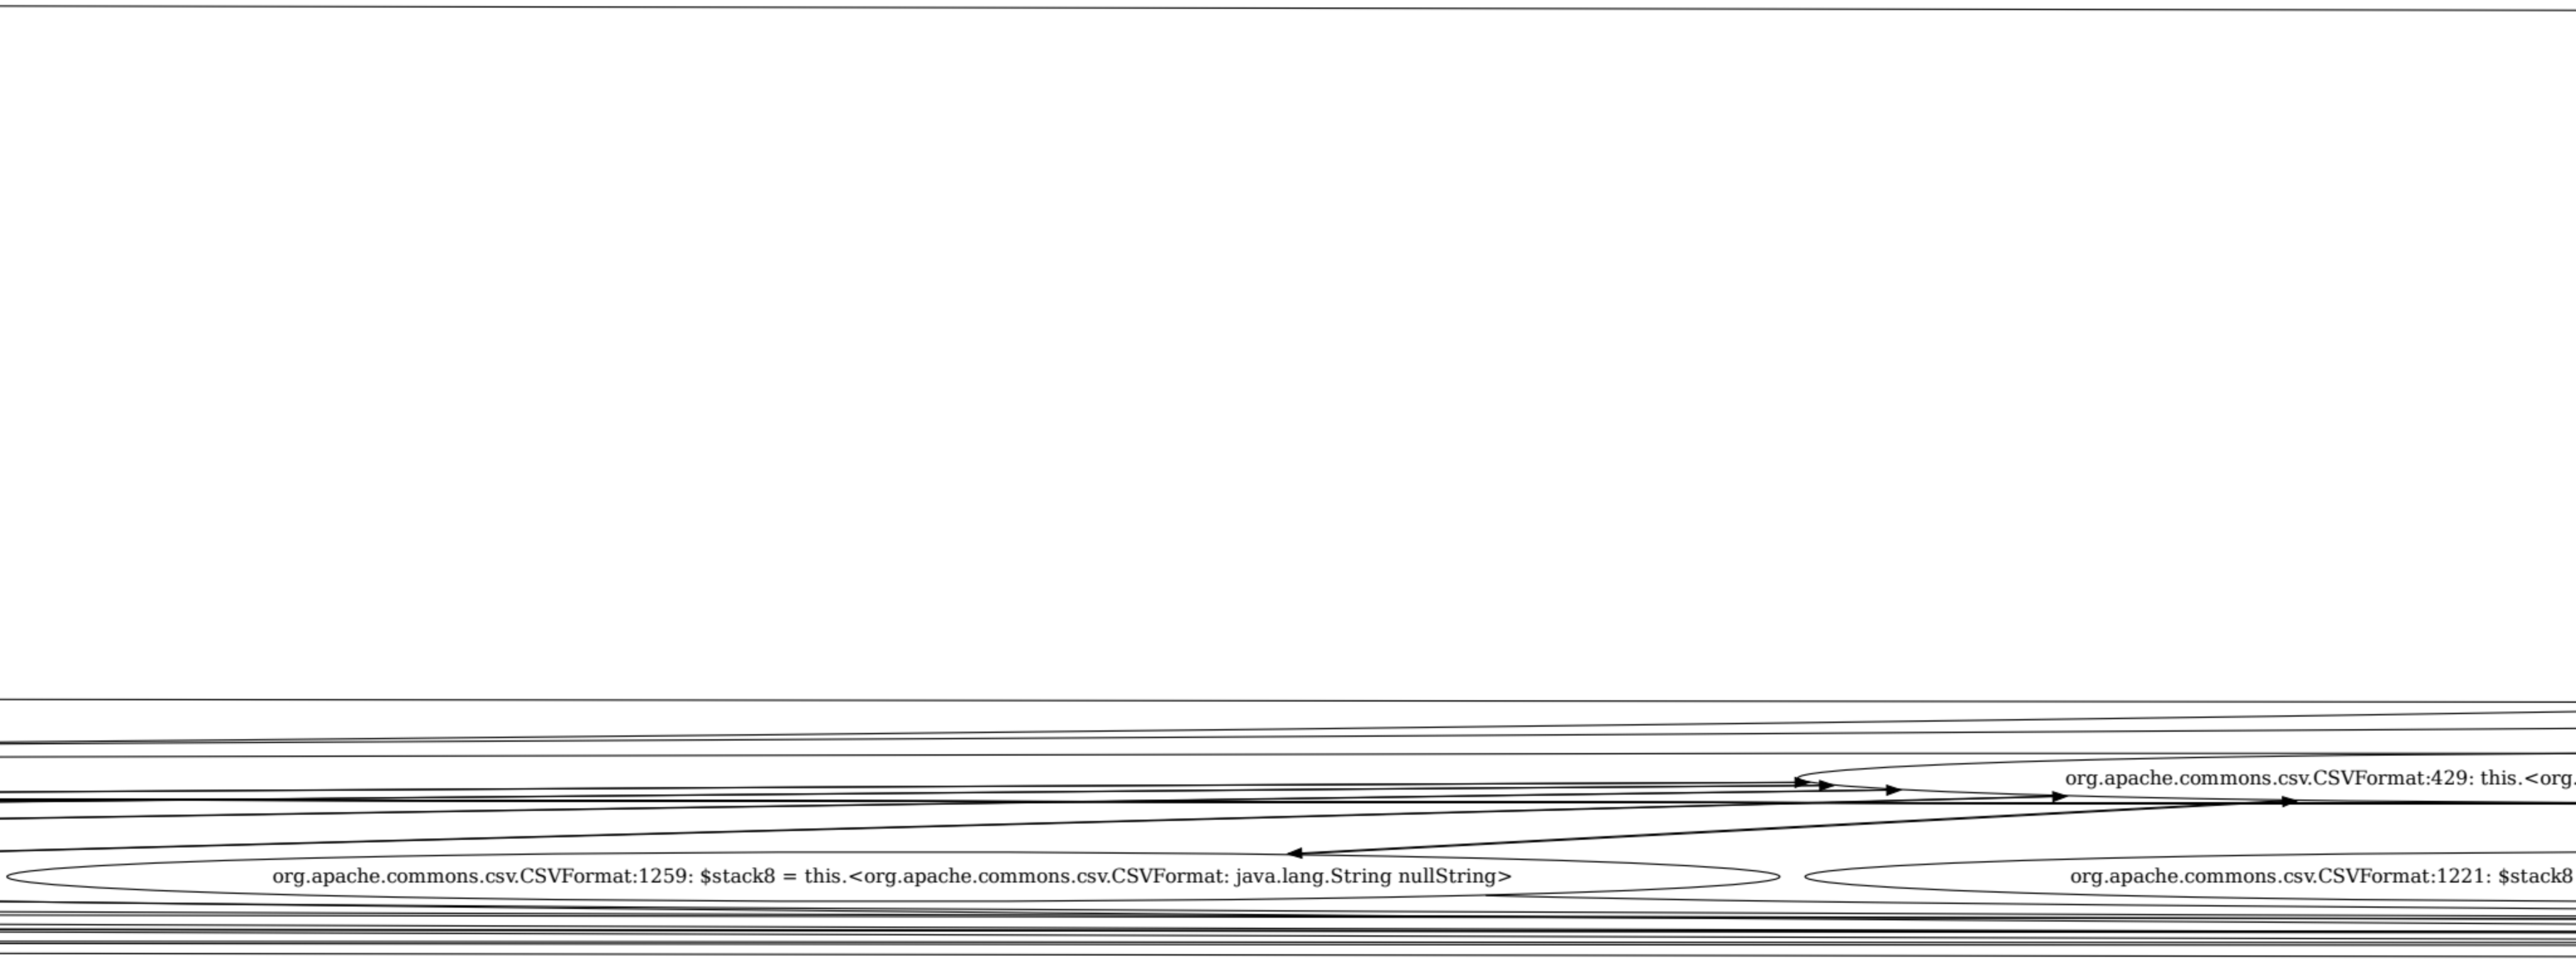
org.apache.commons.csv.CSVFormat:429: this.<org.
org.apache.commons.csv.CSVFormat:1259: $stack8 = this.<org.apache.commons.csv.CSVFormat: java.lang.String nullString>
org.apache.commons.csv.CSVFormat:1221: $stack8

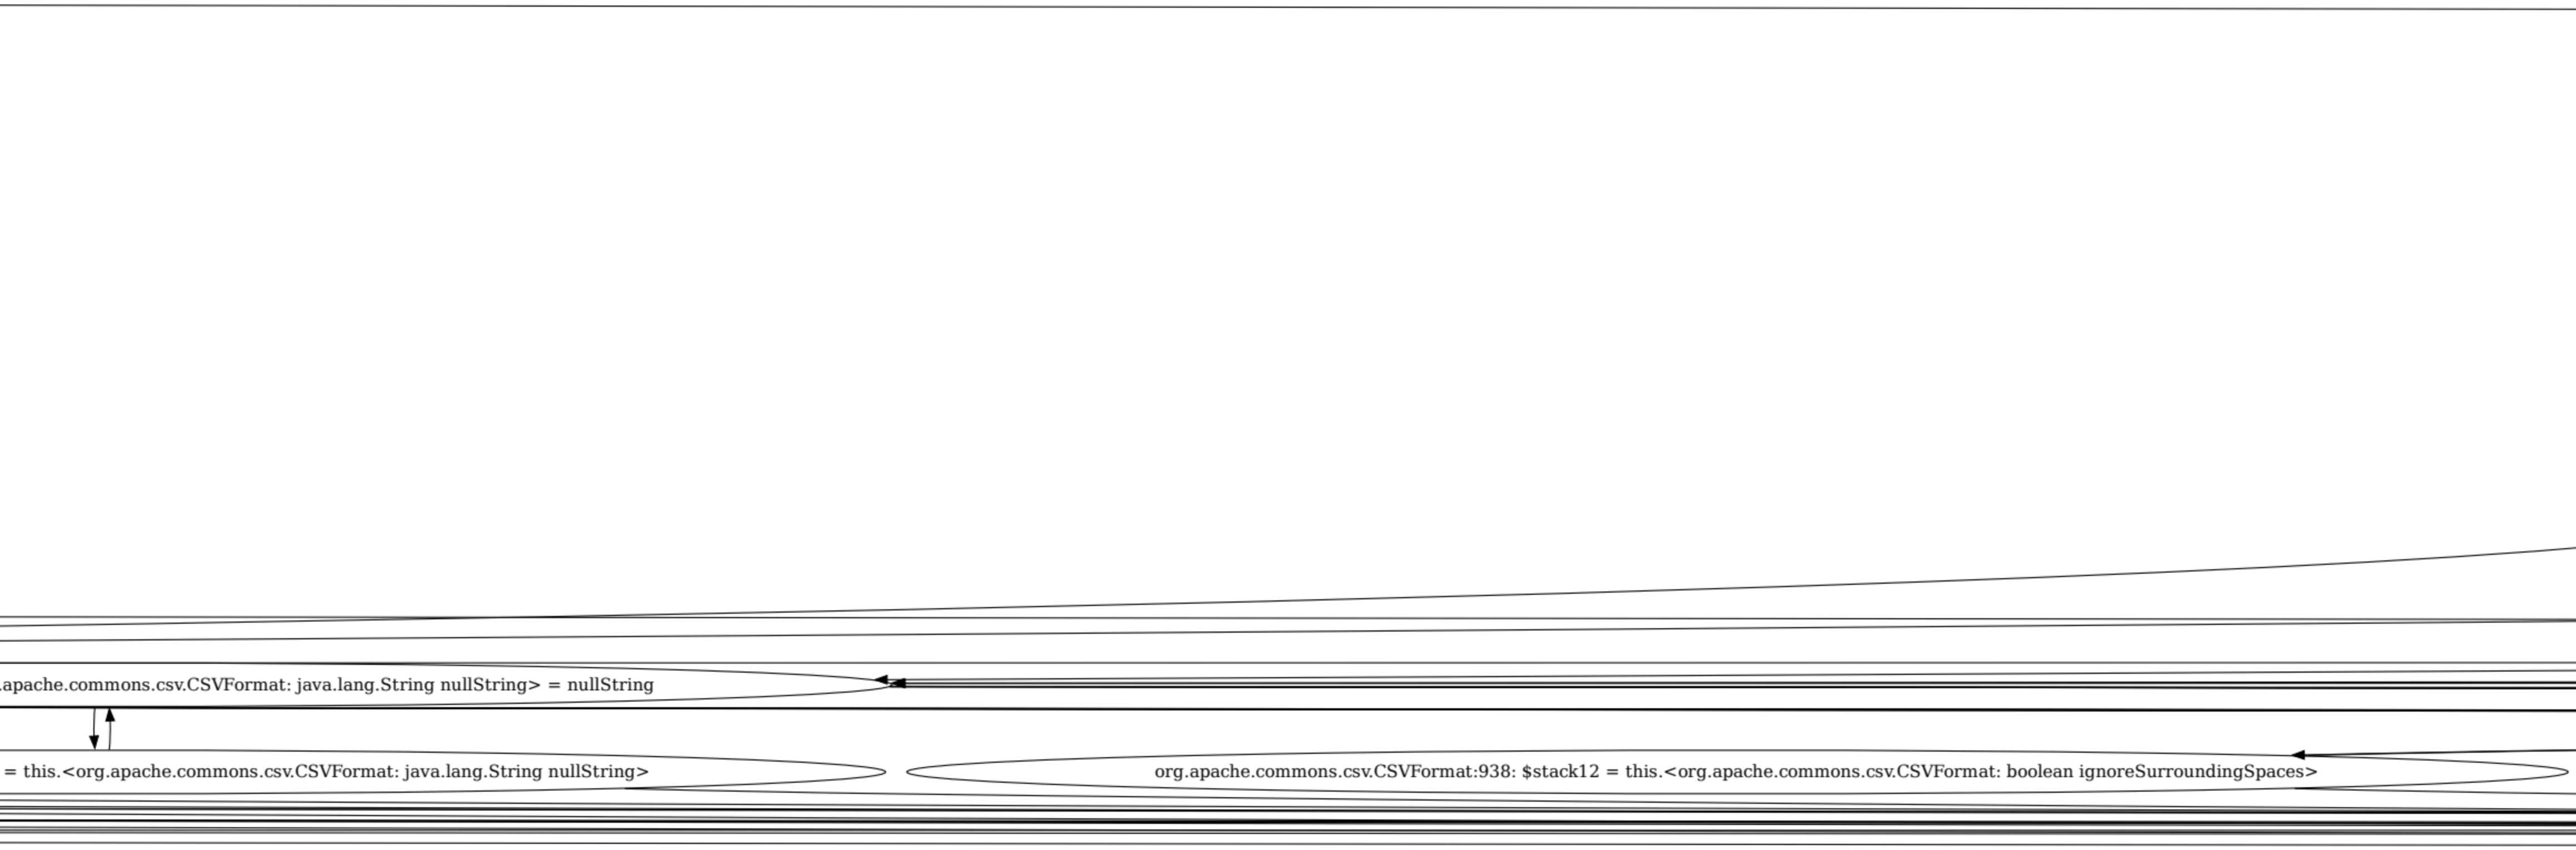
.apache.commons.csv.CSVFormat: java.lang.String nullString> = nullString
= this.<org.apache.commons.csv.CSVFormat: java.lang.String nullString>
org.apache.commons.csv.CSVFormat:938: $stack12 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreSurroundingSpaces>

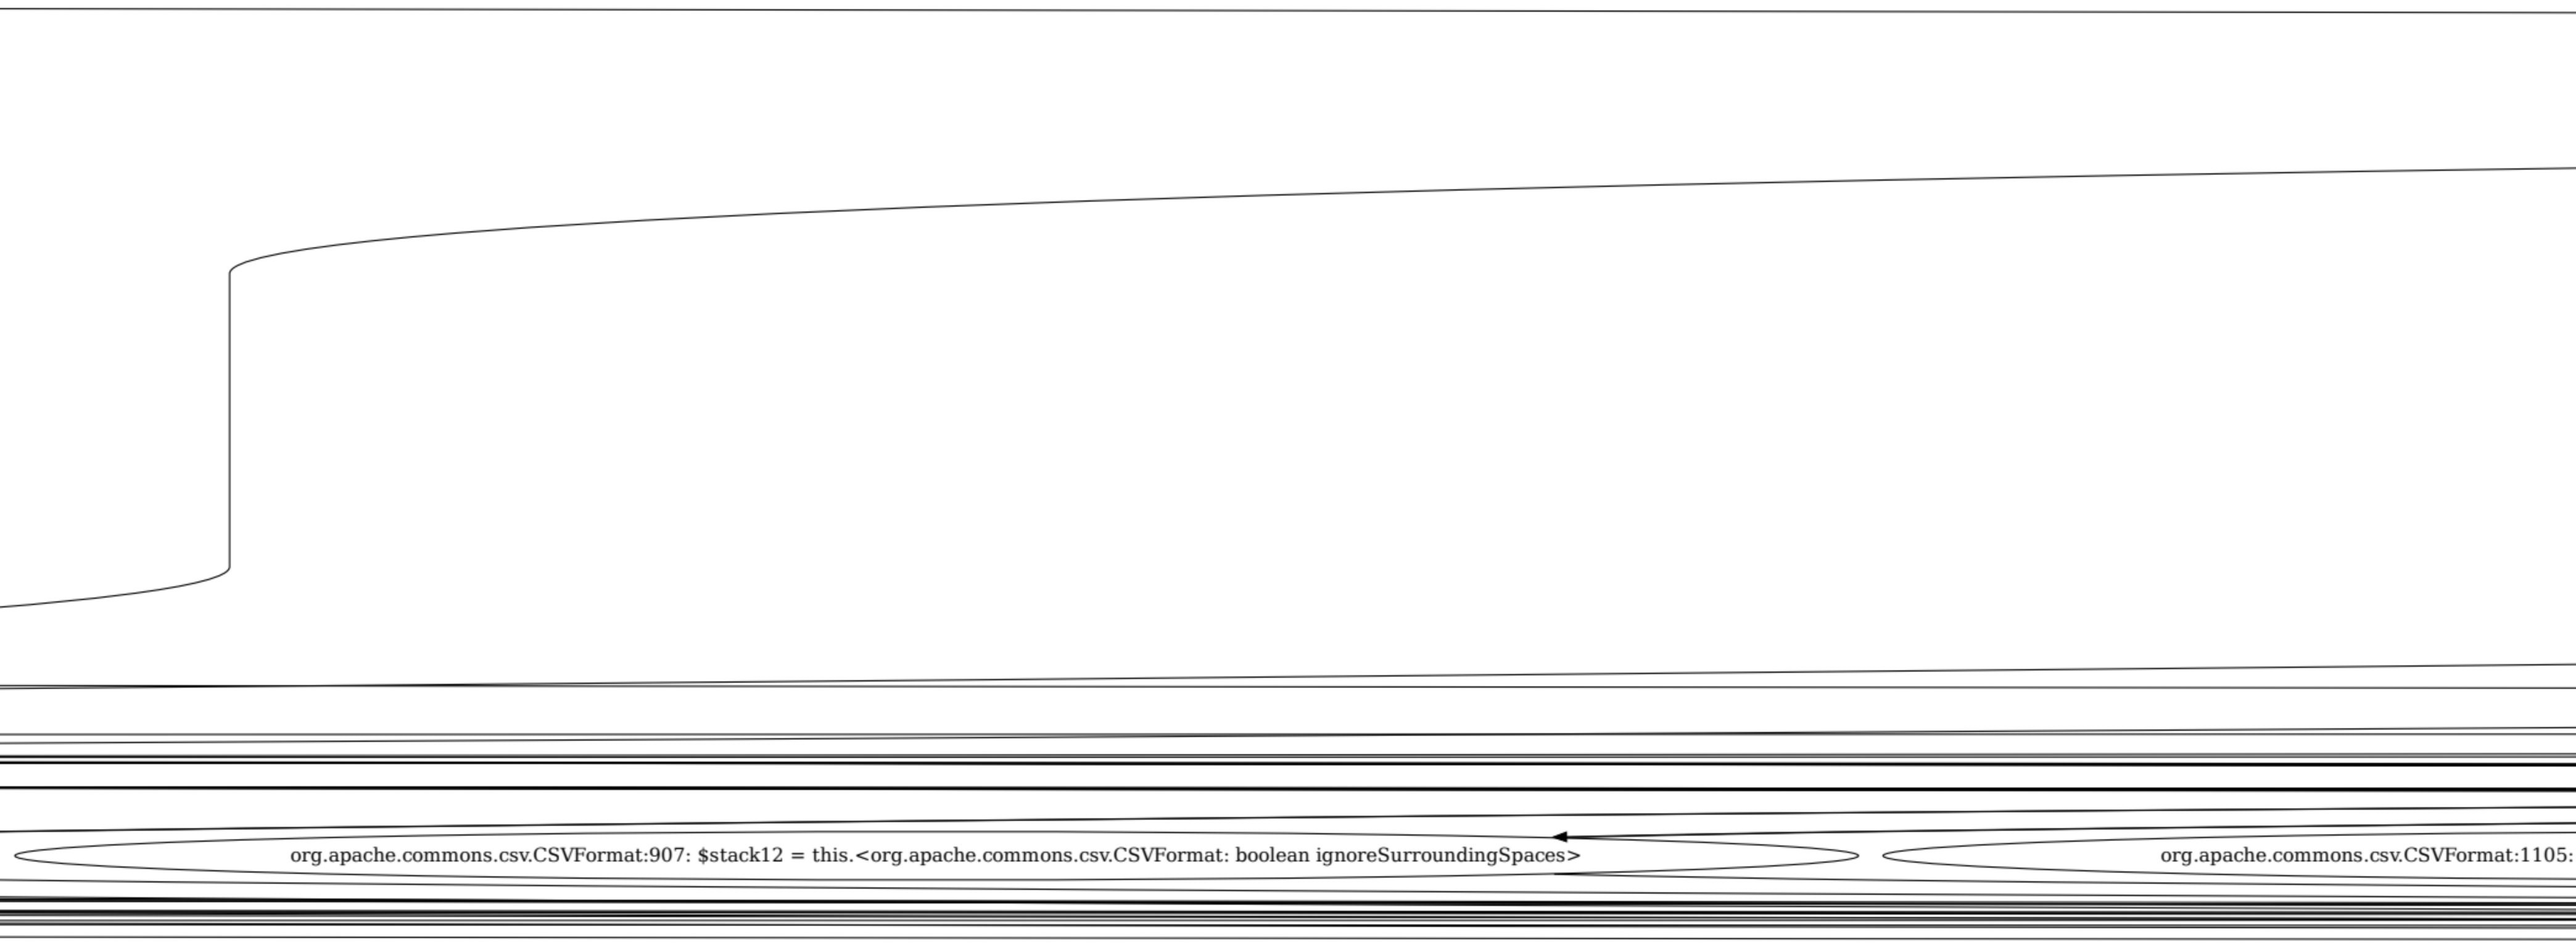
org.apache.commons.csv.CSVFormat:907: $stack12 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreSurroundingSpaces>
org.apache.commons.csv.CSVFormat:1105:

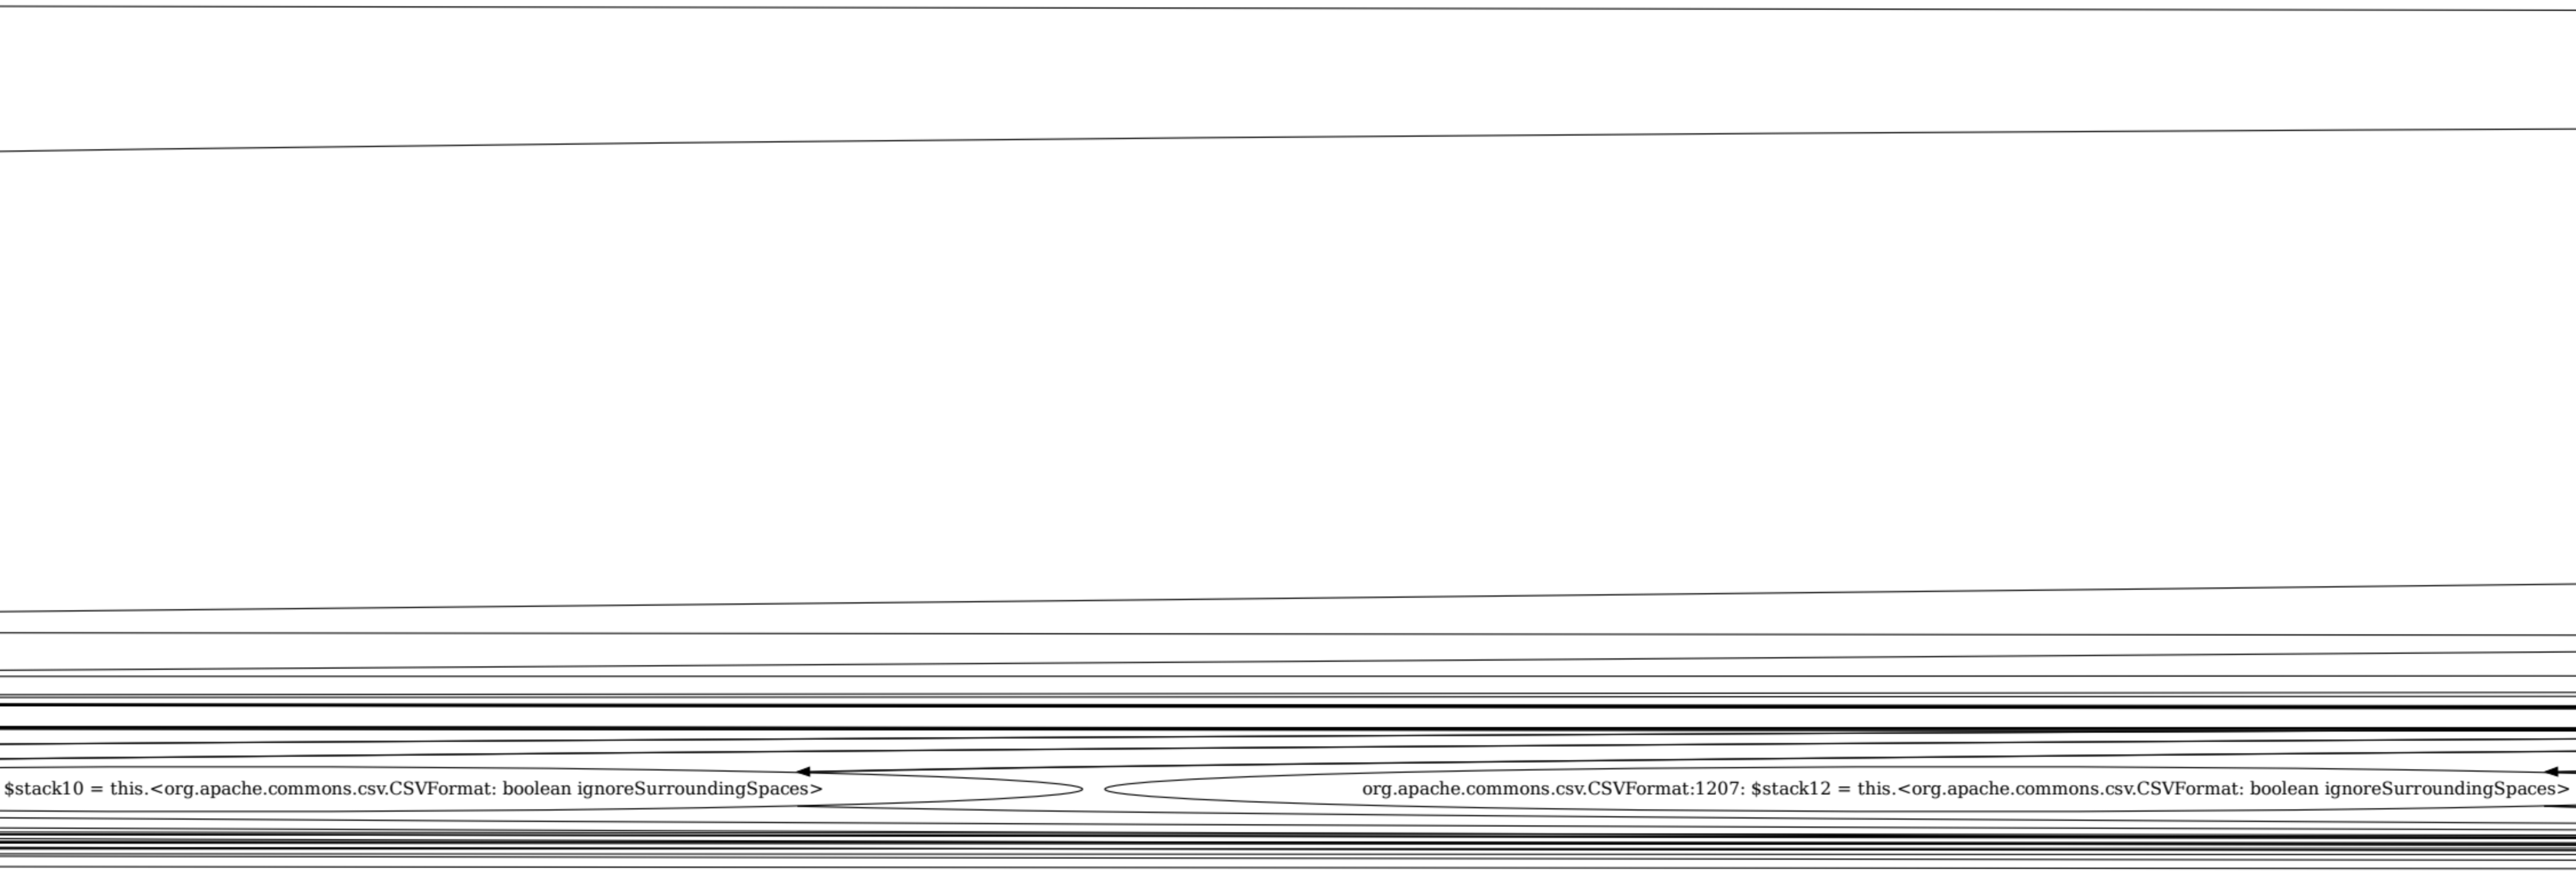
$stack10 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreSurroundingSpaces>
org.apache.commons.csv.CSVFormat:1207: $stack12 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreSurroundingSpaces>

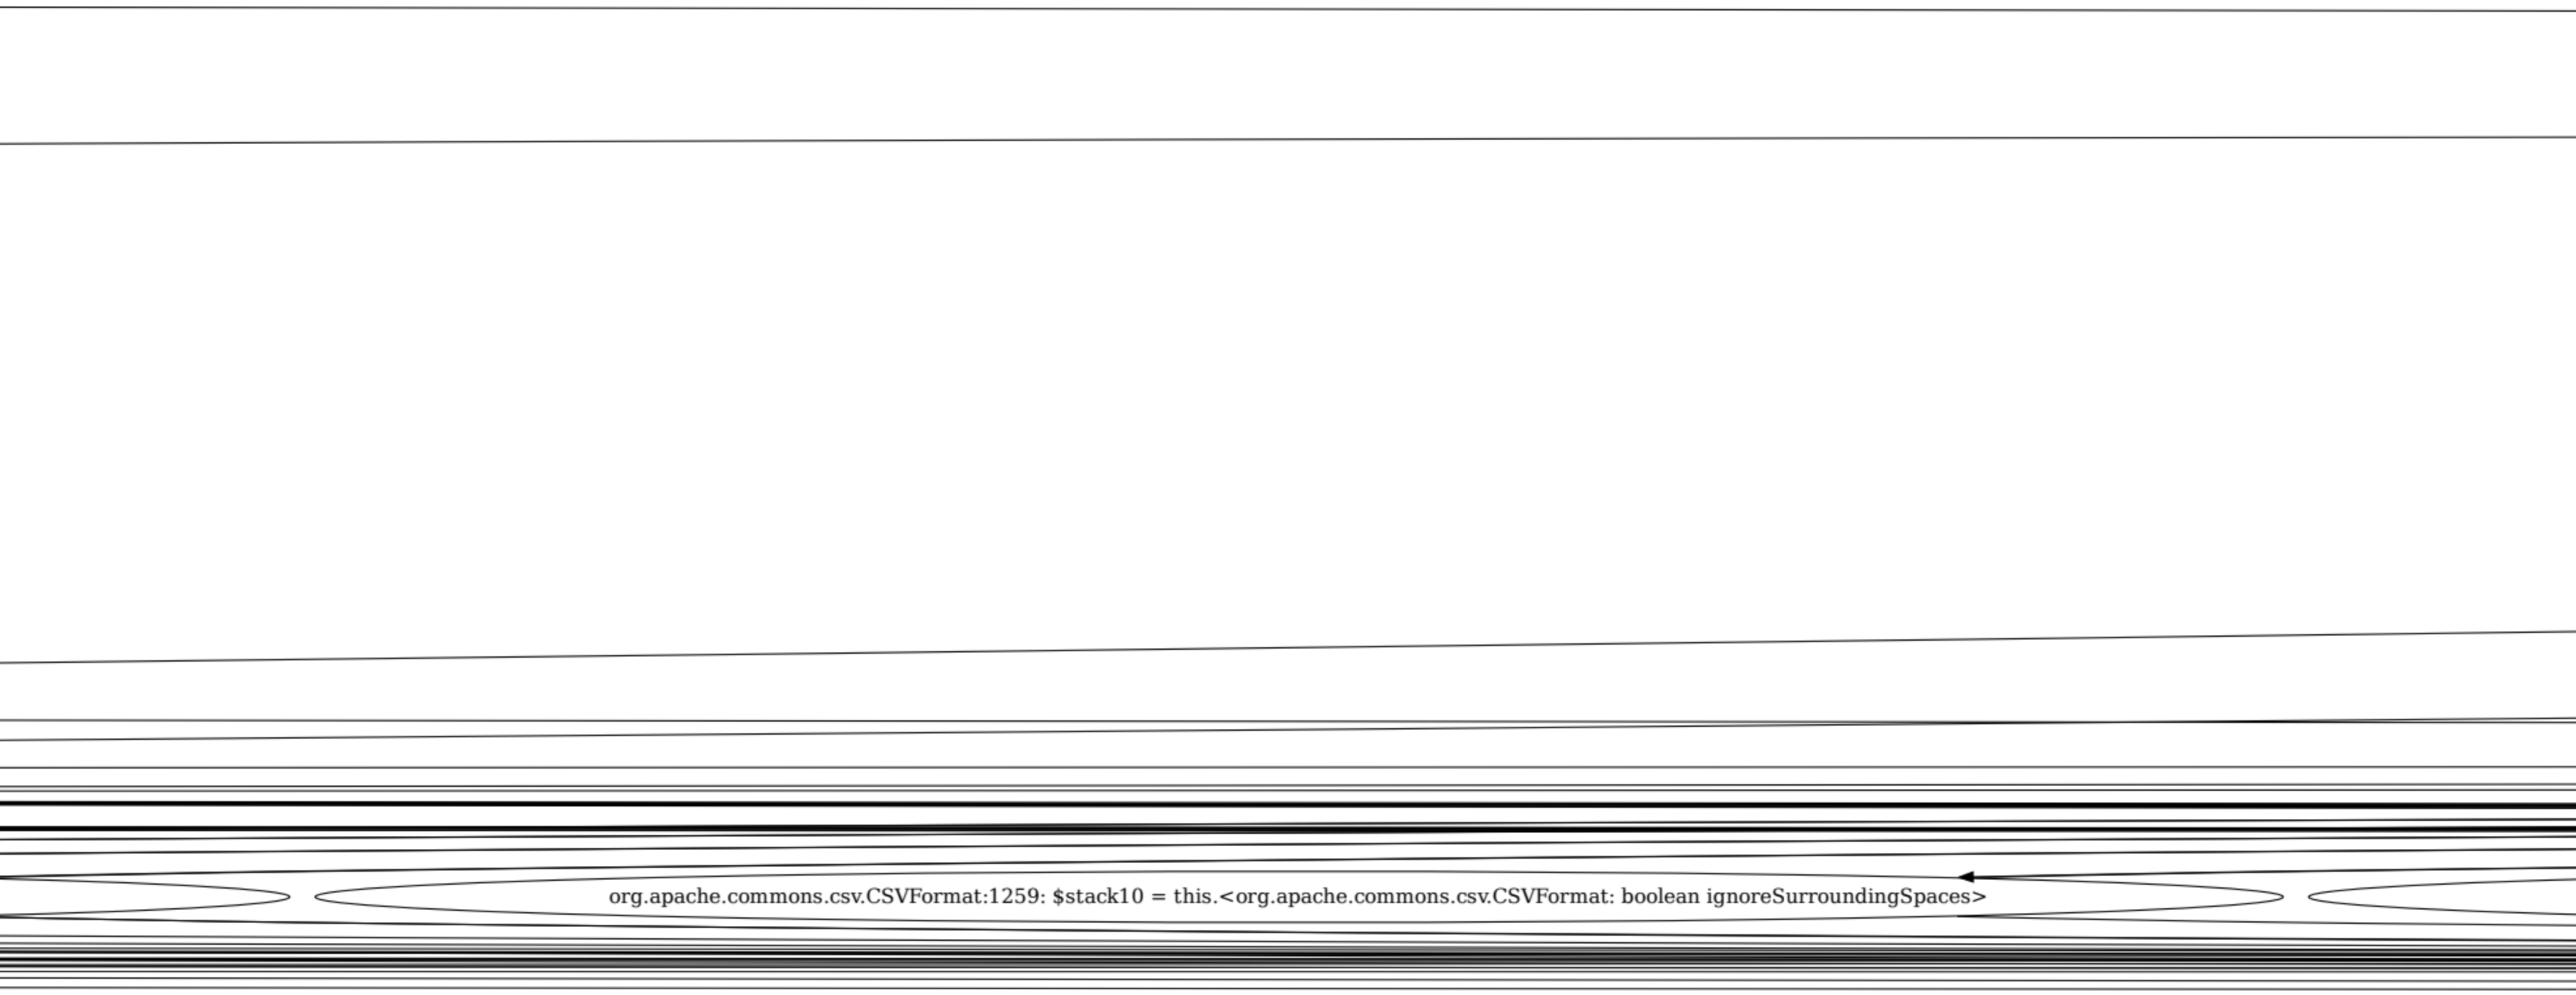
org.apache.commons.csv.CSVFormat:1259: $stack10 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreSurroundingSpaces>

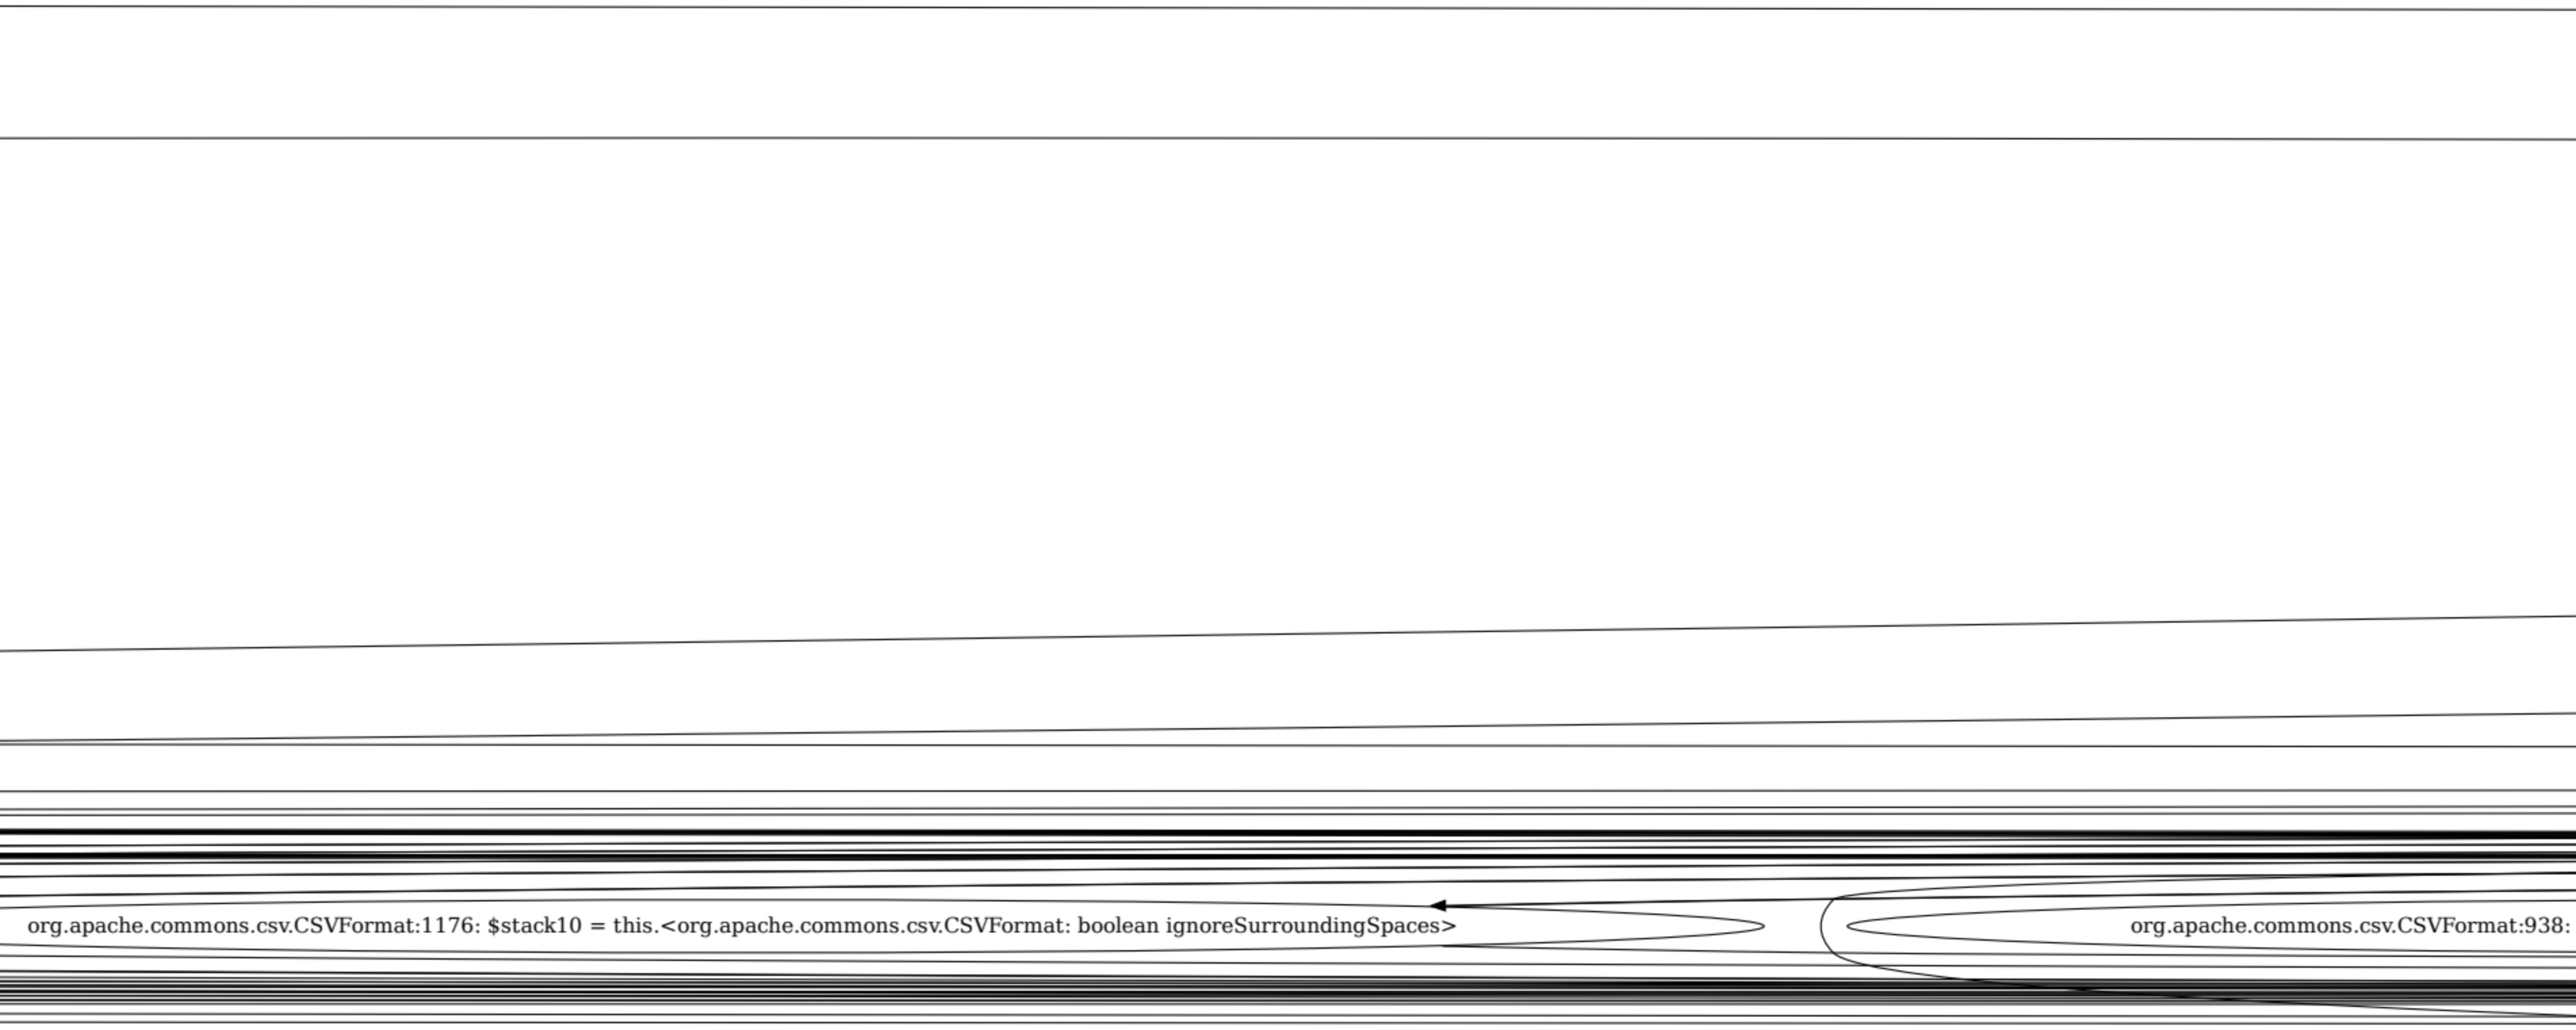

org.apache.commons.csv.CSVFormat:1176: $stack10 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreSurroundingSpaces>
org.apache.commons.csv.CSVFormat:938:

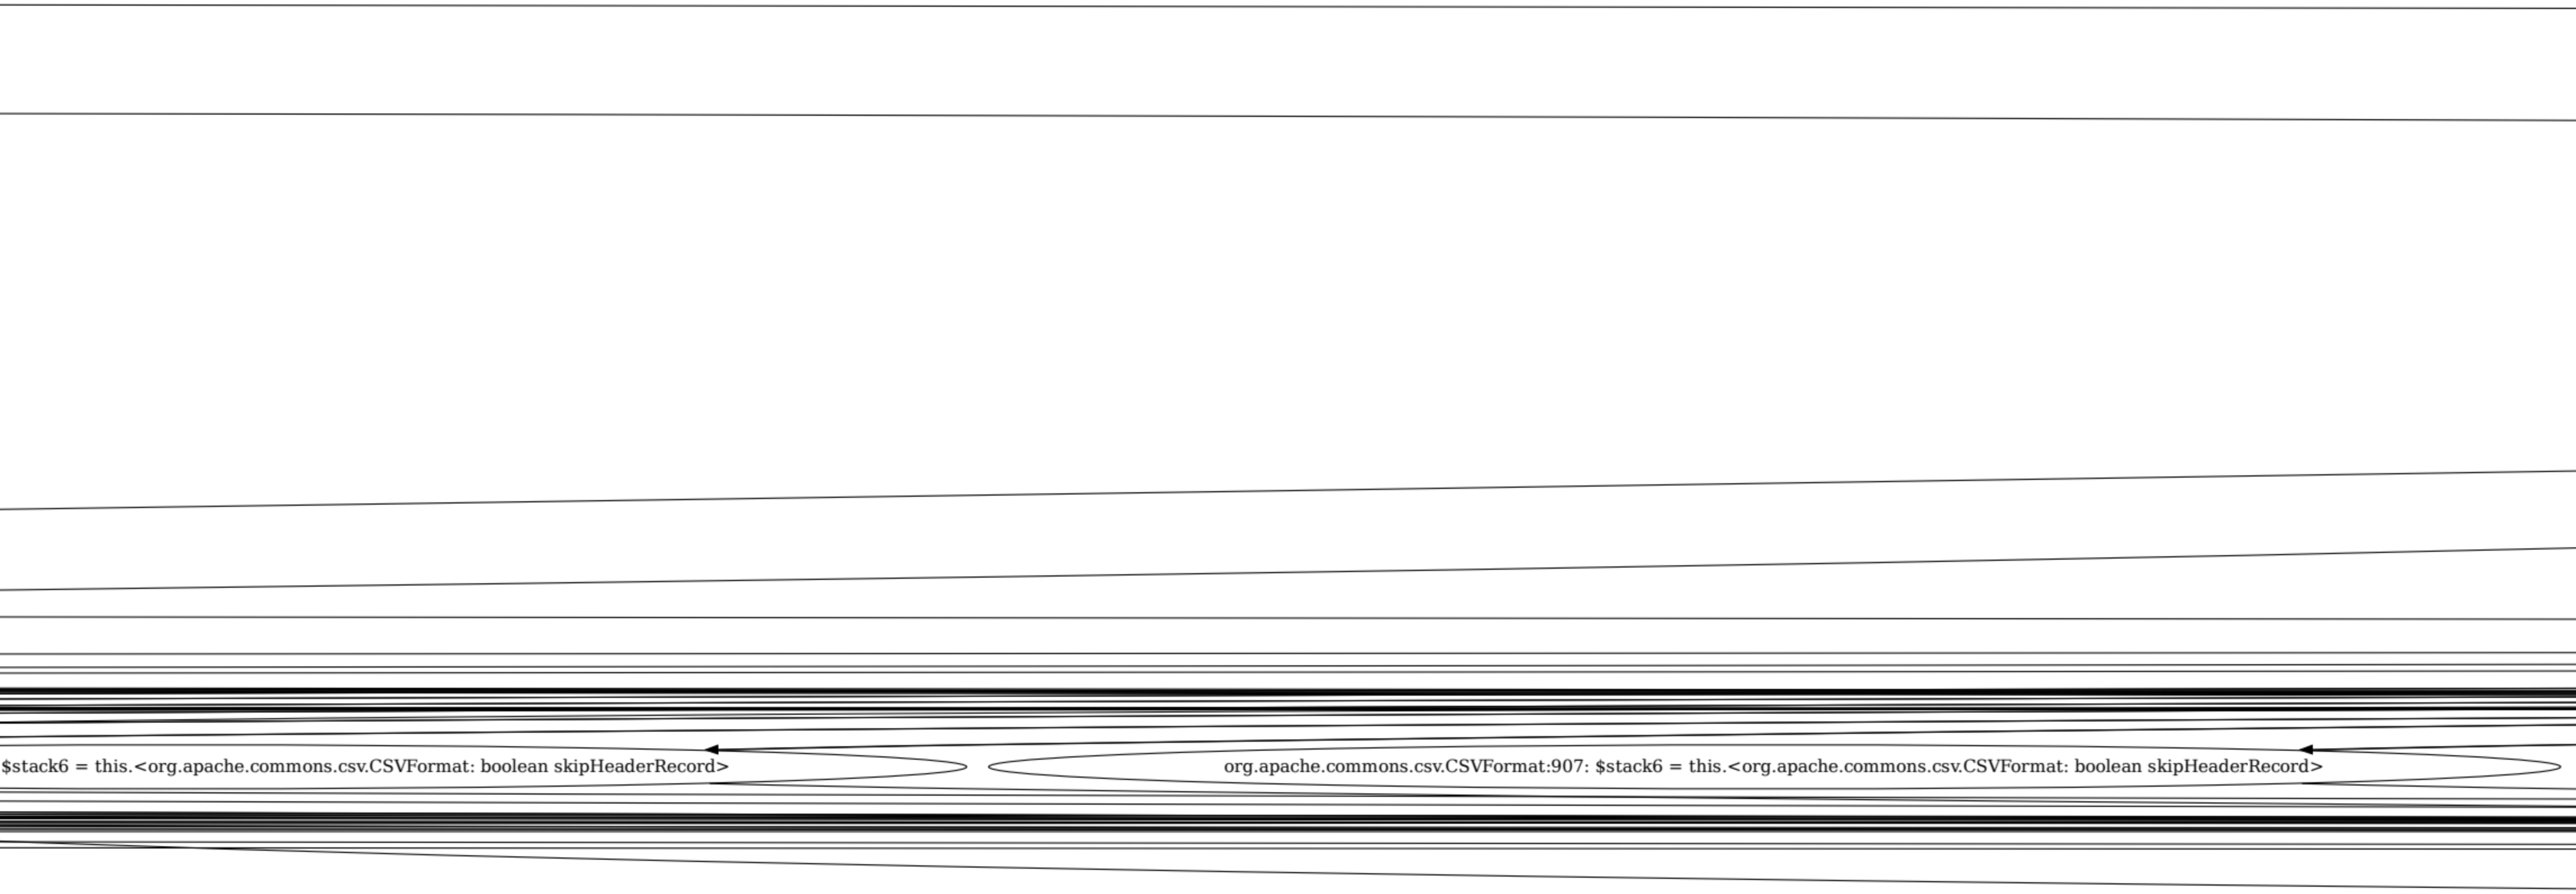
$stack6 = this.<org.apache.commons.csv.CSVFormat: boolean skipHeaderRecord>
org.apache.commons.csv.CSVFormat:907: $stack6 = this.<org.apache.commons.csv.CSVFormat: boolean skipHeaderRecord>

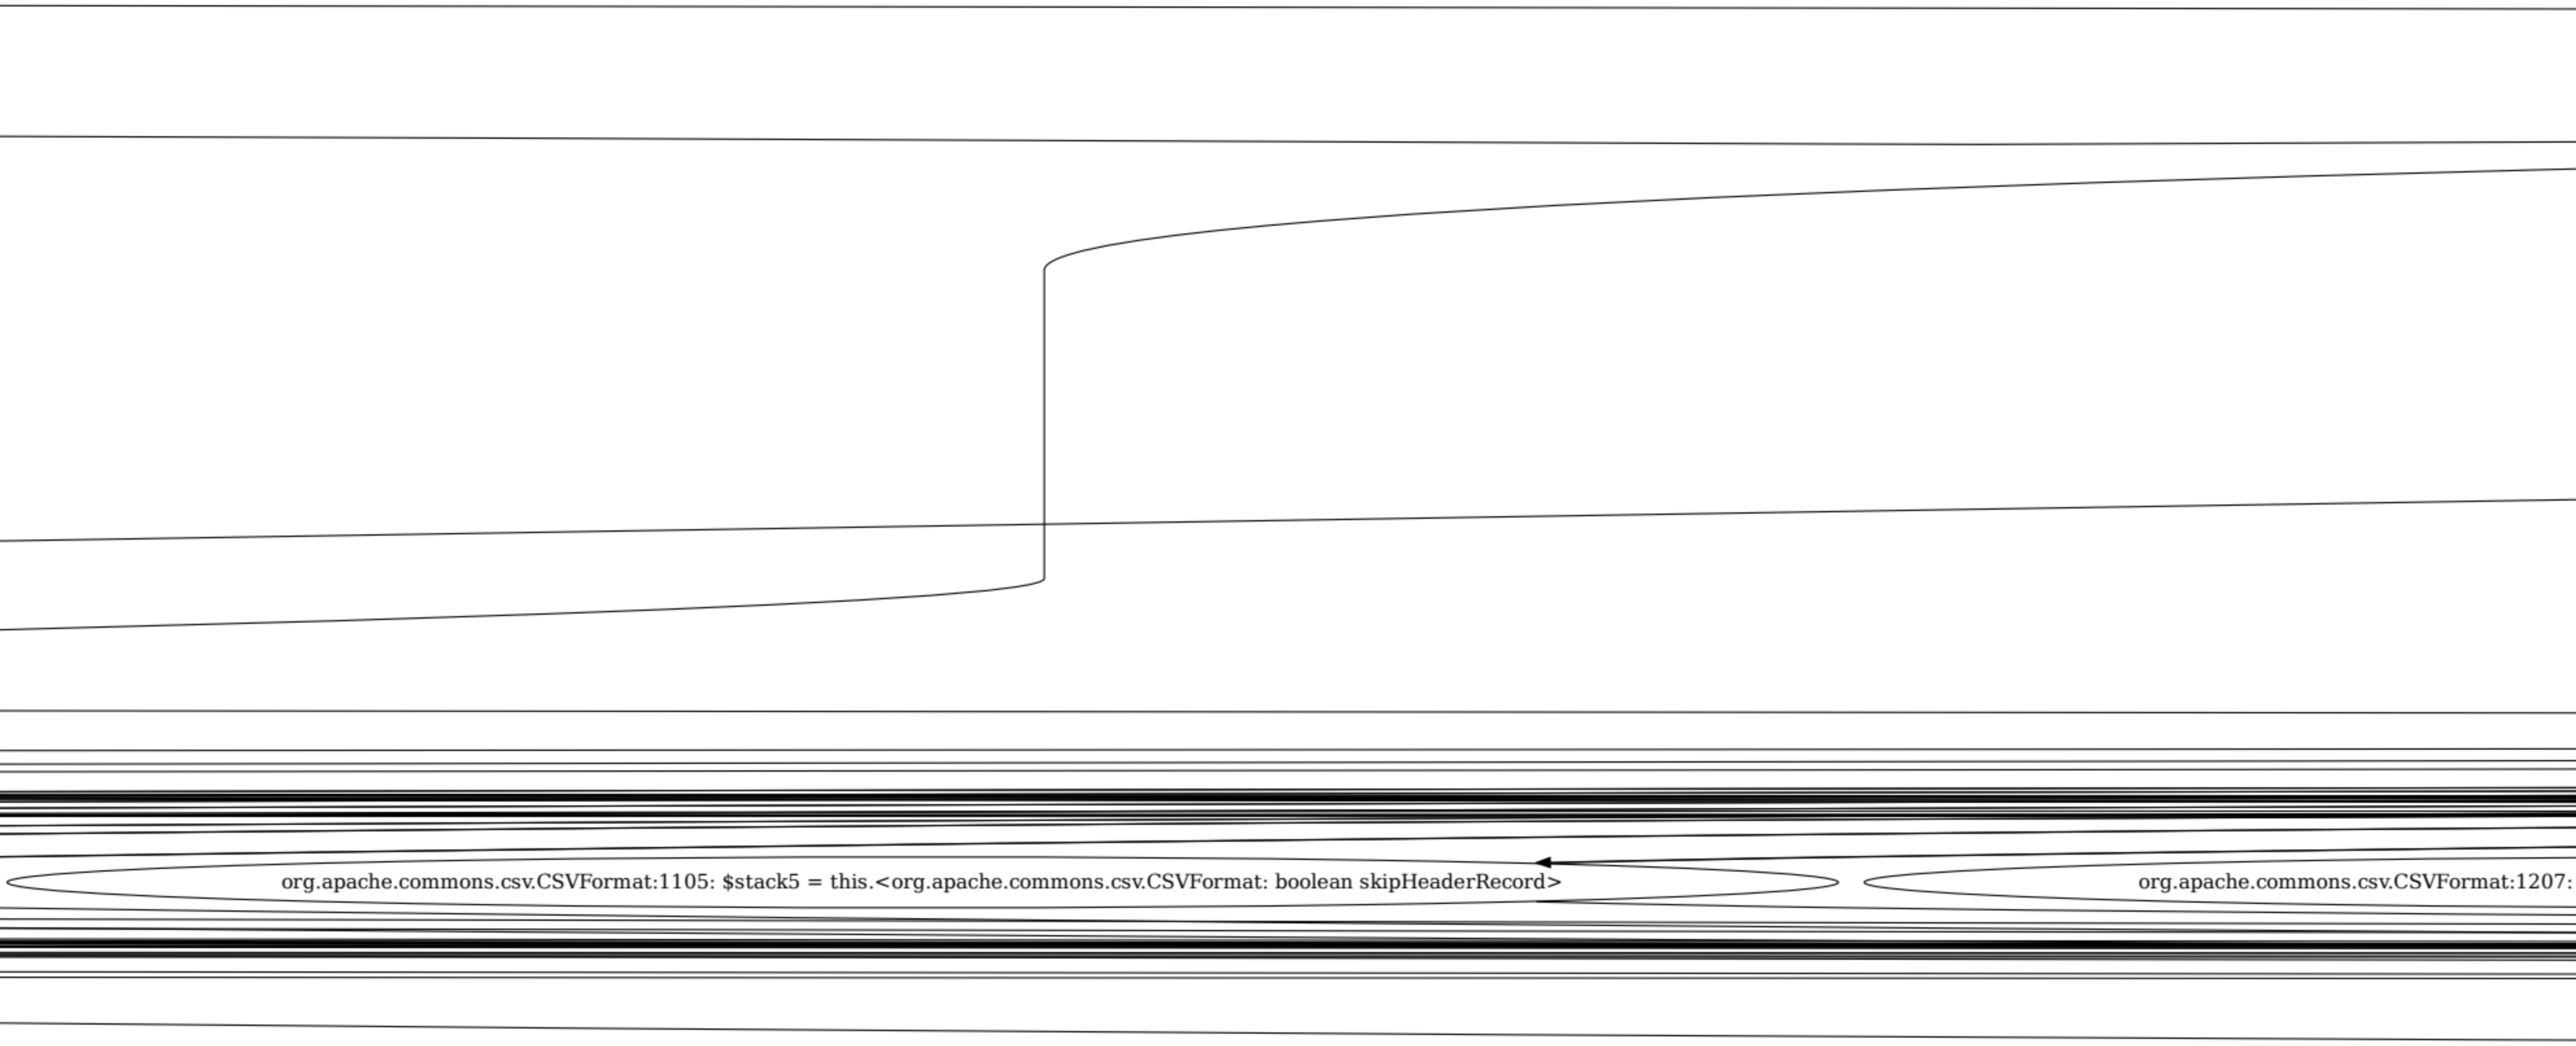
org.apache.commons.csv.CSVFormat:1105: $stack5 = this.<org.apache.commons.csv.CSVFormat: boolean skipHeaderRecord>
org.apache.commons.csv.CSVFormat:1207:

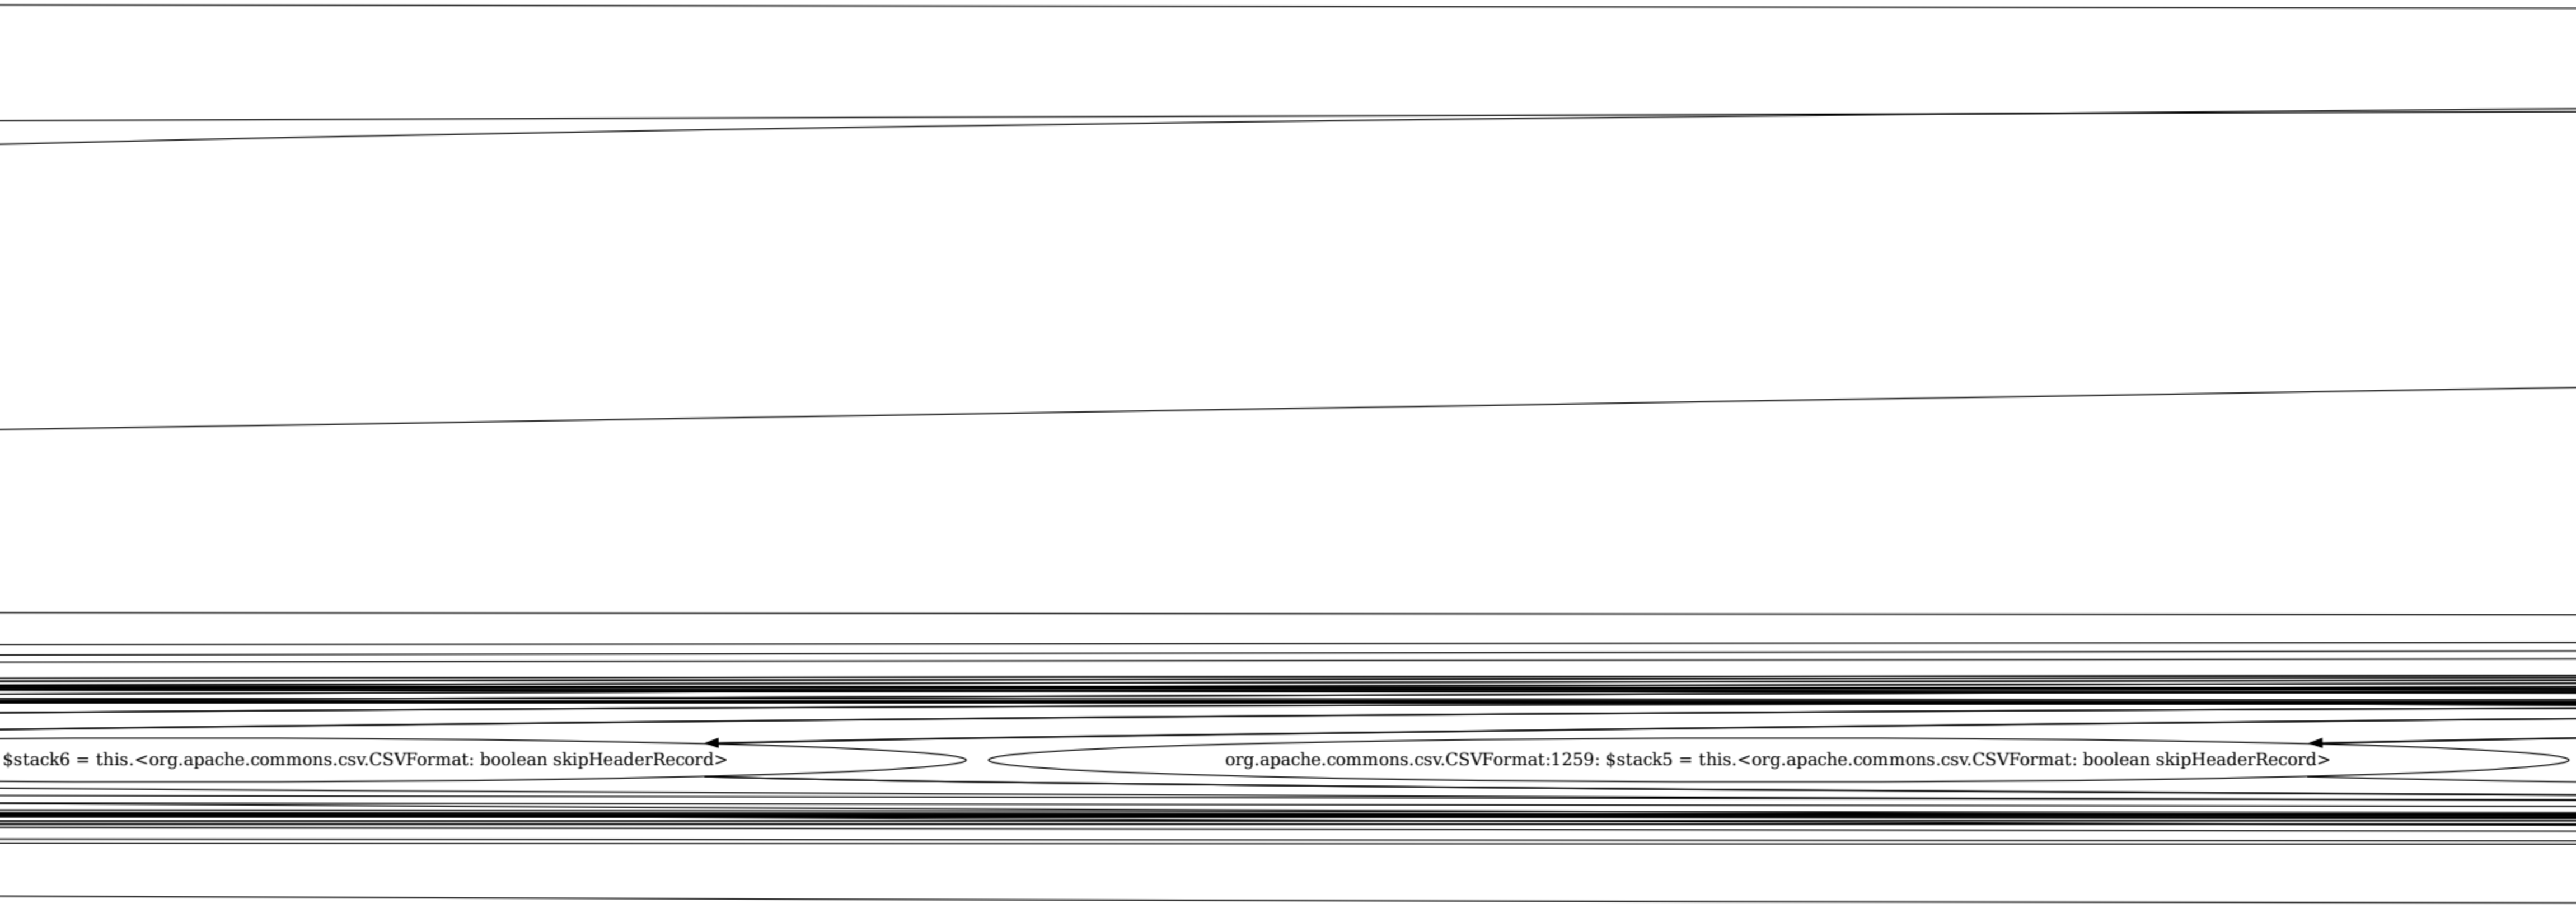
$stack6 = this.<org.apache.commons.csv.CSVFormat: boolean skipHeaderRecord>
org.apache.commons.csv.CSVFormat:1259: $stack5 = this.<org.apache.commons.csv.CSVFormat: boolean skipHeaderRecord>

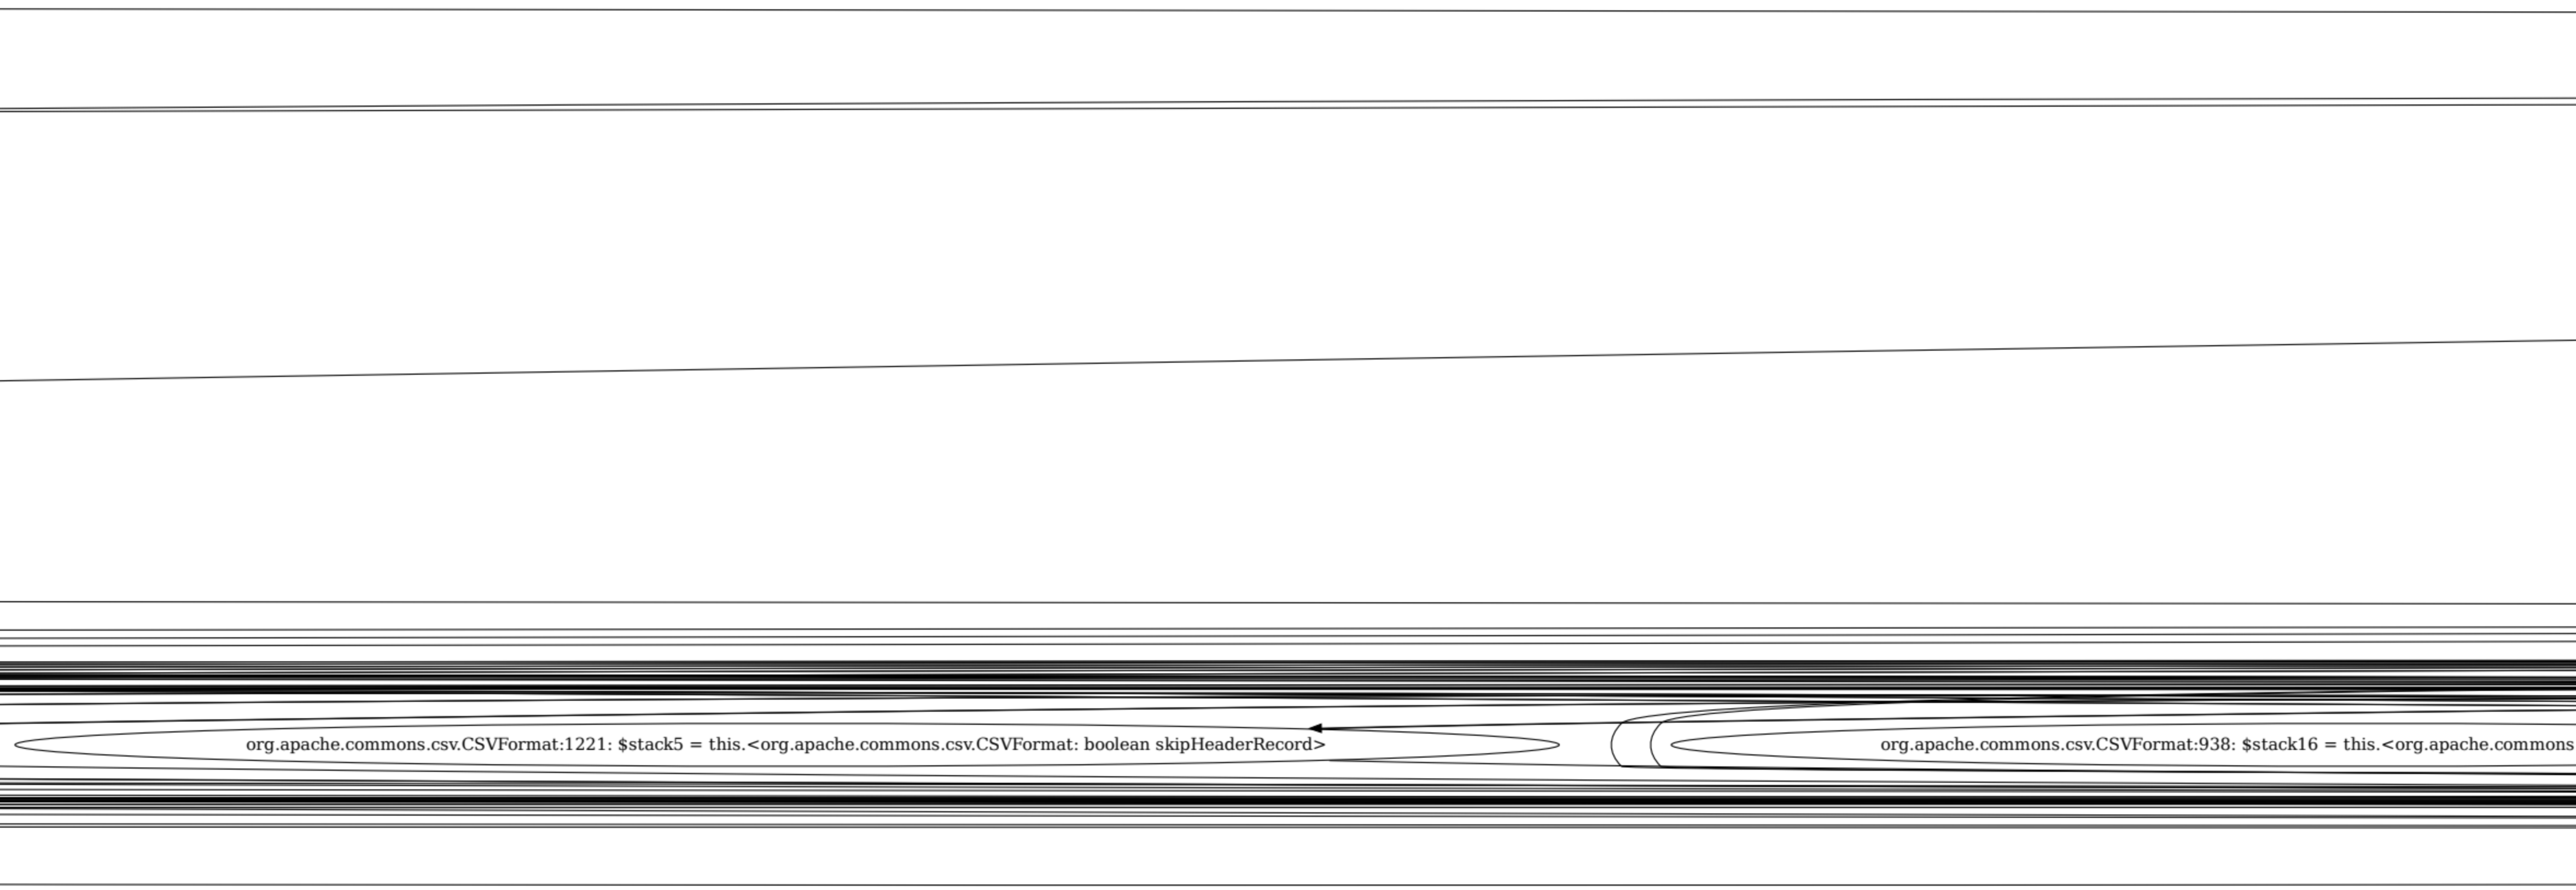
org.apache.commons.csv.CSVFormat:1221: $stack5 = this.<org.apache.commons.csv.CSVFormat: boolean skipHeaderRecord>
org.apache.commons.csv.CSVFormat:938: $stack16 = this.<org.apache.commons

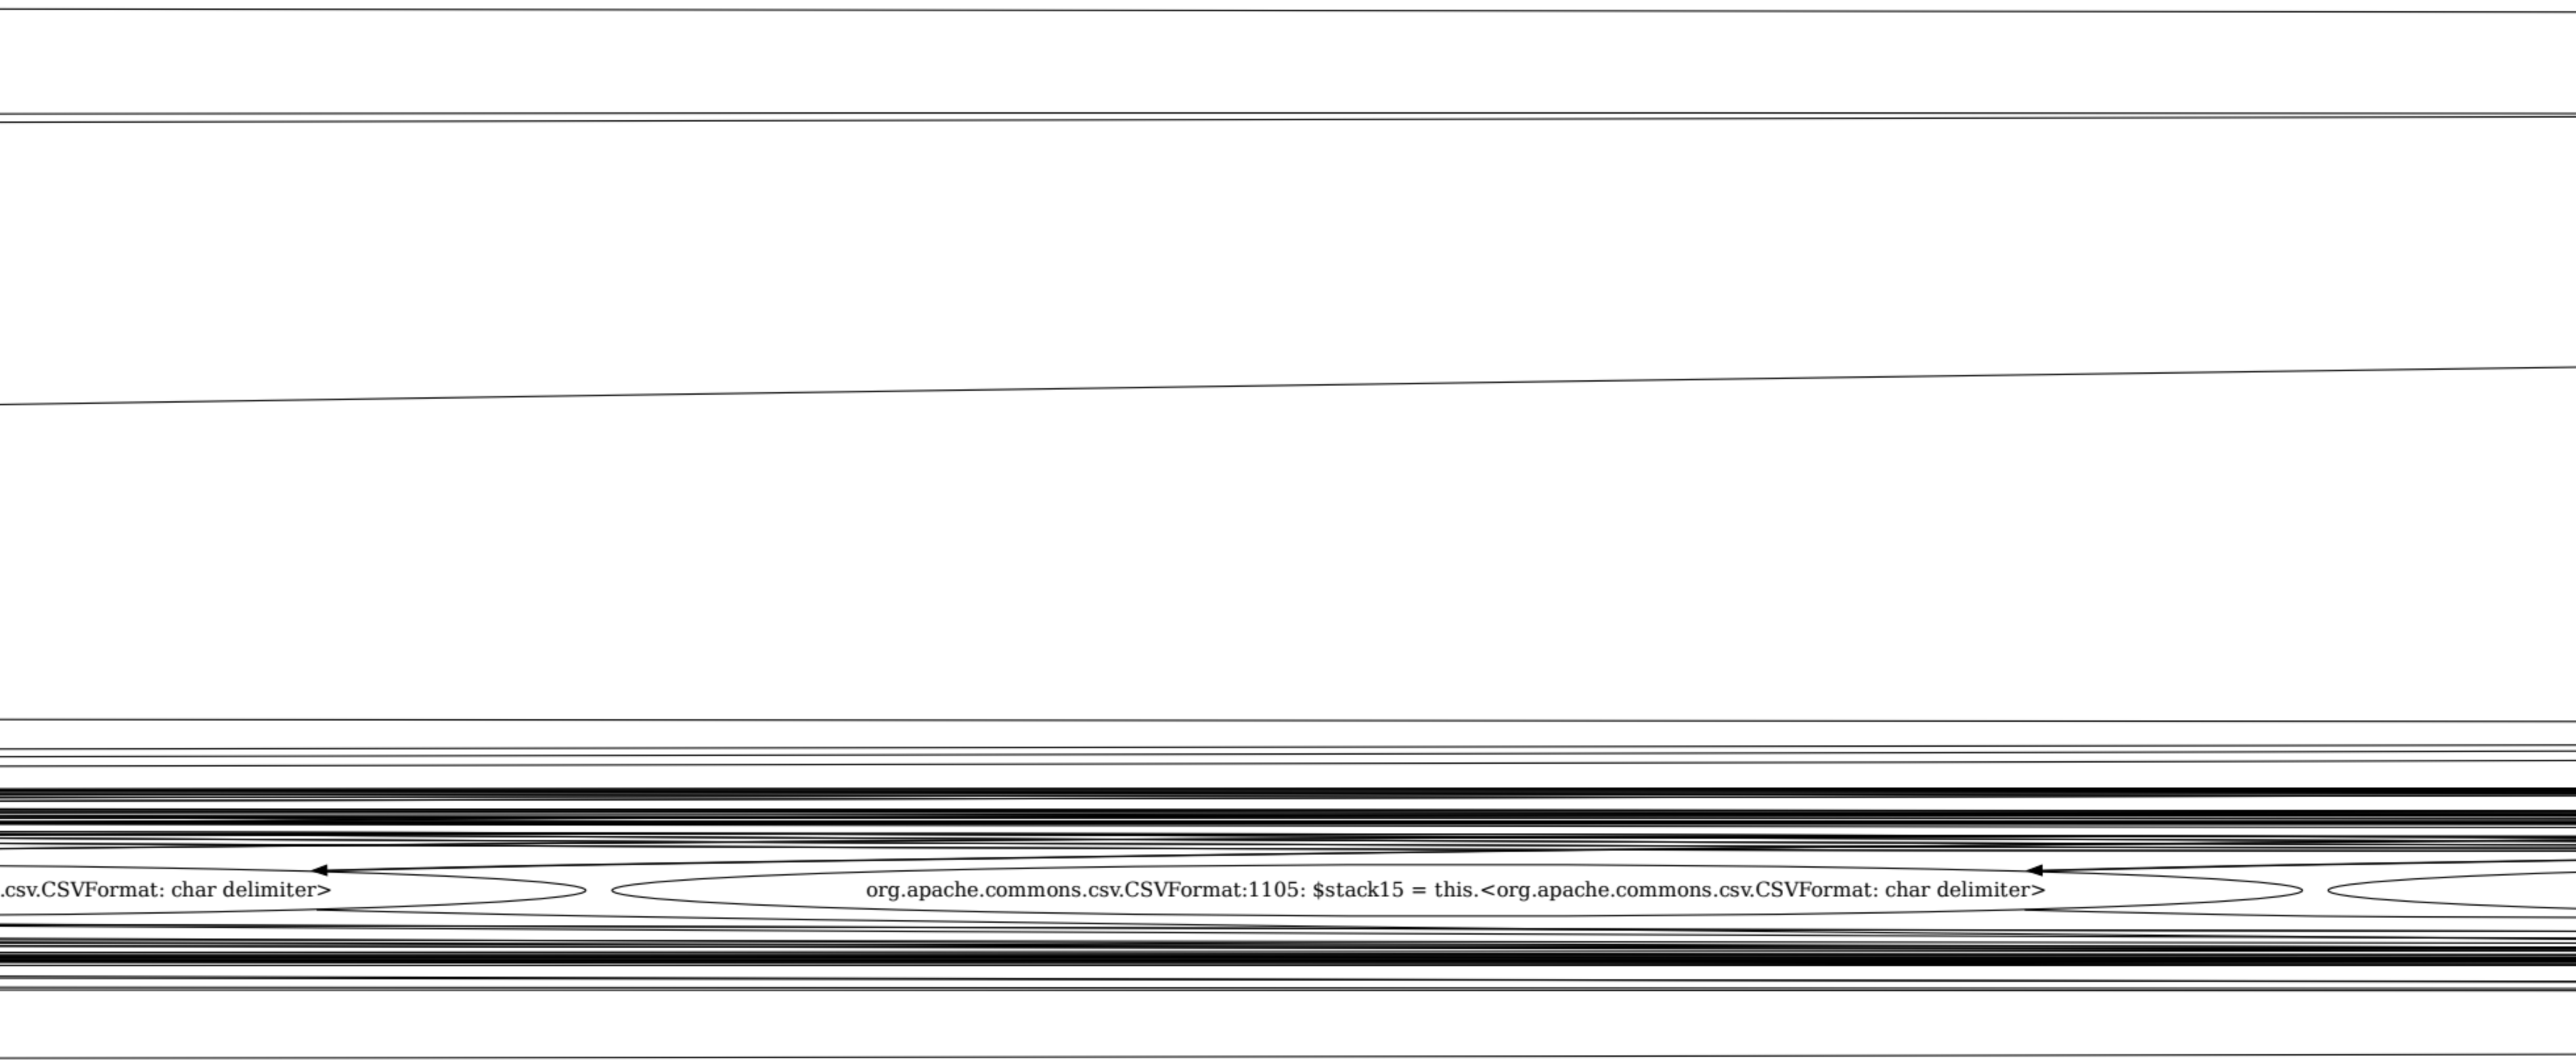
.csv.CSVFormat: char delimiter>
org.apache.commons.csv.CSVFormat:1105: $stack15 = this.<org.apache.commons.csv.CSVFormat: char delimiter>

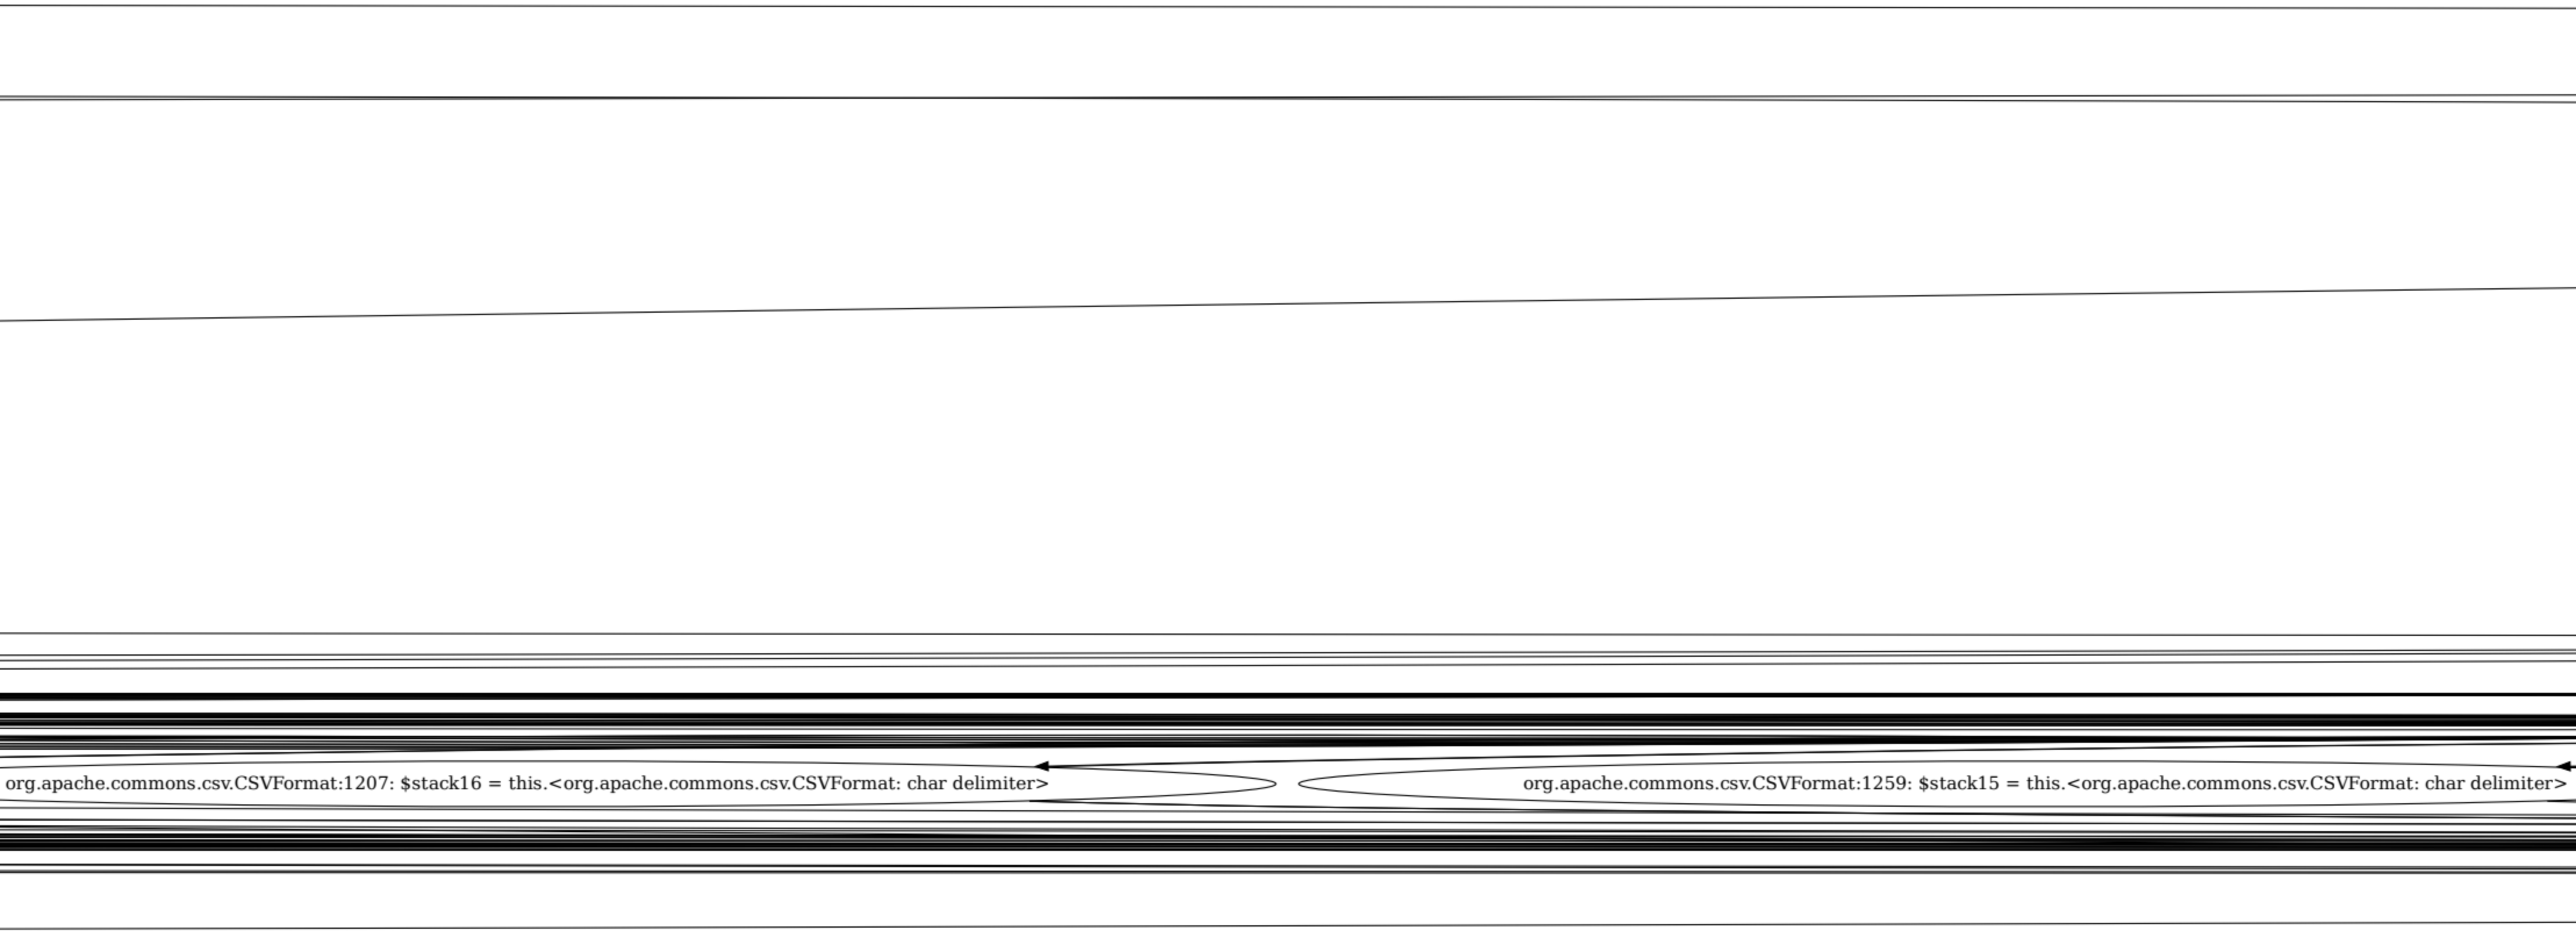
org.apache.commons.csv.CSVFormat:1207: $stack16 = this.<org.apache.commons.csv.CSVFormat: char delimiter>
org.apache.commons.csv.CSVFormat:1259: $stack15 = this.<org.apache.commons.csv.CSVFormat: char delimiter>

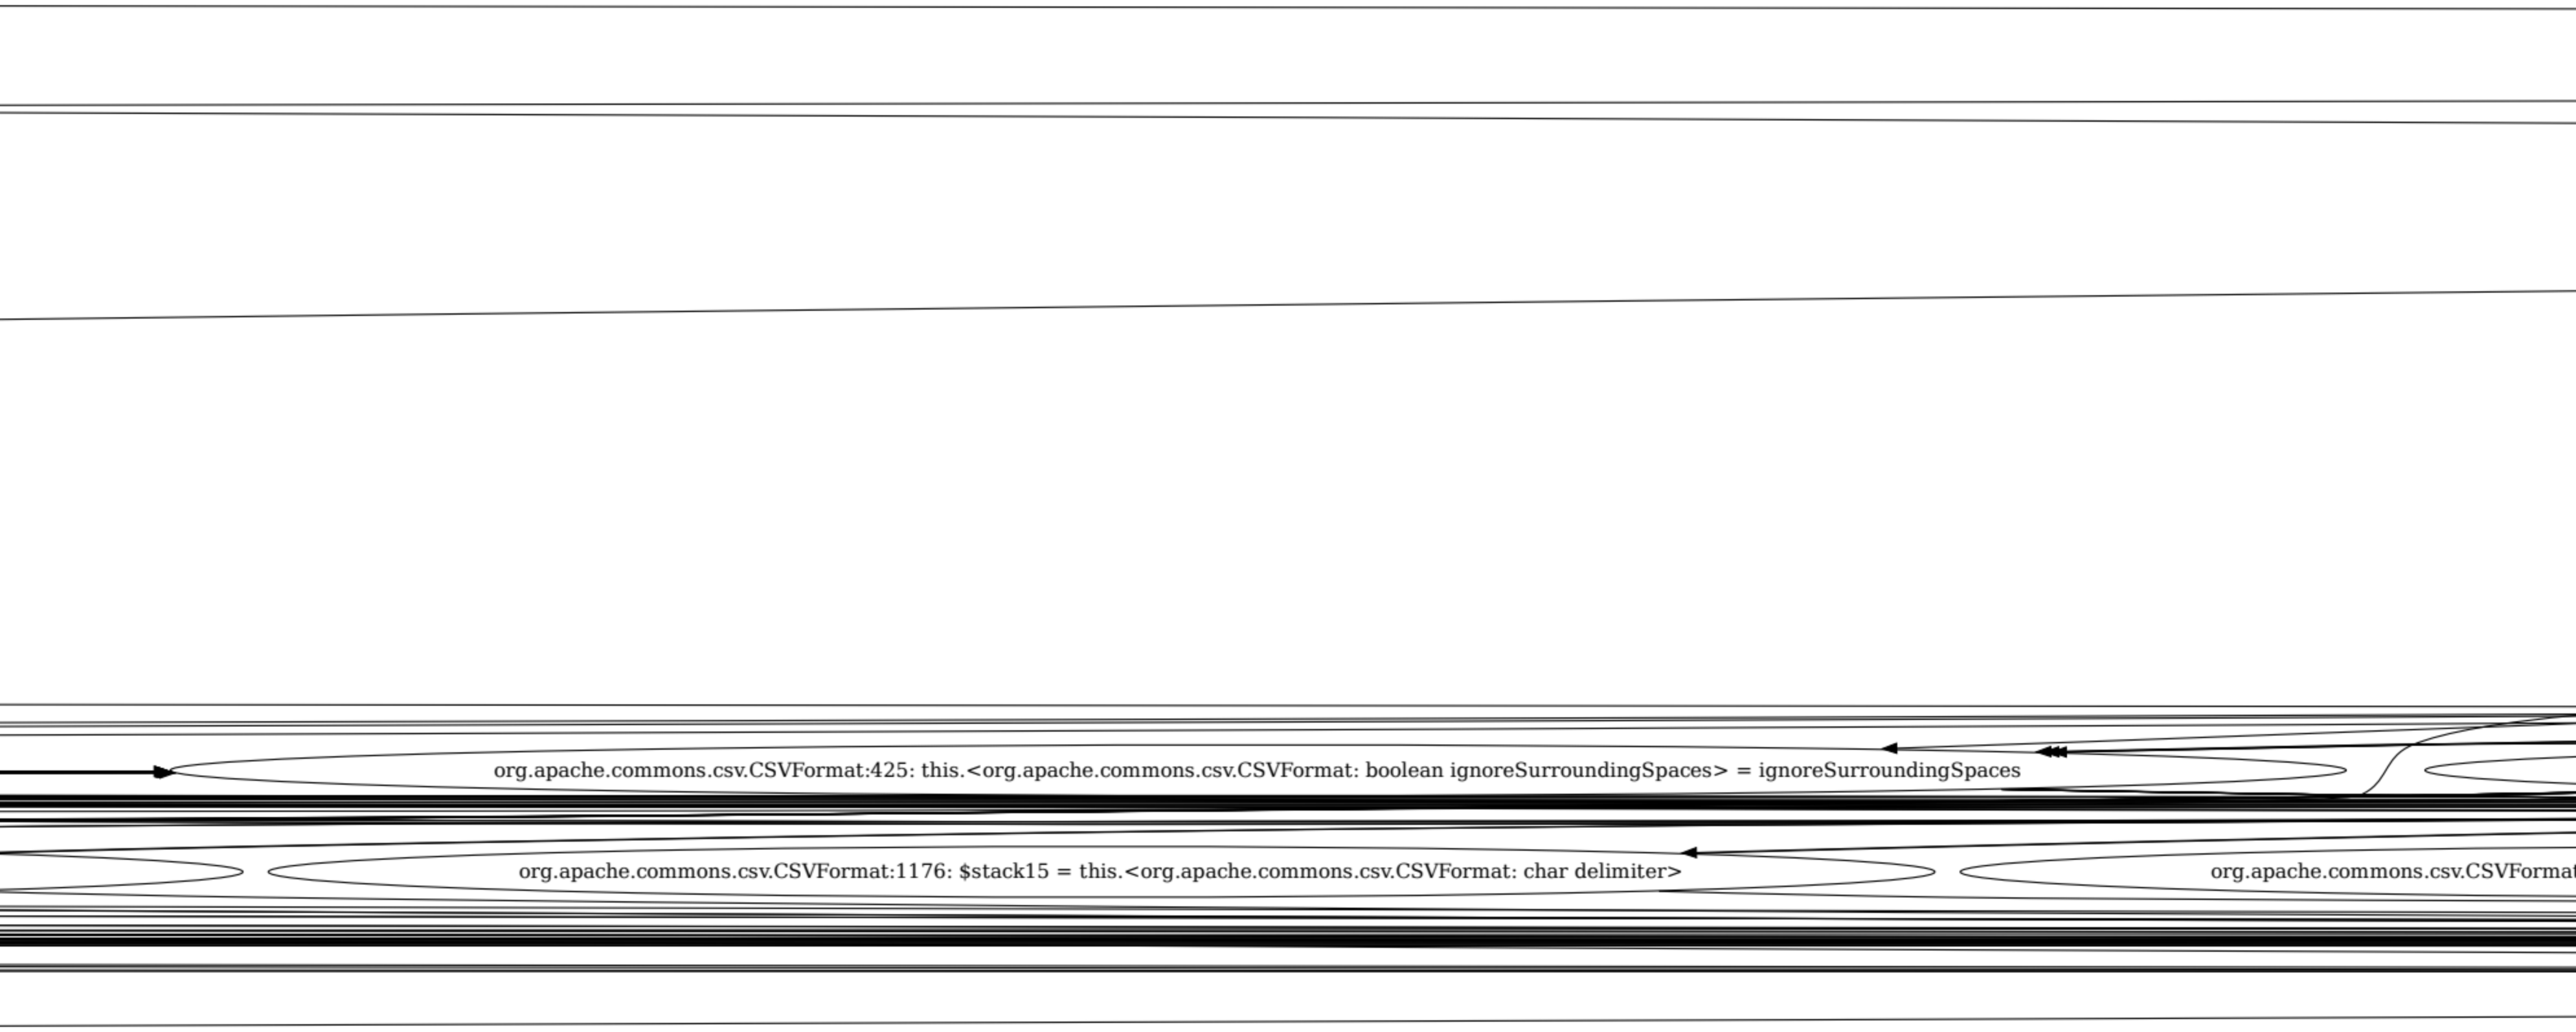
org.apache.commons.csv.CSVFormat:425: this.<org.apache.commons.csv.CSVFormat: boolean ignoreSurroundingSpaces> = ignoreSurroundingSpaces
org.apache.commons.csv.CSVFormat:1176: $stack15 = this.<org.apache.commons.csv.CSVFormat: char delimiter>
org.apache.commons.csv.CSVFormat

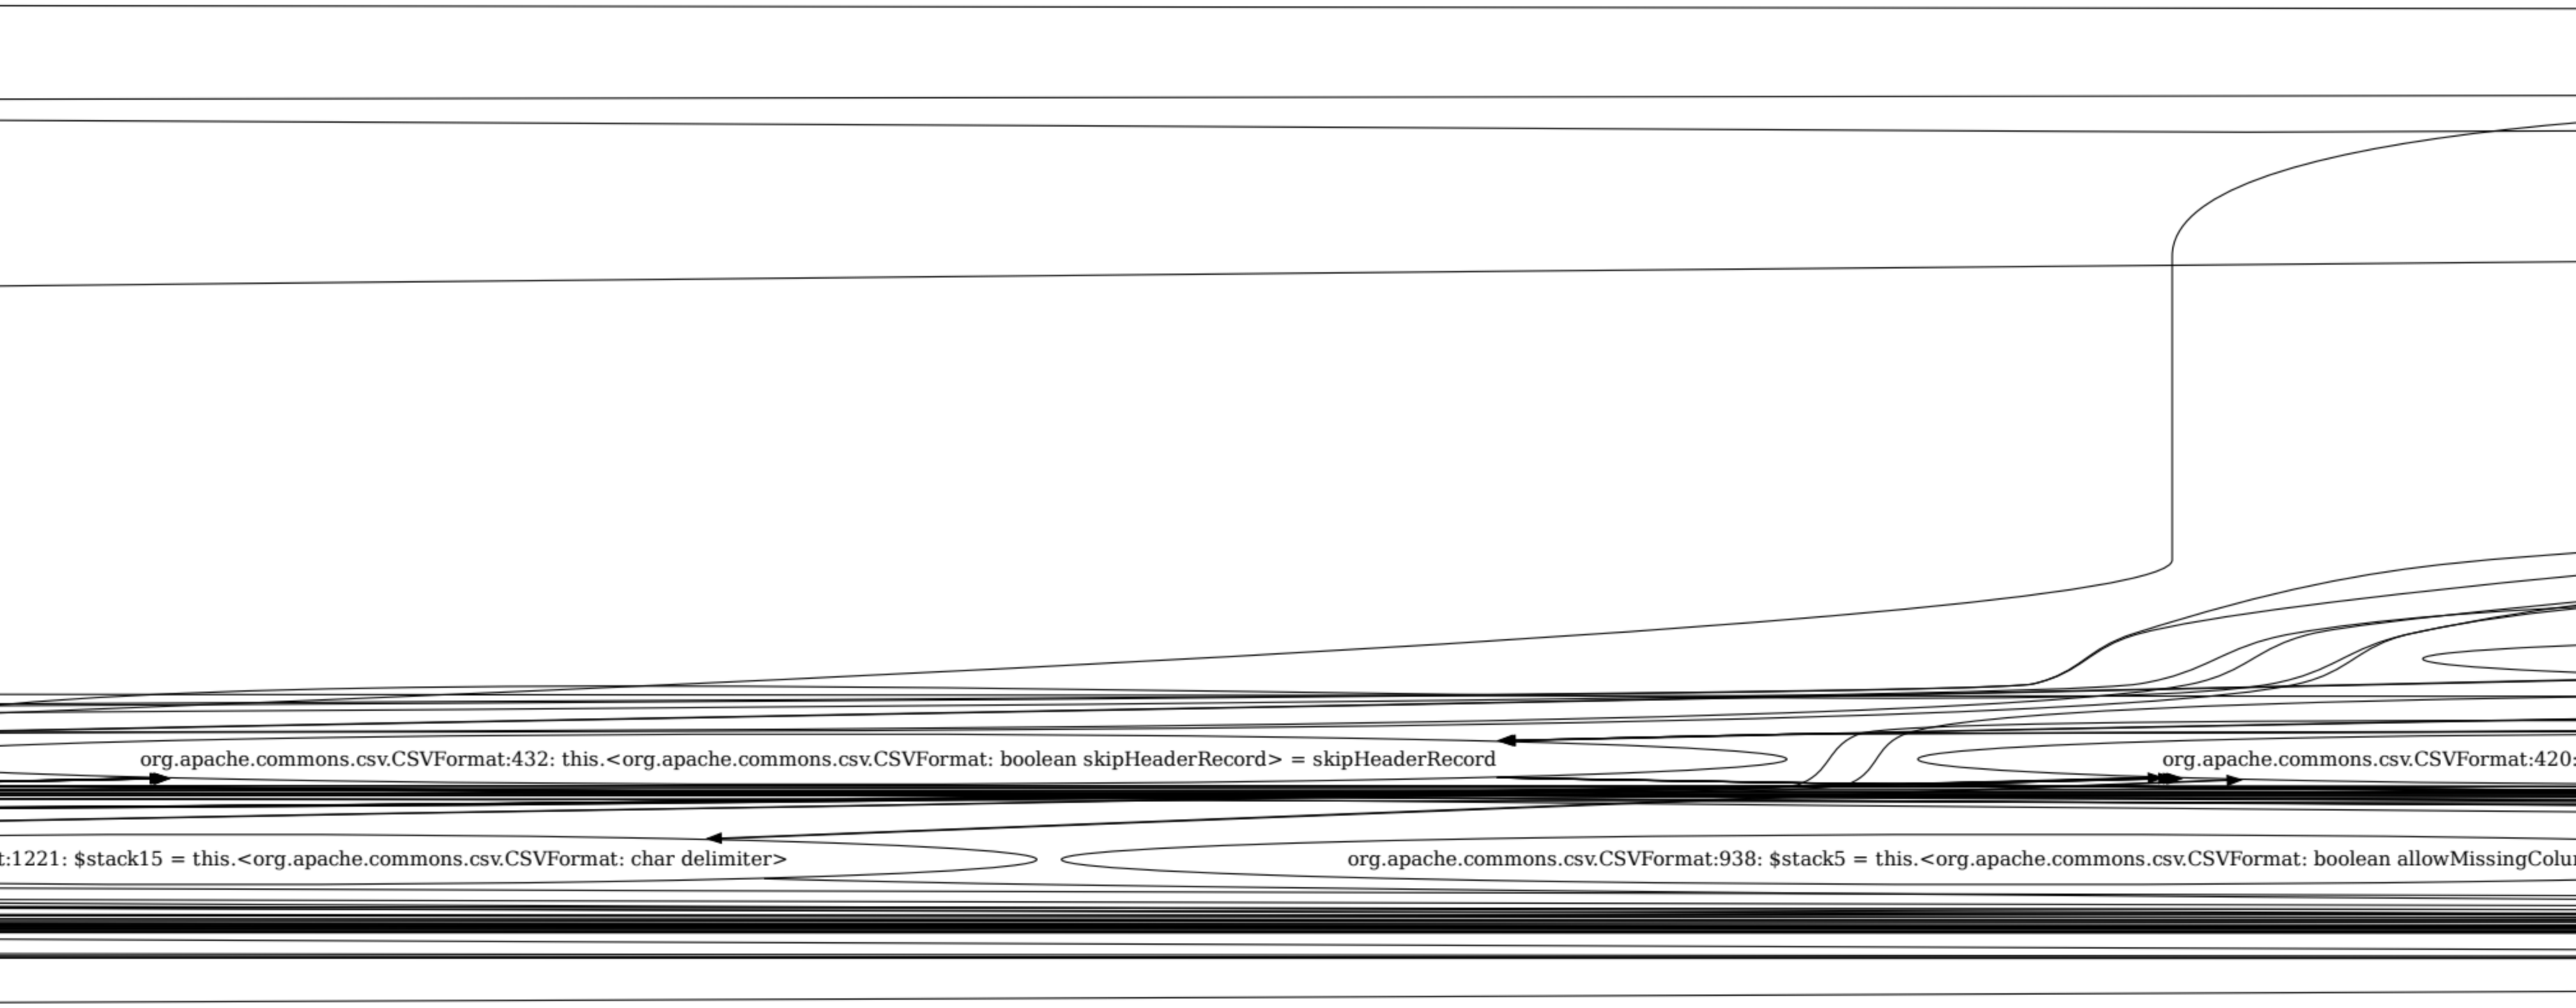
org.apache.commons.csv.CSVFormat:432: this.<org.apache.commons.csv.CSVFormat: boolean skipHeaderRecord> = skipHeaderRecord
org.apache.commons.csv.CSVFormat:420:
t:1221: $stack15 = this.<org.apache.commons.csv.CSVFormat: char delimiter>
org.apache.commons.csv.CSVFormat:938: $stack5 = this.<org.apache.commons.csv.CSVFormat: boolean allowMissingColu

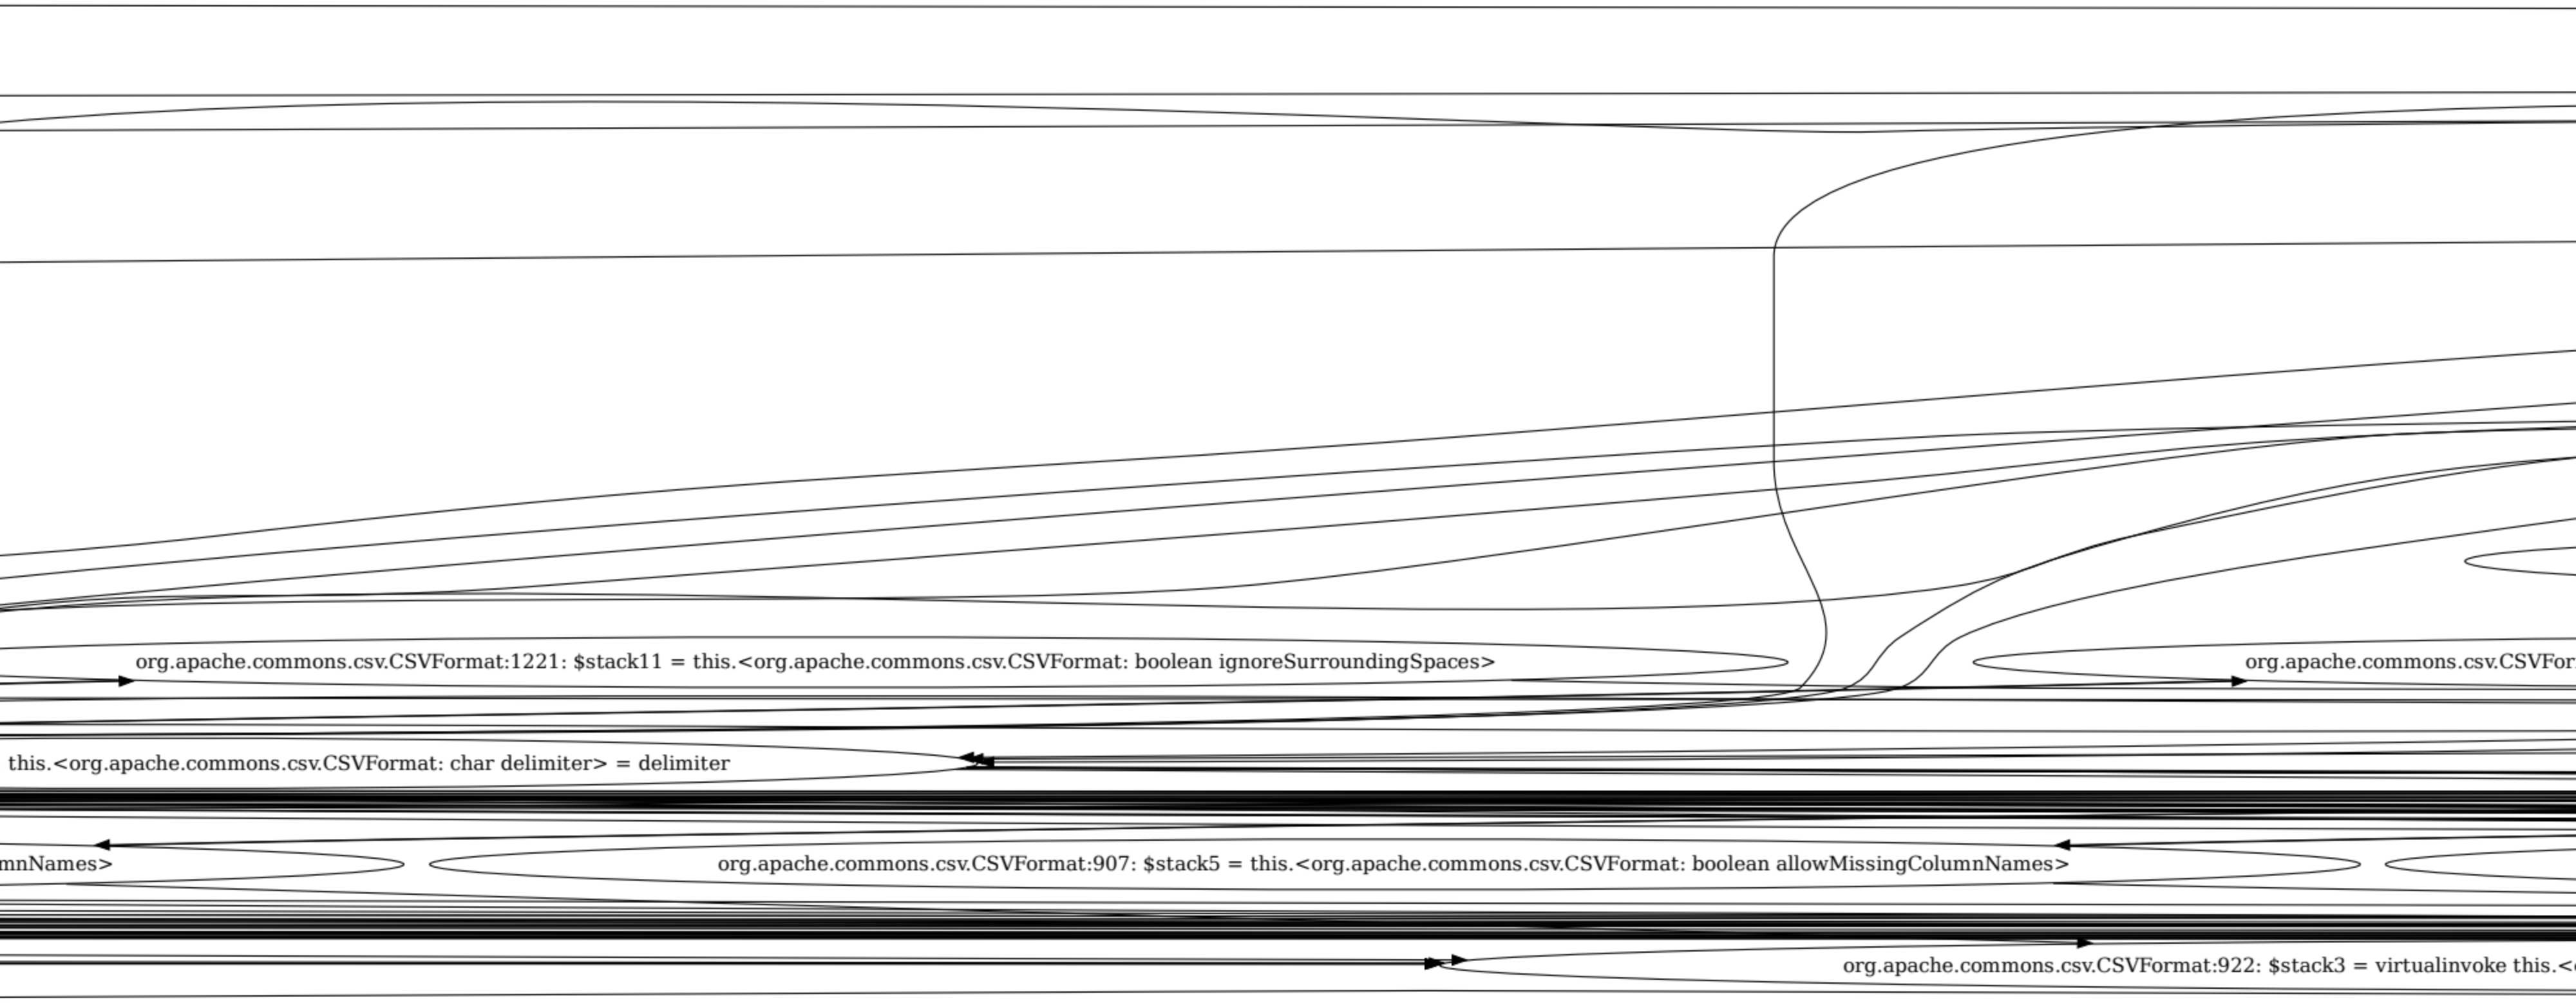
org.apache.commons.csv.CSVFormat:1221: $stack11 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreSurroundingSpaces>
org.apache.commons.csv.CSVFor
this.<org.apache.commons.csv.CSVFormat: char delimiter> = delimiter
mnNames>
org.apache.commons.csv.CSVFormat:907: $stack5 = this.<org.apache.commons.csv.CSVFormat: boolean allowMissingColumnNames>
org.apache.commons.csv.CSVFormat:922: $stack3 = virtualinvoke this.<c

org.apache.commons.csv.CSVFormat:1207: $stack3 = new org.apache.commons.csv.CSVFormat
mat:1176: $stack5 = this.<org.apache.commons.csv.CSVFormat: boolean skipHeaderRecord>
org.apache.commons.csv.CSVFormat:1105: $stack4 = this.<org.apache.commons.csv.CSVFormat: boolean allowMissingColumnNames>
org.apache.commons.csv.CSVFormat:1207: $stack5 = this.<org.apache.commons.csv.CSVFormat:
org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withEscape(java.lang.Character)>($stack2)

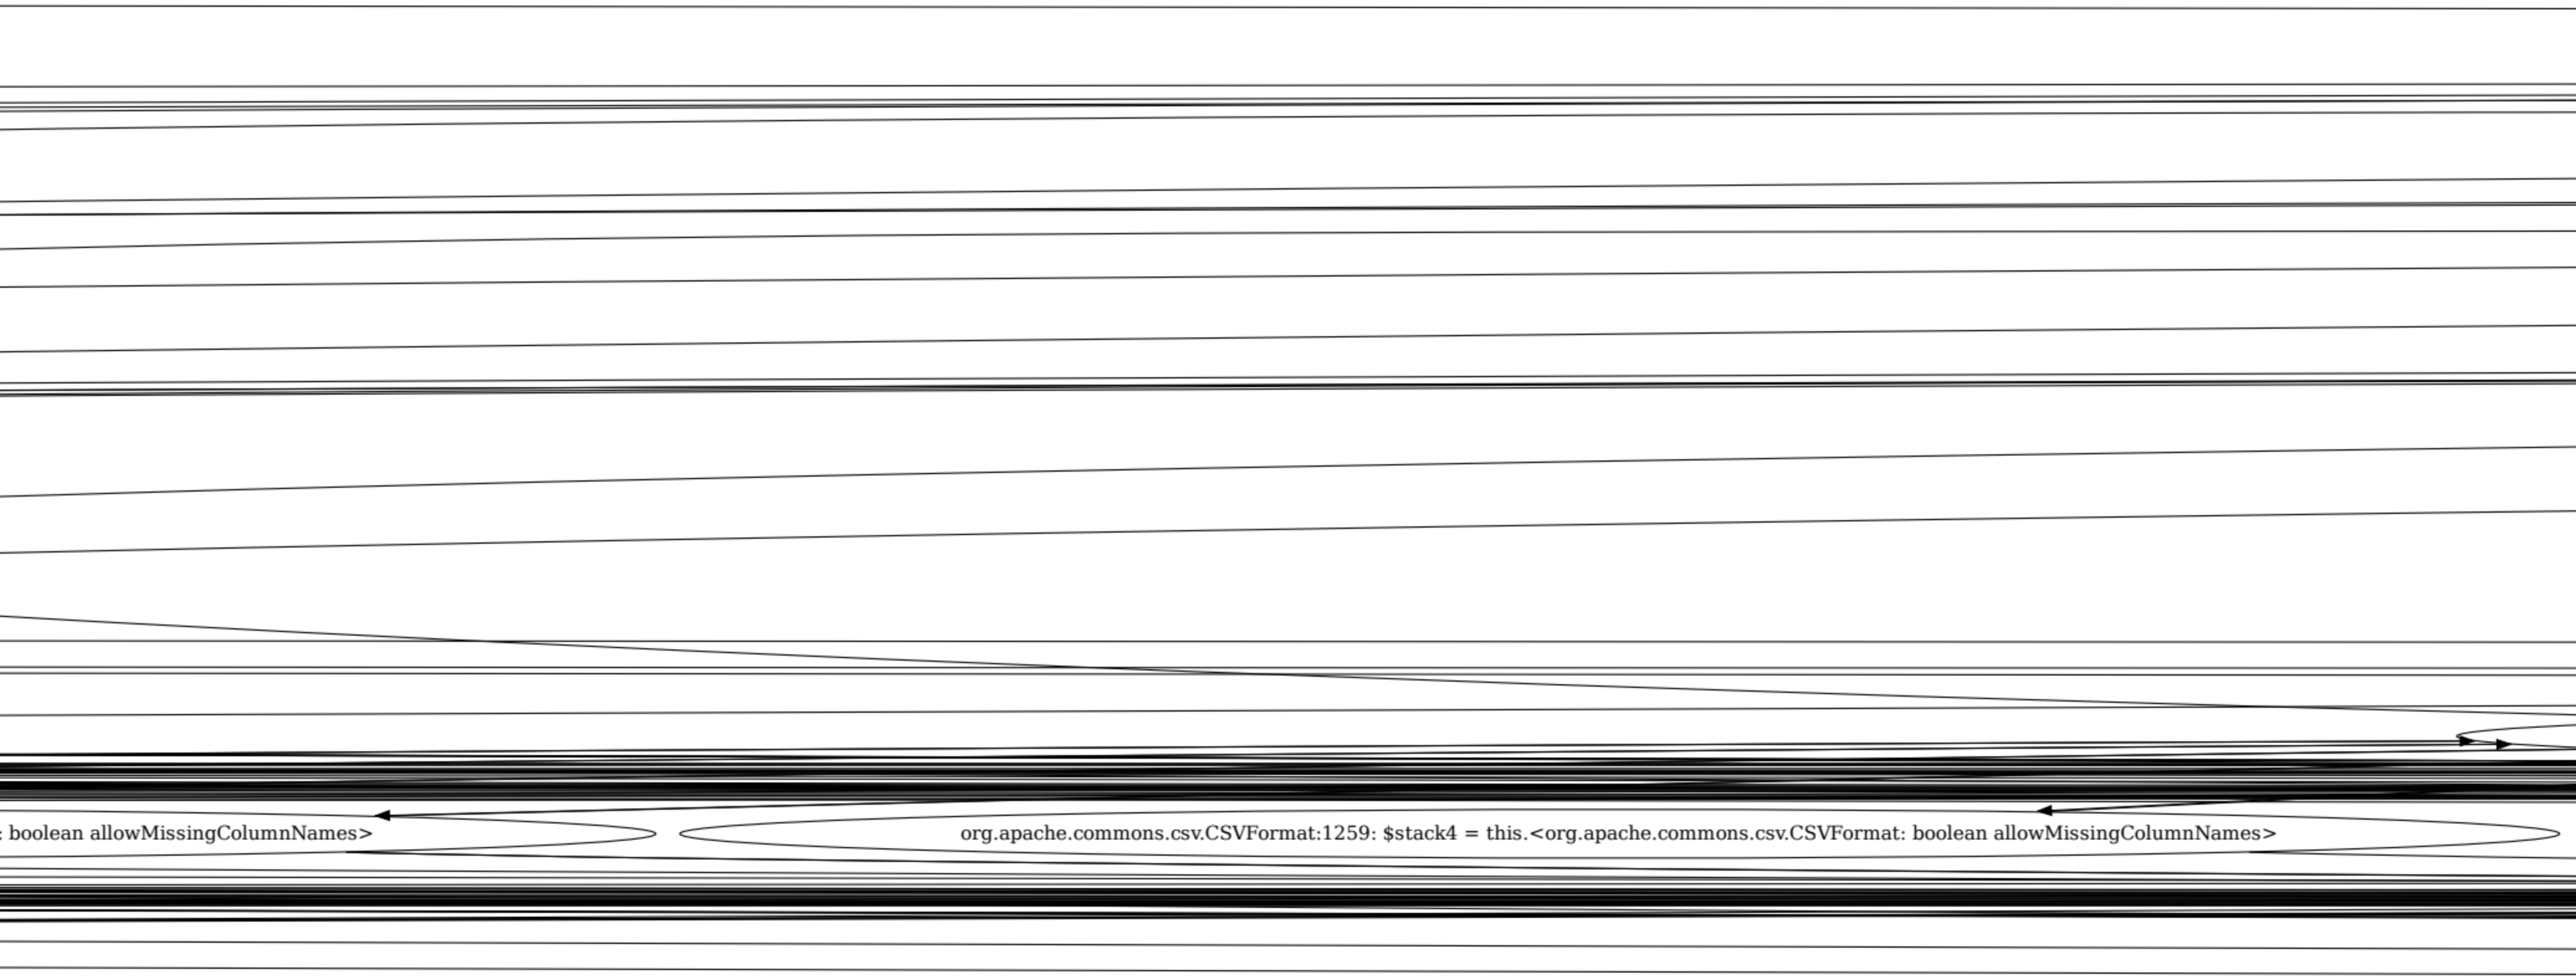
: boolean allowMissingColumnNames>
org.apache.commons.csv.CSVFormat:1259: $stack4 = this.<org.apache.commons.csv.CSVFormat: boolean allowMissingColumnNames>

org.apache.commons.csv.CSVFormat:426: this.<org.apache.commons.csv.CSVFormat: boolean allowMissingColumnNames> = allowMissingColumnNames
org.apache.commons.csv.CSVFormat:1176: $stack4 = this.<org.apache.commons.csv.CSVFormat: boolean allowMissingColumnNames>
org.apache.commons.csv.CSVFor

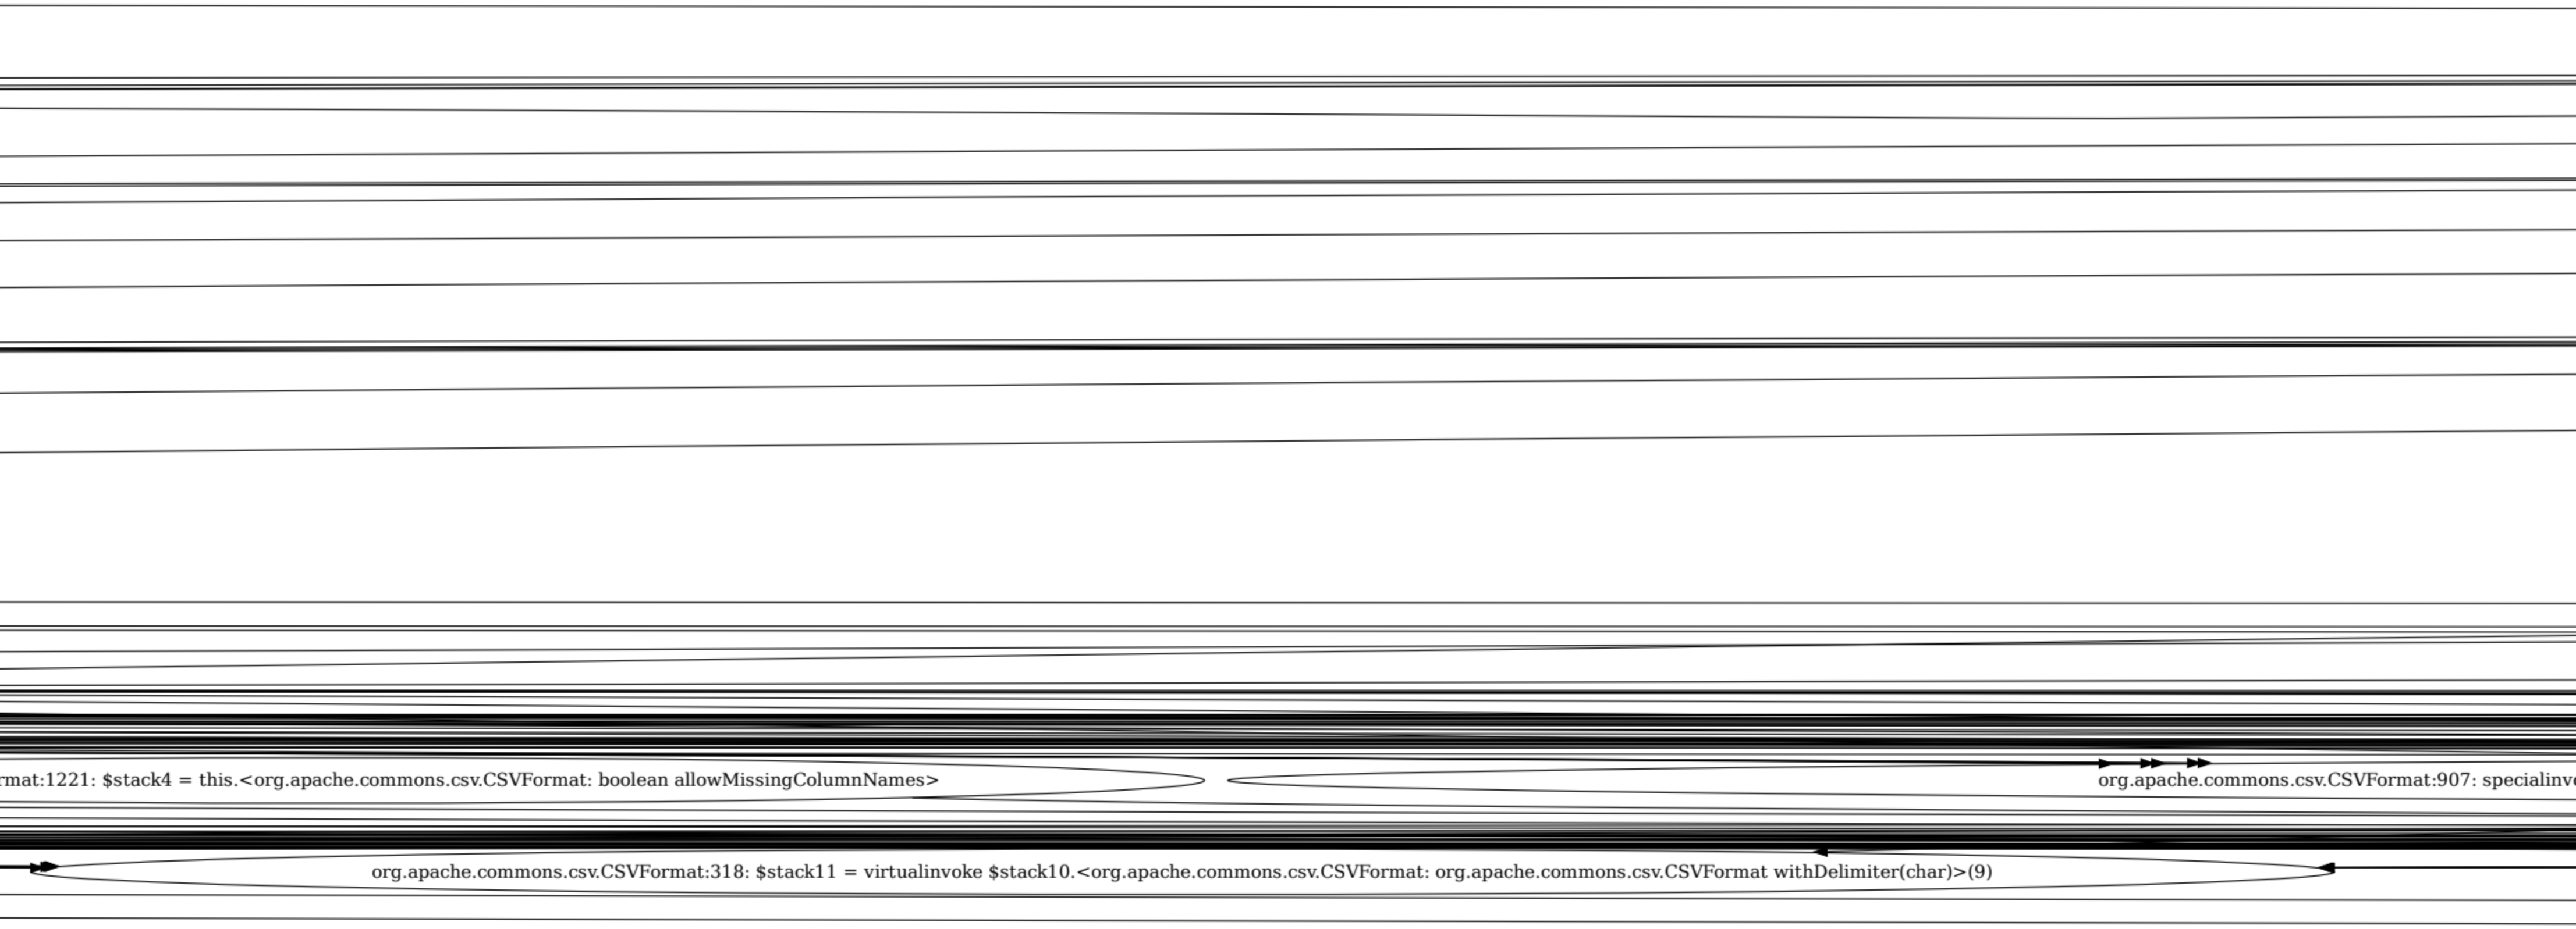
rmat:1221: $stack4 = this.<org.apache.commons.csv.CSVFormat: boolean allowMissingColumnNames>
org.apache.commons.csv.CSVFormat:907: specialinv
org.apache.commons.csv.CSVFormat:318: $stack11 = virtualinvoke $stack10.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withDelimiter(char)>(9)

oke $stack3.<org.apache.commons.csv.CSVFormat: void <init>(char,java.lang.Character,org.apache.commons.csv.QuoteMode,java.lang.Character,java.lang.Character,boolean,boolean,java.lang.String,java.lang.String,java.lang.Object[],java.lang.Stri

ng[],boolean,boolean,boolean)>(delimiter, $stack16, $stack15, $stack14, $stack13, $stack12, $stack11, $stack10, $stack9, $stack8, $stack7, $stack6, $stack5, $stack4)

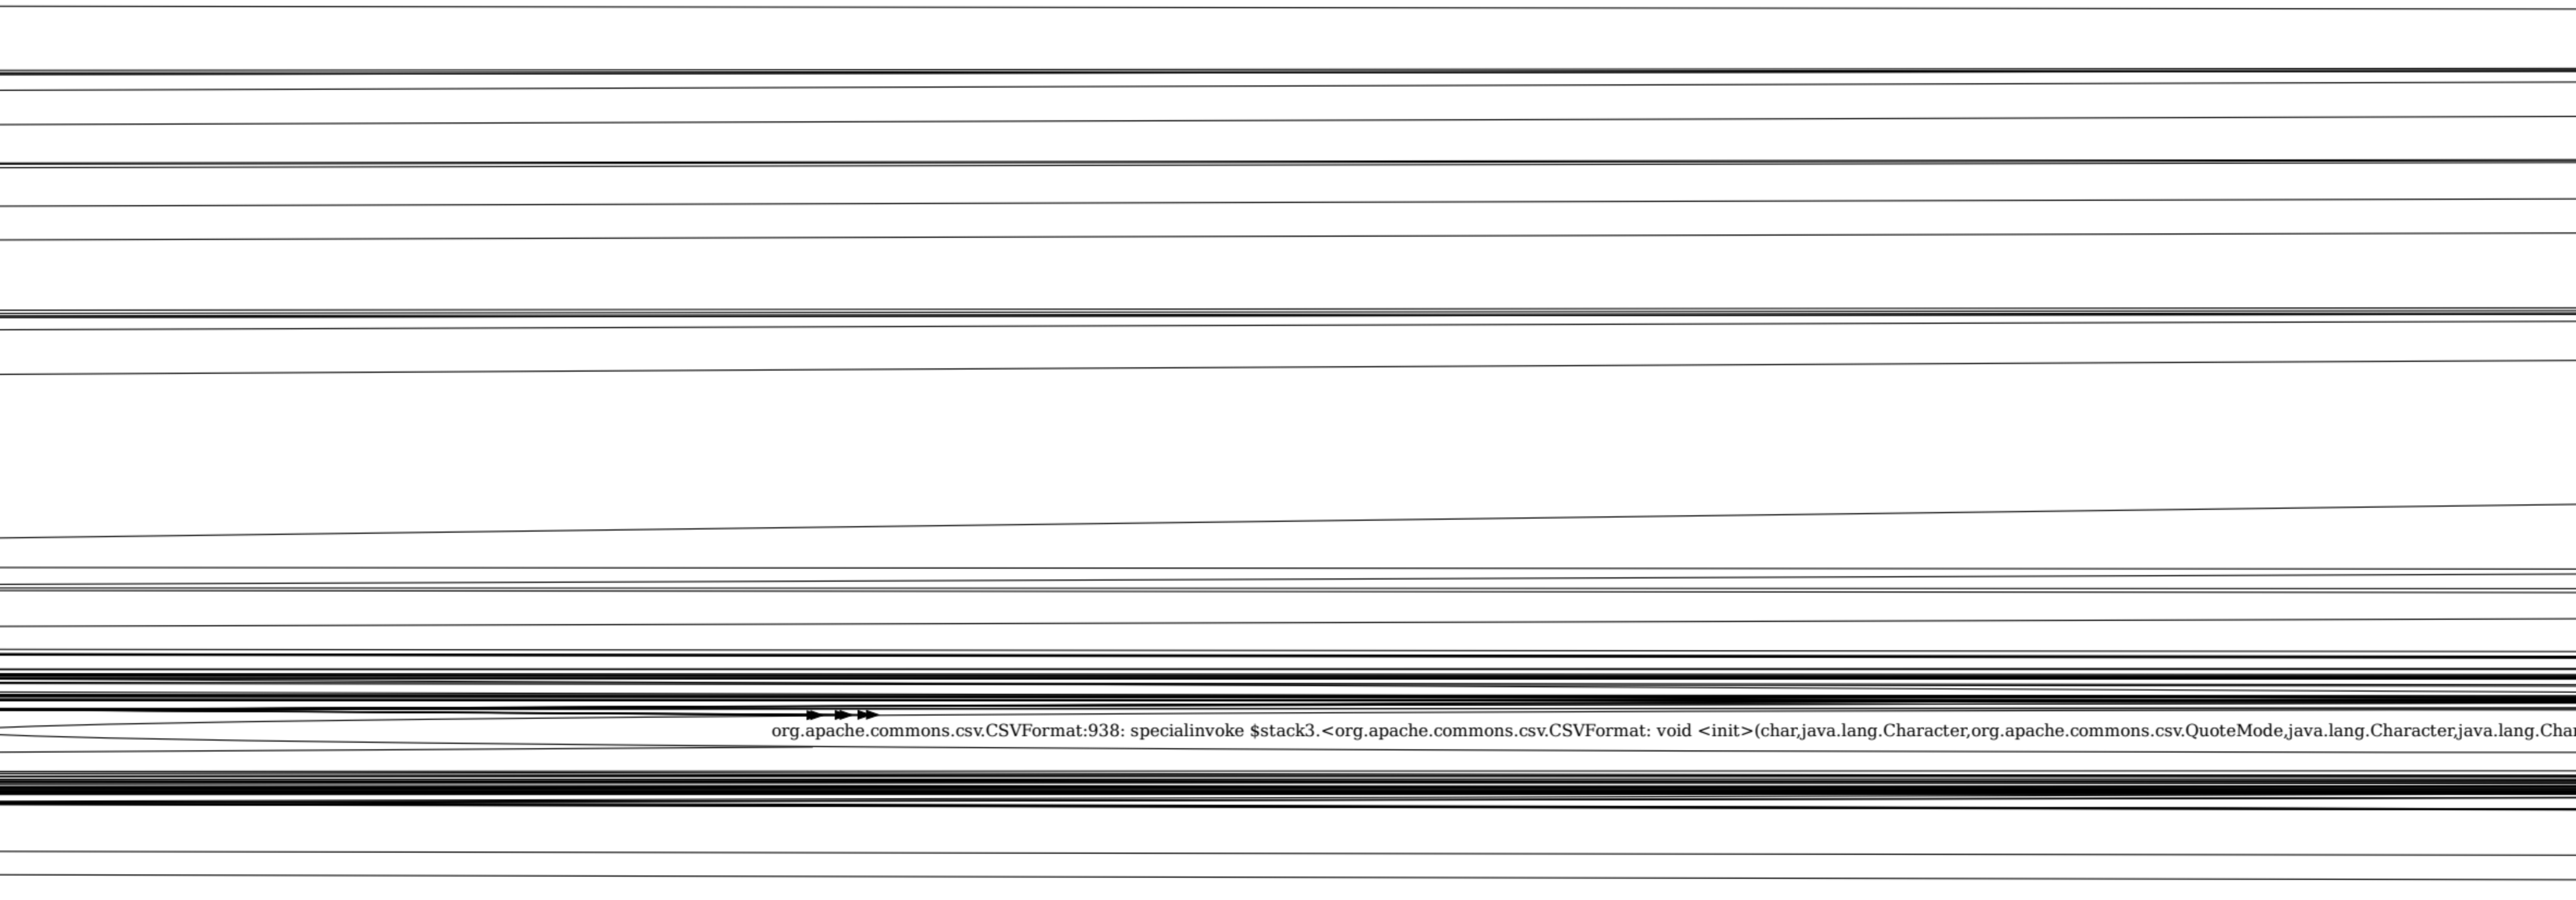
org.apache.commons.csv.CSVFormat:938: specialinvoke $stack3.<org.apache.commons.csv.CSVFormat: void <init>(char,java.lang.Character,org.apache.commons.csv.QuoteMode,java.lang.Character,java.lang.Char

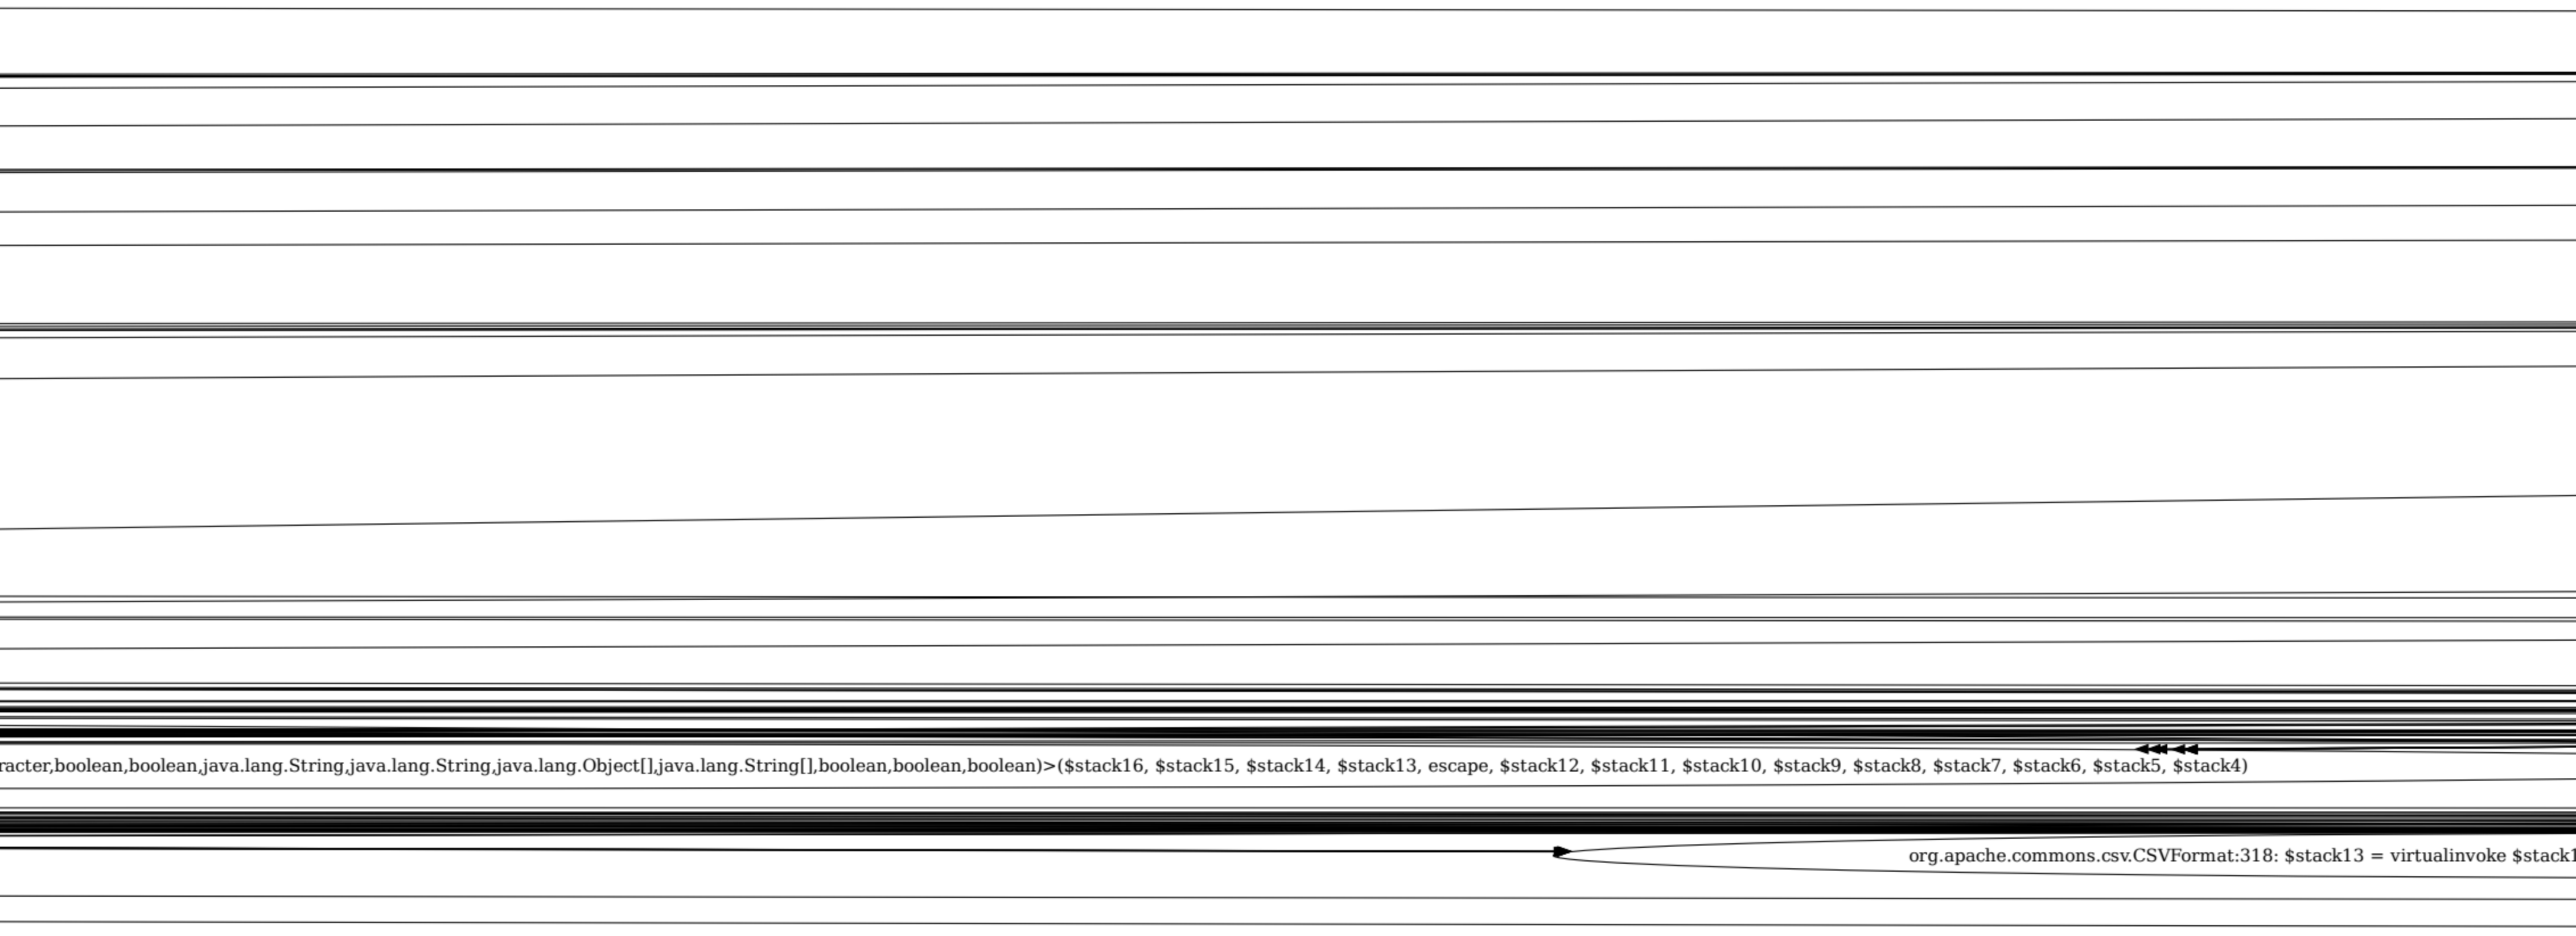
racter,boolean,boolean,java.lang.String,java.lang.String,java.lang.Object[],java.lang.String[],boolean,boolean,boolean)>($stack16, $stack15, $stack14, $stack13, escape, $stack12, $stack11, $stack10, $stack9, $stack8, $stack7, $stack6, $stack5, $stack4)
org.apache.commons.csv.CSVFormat:318: $stack13 = virtualinvoke $stack1

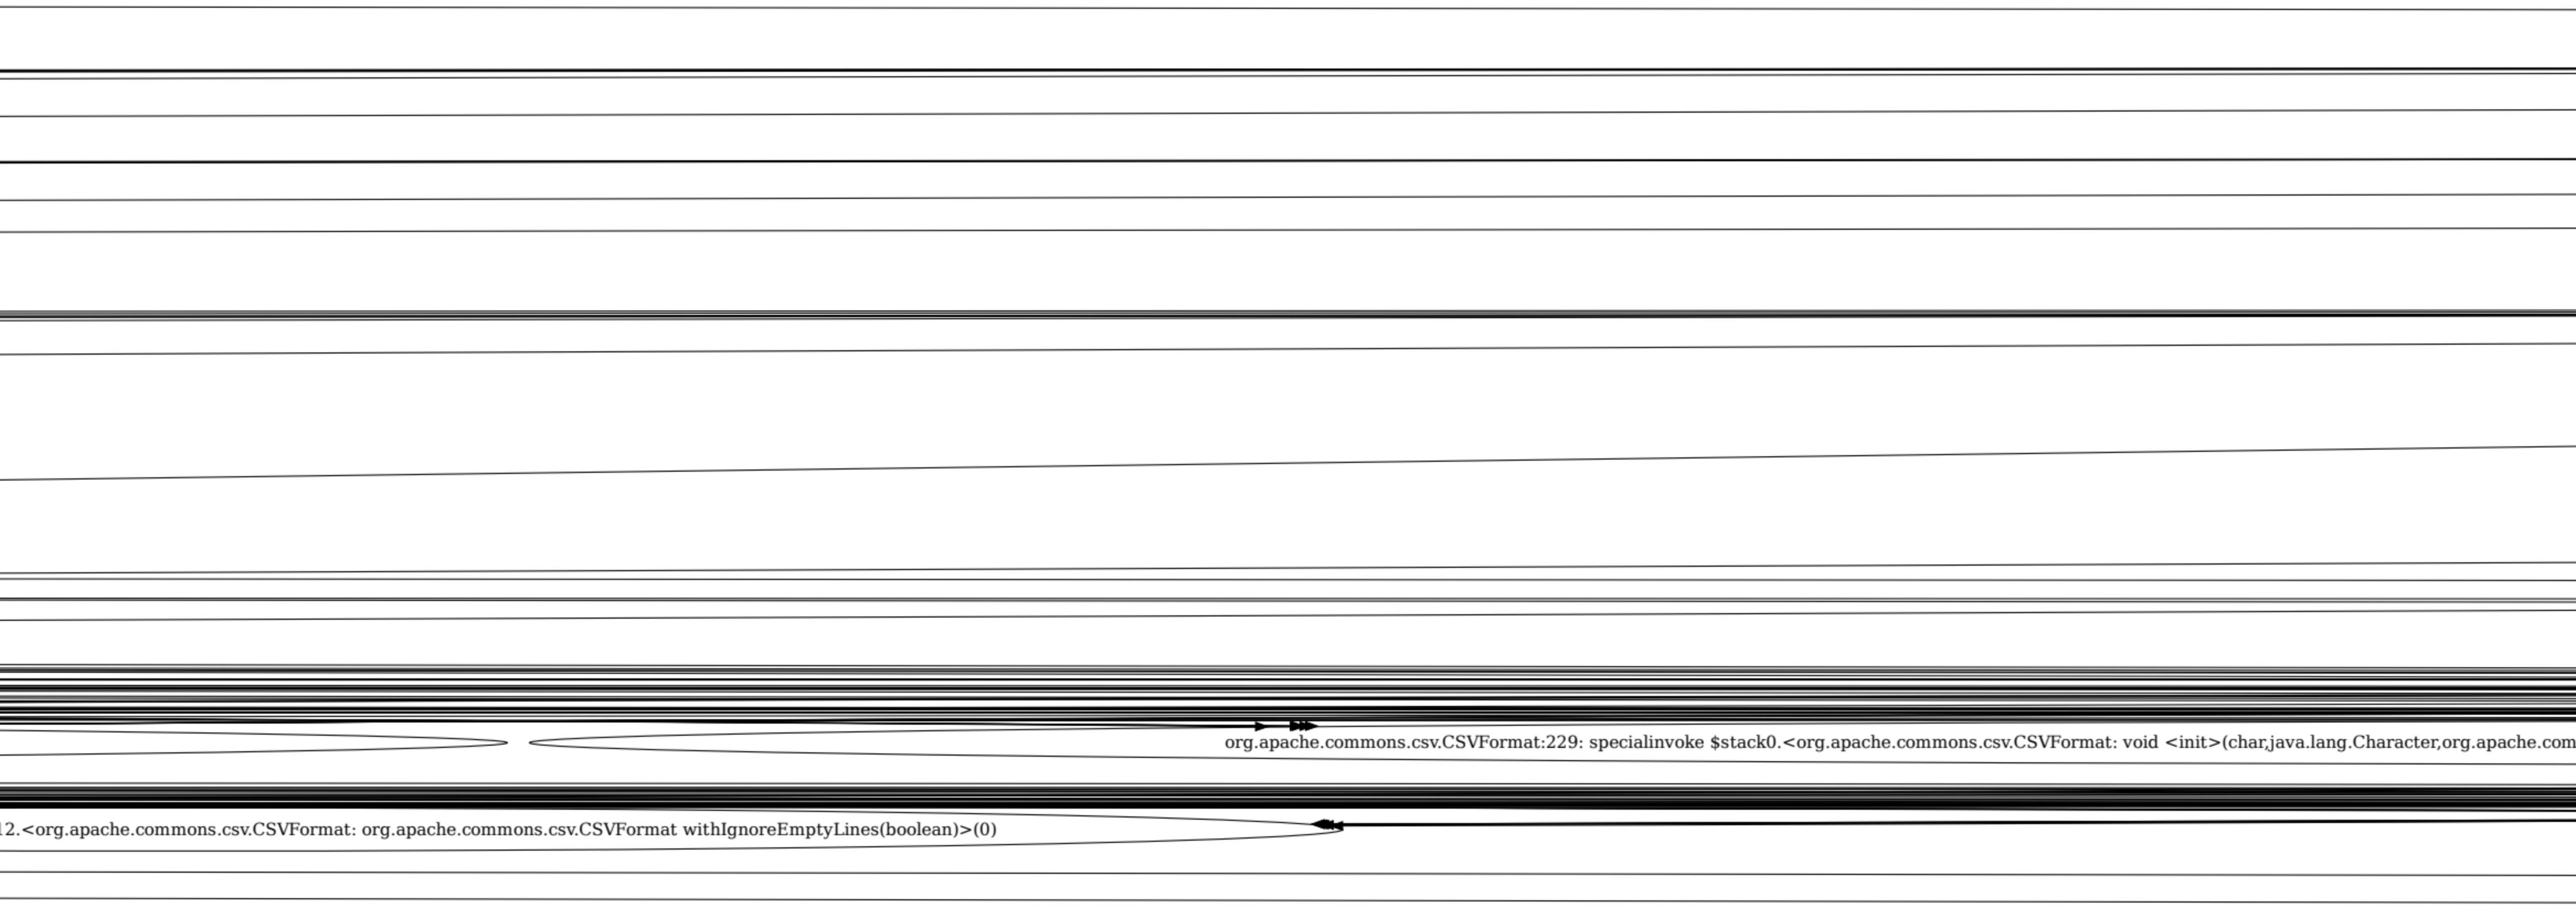
org.apache.commons.csv.CSVFormat:229: specialinvoke $stack0.<org.apache.commons.csv.CSVFormat: void <init>(char,java.lang.Character,org.apache.com
12.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withIgnoreEmptyLines(boolean)>(0)

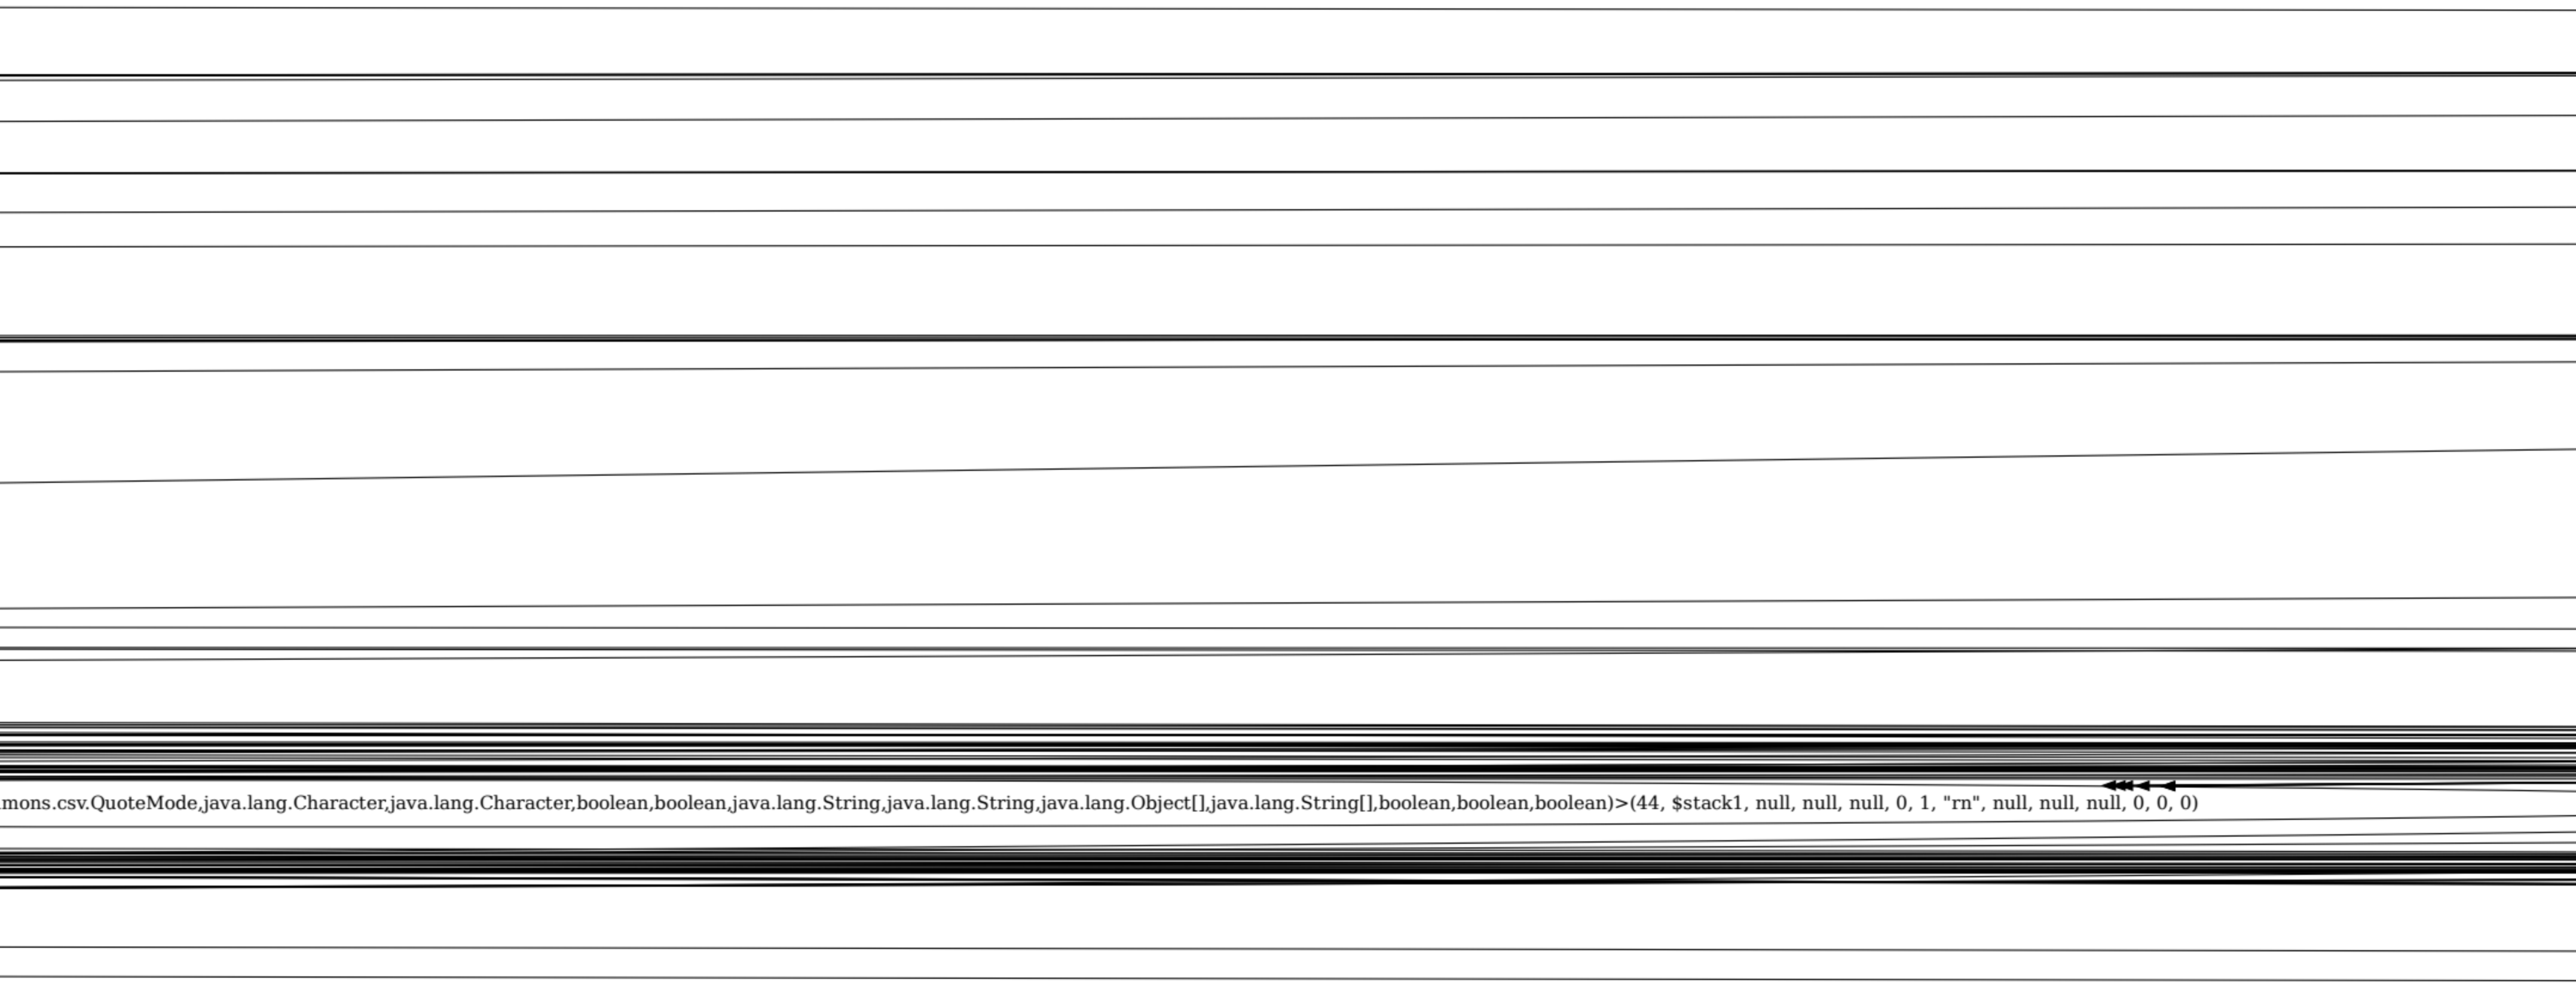
mons.csv.QuoteMode,java.lang.Character,java.lang.Character,boolean,boolean,java.lang.String,java.lang.String,java.lang.Object[],java.lang.String[],boolean,boolean,boolean)>(44, $stack1, null, null, null, 0, 1, "rn", null, null, null, 0, 0, 0)

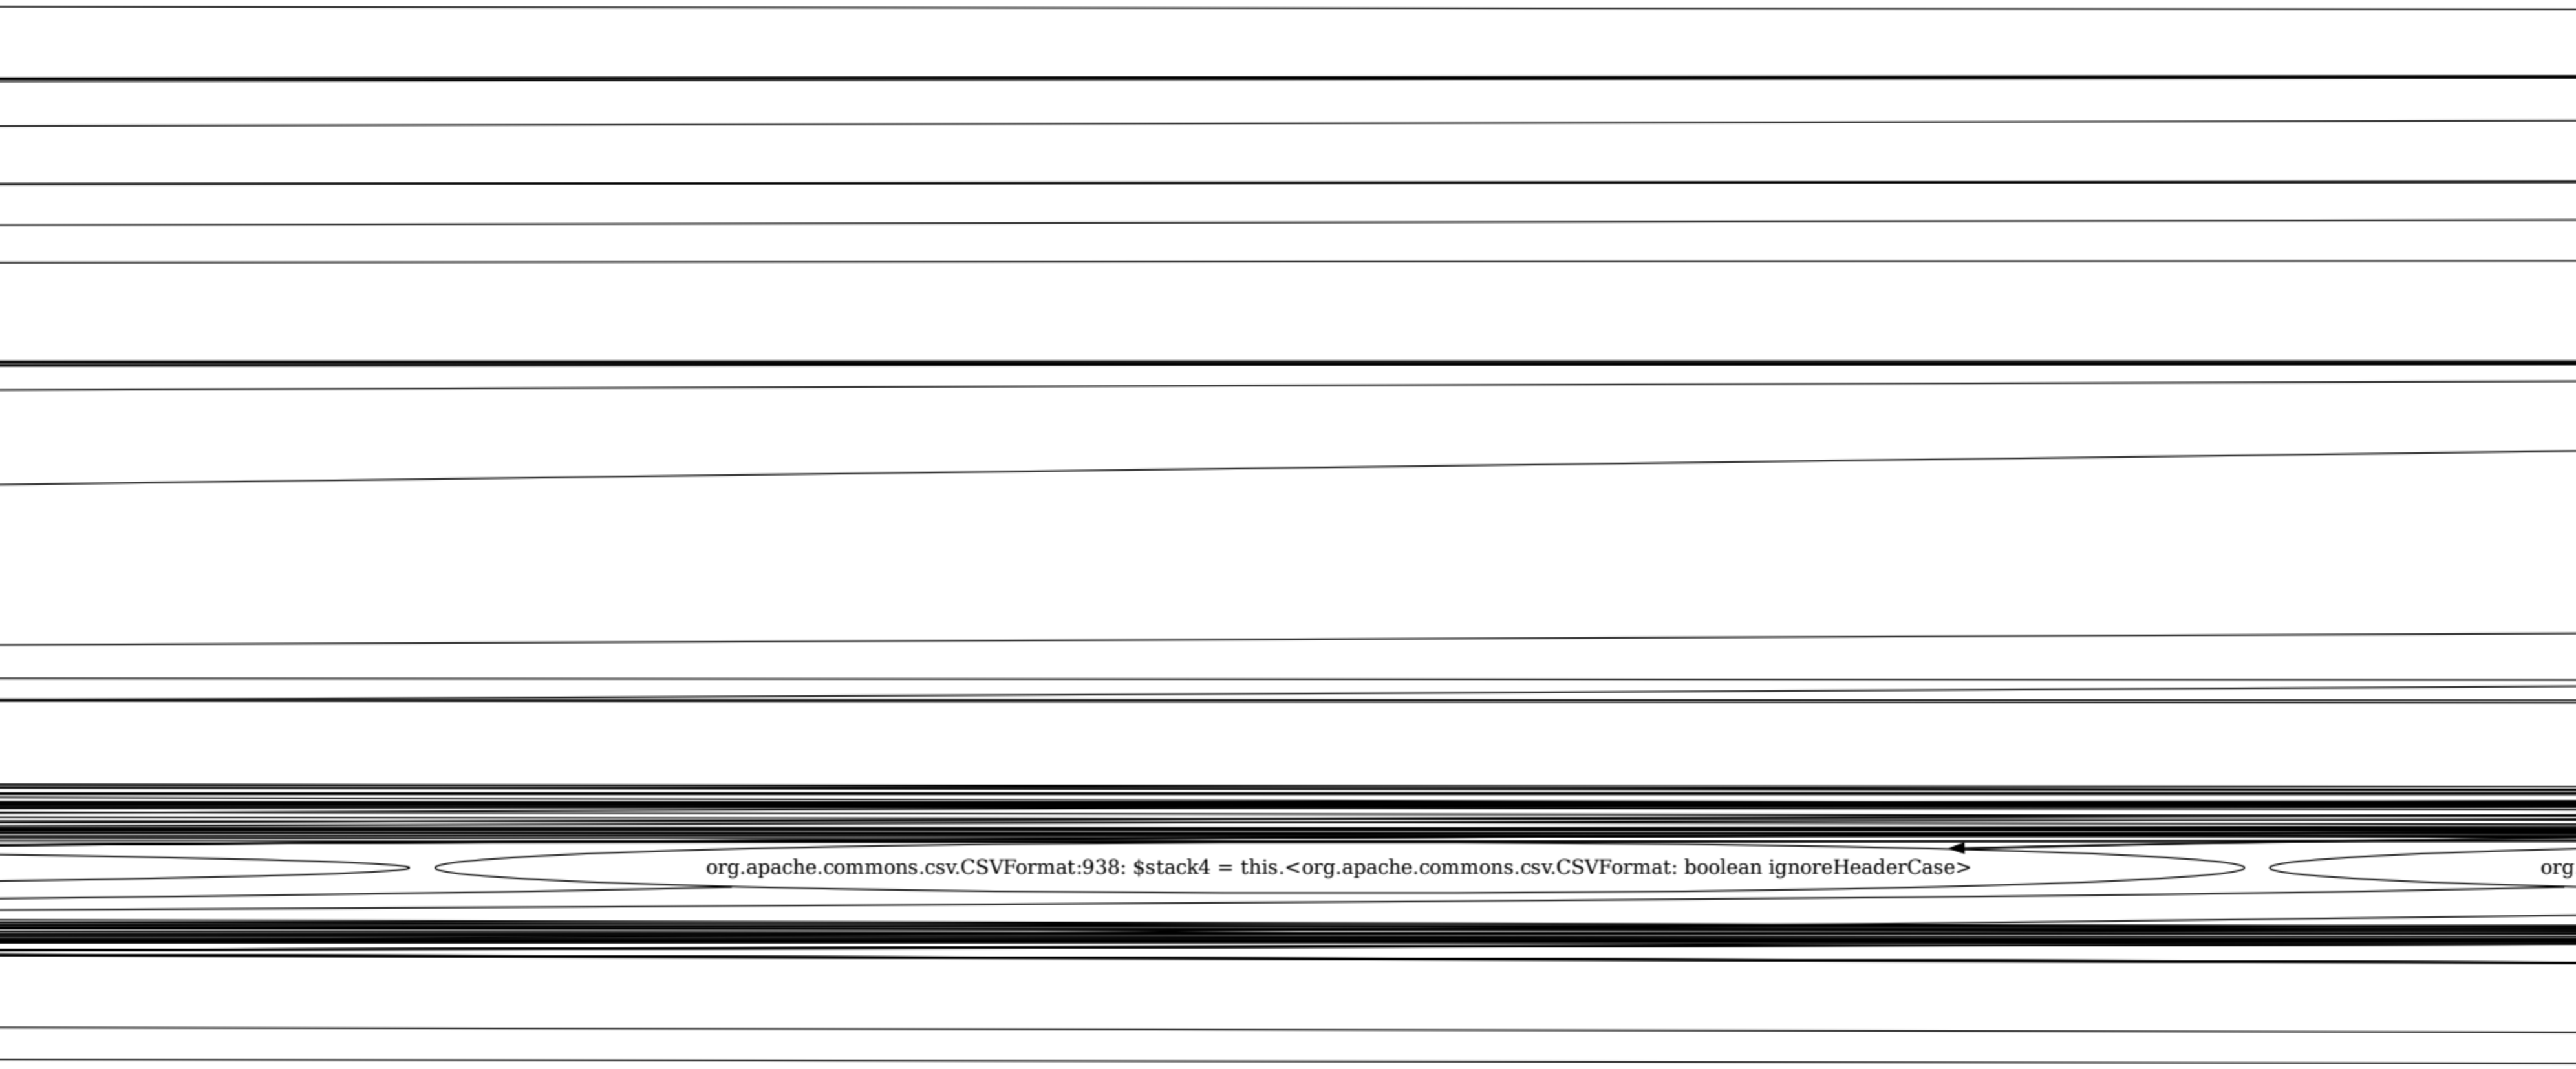
org.apache.commons.csv.CSVFormat:938: $stack4 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreHeaderCase>
org

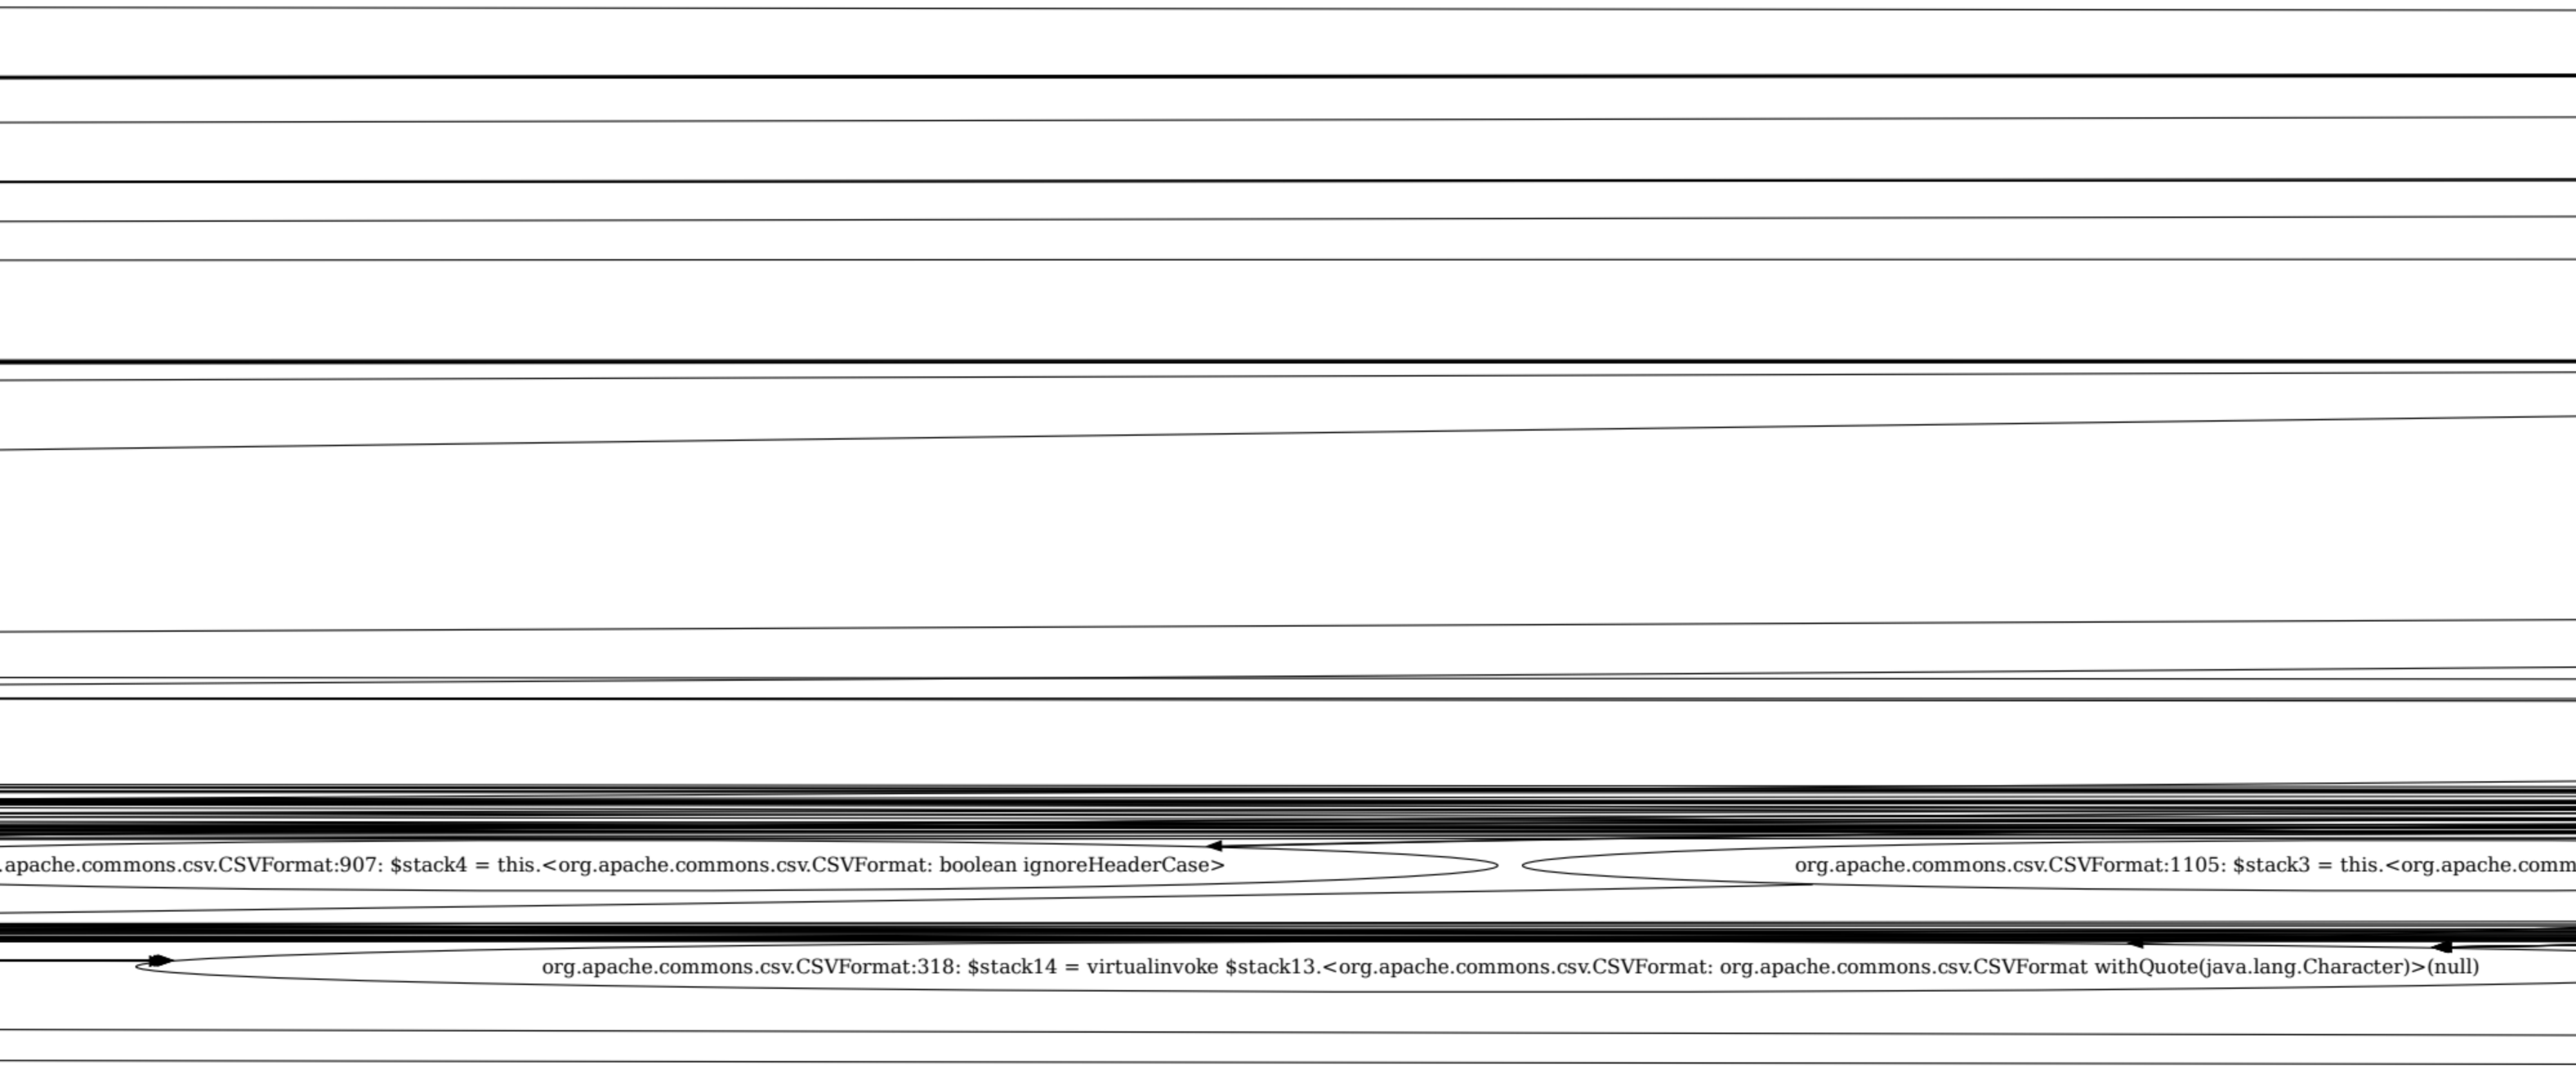

.apache.commons.csv.CSVFormat:907: $stack4 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreHeaderCase>
org.apache.commons.csv.CSVFormat:1105: $stack3 = this.<org.apache.comm
org.apache.commons.csv.CSVFormat:318: $stack14 = virtualinvoke $stack13.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withQuote(java.lang.Character)>(null)

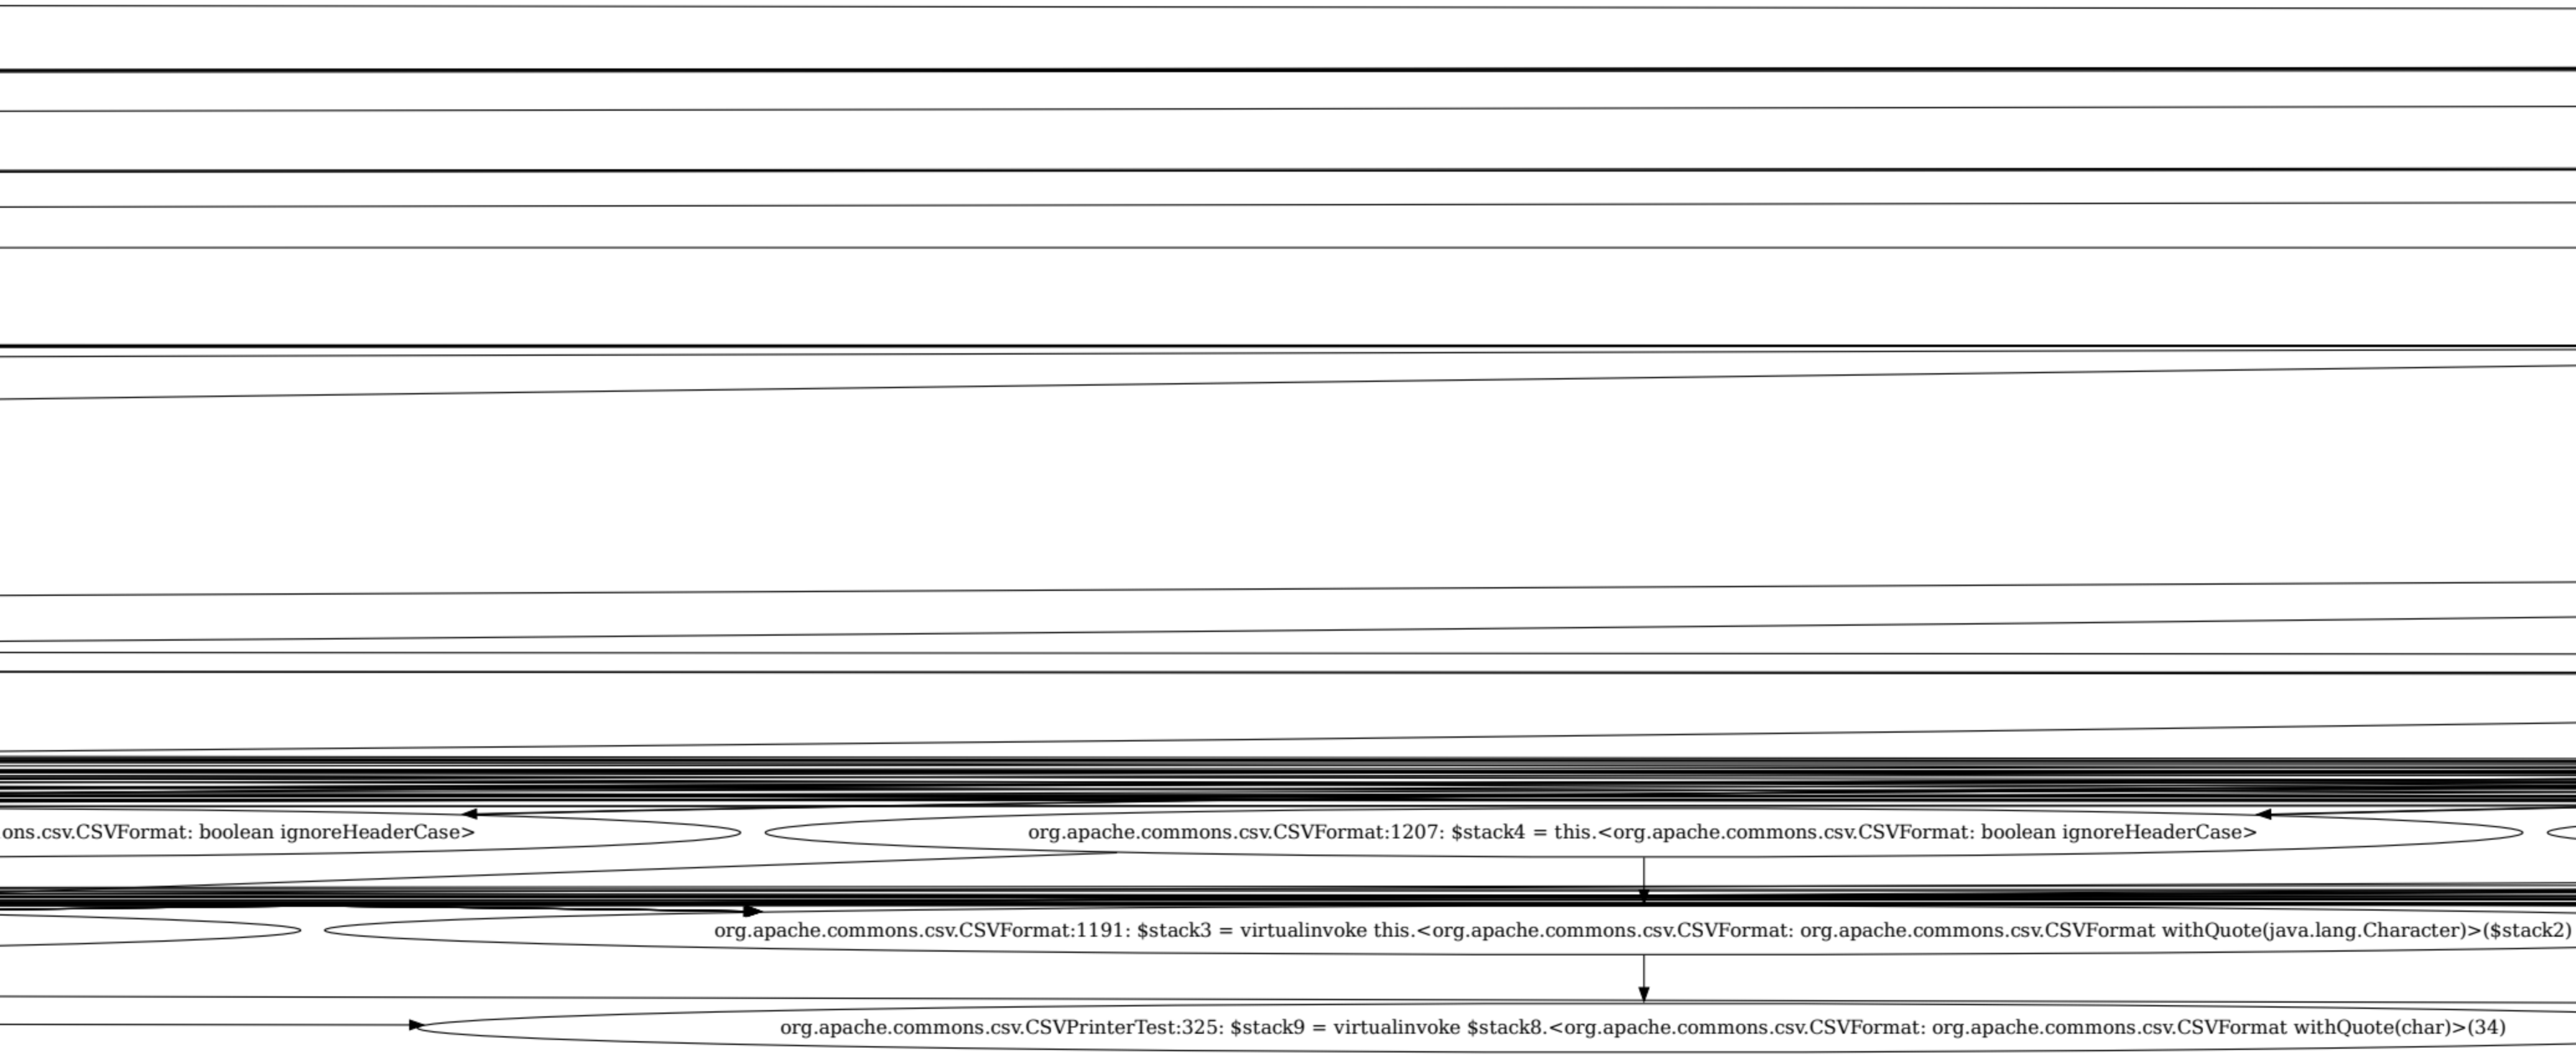
ons.csv.CSVFormat: boolean ignoreHeaderCase>
org.apache.commons.csv.CSVFormat:1207: $stack4 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreHeaderCase>
org.apache.commons.csv.CSVFormat:1191: $stack3 = virtualinvoke this.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withQuote(java.lang.Character)>($stack2)
org.apache.commons.csv.CSVPrinterTest:325: $stack9 = virtualinvoke $stack8.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withQuote(char)>(34)

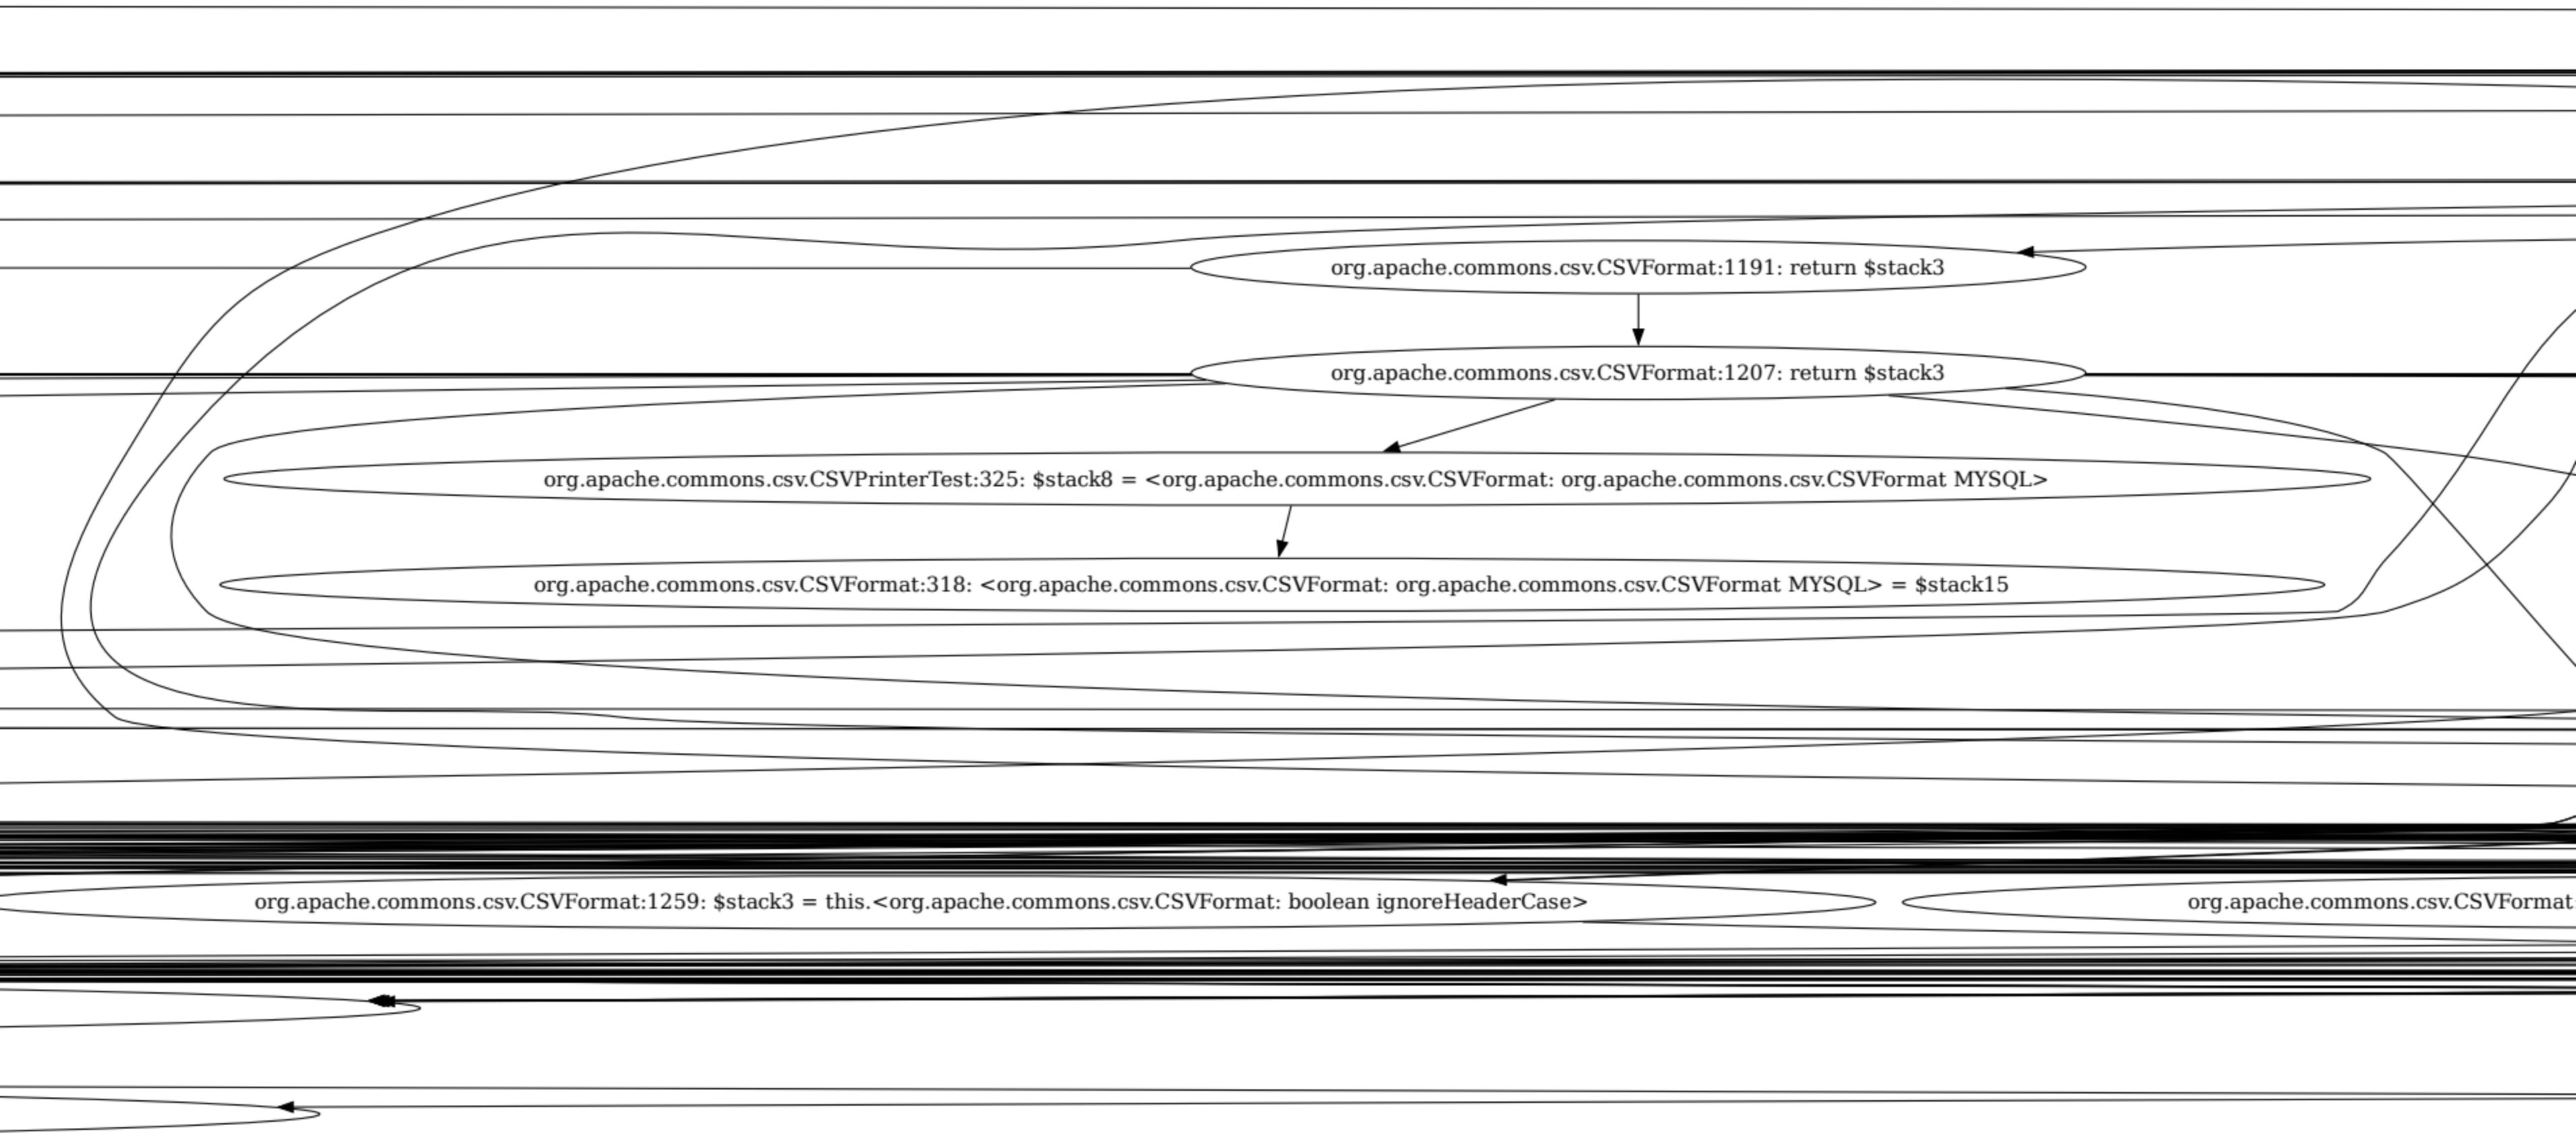
org.apache.commons.csv.CSVFormat:1191: return $stack3
org.apache.commons.csv.CSVFormat:1207: return $stack3
org.apache.commons.csv.CSVPrinterTest:325: $stack8 = <org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat MYSQL>
org.apache.commons.csv.CSVFormat:318: <org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat MYSQL> = $stack15
org.apache.commons.csv.CSVFormat:1259: $stack3 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreHeaderCase>
org.apache.commons.csv.CSVFormat

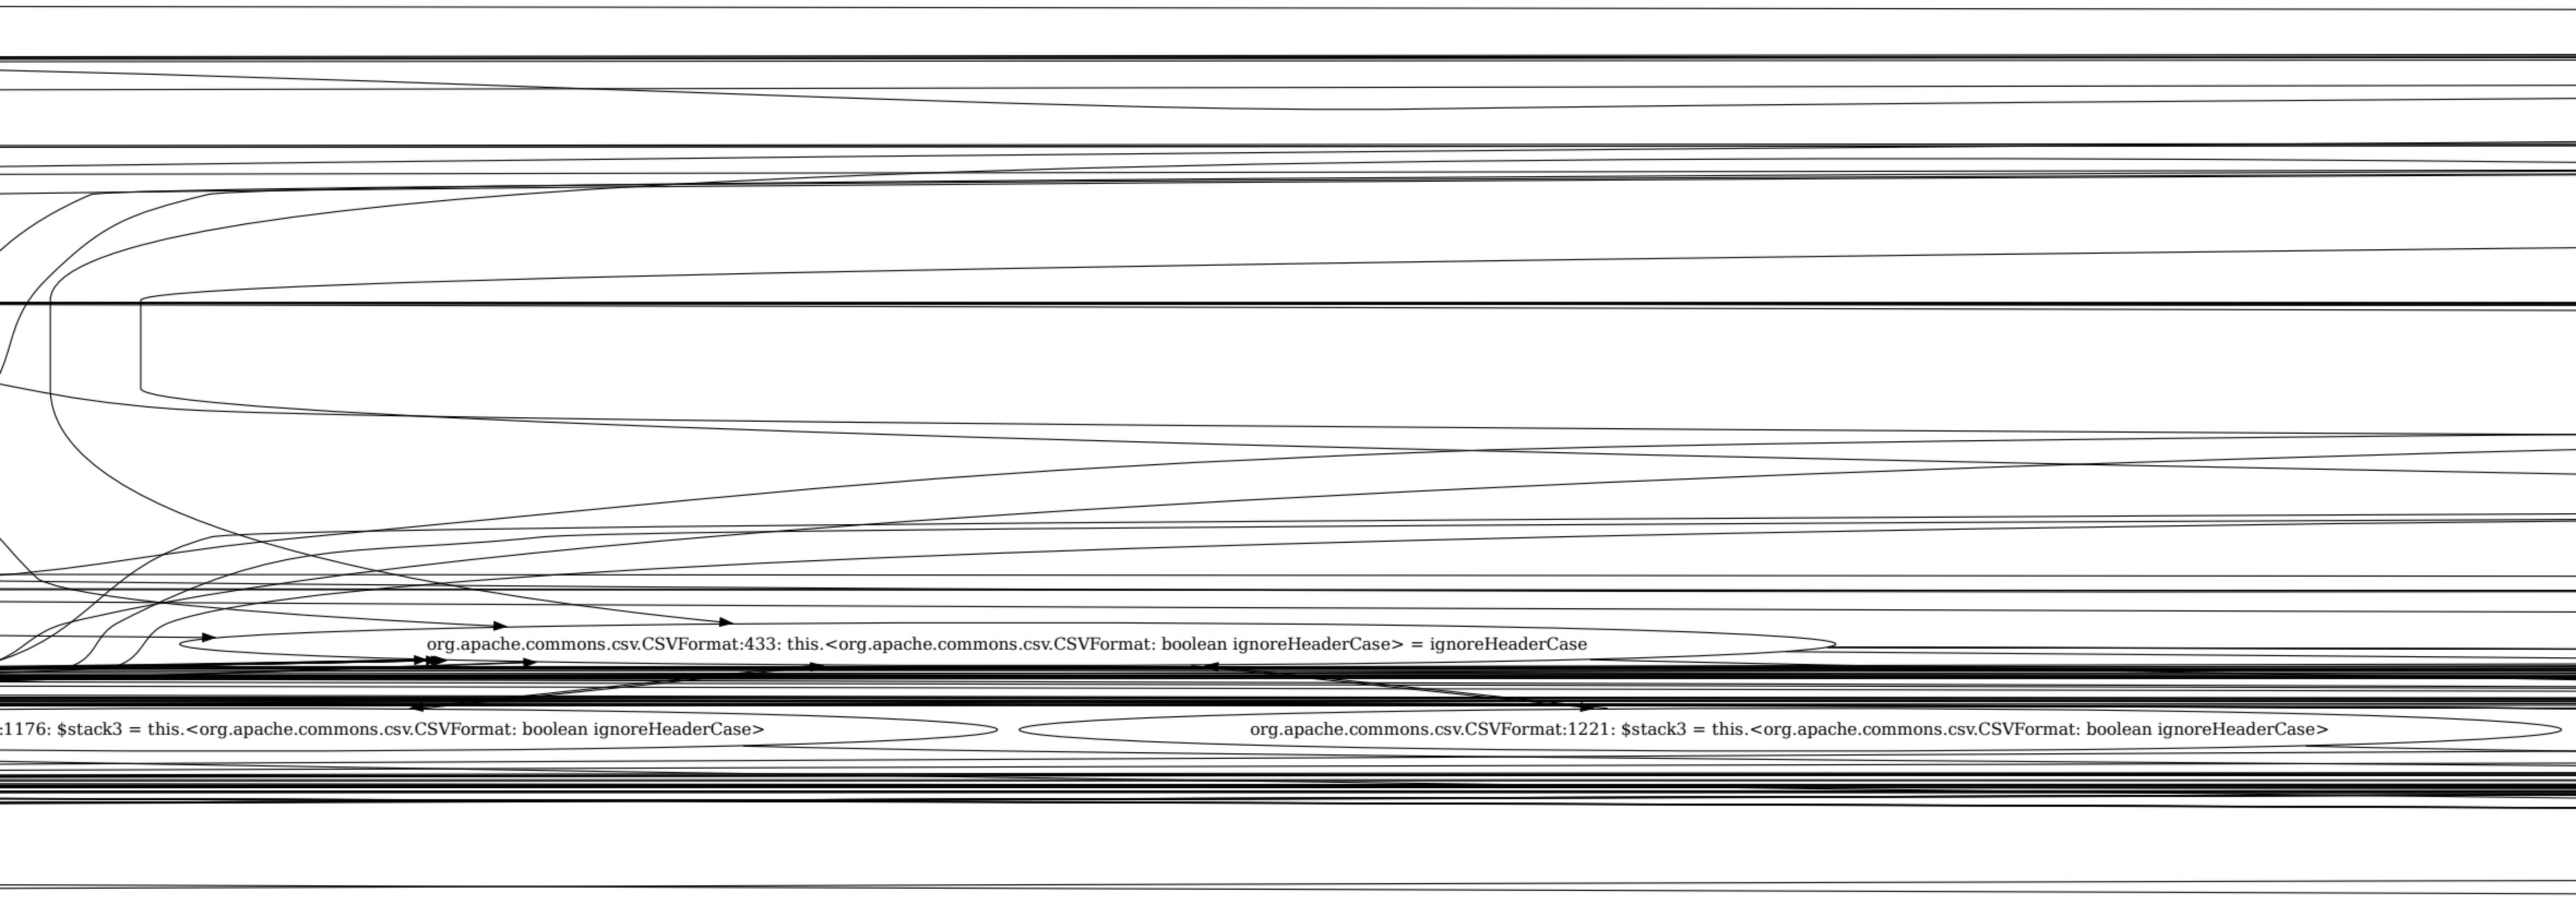
org.apache.commons.csv.CSVFormat:433: this.<org.apache.commons.csv.CSVFormat: boolean ignoreHeaderCase> = ignoreHeaderCase
:1176: $stack3 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreHeaderCase>
org.apache.commons.csv.CSVFormat:1221: $stack3 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreHeaderCase>

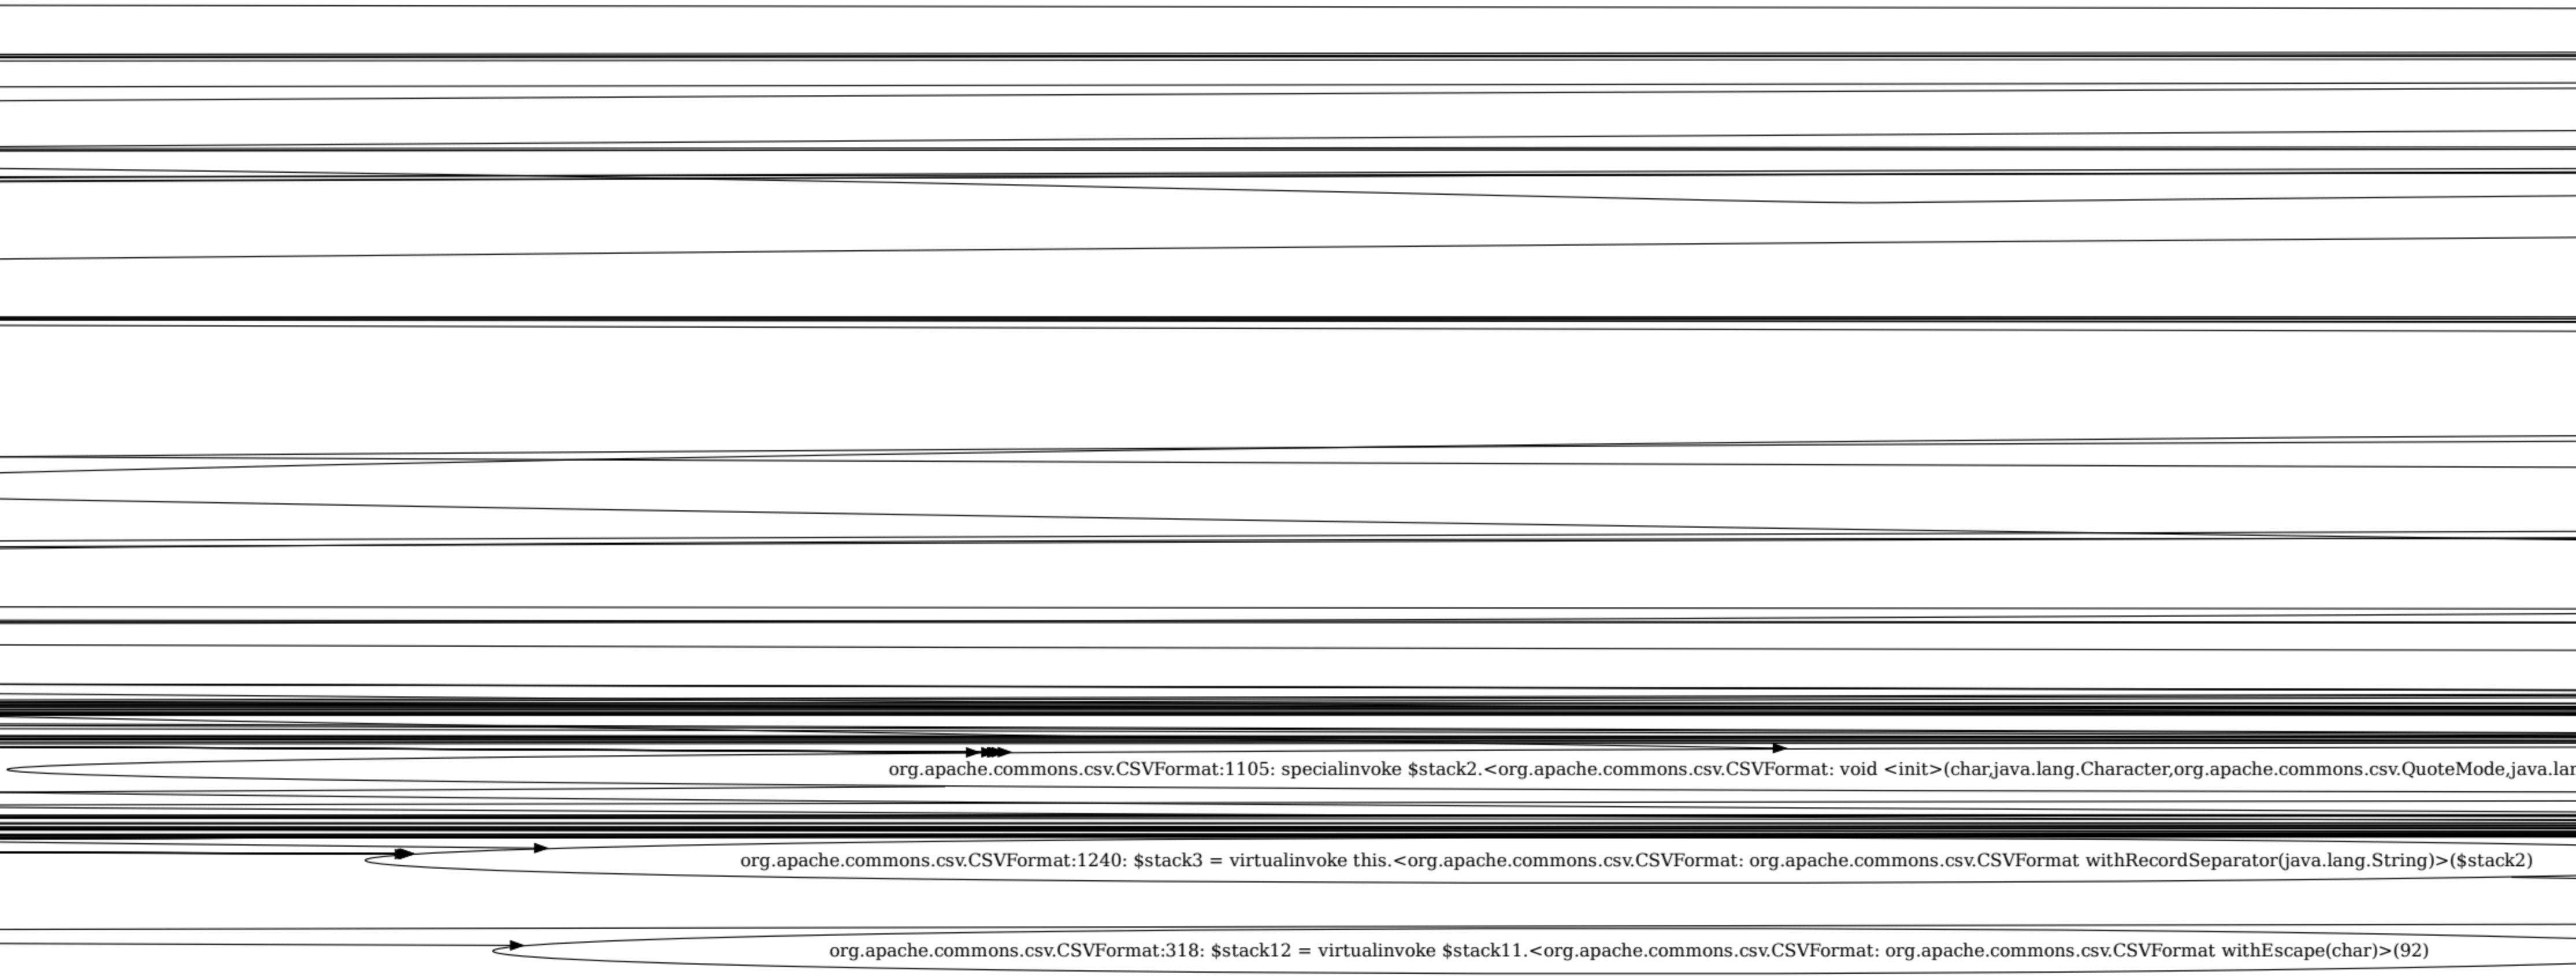
org.apache.commons.csv.CSVFormat:1105: specialinvoke $stack2.<org.apache.commons.csv.CSVFormat: void <init>(char,java.lang.Character,org.apache.commons.csv.QuoteMode,java.lar
org.apache.commons.csv.CSVFormat:1240: $stack3 = virtualinvoke this.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withRecordSeparator(java.lang.String)>($stack2)
org.apache.commons.csv.CSVFormat:318: $stack12 = virtualinvoke $stack11.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withEscape(char)>(92)

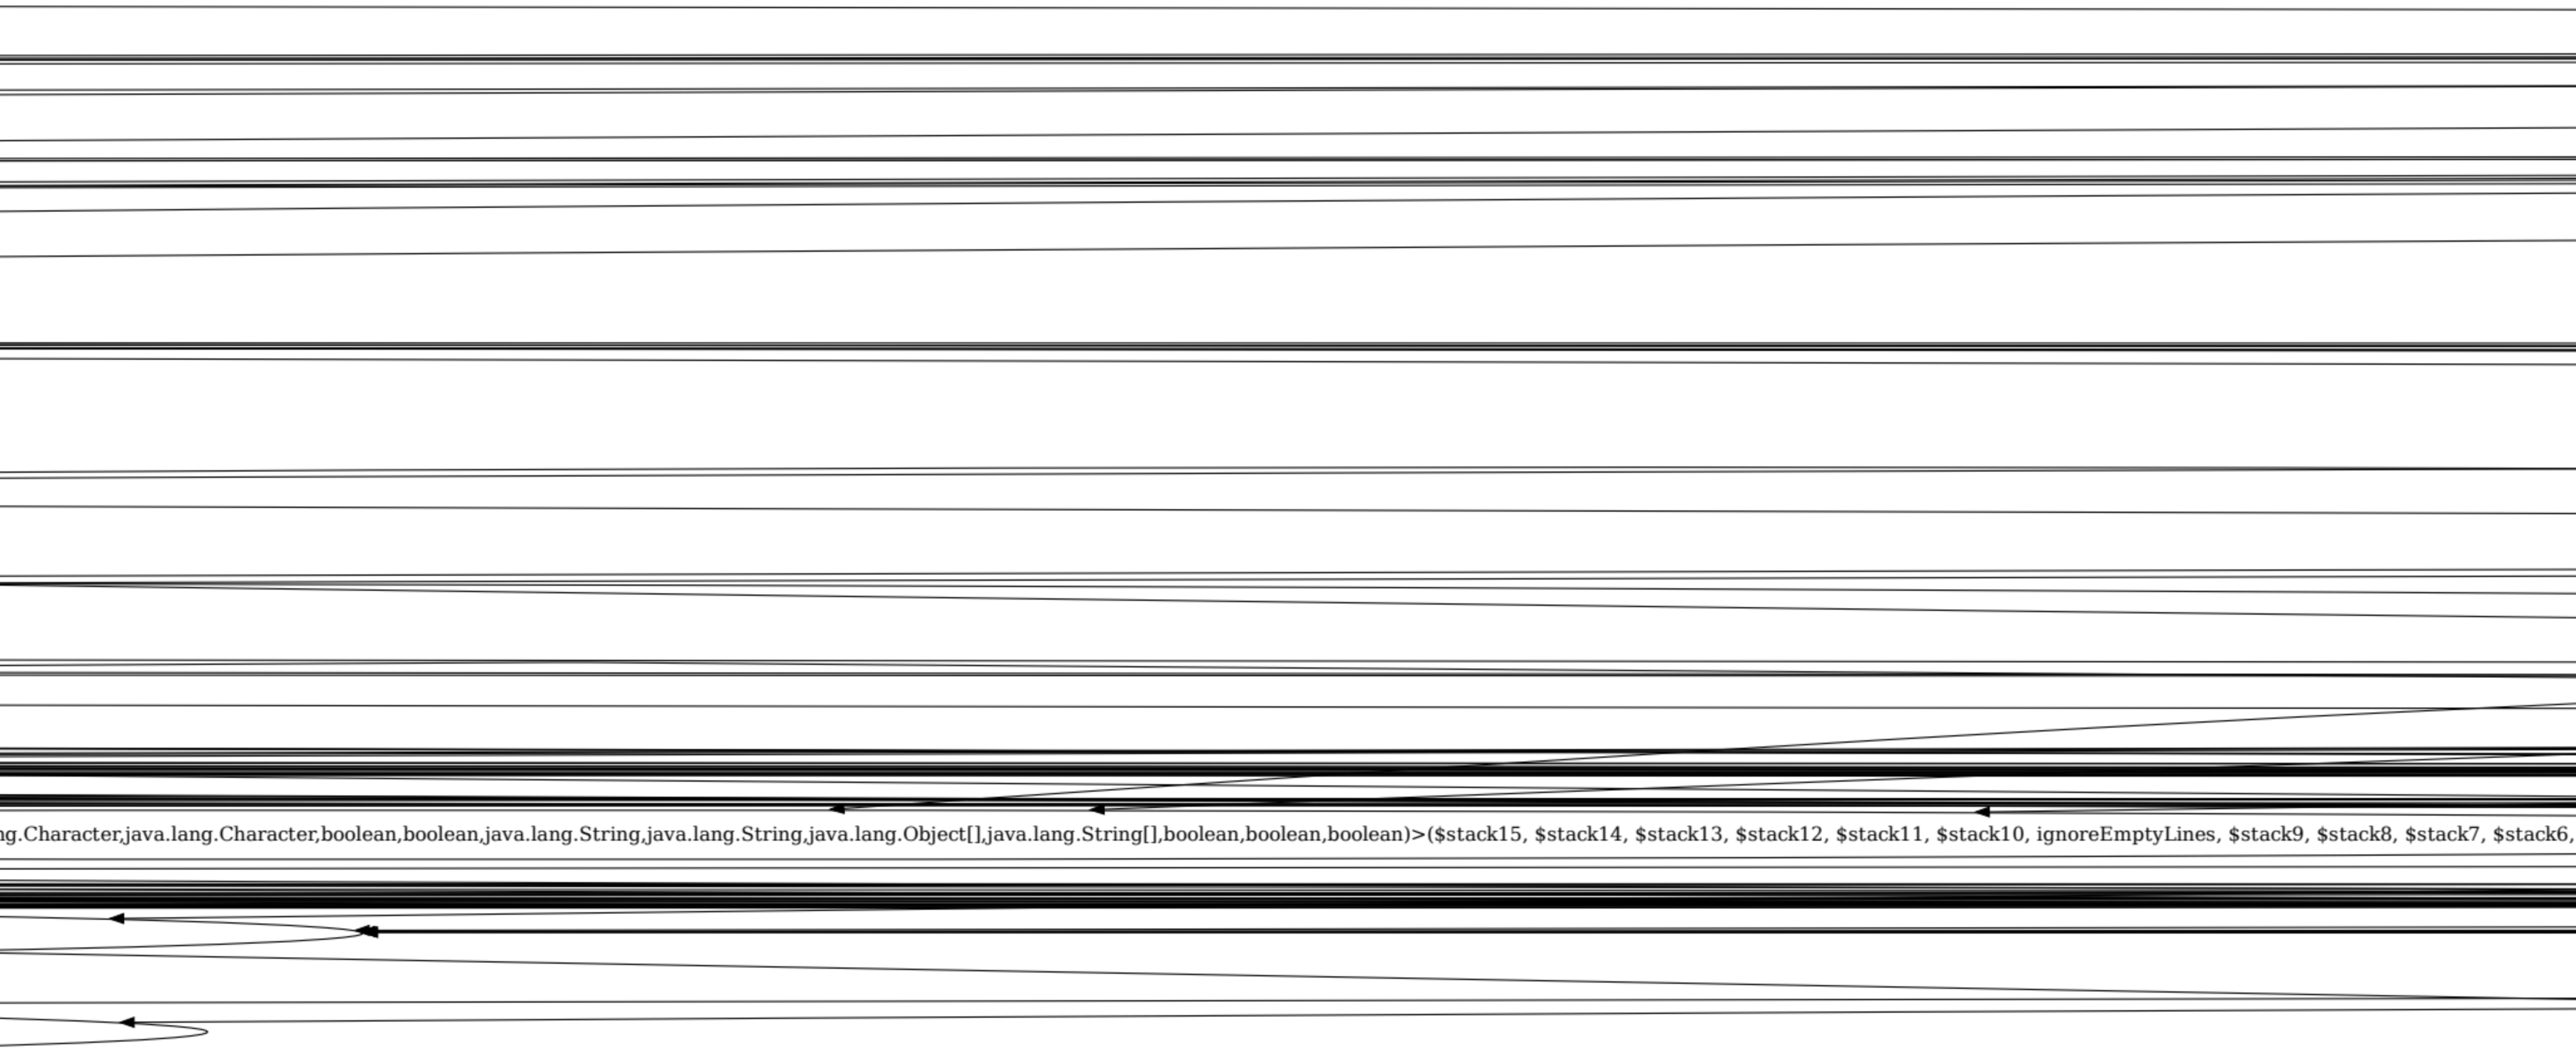
ng.Character,java.lang.Character,boolean,boolean,java.lang.String,java.lang.String,java.lang.Object[],java.lang.String[],boolean,boolean,boolean)>($stack15, $stack14, $stack13, $stack12, $stack11, $stack10, ignoreEmptyLines, $stack9, $stack8, $stack7, $stack6,

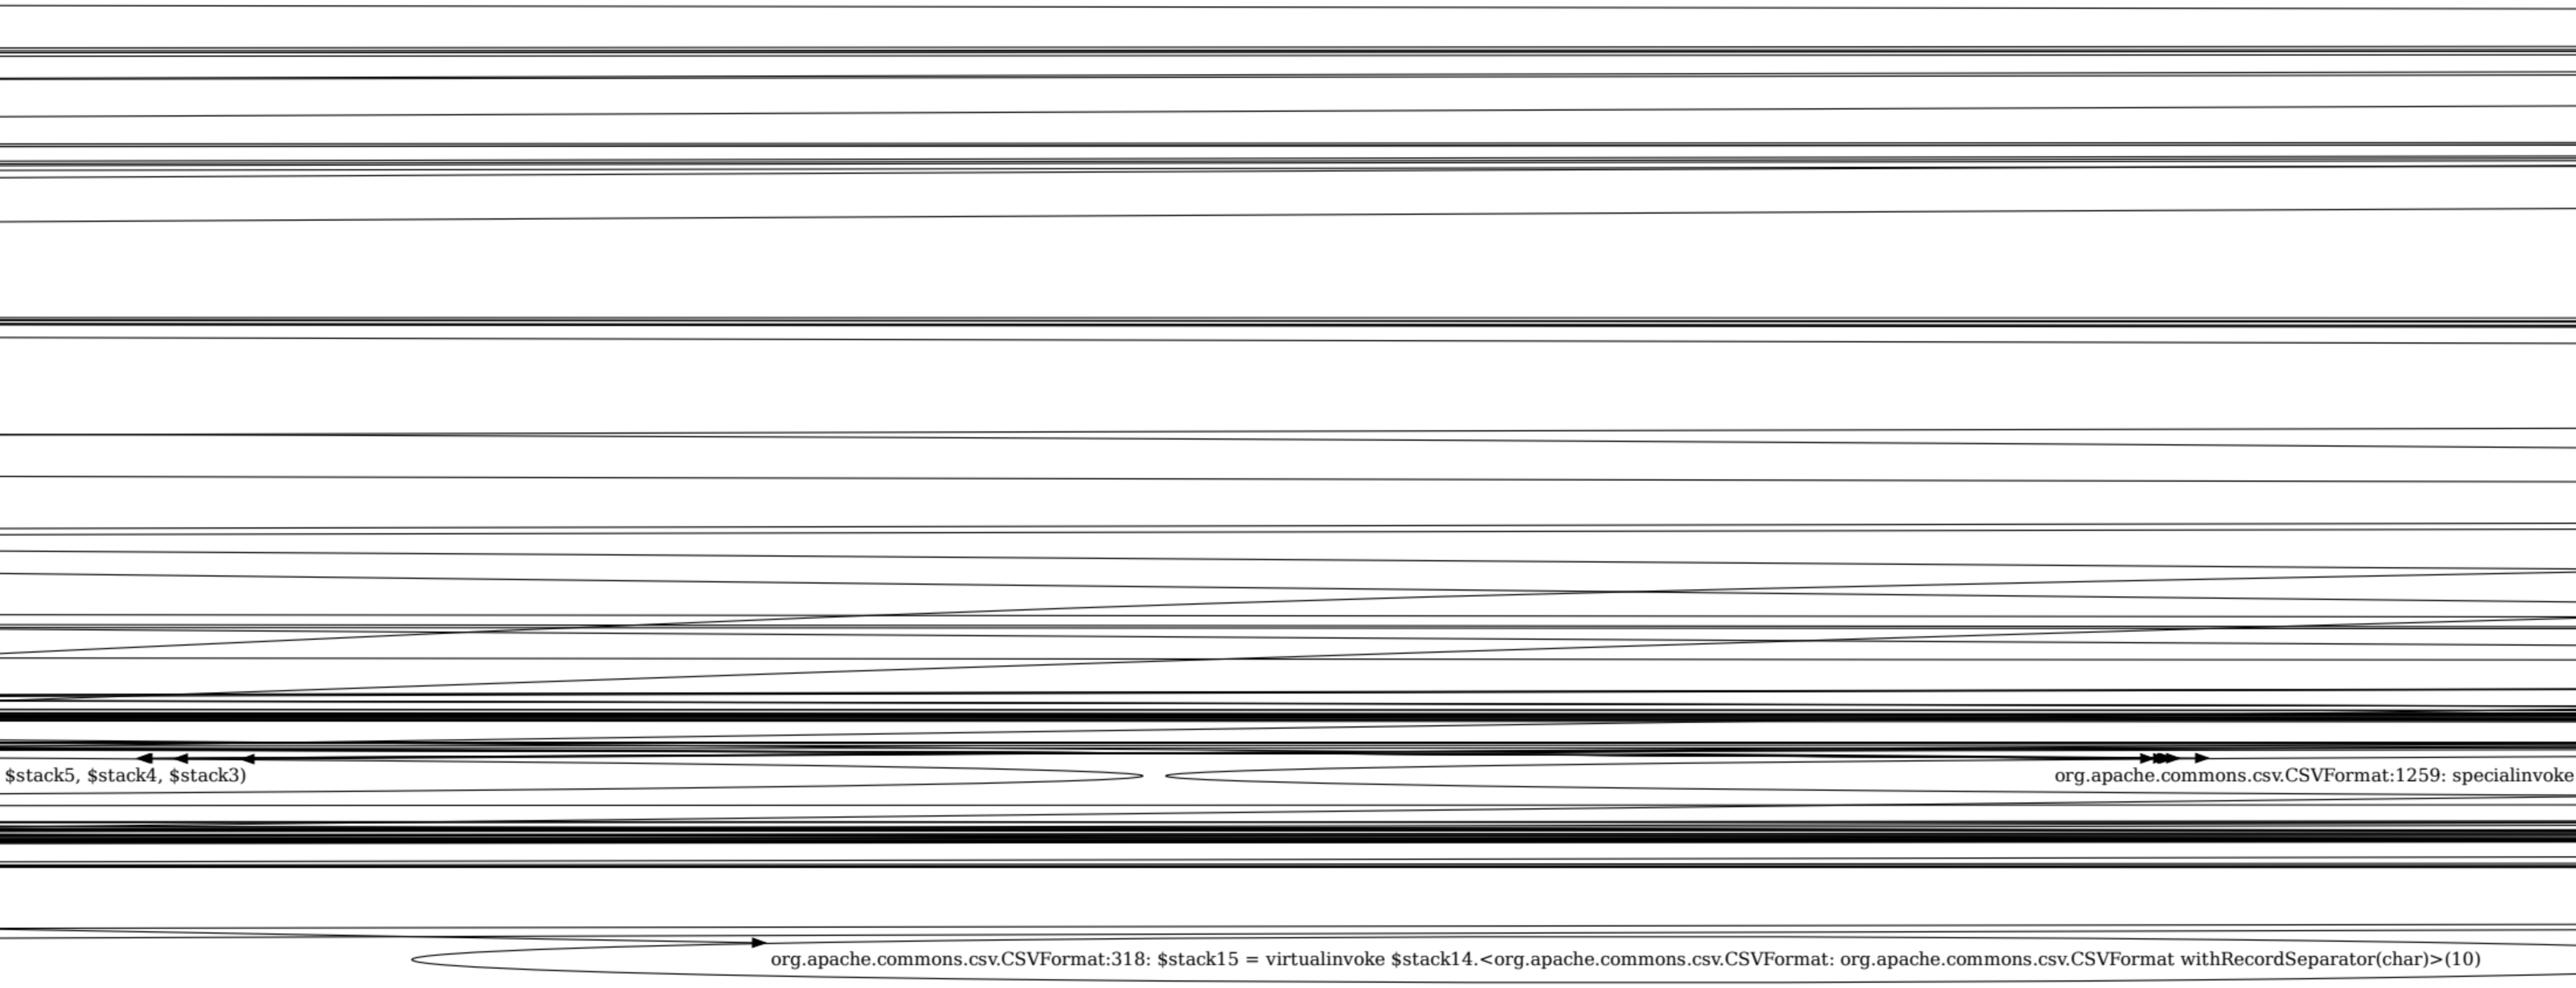
$stack5, $stack4, $stack3)
org.apache.commons.csv.CSVFormat:1259: specialinvoke
org.apache.commons.csv.CSVFormat:318: $stack15 = virtualinvoke $stack14.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withRecordSeparator(char)>(10)

org.apache.commons.csv.CSVFormat:430: $stack15 = specialinvoke this.<org.apache.commons.csv.CSVFormat: java.lang.String[] toStringArray(java.lang.Object[])>(headerComments)
$stack2.<org.apache.commons.csv.CSVFormat: void <init>(char,java.lang.Character,org.apache.commons.csv.QuoteMode,java.lang.Character,java.lang.Character,boolean,boolean,java.lang.String,java.lang.String,java.lang.Object[],java.lang.String[],boolean,boolean,boolean)>($st

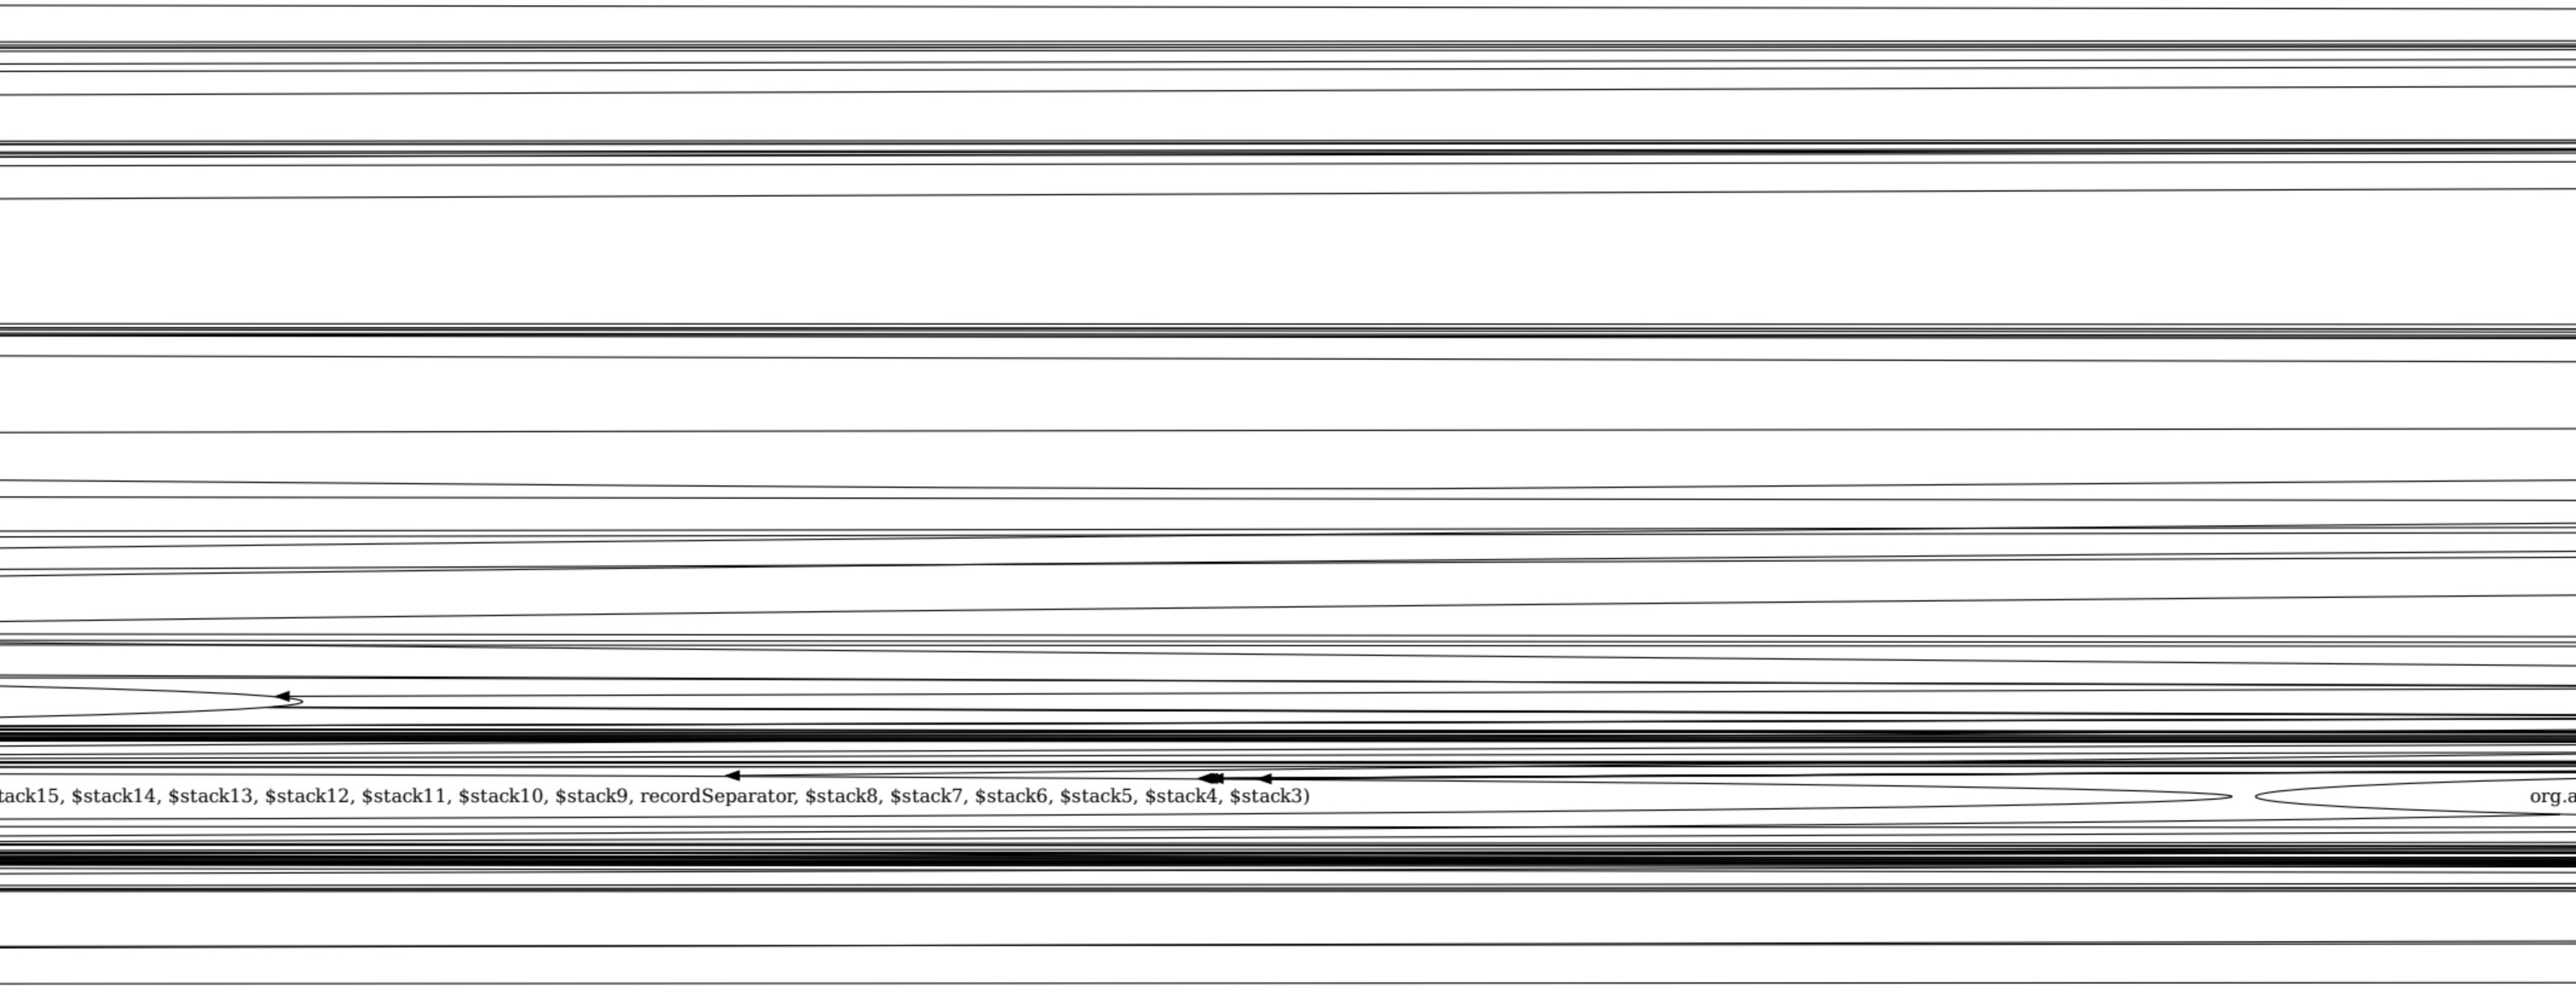
tack15, $stack14, $stack13, $stack12, $stack11, $stack10, $stack9, recordSeparator, $stack8, $stack7, $stack6, $stack5, $stack4, $stack3)
org.a

apache.commons.csv.CSVFormat:938: $stack13 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character commentMarker>
org.apache.commons.csv.CSVFormat:907: $stack14 = this.<org.apache.commons.csv.CSVFor

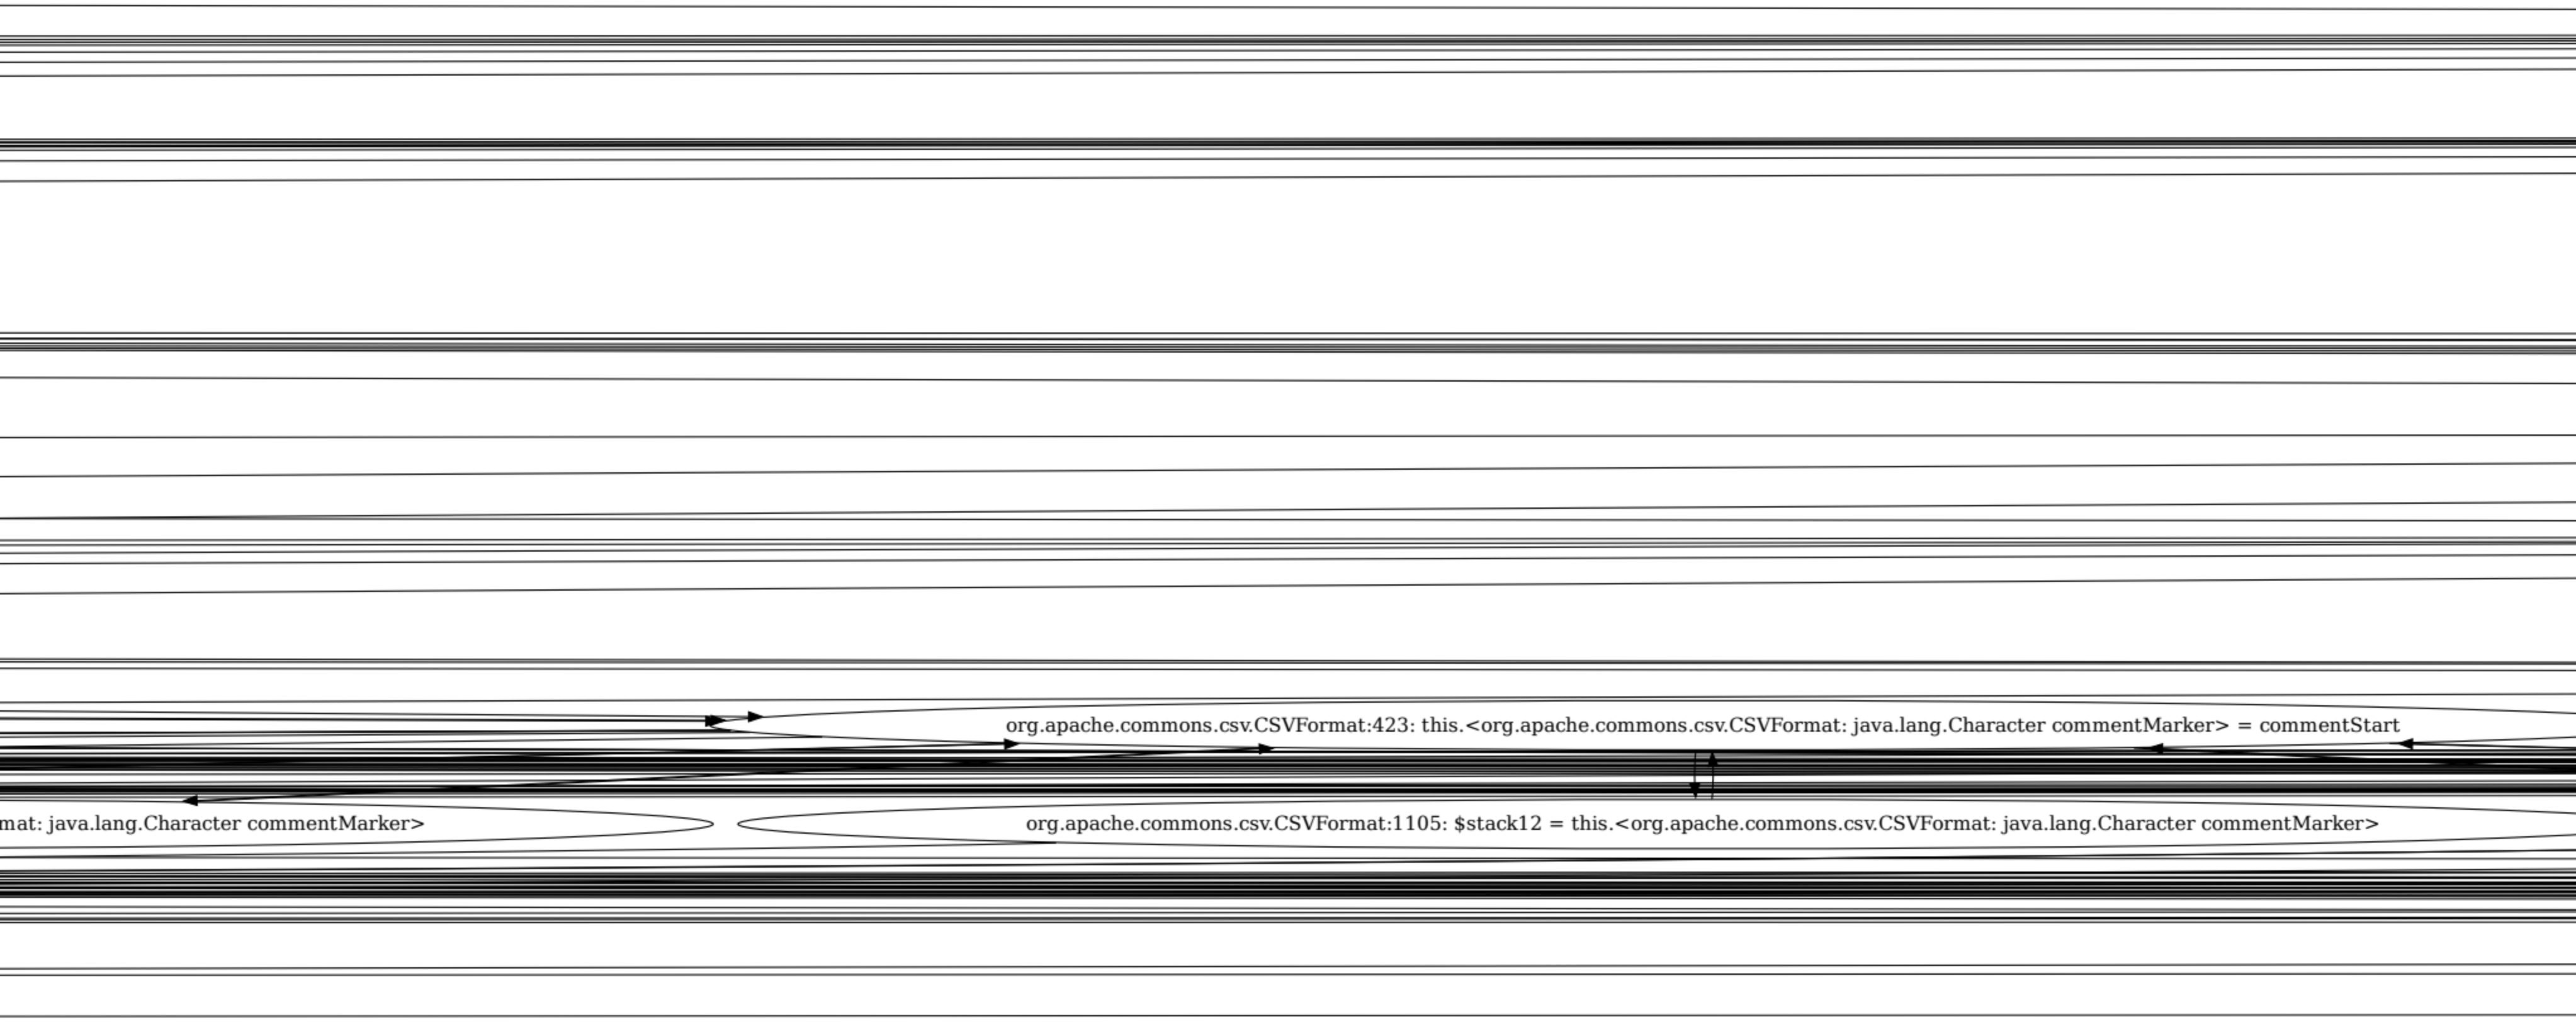
org.apache.commons.csv.CSVFormat:423: this.<org.apache.commons.csv.CSVFormat: java.lang.Character commentMarker> = commentStart
mat: java.lang.Character commentMarker>
org.apache.commons.csv.CSVFormat:1105: $stack12 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character commentMarker>

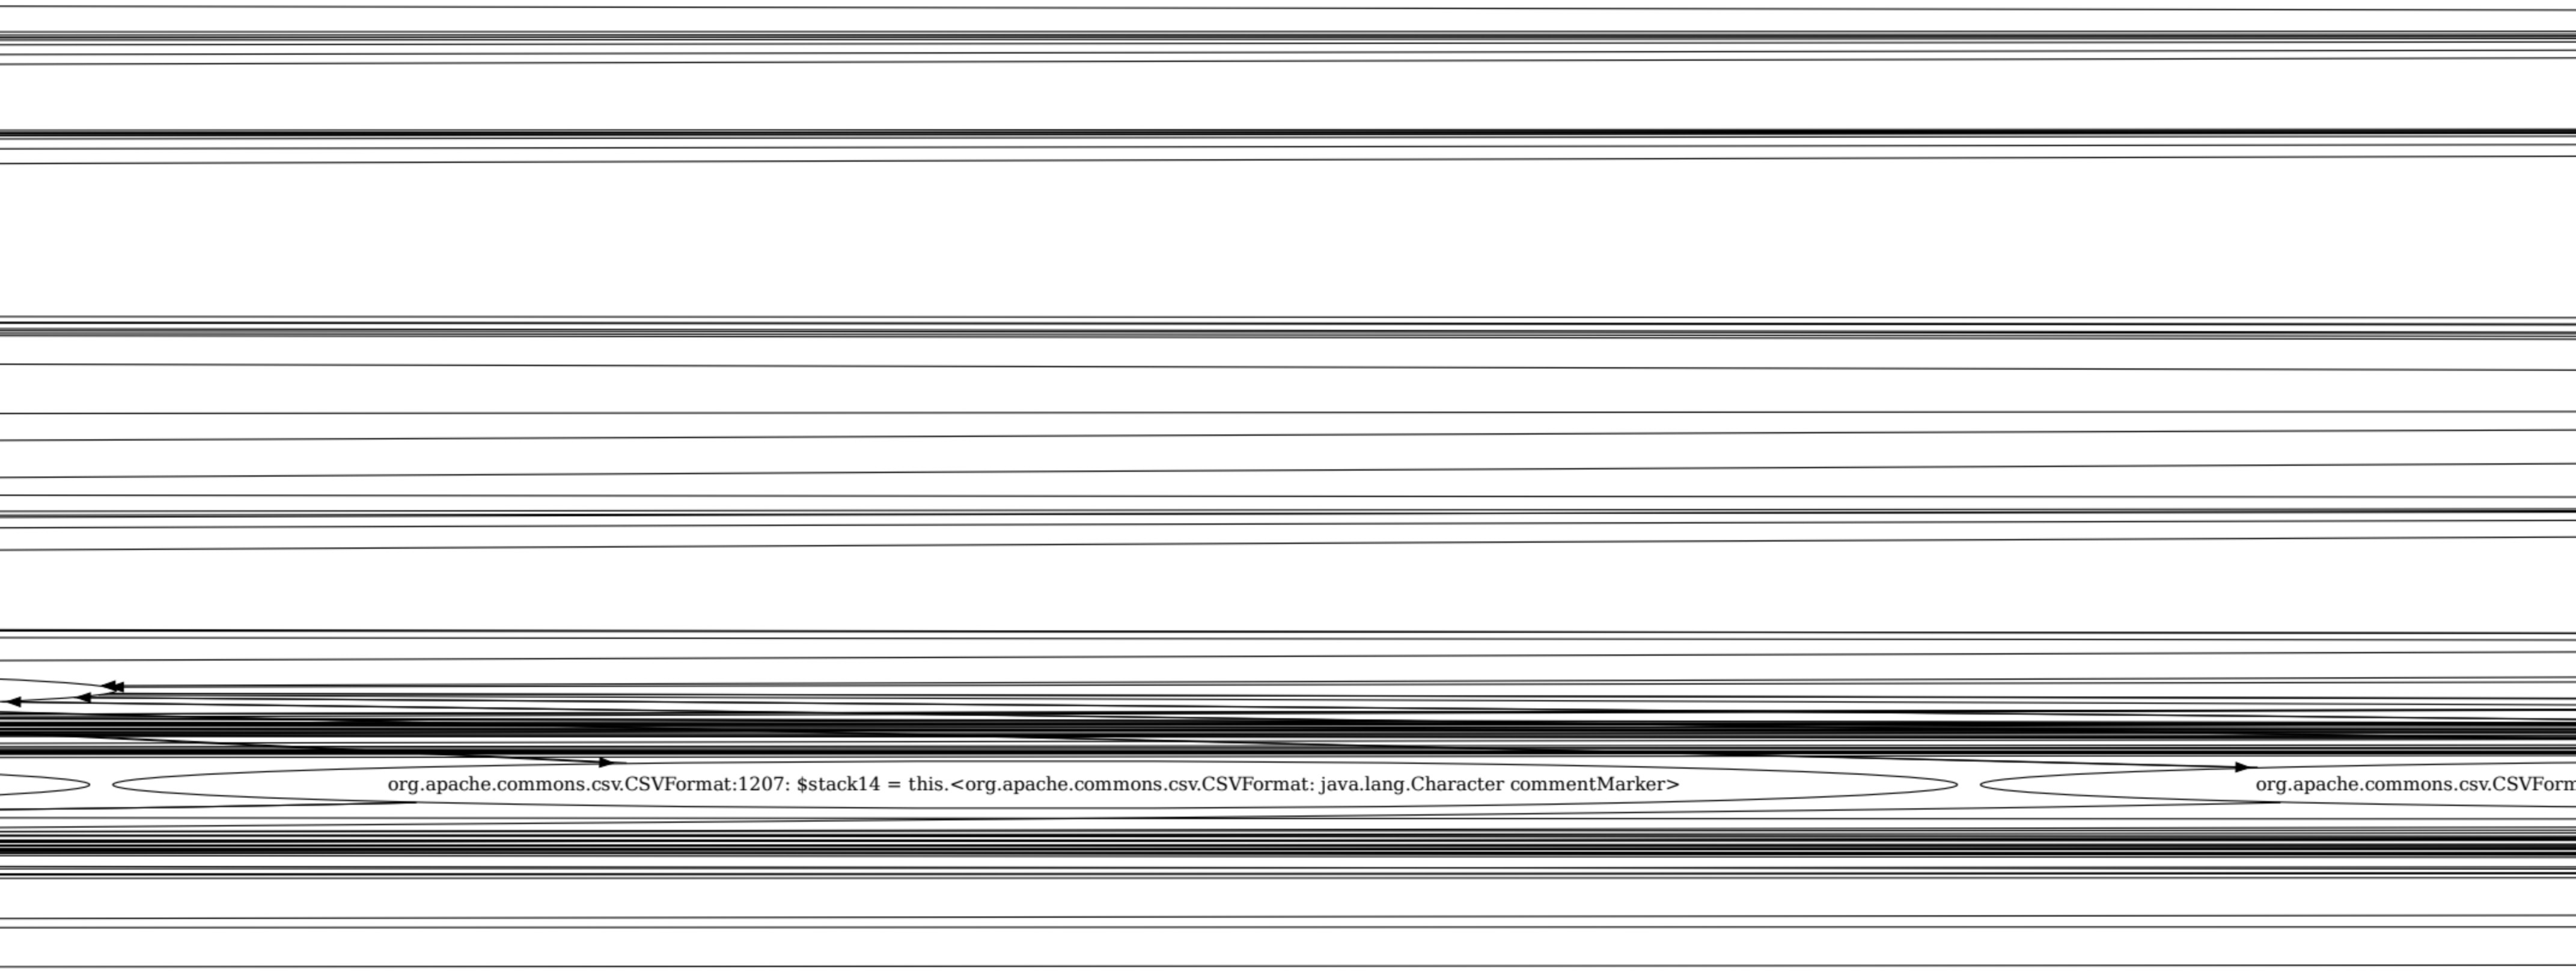

org.apache.commons.csv.CSVFormat:1207: $stack14 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character commentMarker>
org.apache.commons.csv.CSVForm

at:1259: $stack12 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character commentMarker>
org.apache.commons.csv.CSVFormat:1176: $stack12 = this.<org.apache.commo

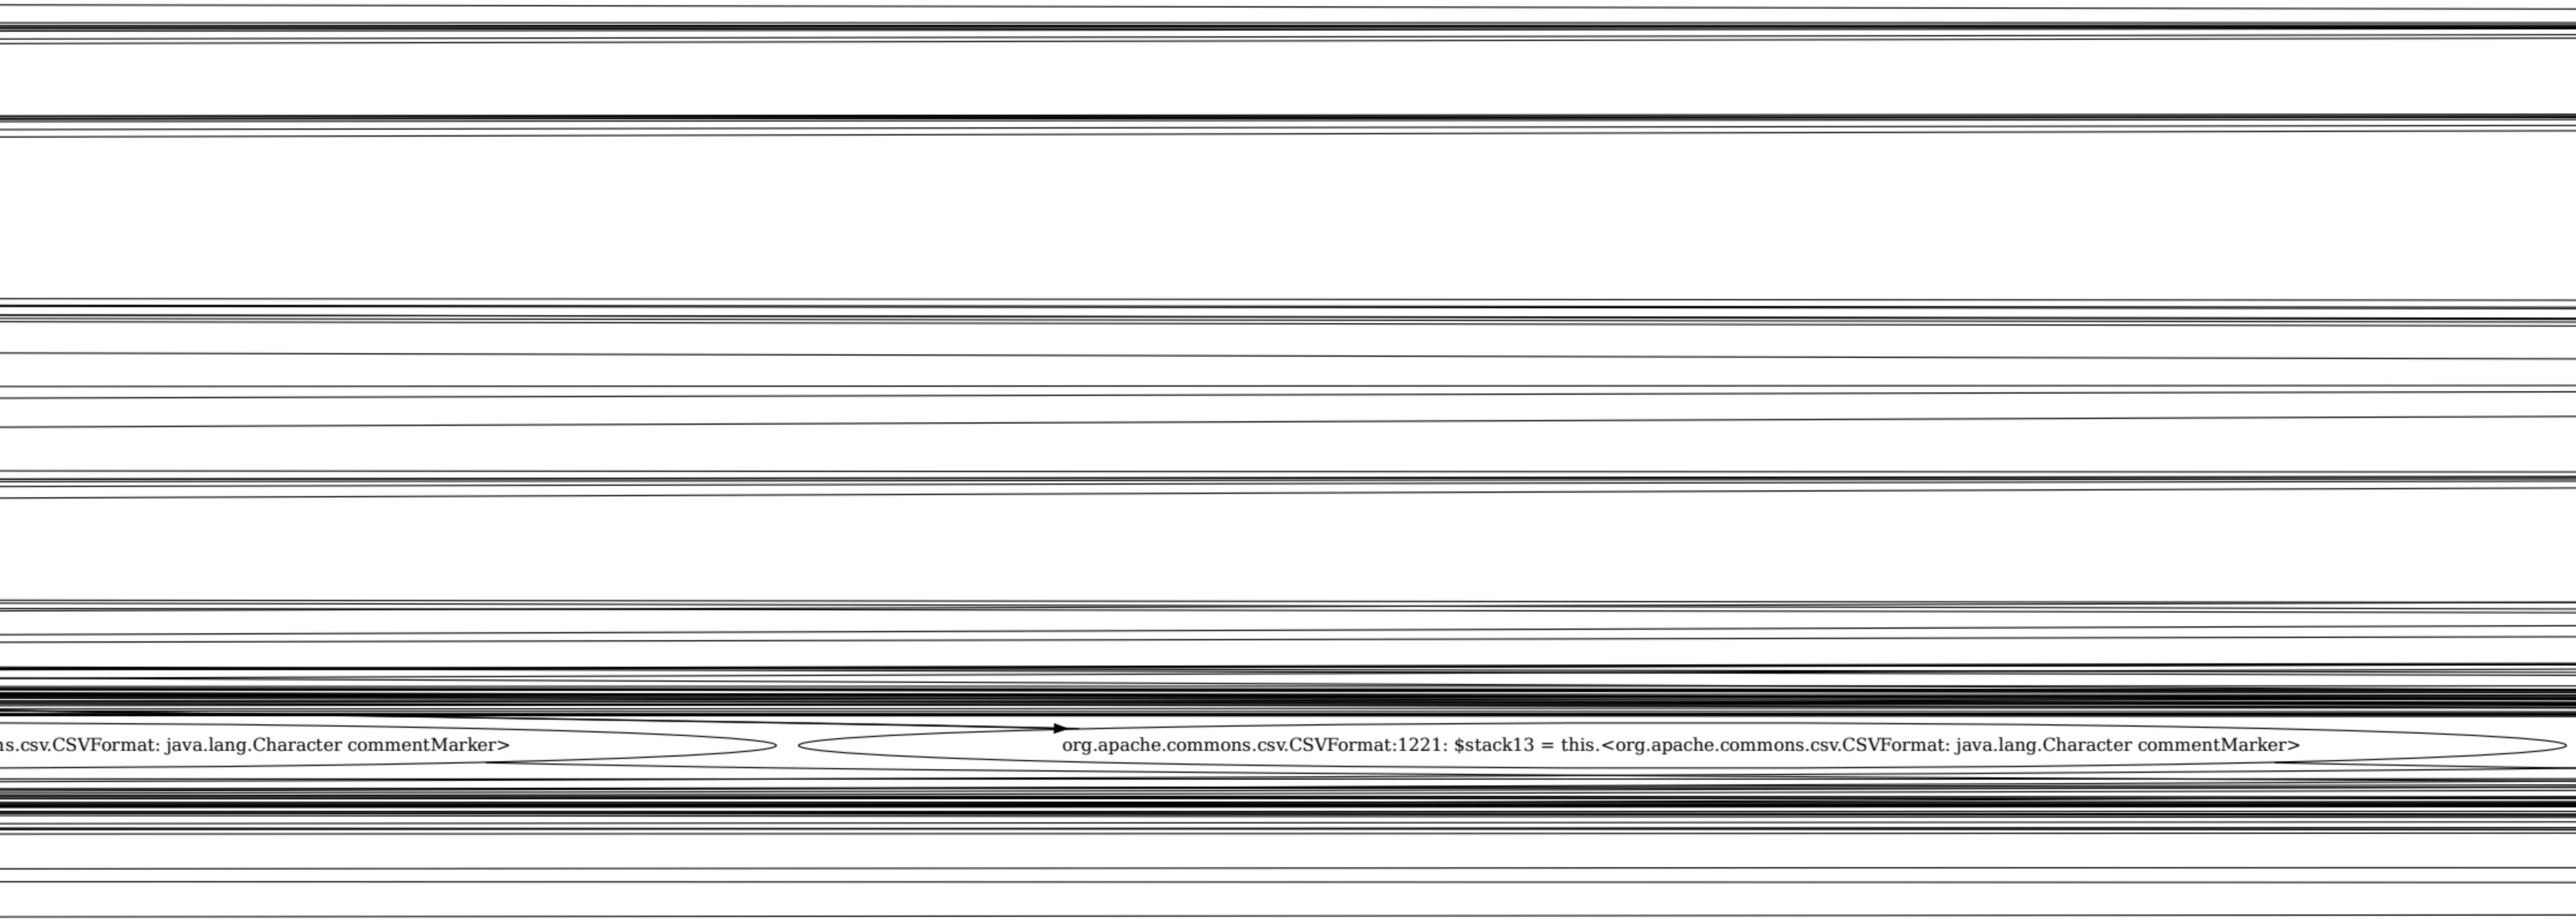
s.csv.CSVFormat: java.lang.Character commentMarker>
org.apache.commons.csv.CSVFormat:1221: $stack13 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character commentMarker>

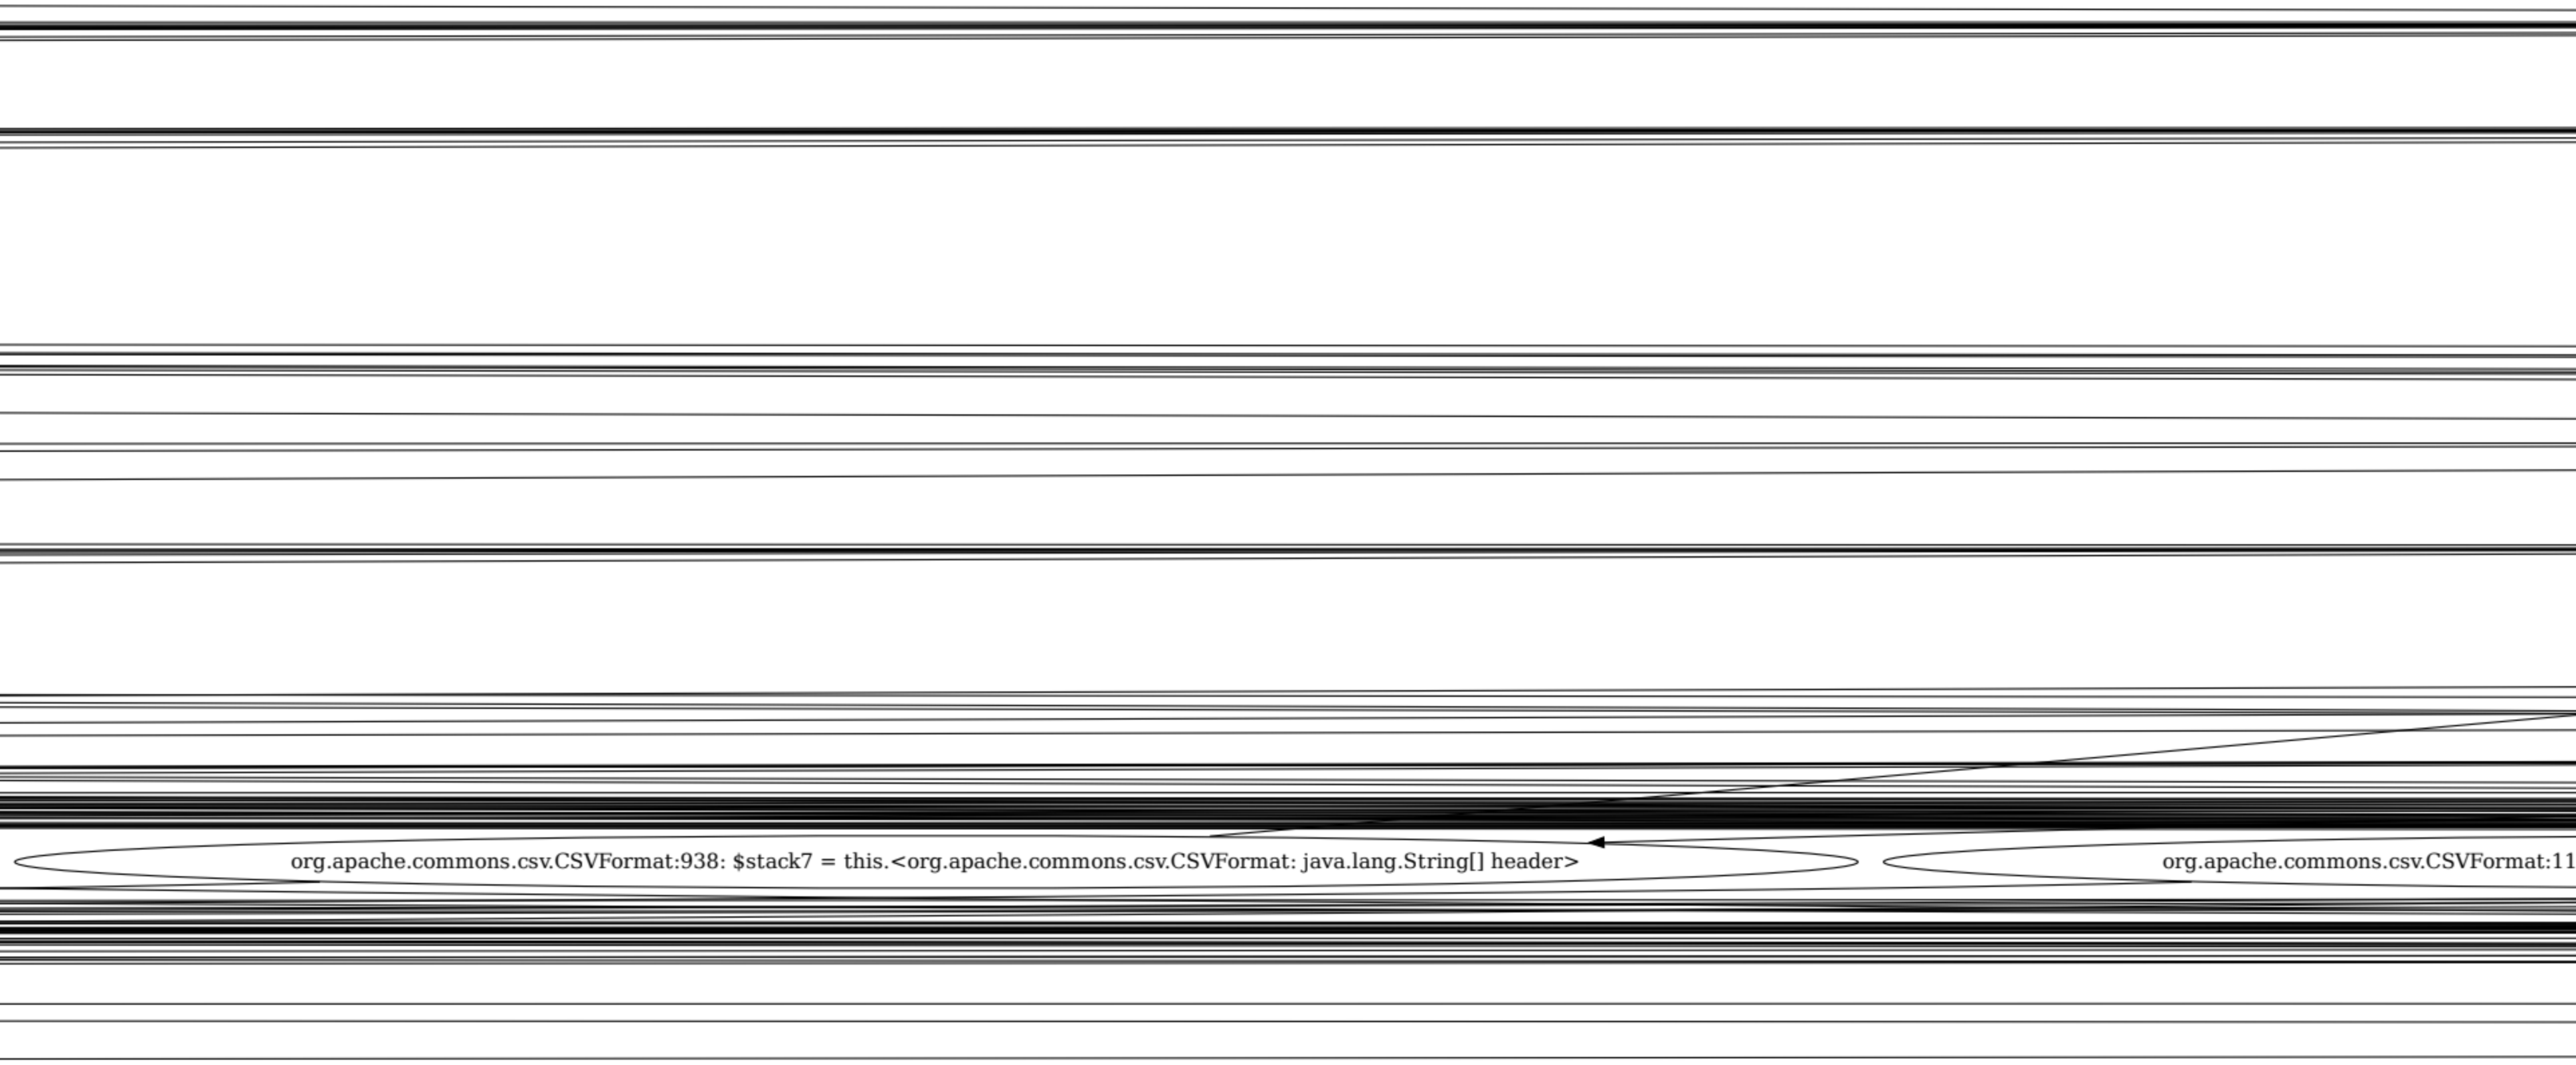
org.apache.commons.csv.CSVFormat:938: $stack7 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[] header>
org.apache.commons.csv.CSVFormat:11

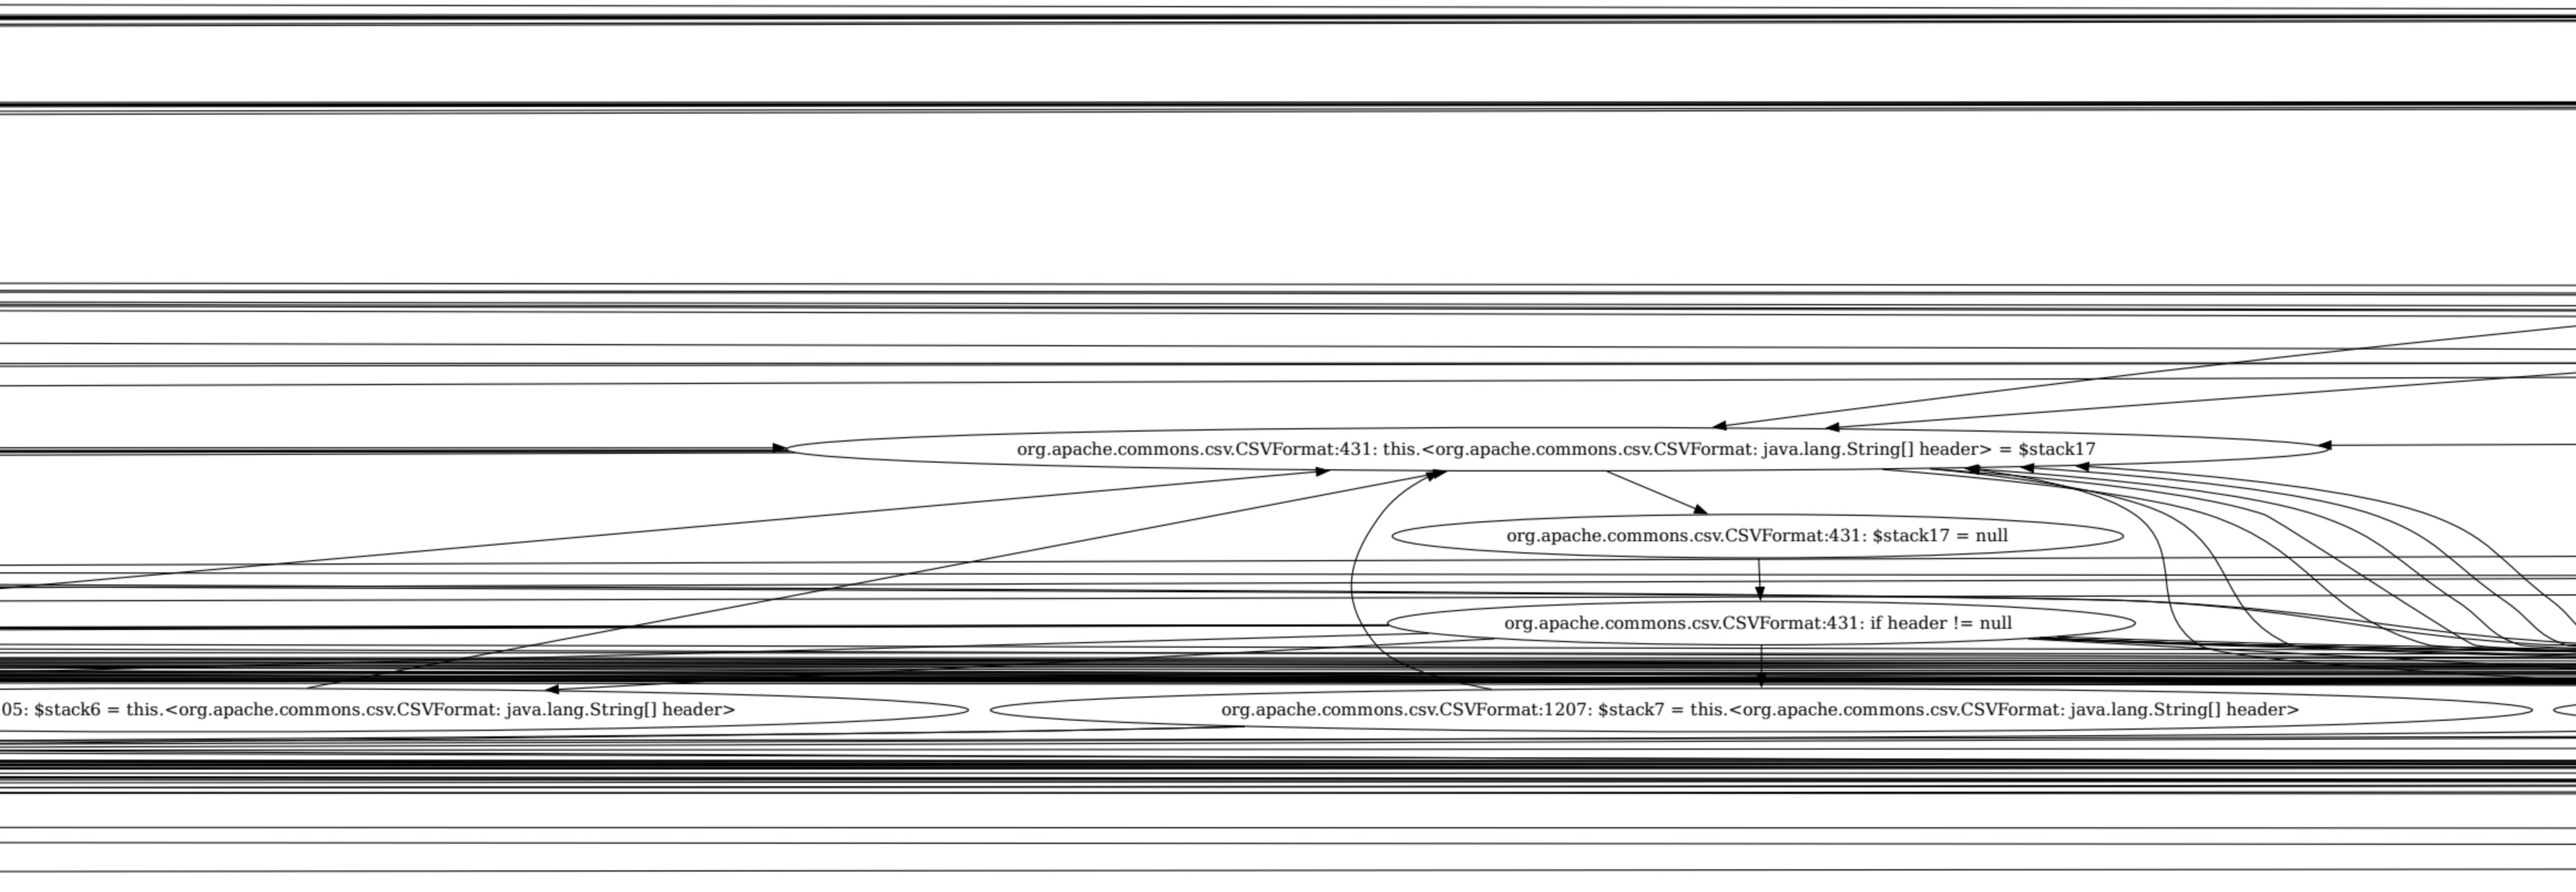
org.apache.commons.csv.CSVFormat:431: this.<org.apache.commons.csv.CSVFormat: java.lang.String[] header> = $stack17
org.apache.commons.csv.CSVFormat:431: $stack17 = null
org.apache.commons.csv.CSVFormat:431: if header != null
05: $stack6 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[] header>
org.apache.commons.csv.CSVFormat:1207: $stack7 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[] header>

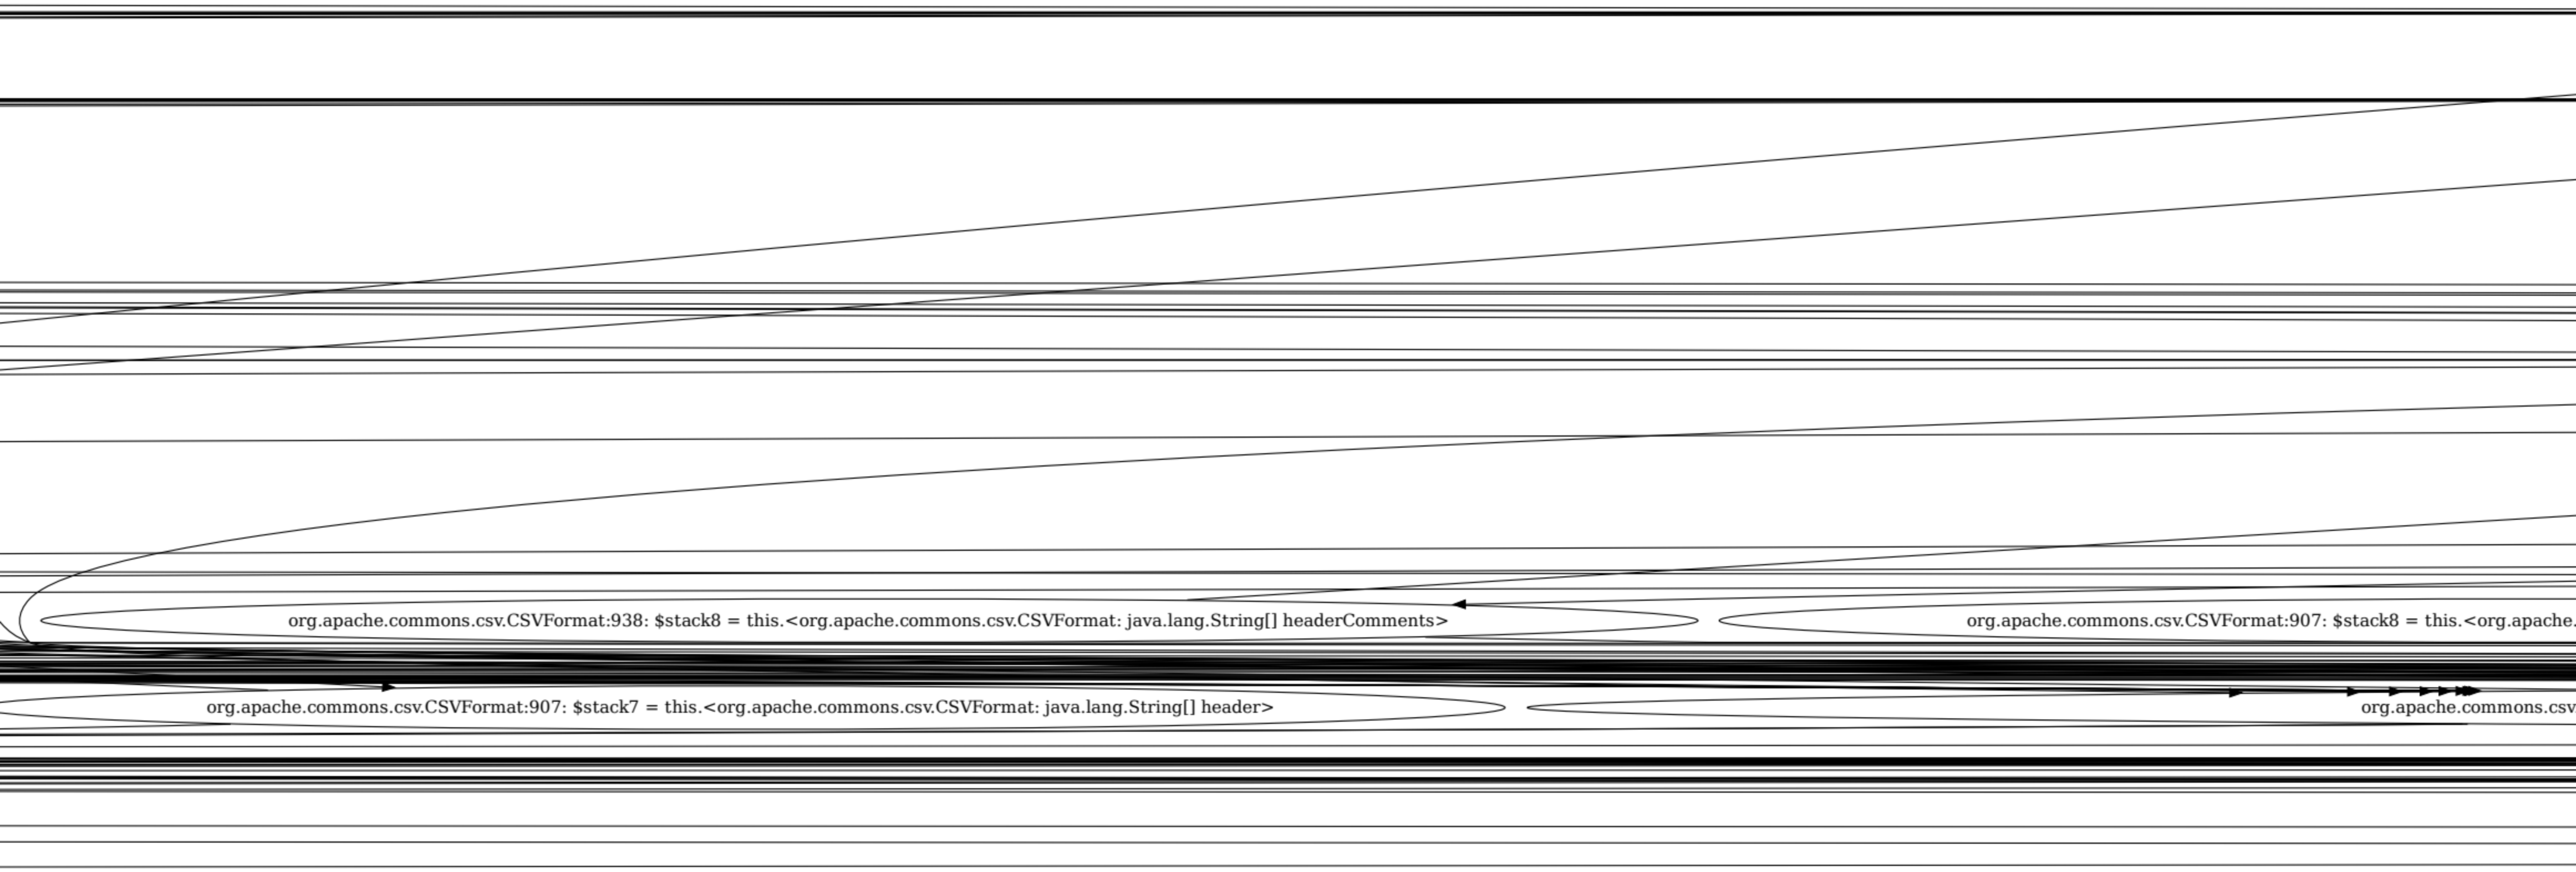
org.apache.commons.csv.CSVFormat:938: $stack8 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[] headerComments>
org.apache.commons.csv.CSVFormat:907: $stack8 = this.<org.apache.
org.apache.commons.csv.CSVFormat:907: $stack7 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[] header>
org.apache.commons.csv

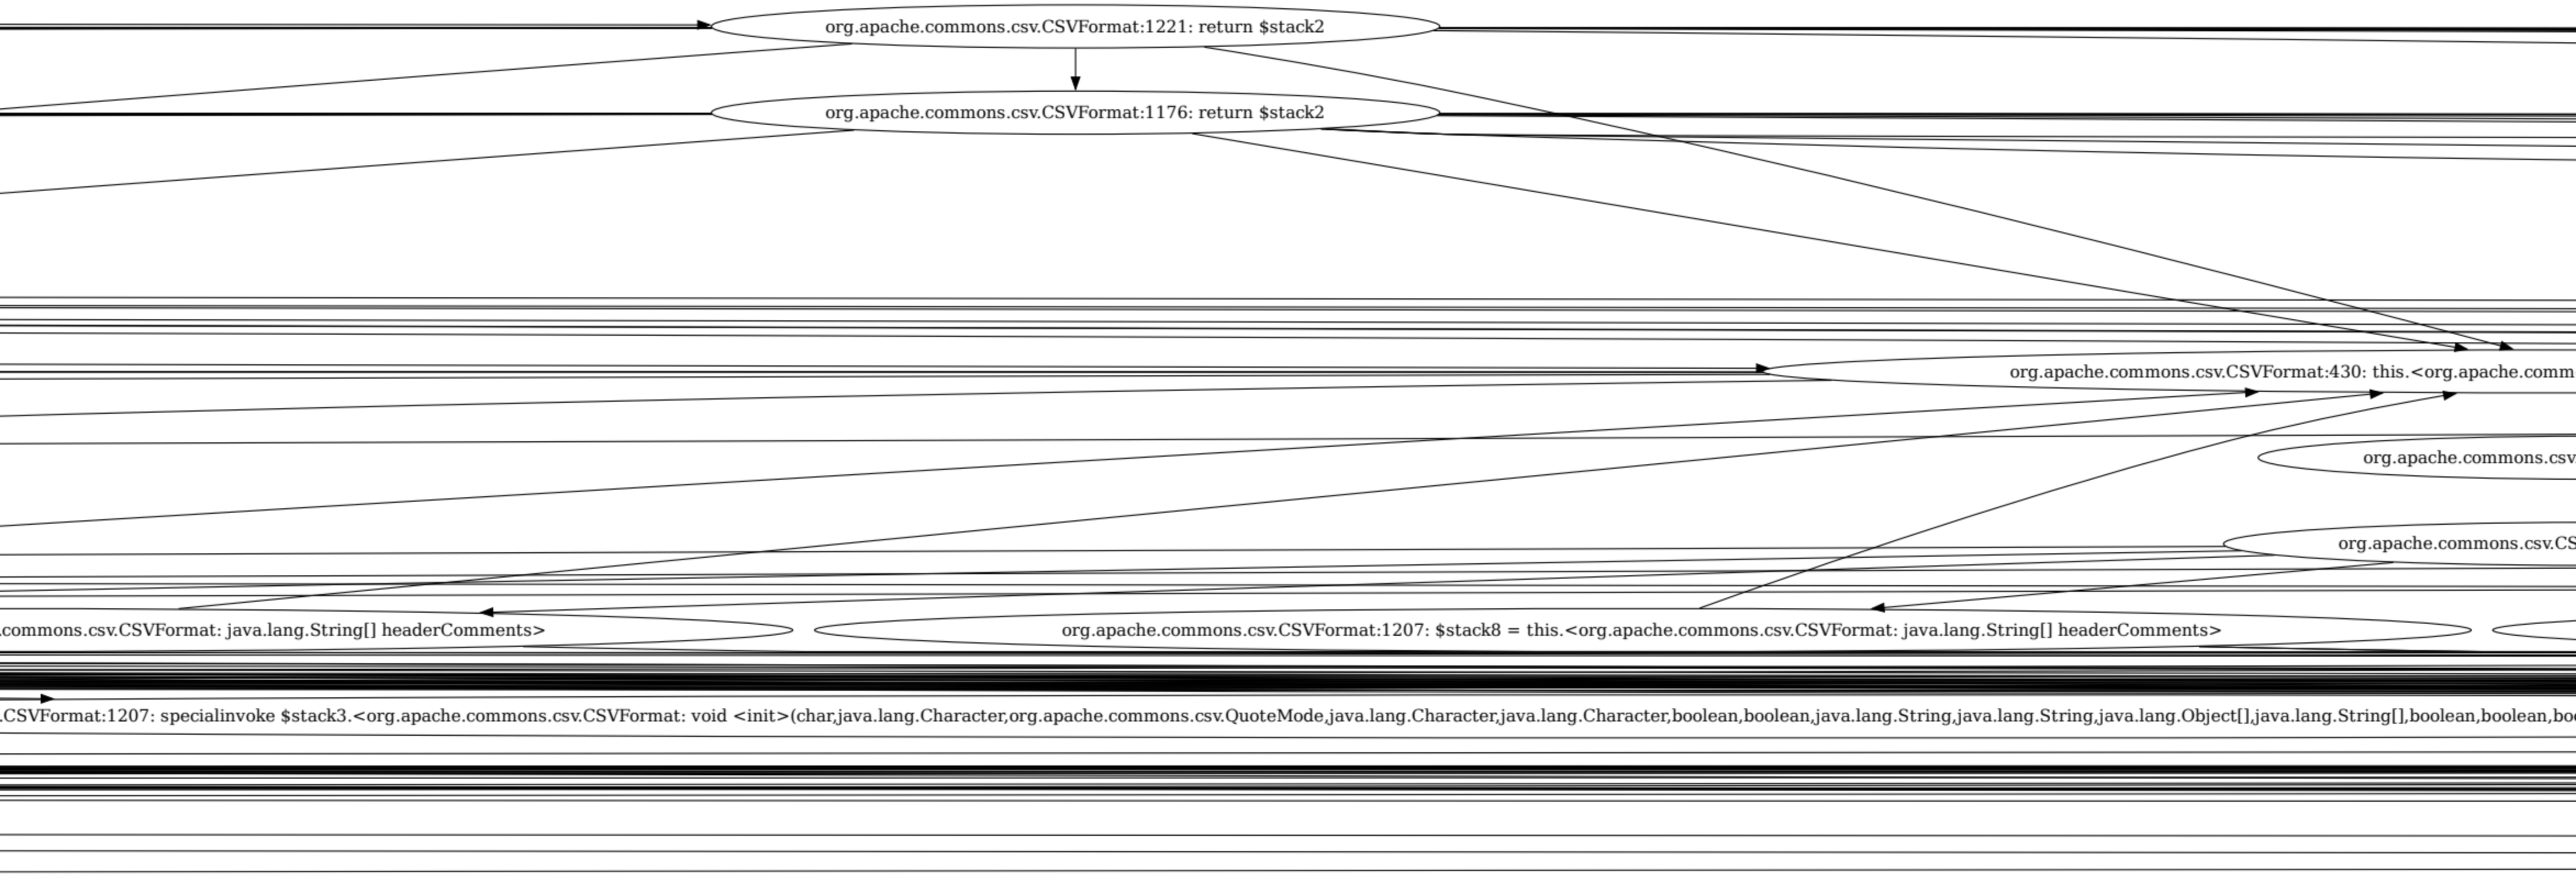
org.apache.commons.csv.CSVFormat:1221: return $stack2
org.apache.commons.csv.CSVFormat:1176: return $stack2
org.apache.commons.csv.CSVFormat:430: this.<org.apache.comm
org.apache.commons.csv
org.apache.commons.csv.CS
.commons.csv.CSVFormat: java.lang.String[] headerComments>
org.apache.commons.csv.CSVFormat:1207: $stack8 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[] headerComments>
.CSVFormat:1207: specialinvoke $stack3.<org.apache.commons.csv.CSVFormat: void <init>(char,java.lang.Character,org.apache.commons.csv.QuoteMode,java.lang.Character,java.lang.Character,boolean,boolean,java.lang.String,java.lang.String,java.lang.Object[],java.lang.String[],boolean,boolean,bo

ons.csv.CSVFormat: java.lang.String[] headerComments> = $stack15
.CSVFormat:439: return null
SVFormat:438: if values != null
org.apache.commons.csv.CSVFormat:1105: $stack7 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[] headerComments>
org.apache.commons.csv.CSVFormat:1259: $stack7 = this.<org.apach
olean)>($stack16, quoteChar, $stack15, $stack14, $stack13, $stack12, $stack11, $stack10, $stack9, $stack8, $stack7, $stack6, $stack5, $stack4)

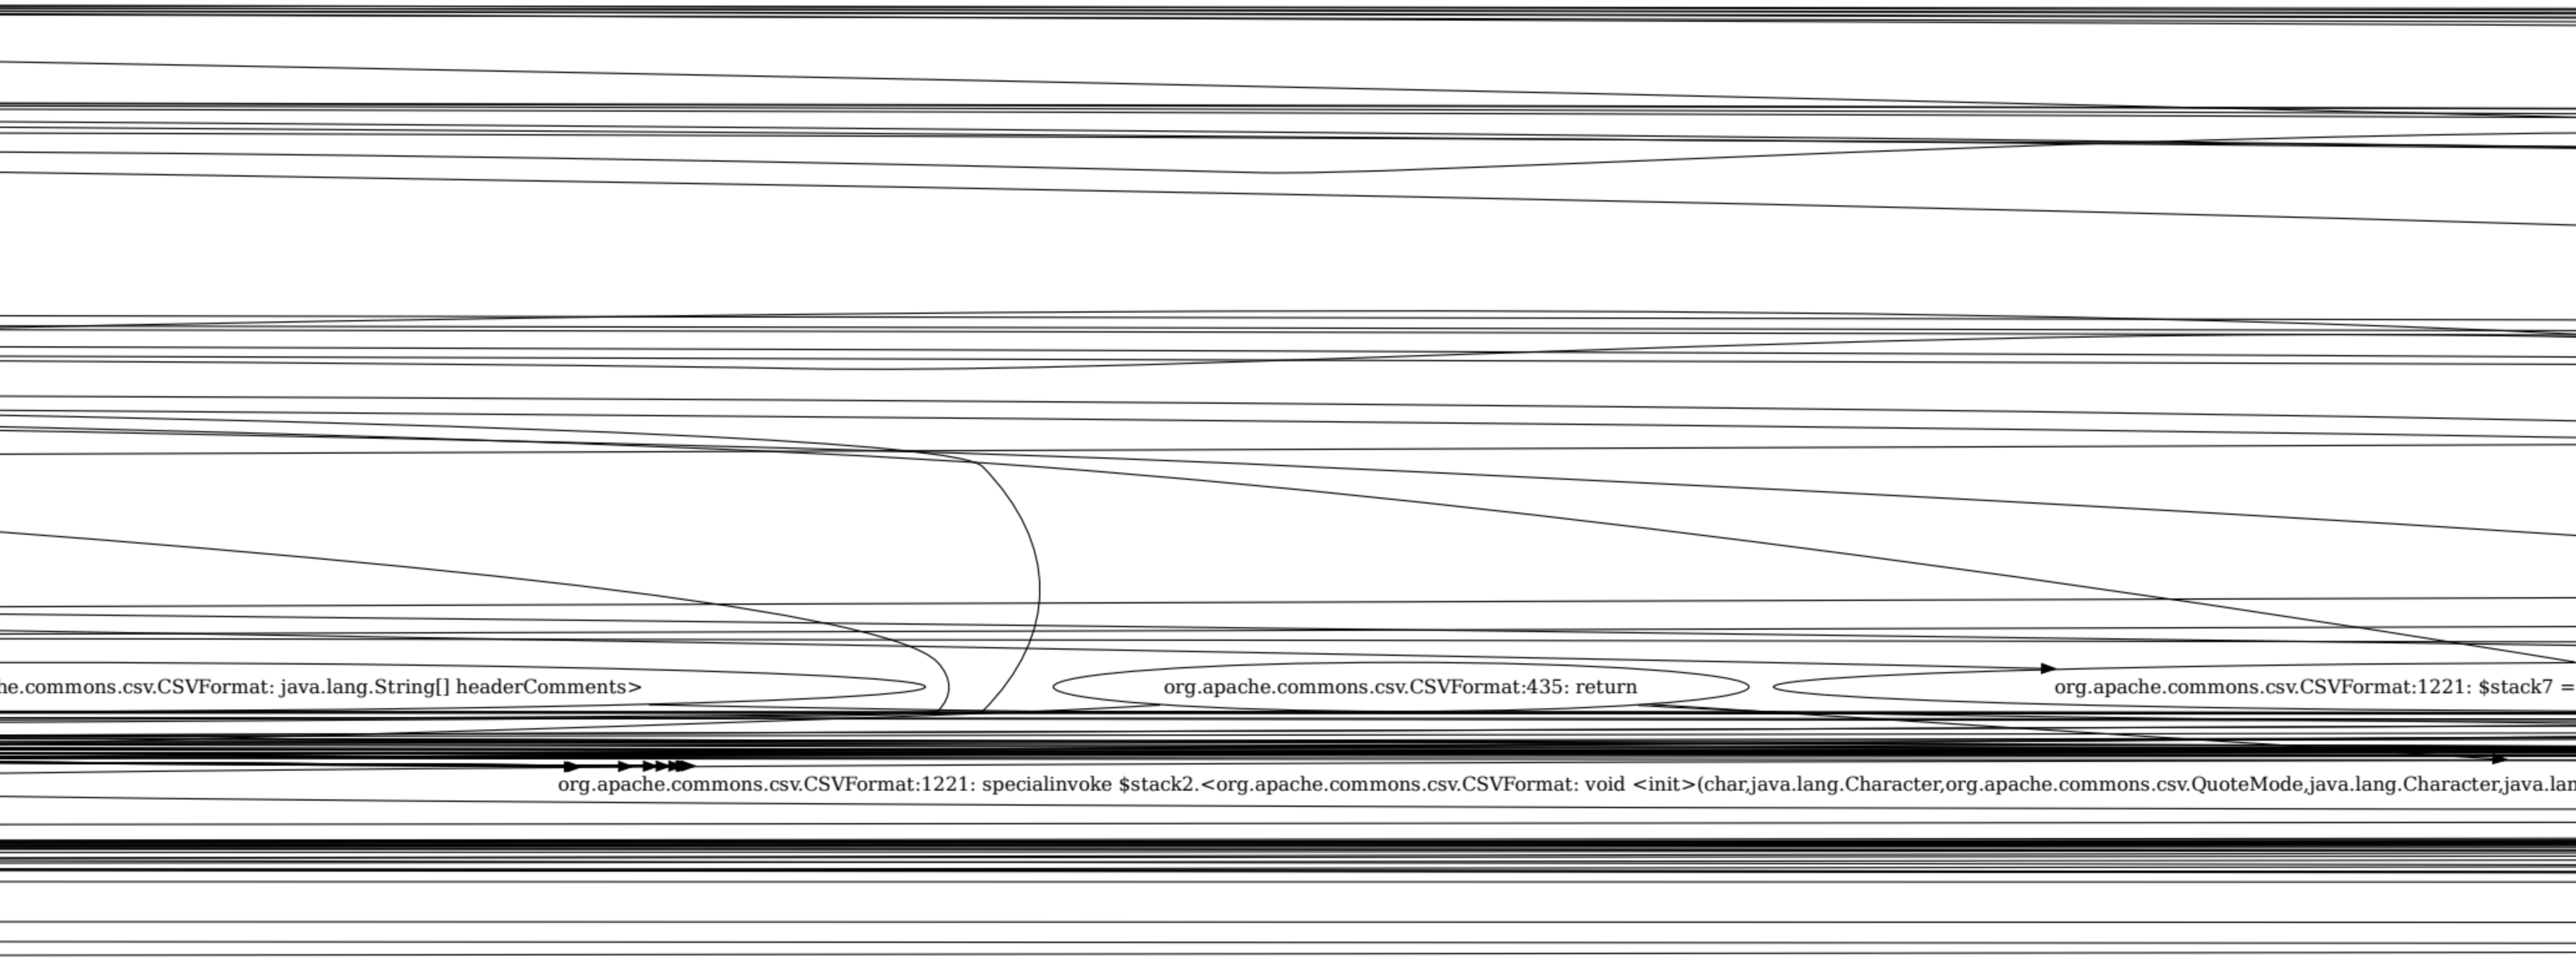
he.commons.csv.CSVFormat: java.lang.String[] headerComments>
org.apache.commons.csv.CSVFormat:435: return
org.apache.commons.csv.CSVFormat:1221: $stack7 =
org.apache.commons.csv.CSVFormat:1221: specialinvoke $stack2.<org.apache.commons.csv.CSVFormat: void <init>(char,java.lang.Character,org.apache.commons.csv.QuoteMode,java.lang.Character,java.lan

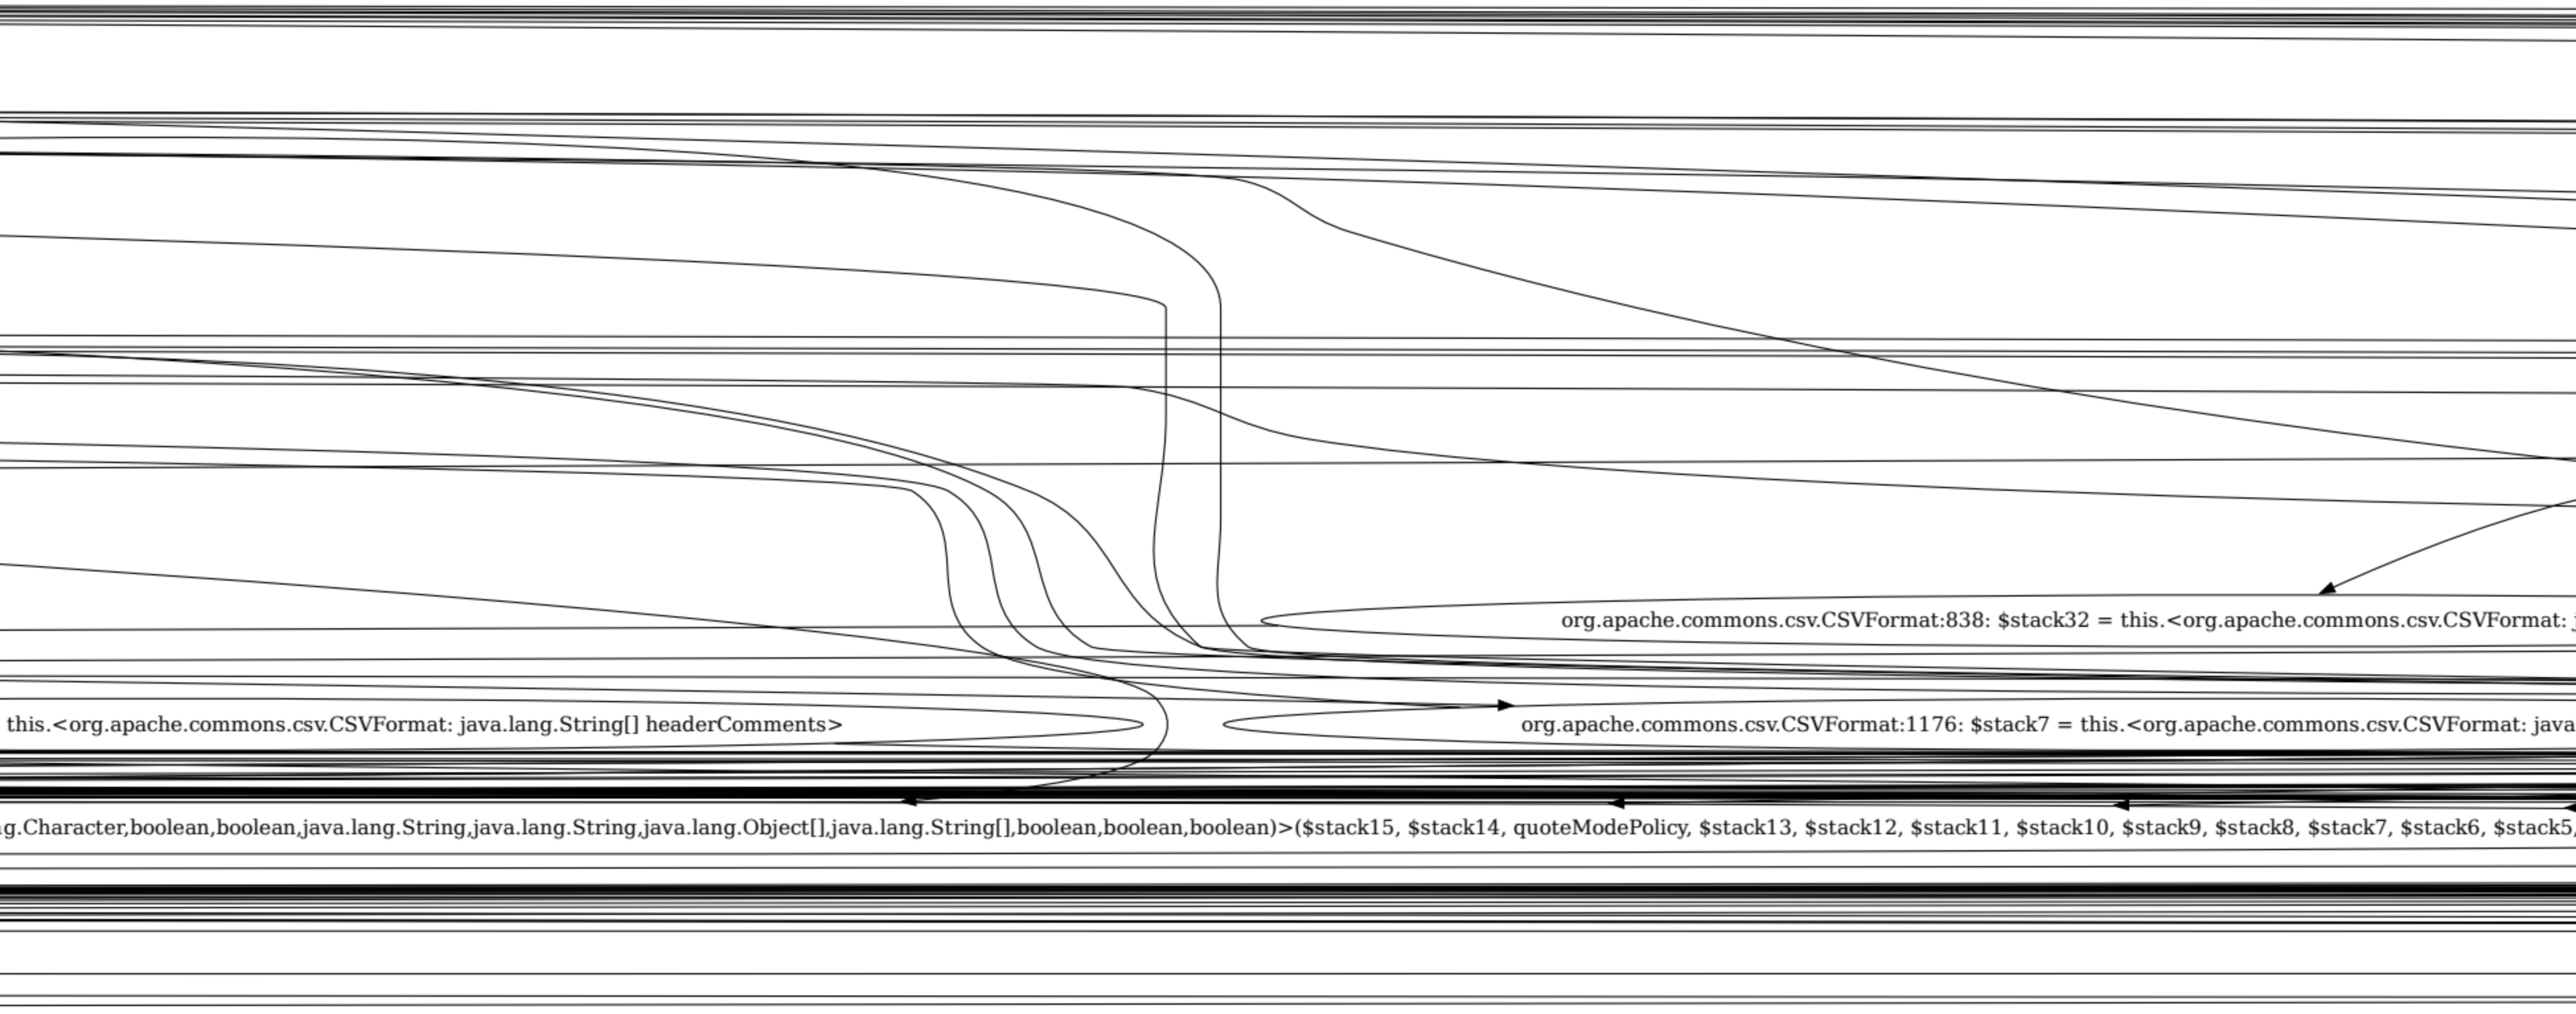
org.apache.commons.csv.CSVFormat:838: $stack32 = this.<org.apache.commons.csv.CSVFormat: j
this.<org.apache.commons.csv.CSVFormat: java.lang.String[] headerComments>
org.apache.commons.csv.CSVFormat:1176: $stack7 = this.<org.apache.commons.csv.CSVFormat: java
g.Character,boolean,boolean,java.lang.String,java.lang.String,java.lang.Object[],java.lang.String[],boolean,boolean,boolean)>($stack15, $stack14, quoteModePolicy, $stack13, $stack12, $stack11, $stack10, $stack9, $stack8, $stack7, $stack6, $stack5,

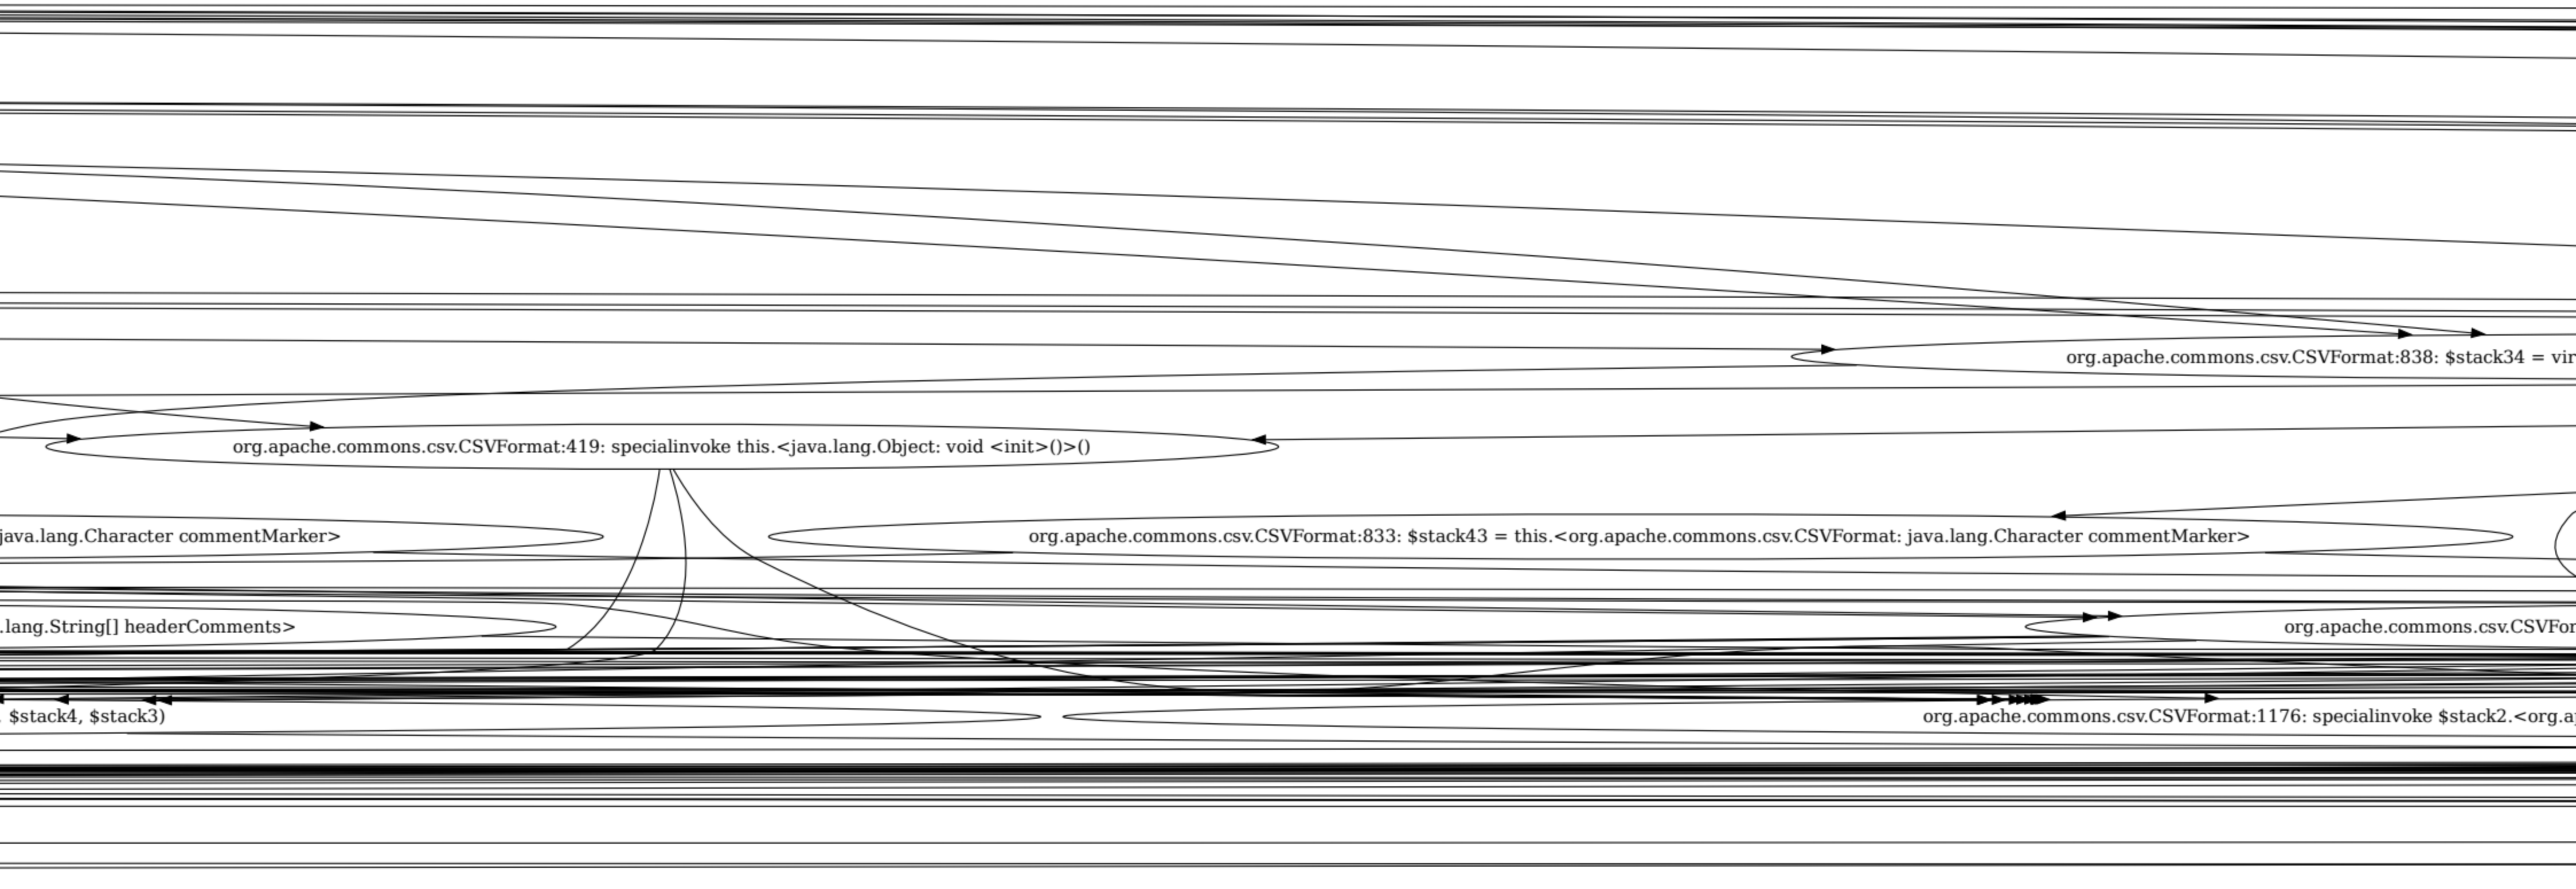
org.apache.commons.csv.CSVFormat:838: $stack34 = vir
org.apache.commons.csv.CSVFormat:419: specialinvoke this.<java.lang.Object: void <init>()>()
java.lang.Character commentMarker>
org.apache.commons.csv.CSVFormat:833: $stack43 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character commentMarker>
.lang.String[] headerComments>
org.apache.commons.csv.CSVFor
, $stack4, $stack3)
org.apache.commons.csv.CSVFormat:1176: specialinvoke $stack2.<org.a

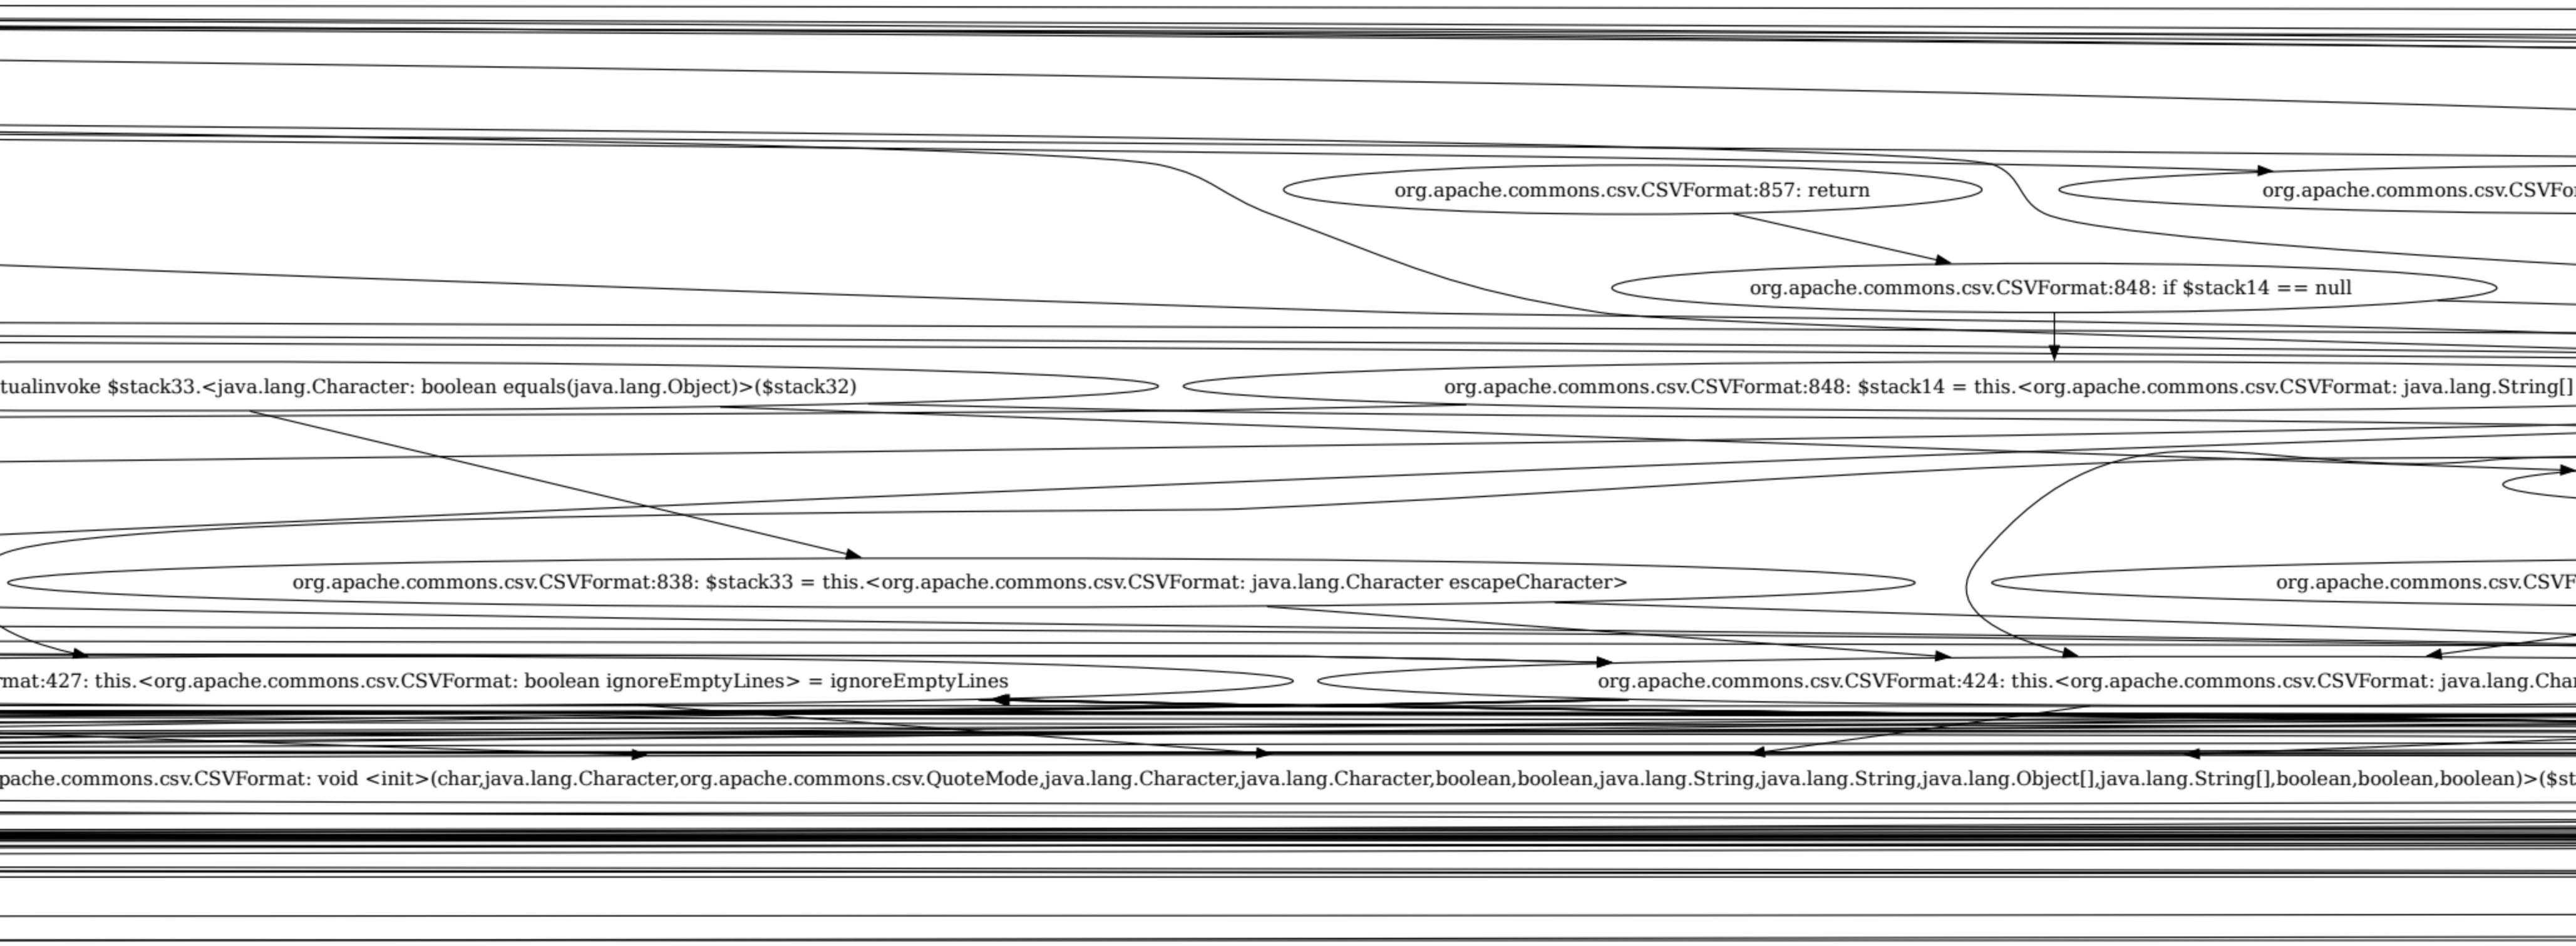
org.apache.commons.csv.CSVFormat:857: return
org.apache.commons.csv.CSVFor
org.apache.commons.csv.CSVFormat:848: if $stack14 == null
tualinvoke $stack33.<java.lang.Character: boolean equals(java.lang.Object)>($stack32)
org.apache.commons.csv.CSVFormat:848: $stack14 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[]
org.apache.commons.csv.CSVFormat:838: $stack33 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character escapeCharacter>
org.apache.commons.csv.CSVF
rmat:427: this.<org.apache.commons.csv.CSVFormat: boolean ignoreEmptyLines> = ignoreEmptyLines
org.apache.commons.csv.CSVFormat:424: this.<org.apache.commons.csv.CSVFormat: java.lang.Char
pache.commons.csv.CSVFormat: void <init>(char,java.lang.Character,org.apache.commons.csv.QuoteMode,java.lang.Character,java.lang.Character,boolean,boolean,java.lang.String,java.lang.String,java.lang.Object[],java.lang.String[],boolean,boolean,boolean)>($st

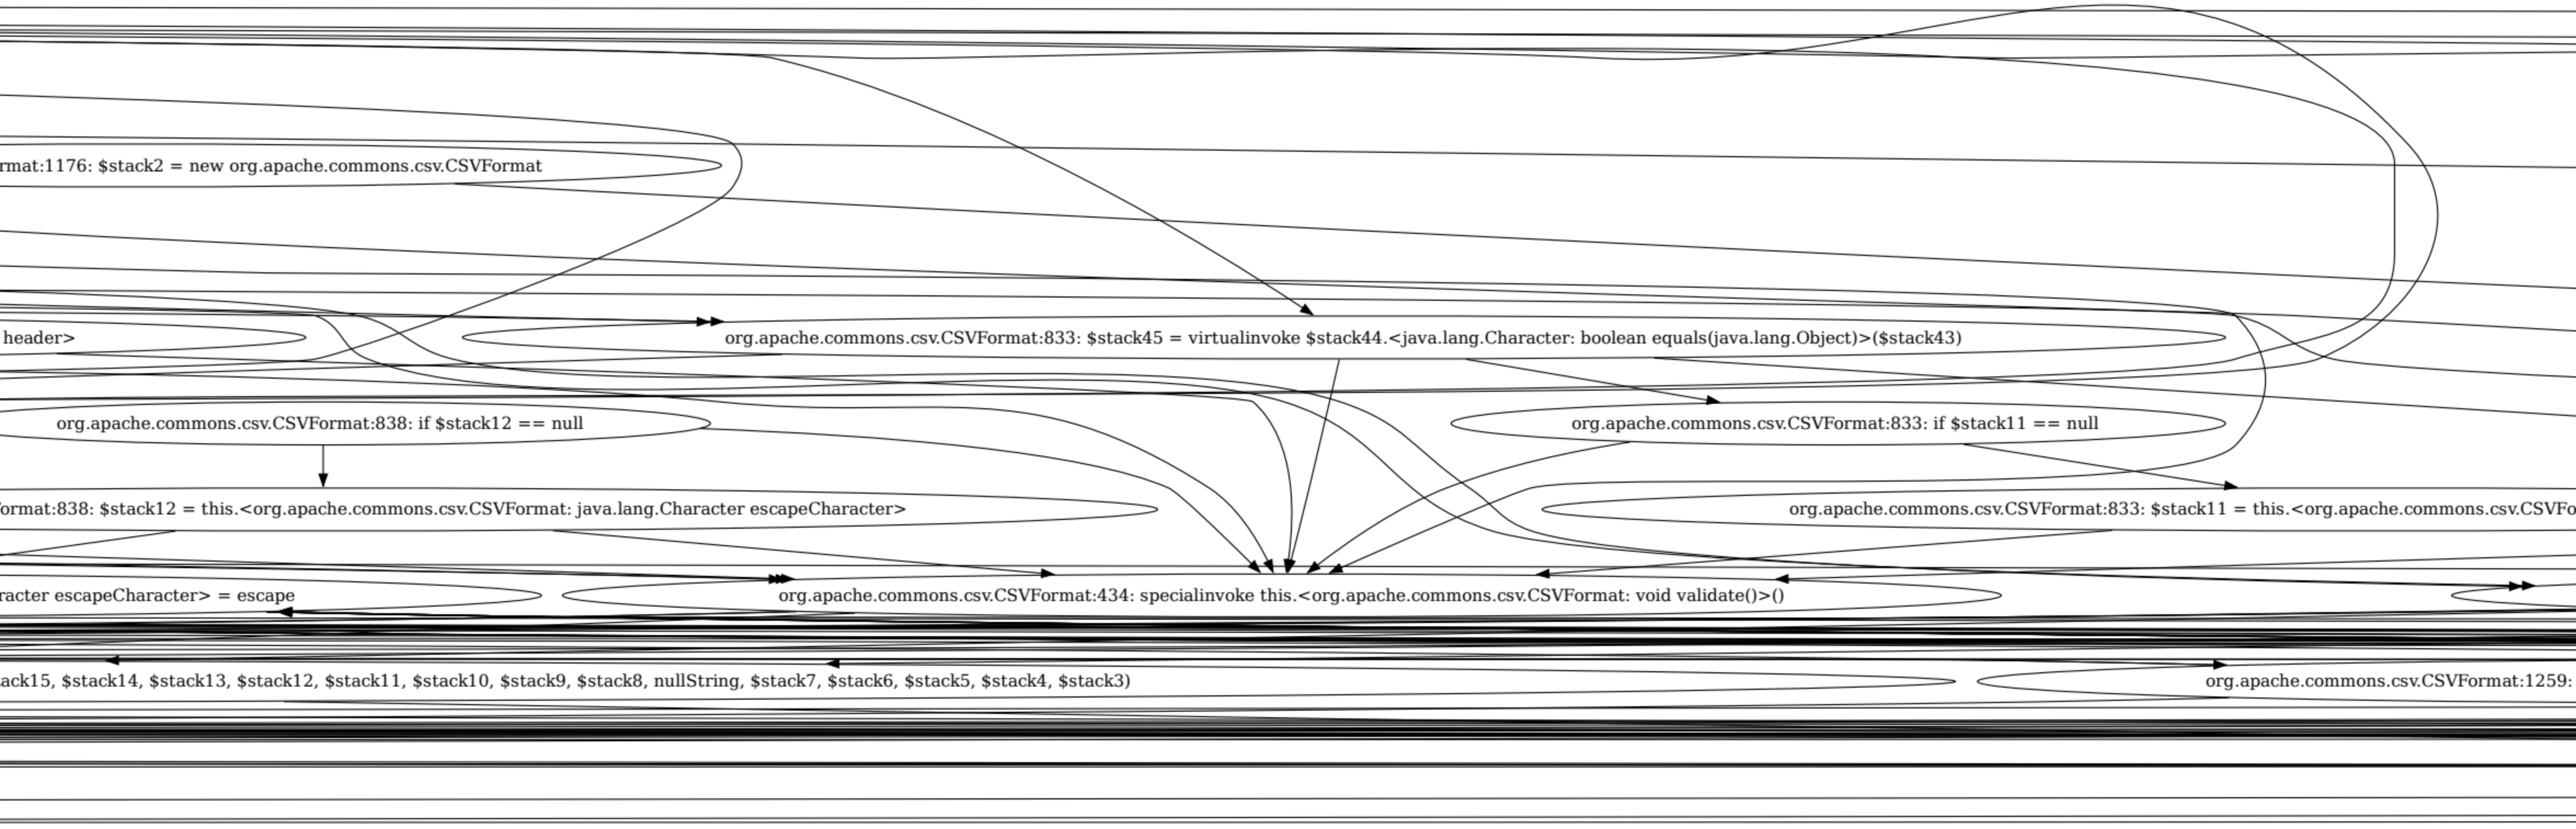
rmat:1176: $stack2 = new org.apache.commons.csv.CSVFormat
header>
org.apache.commons.csv.CSVFormat:833: $stack45 = virtualinvoke $stack44.<java.lang.Character: boolean equals(java.lang.Object)>($stack43)
org.apache.commons.csv.CSVFormat:838: if $stack12 == null
org.apache.commons.csv.CSVFormat:833: if $stack11 == null
ormat:838: $stack12 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character escapeCharacter>
org.apache.commons.csv.CSVFormat:833: $stack11 = this.<org.apache.commons.csv.CSVFo
racter escapeCharacter> = escape
org.apache.commons.csv.CSVFormat:434: specialinvoke this.<org.apache.commons.csv.CSVFormat: void validate()>()
ack15, $stack14, $stack13, $stack12, $stack11, $stack10, $stack9, $stack8, nullString, $stack7, $stack6, $stack5, $stack4, $stack3)
org.apache.commons.csv.CSVFormat:1259:

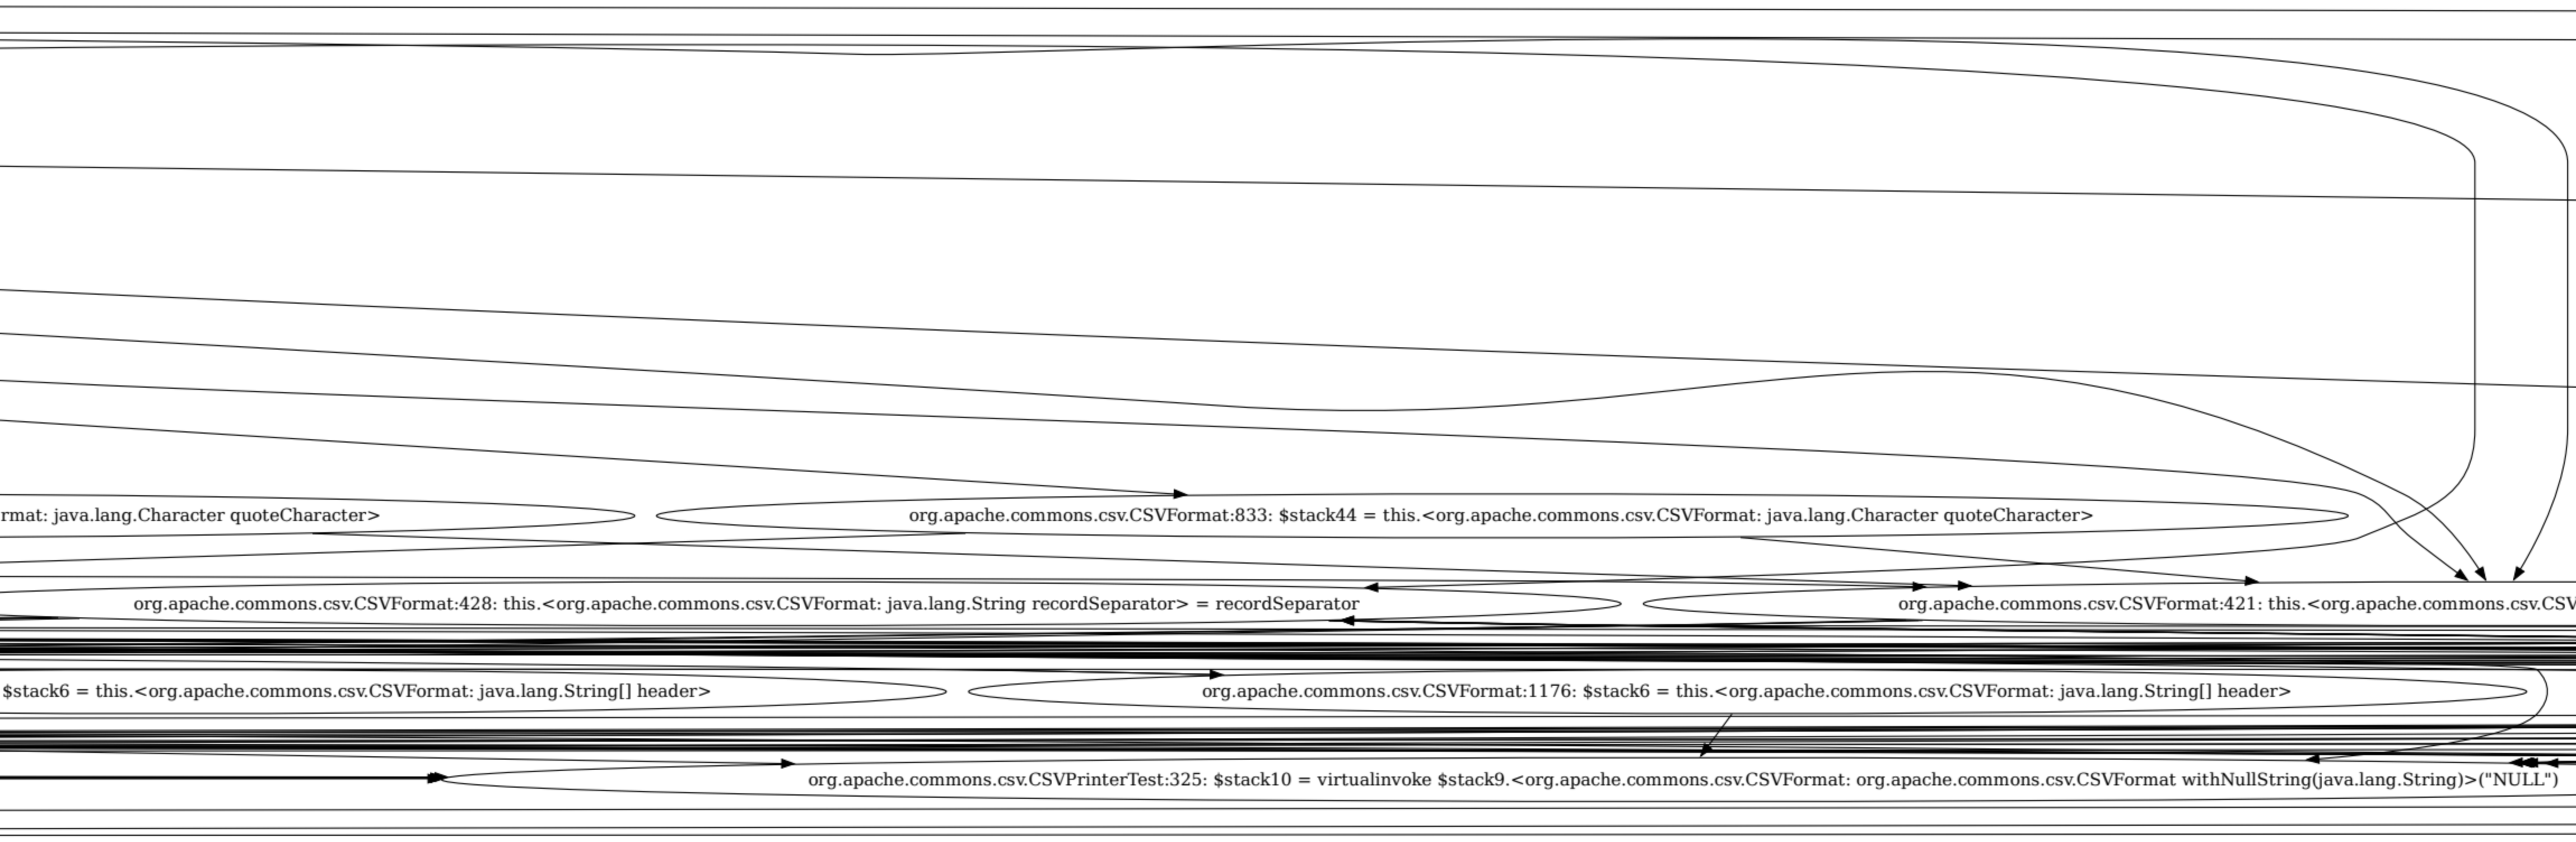
rmat: java.lang.Character quoteCharacter>
org.apache.commons.csv.CSVFormat:833: $stack44 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character quoteCharacter>
org.apache.commons.csv.CSVFormat:428: this.<org.apache.commons.csv.CSVFormat: java.lang.String recordSeparator> = recordSeparator
org.apache.commons.csv.CSVFormat:421: this.<org.apache.commons.csv.CSV
$stack6 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[] header>
org.apache.commons.csv.CSVFormat:1176: $stack6 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[] header>
org.apache.commons.csv.CSVPrinterTest:325: $stack10 = virtualinvoke $stack9.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withNullString(java.lang.String)>("NULL")

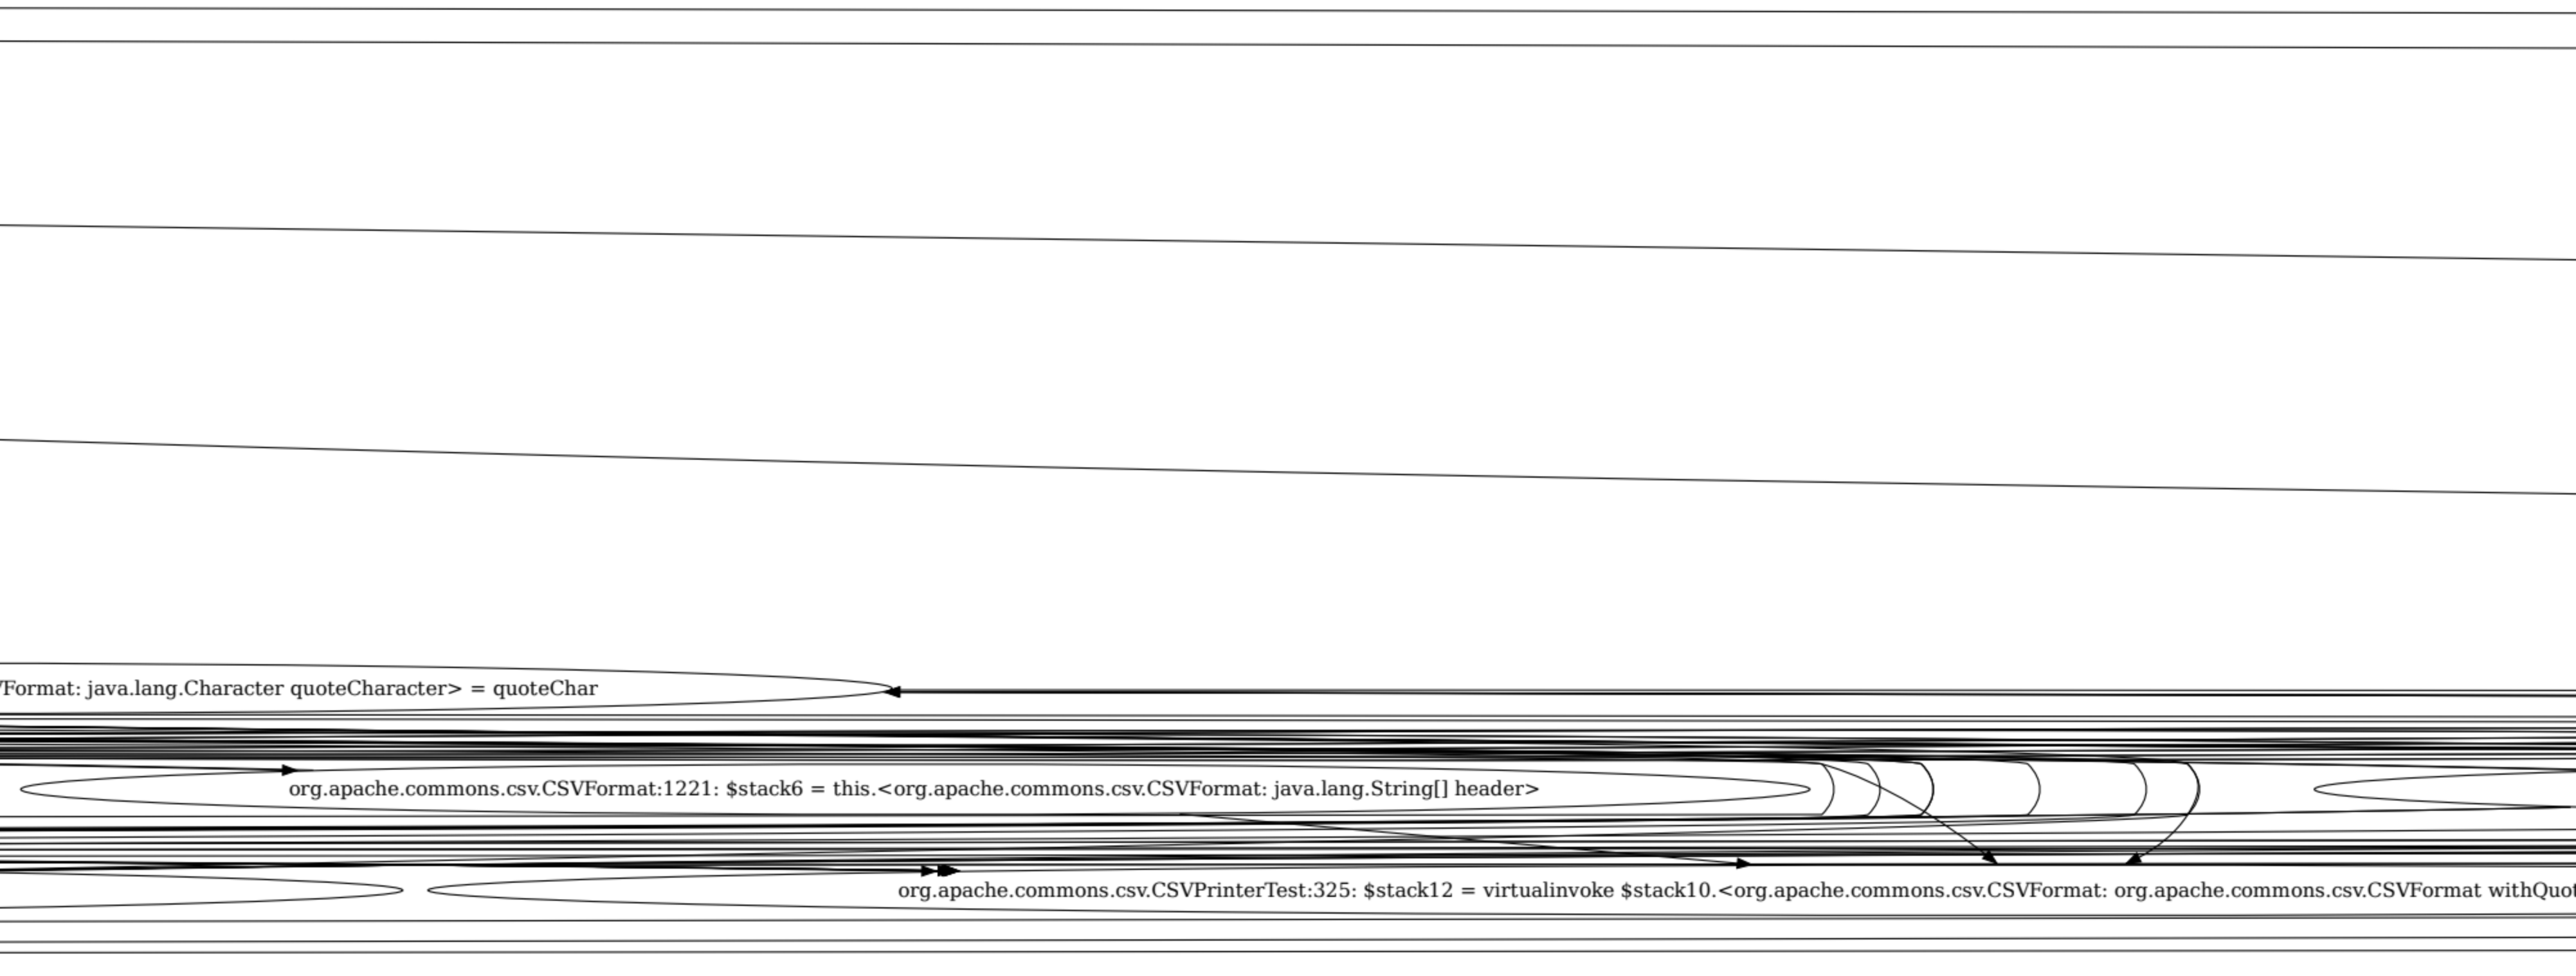
Format: java.lang.Character quoteCharacter> = quoteChar
org.apache.commons.csv.CSVFormat:1221: $stack6 = this.<org.apache.commons.csv.CSVFormat: java.lang.String[] header>
org.apache.commons.csv.CSVPrinterTest:325: $stack12 = virtualinvoke $stack10.<org.apache.commons.csv.CSVFormat: org.apache.commons.csv.CSVFormat withQuot

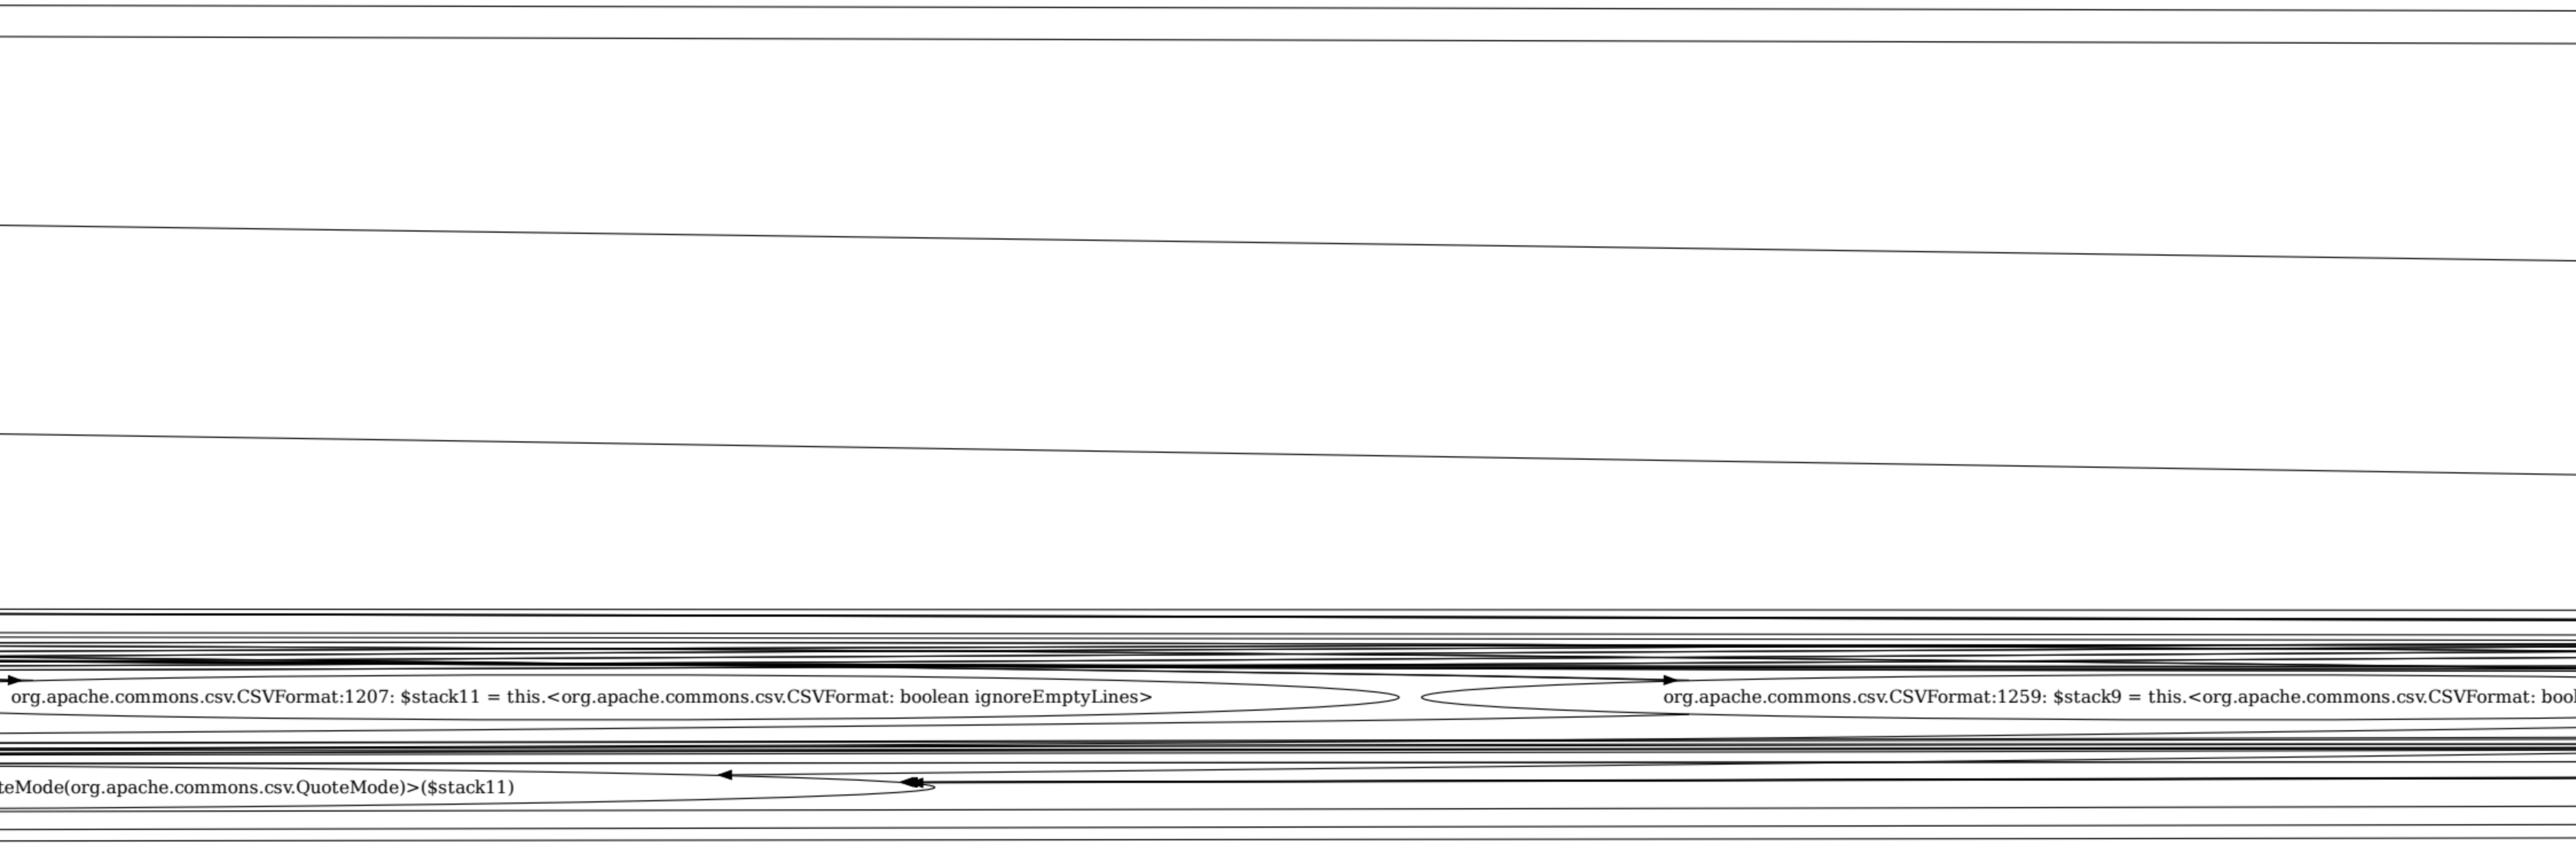
org.apache.commons.csv.CSVFormat:1207: $stack11 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreEmptyLines>
org.apache.commons.csv.CSVFormat:1259: $stack9 = this.<org.apache.commons.csv.CSVFormat: boo
teMode(org.apache.commons.csv.QuoteMode)>($stack11)

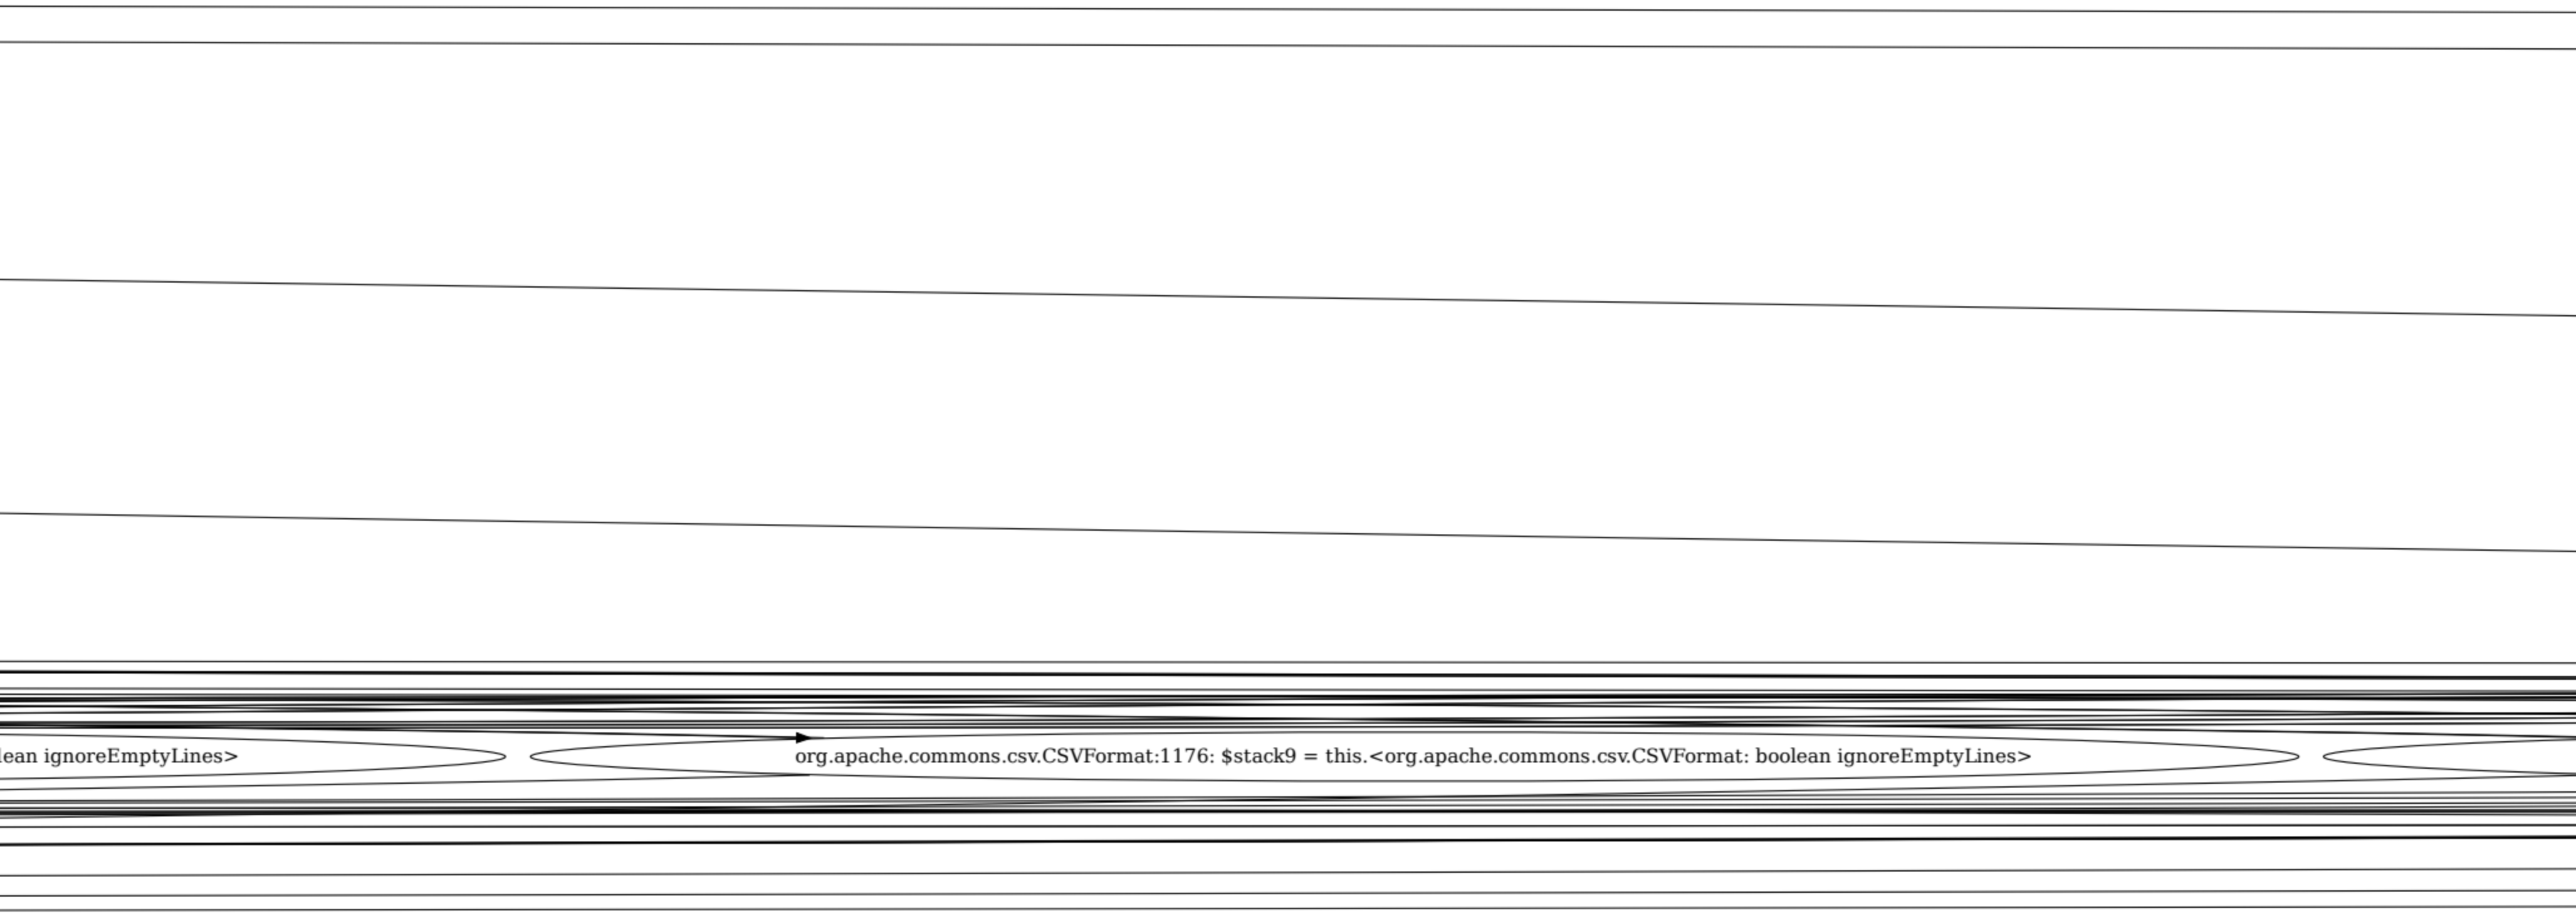

lean ignoreEmptyLines>
org.apache.commons.csv.CSVFormat:1176: $stack9 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreEmptyLines>

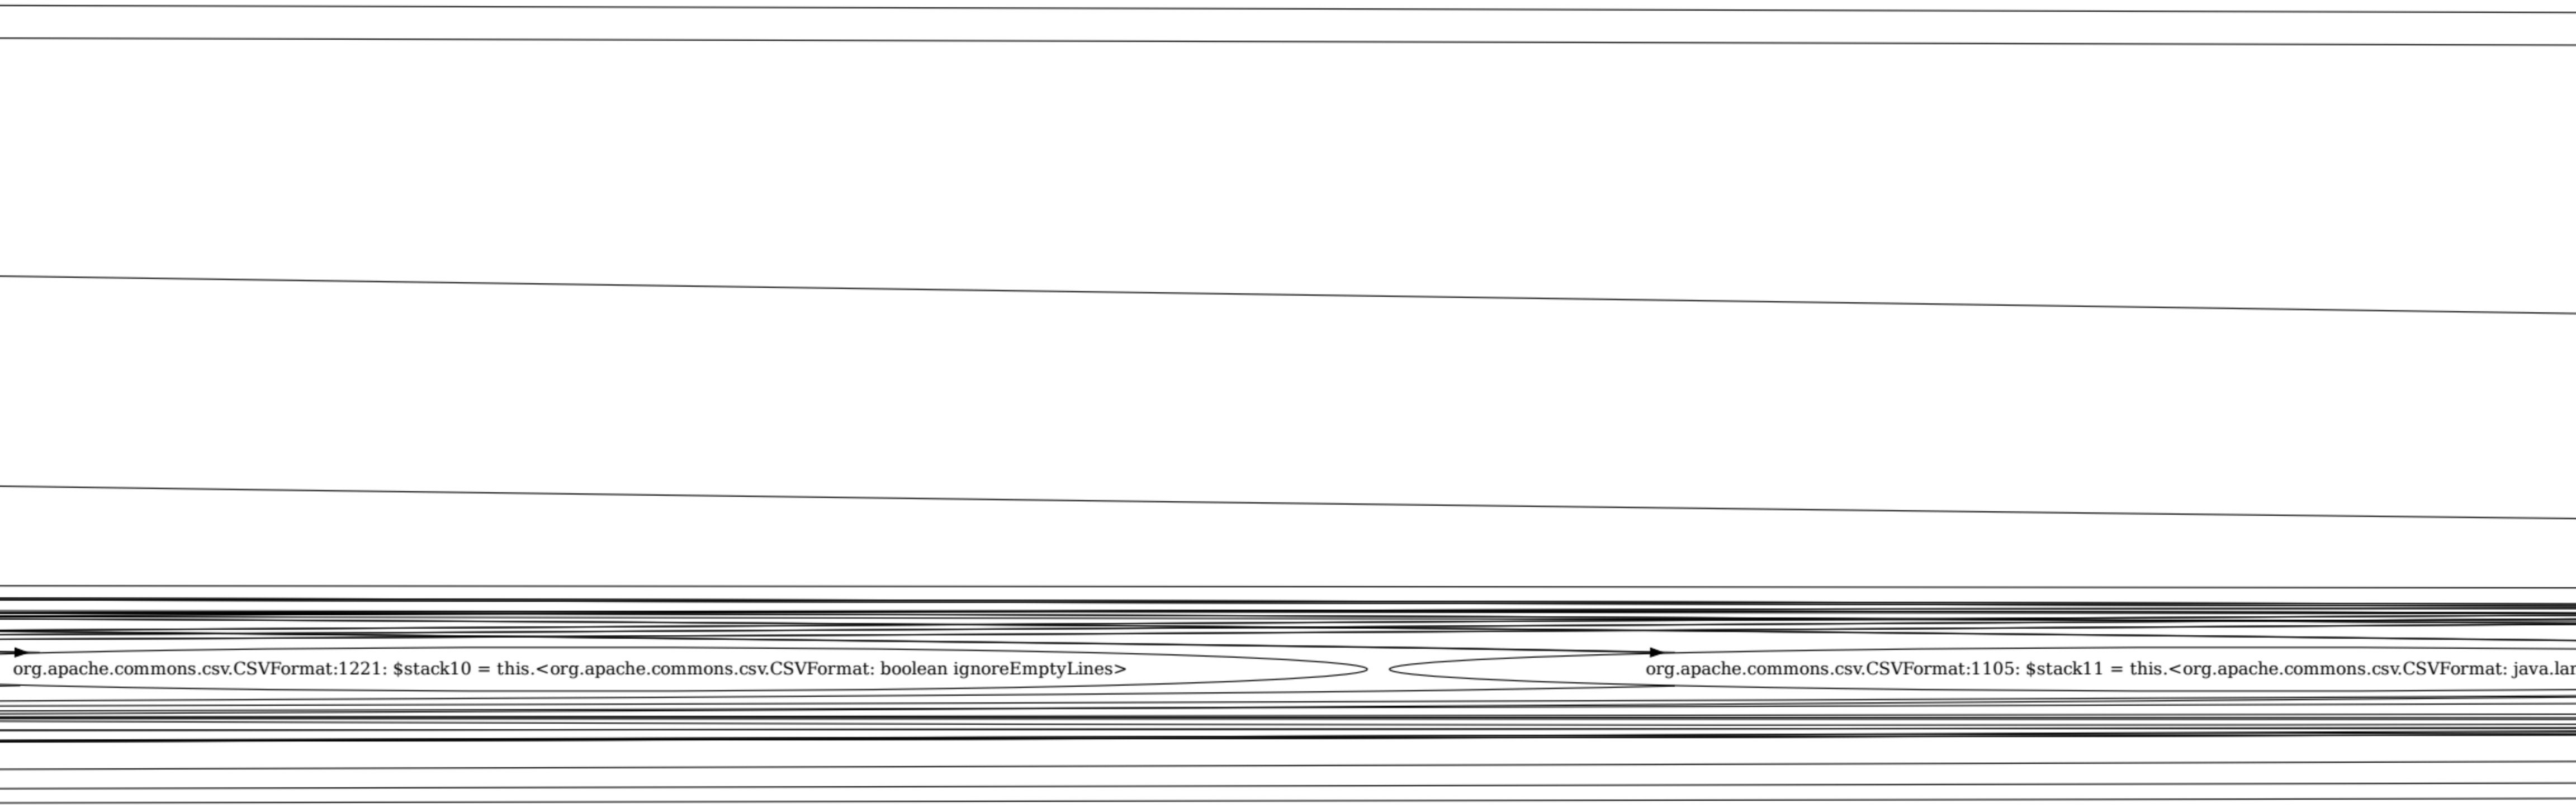
org.apache.commons.csv.CSVFormat:1221: $stack10 = this.<org.apache.commons.csv.CSVFormat: boolean ignoreEmptyLines>
org.apache.commons.csv.CSVFormat:1105: $stack11 = this.<org.apache.commons.csv.CSVFormat: java.lan

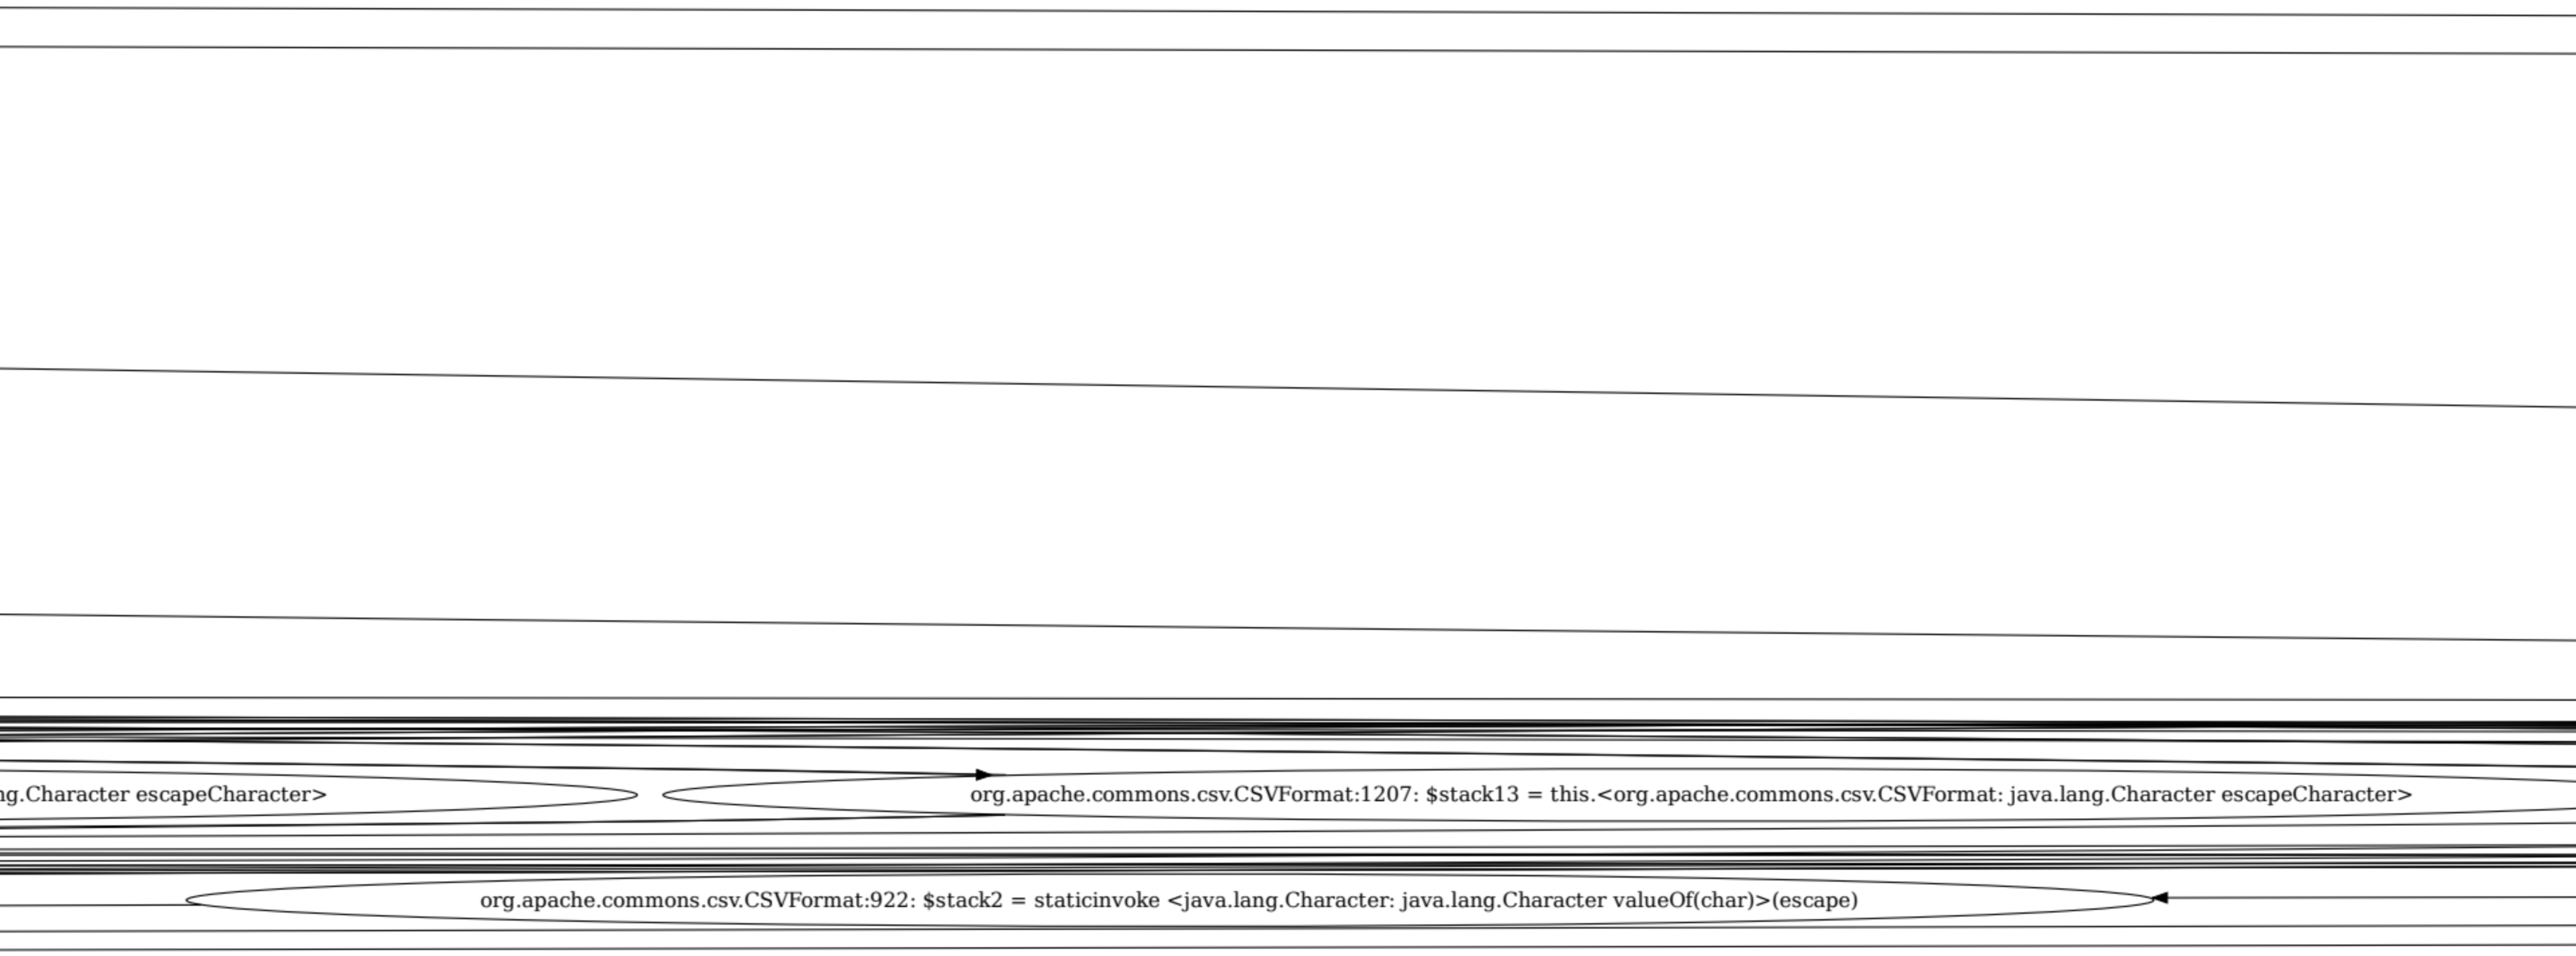
ng.Character escapeCharacter>
org.apache.commons.csv.CSVFormat:1207: $stack13 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character escapeCharacter>
org.apache.commons.csv.CSVFormat:922: $stack2 = staticinvoke <java.lang.Character: java.lang.Character valueOf(char)>(escape)

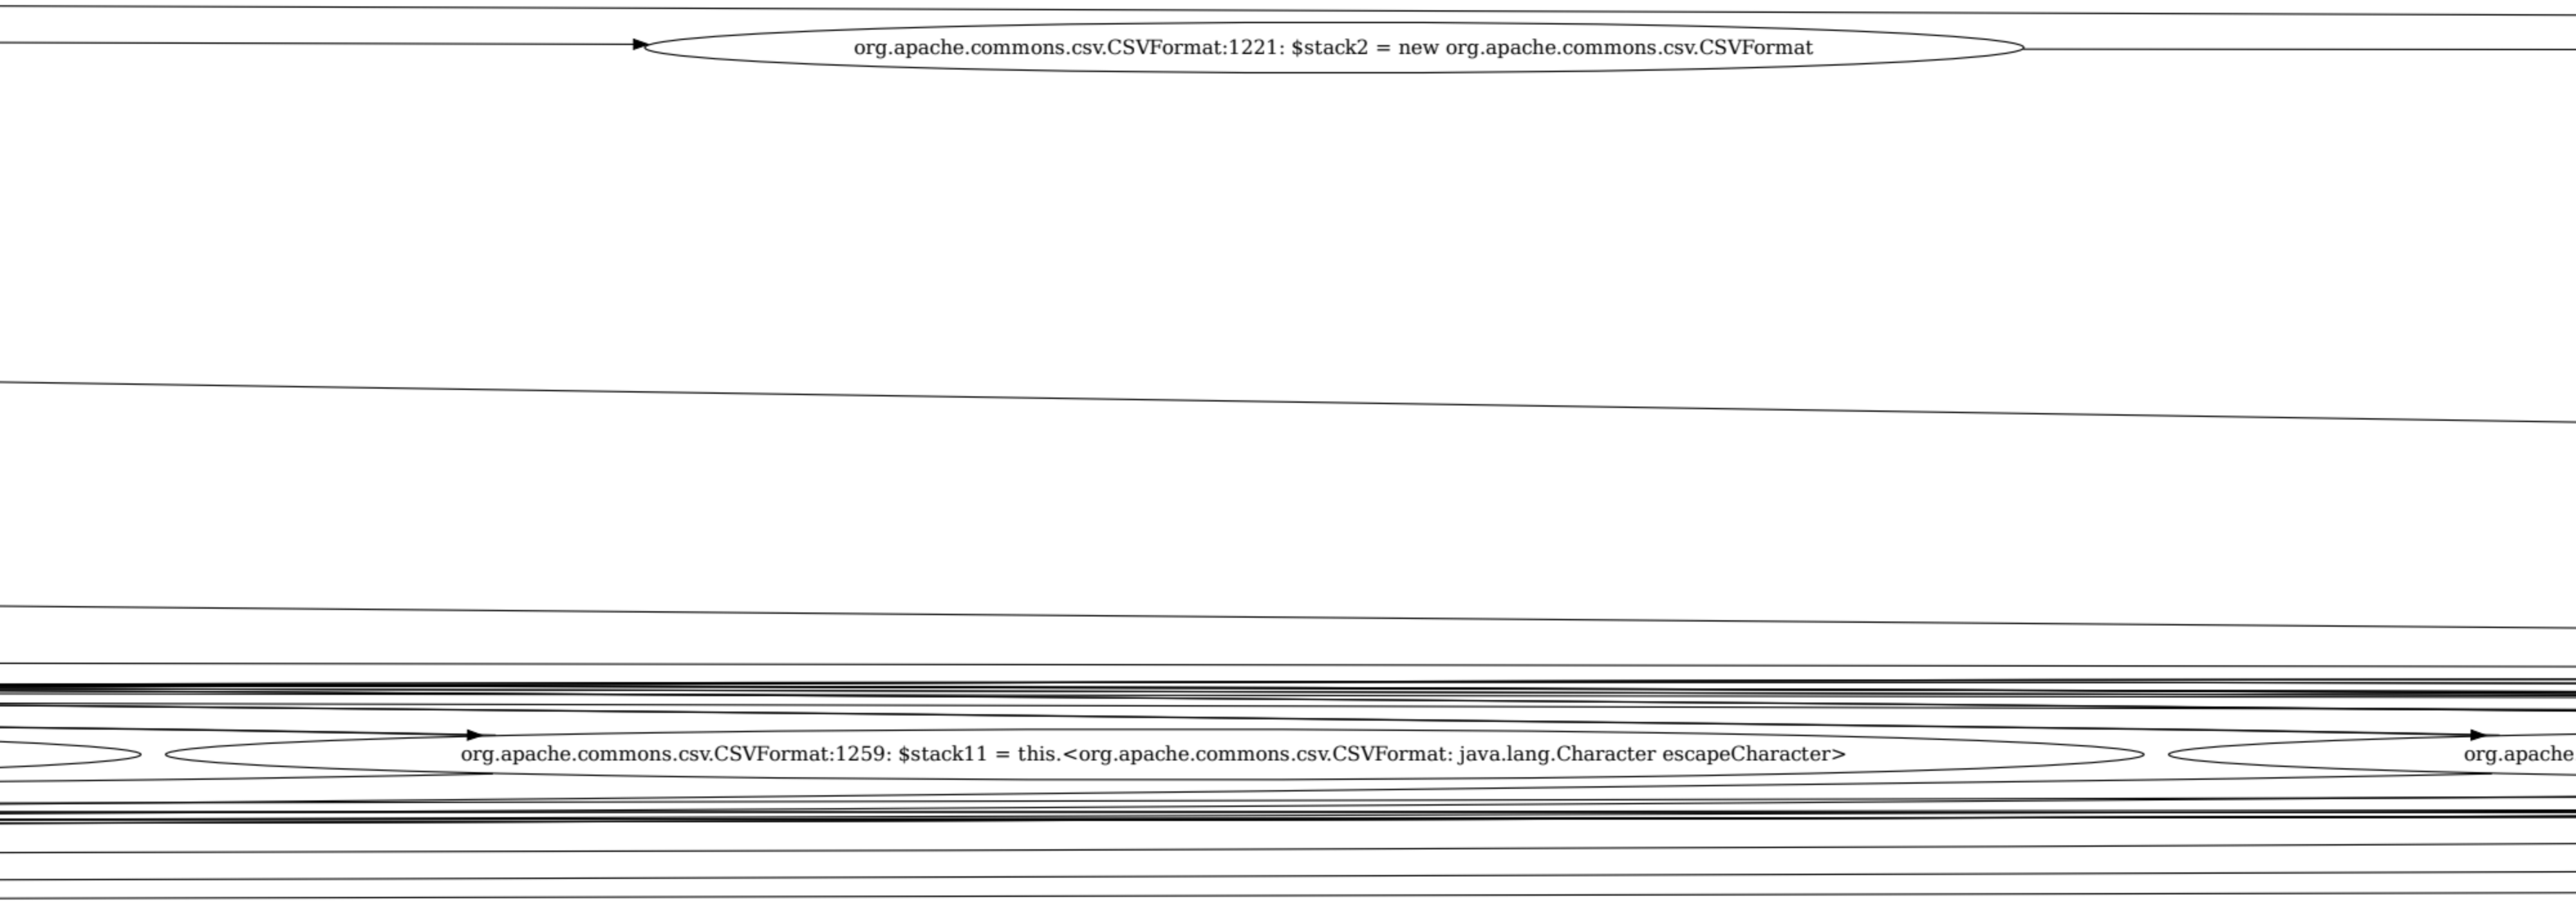
org.apache.commons.csv.CSVFormat:1221: $stack2 = new org.apache.commons.csv.CSVFormat
org.apache.commons.csv.CSVFormat:1259: $stack11 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character escapeCharacter>
org.apache

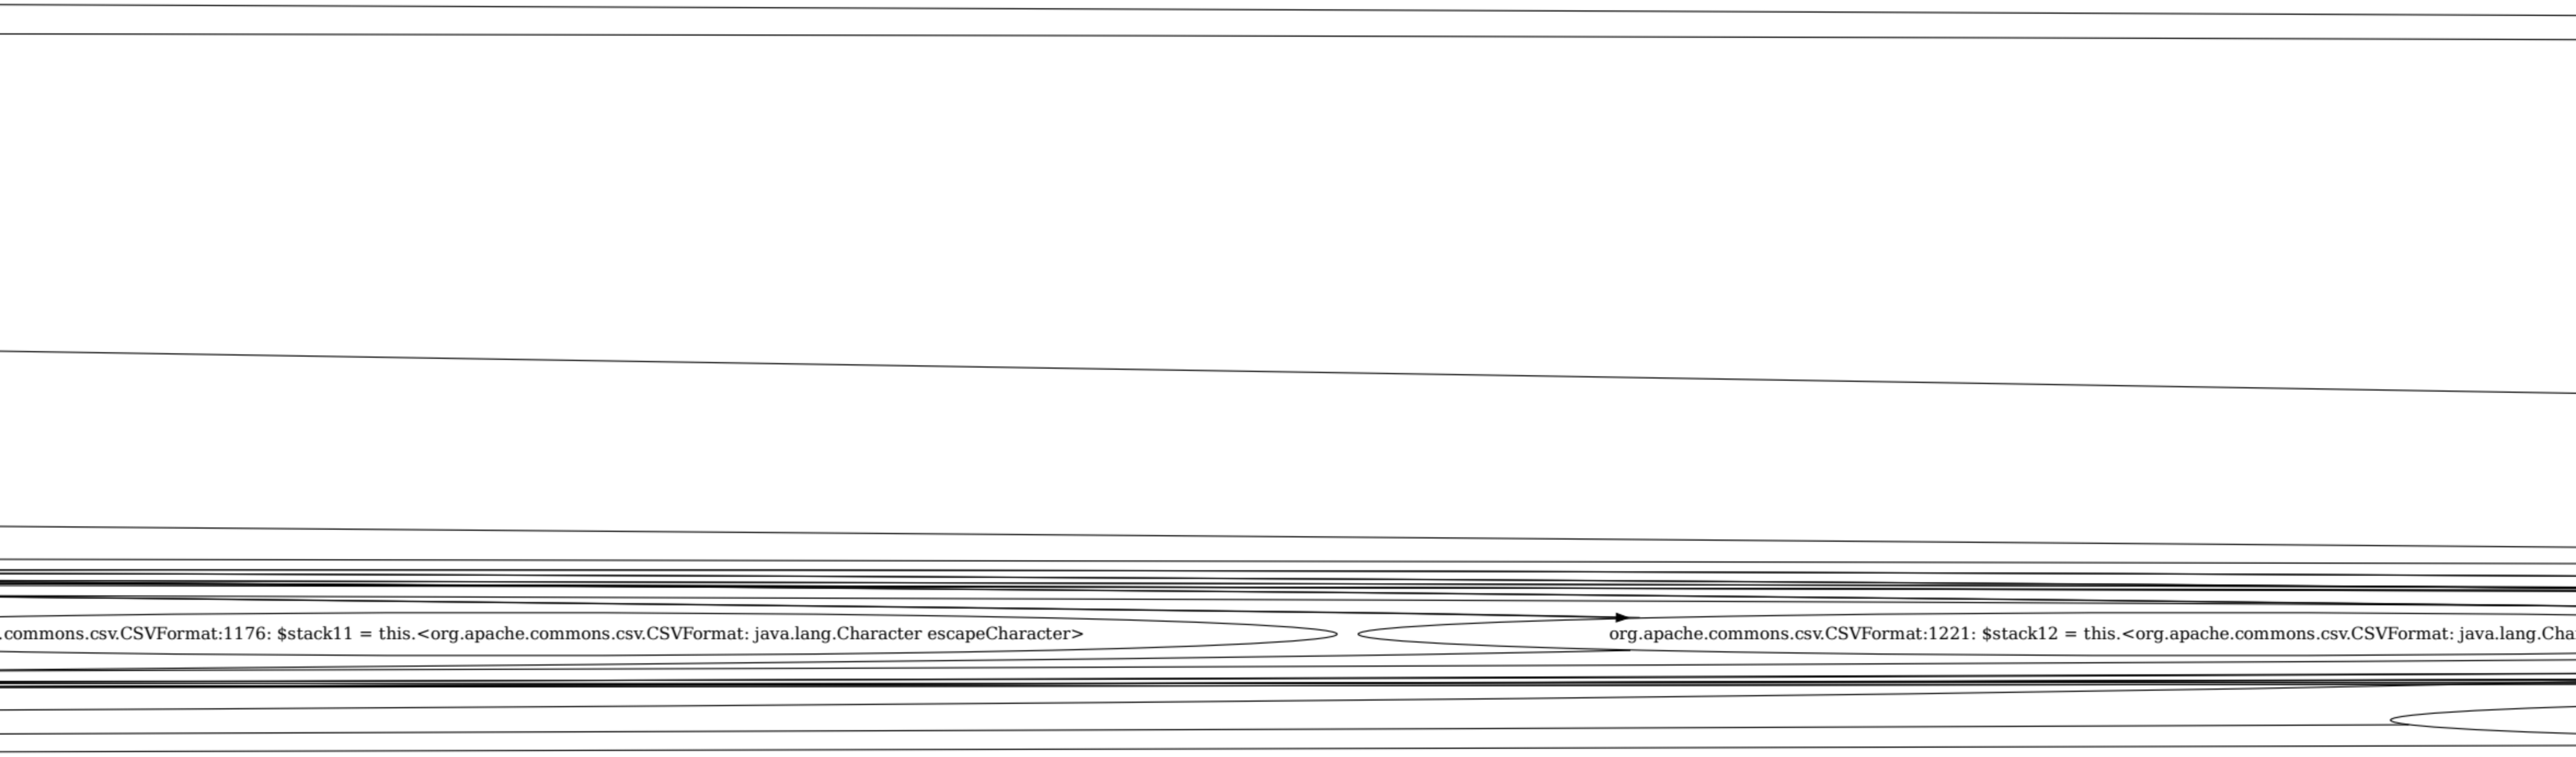
.commons.csv.CSVFormat:1176: $stack11 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character escapeCharacter>
org.apache.commons.csv.CSVFormat:1221: $stack12 = this.<org.apache.commons.csv.CSVFormat: java.lang.Cha

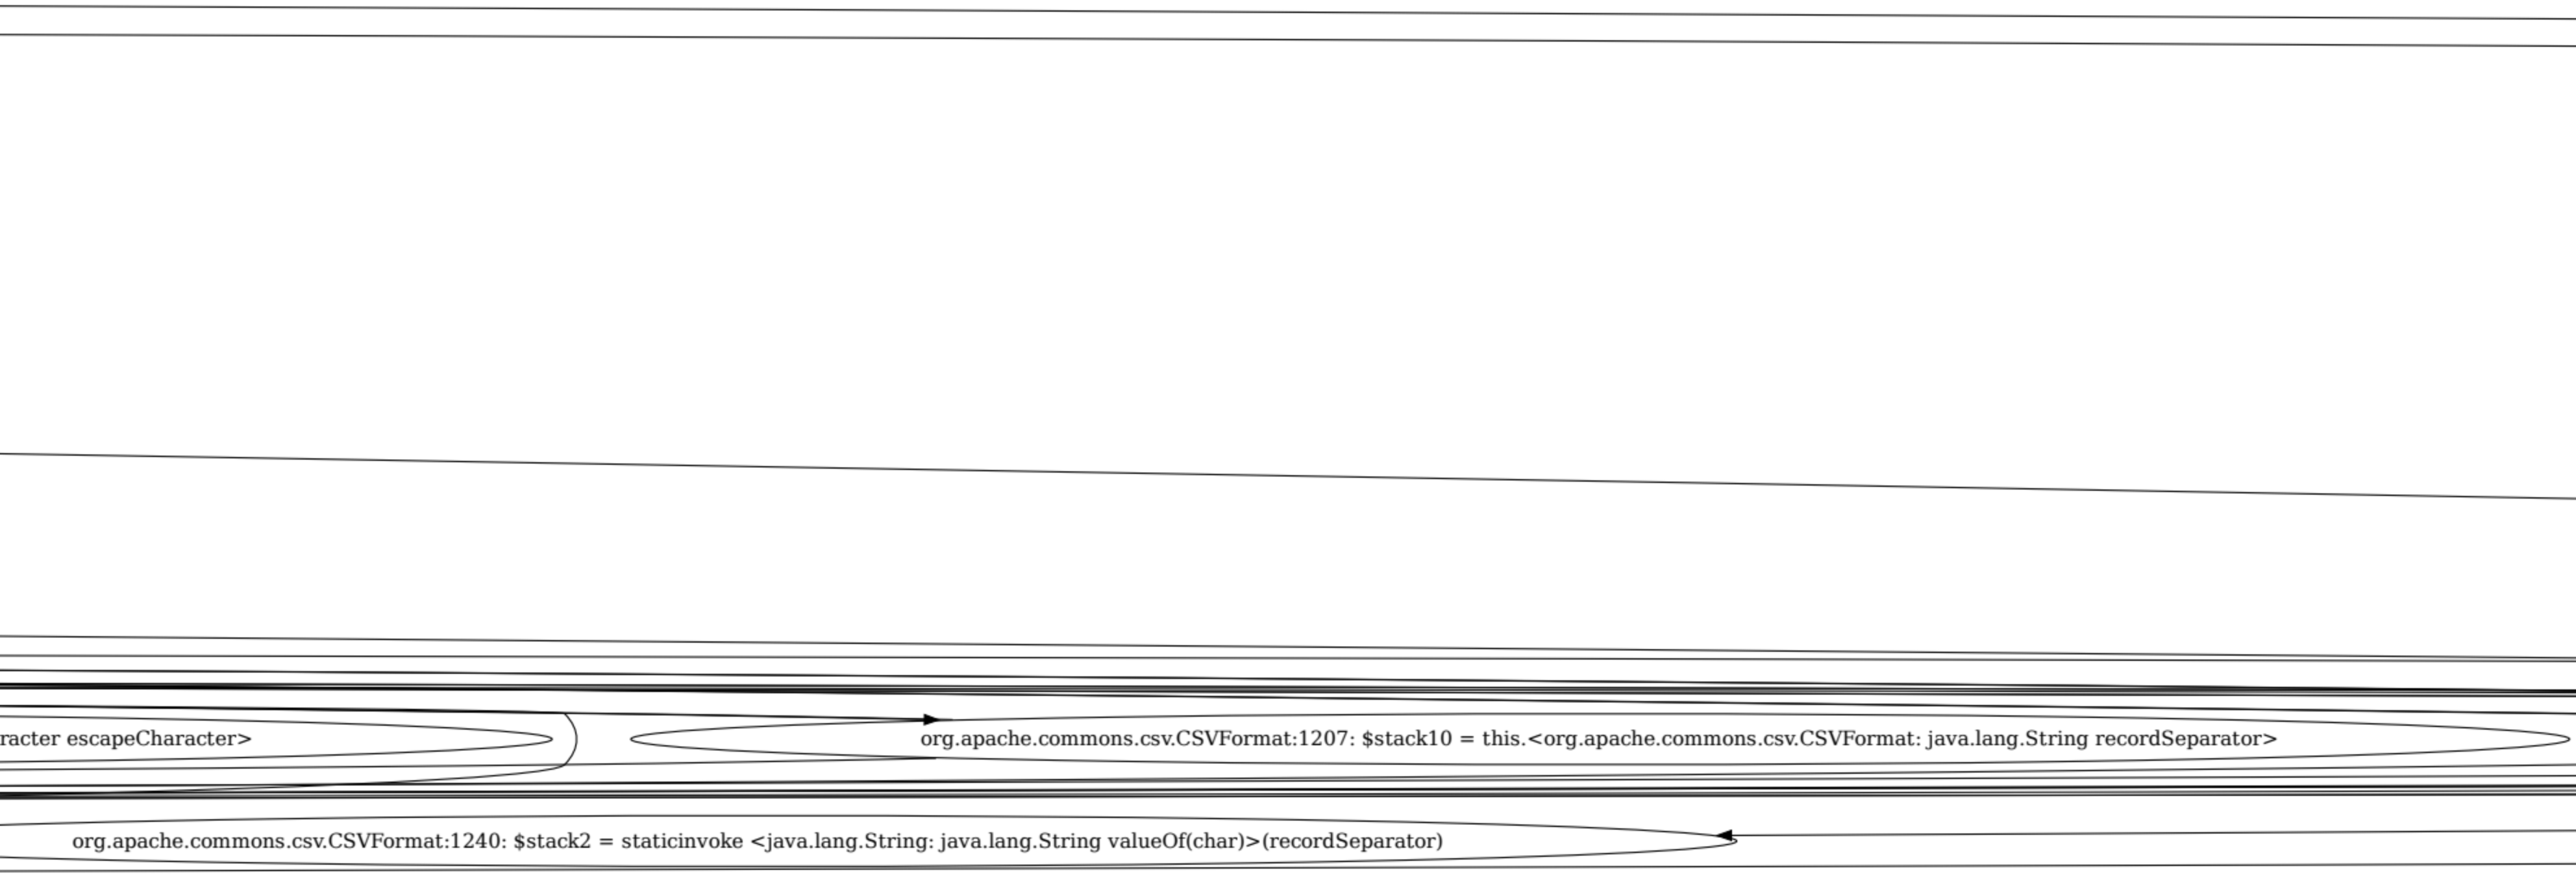
racter escapeCharacter>
org.apache.commons.csv.CSVFormat:1207: $stack10 = this.<org.apache.commons.csv.CSVFormat: java.lang.String recordSeparator>
org.apache.commons.csv.CSVFormat:1240: $stack2 = staticinvoke <java.lang.String: java.lang.String valueOf(char)>(recordSeparator)

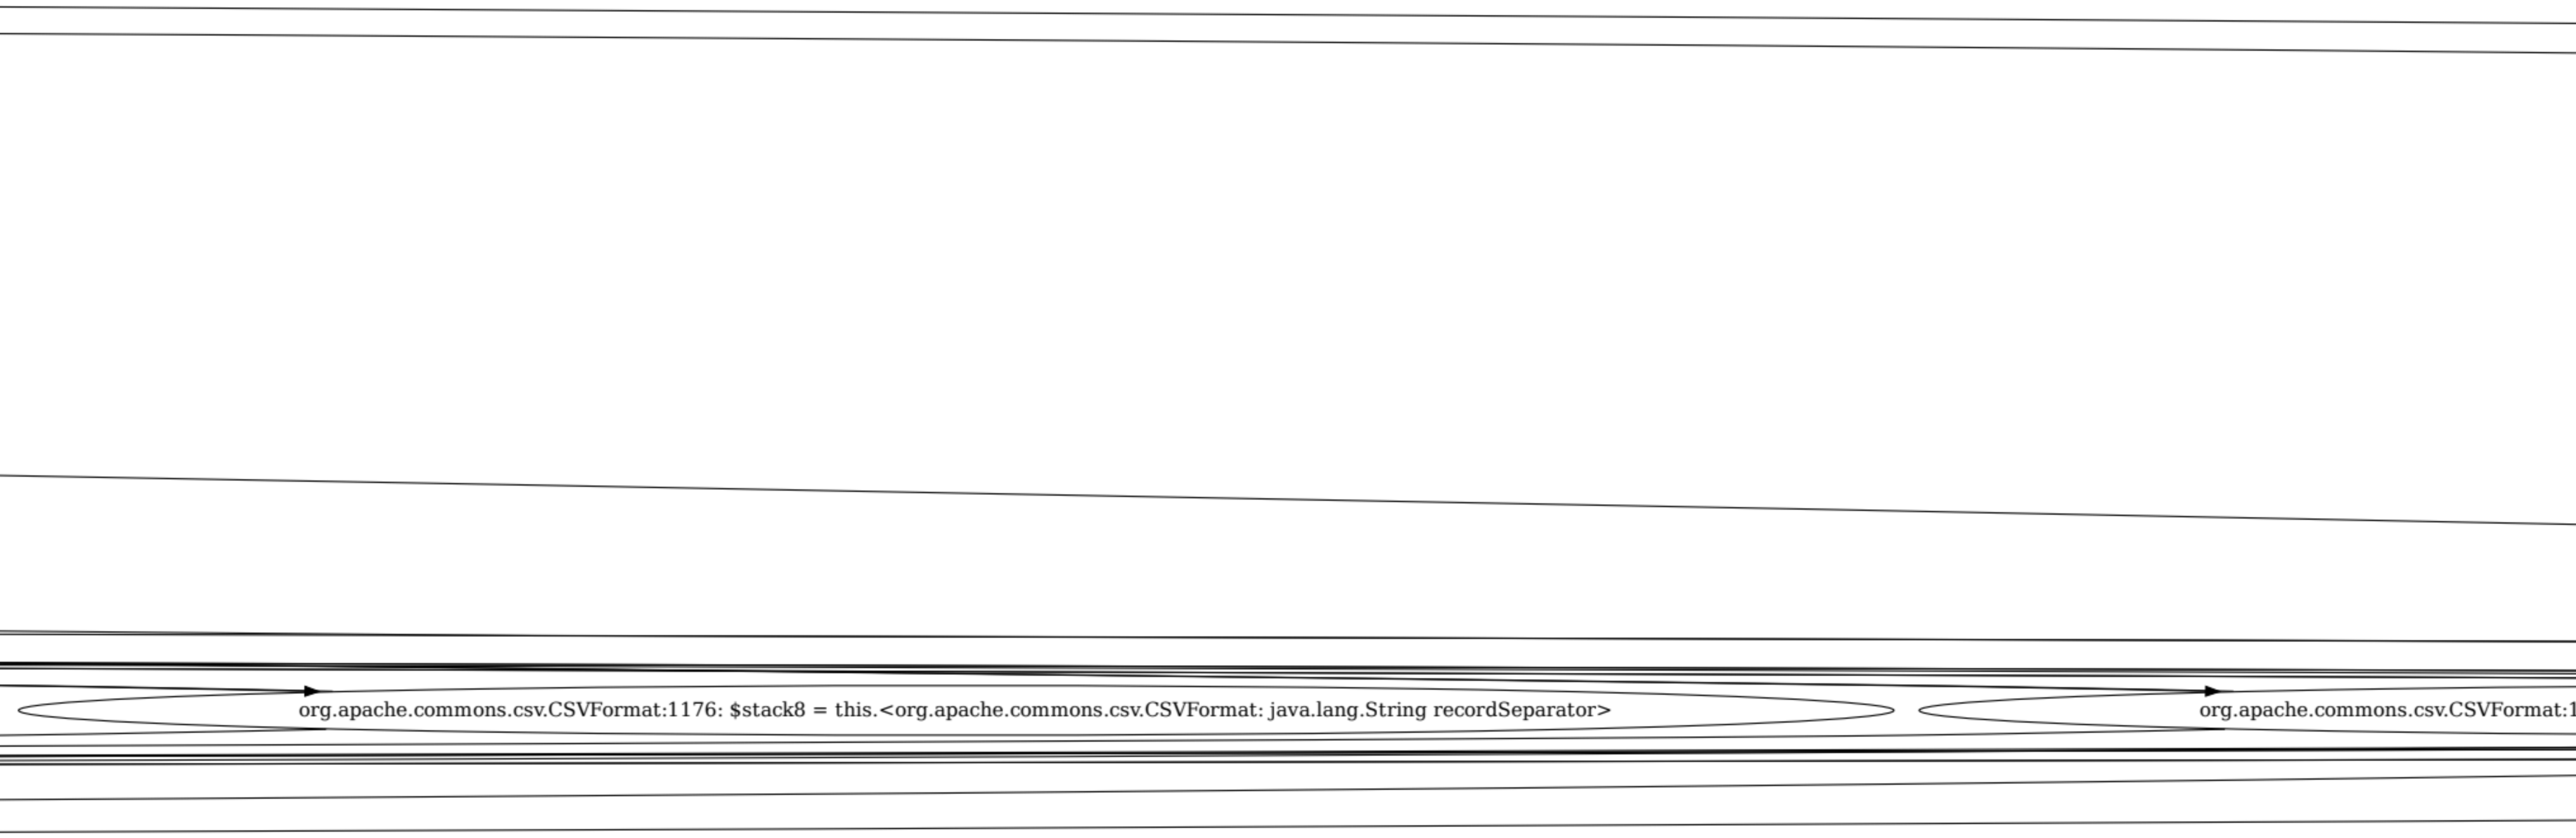
org.apache.commons.csv.CSVFormat:1176: $stack8 = this.<org.apache.commons.csv.CSVFormat: java.lang.String recordSeparator>
org.apache.commons.csv.CSVFormat:1

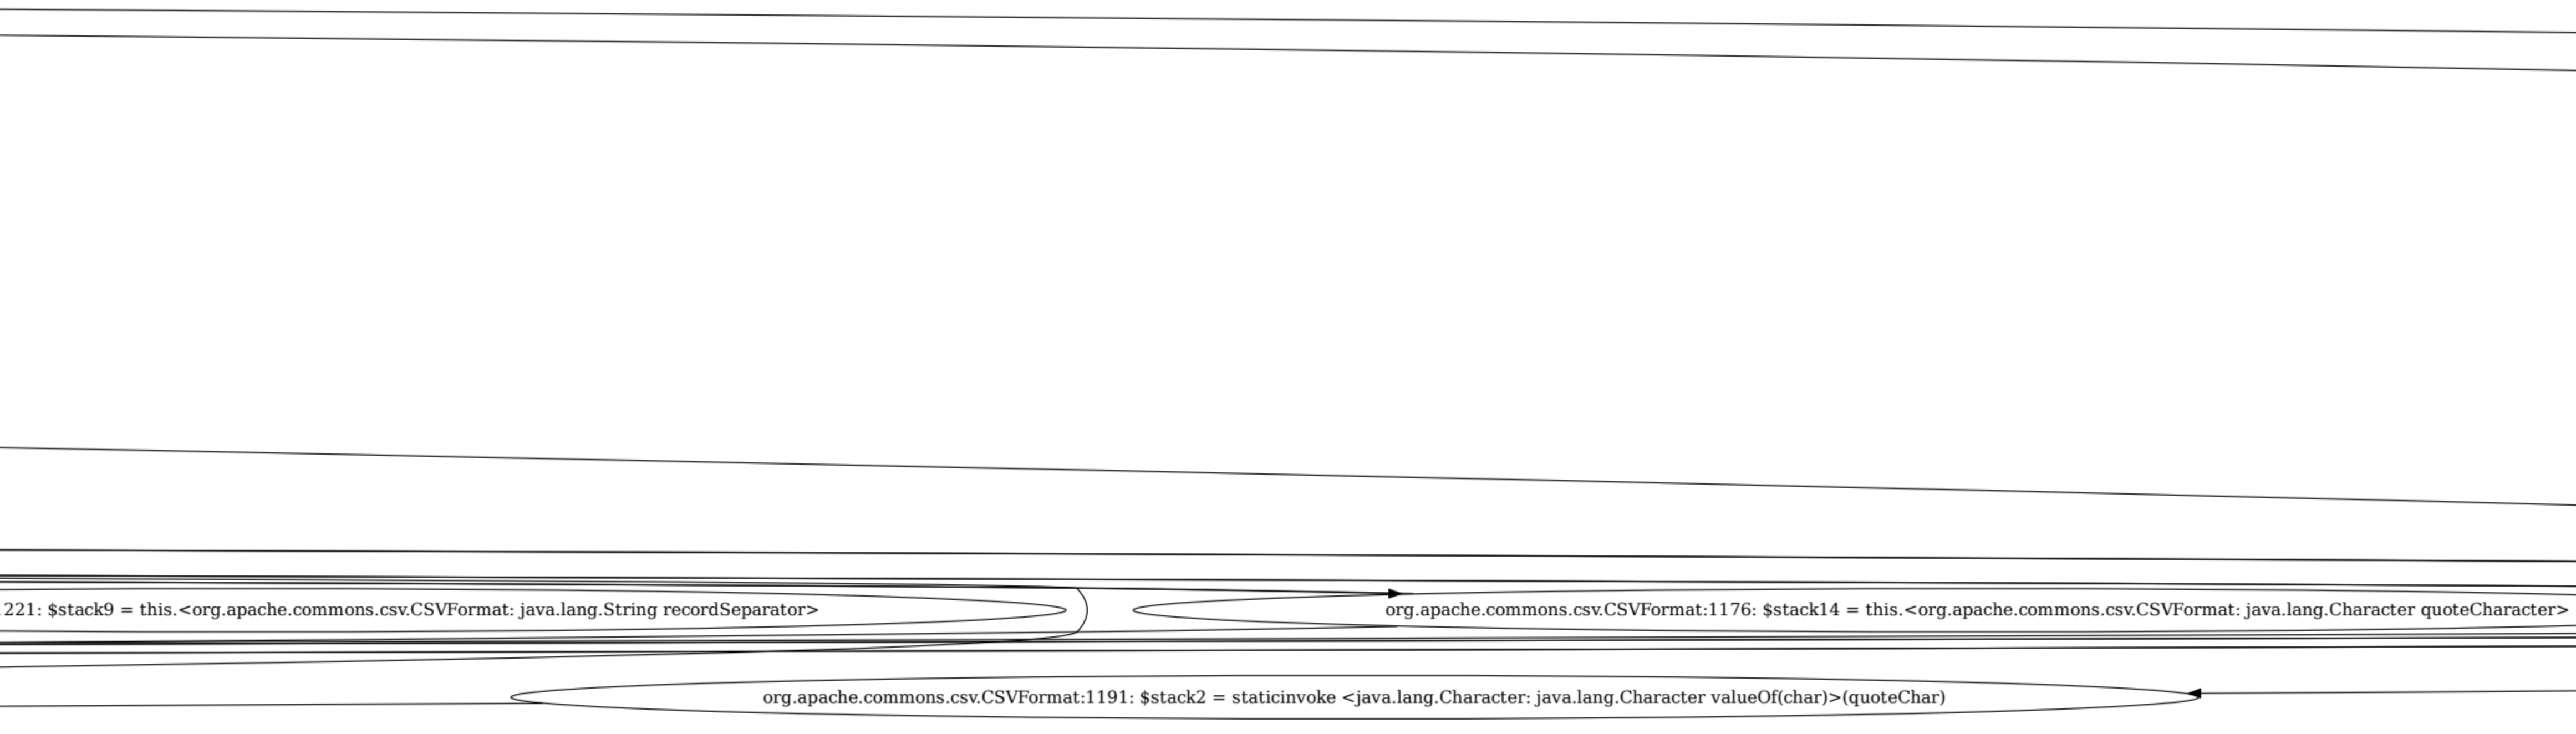
221: $stack9 = this.<org.apache.commons.csv.CSVFormat: java.lang.String recordSeparator>
org.apache.commons.csv.CSVFormat:1176: $stack14 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character quoteCharacter>
org.apache.commons.csv.CSVFormat:1191: $stack2 = staticinvoke <java.lang.Character: java.lang.Character valueOf(char)>(quoteChar)

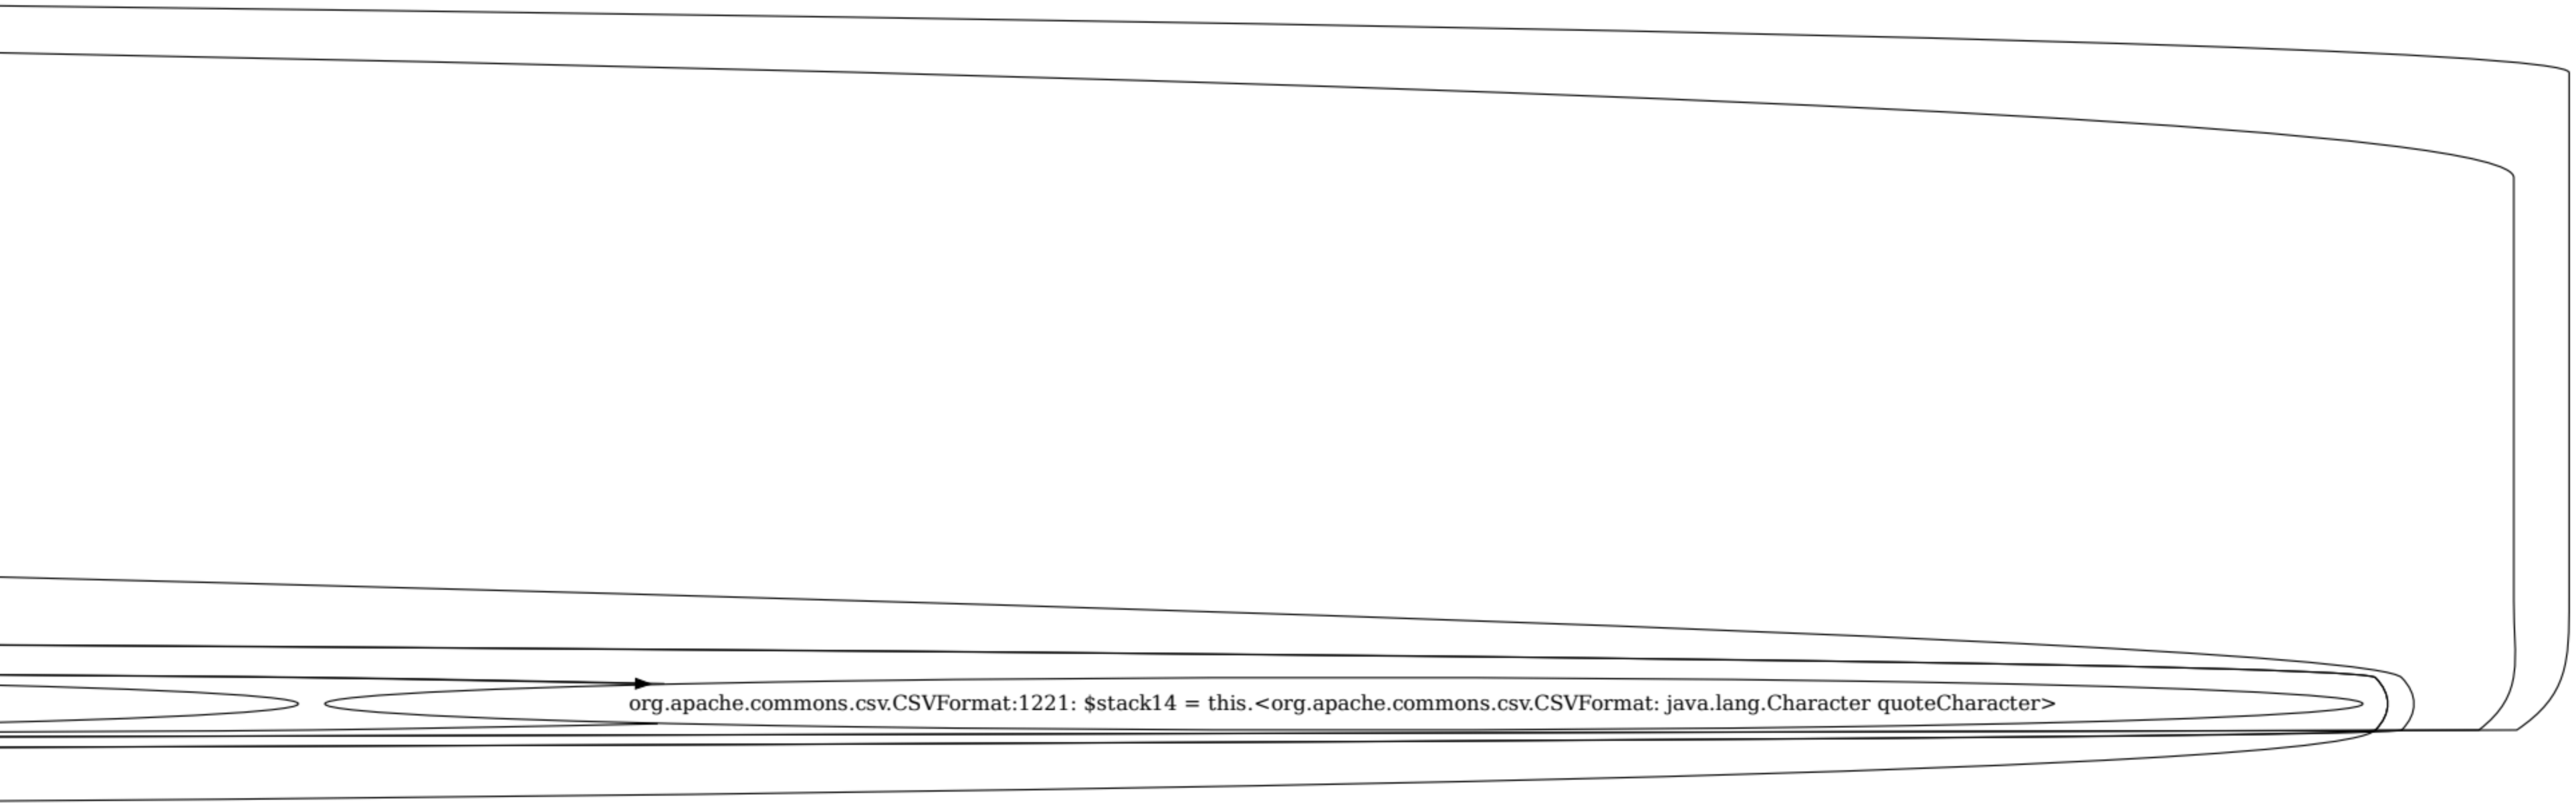
org.apache.commons.csv.CSVFormat:1221: $stack14 = this.<org.apache.commons.csv.CSVFormat: java.lang.Character quoteCharacter>