



Create Storage Account

- In the search bar, type **Storage accounts** or blob and select it.

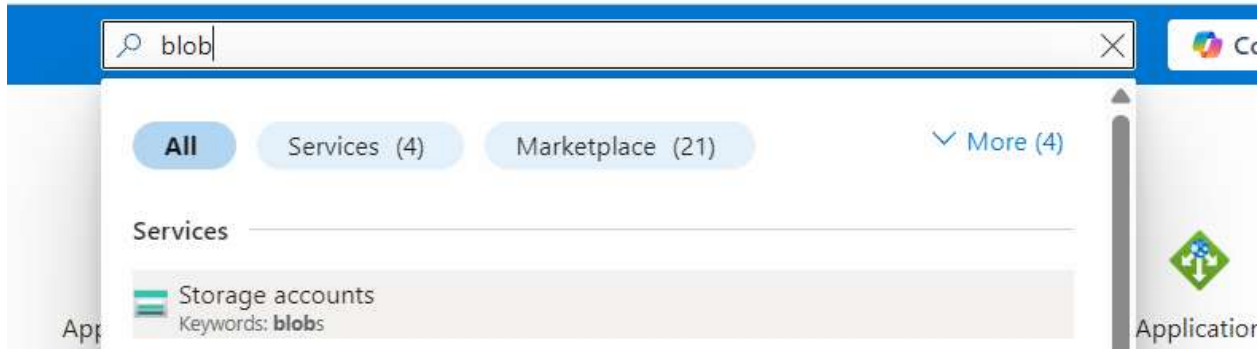

- Click + **Create**.

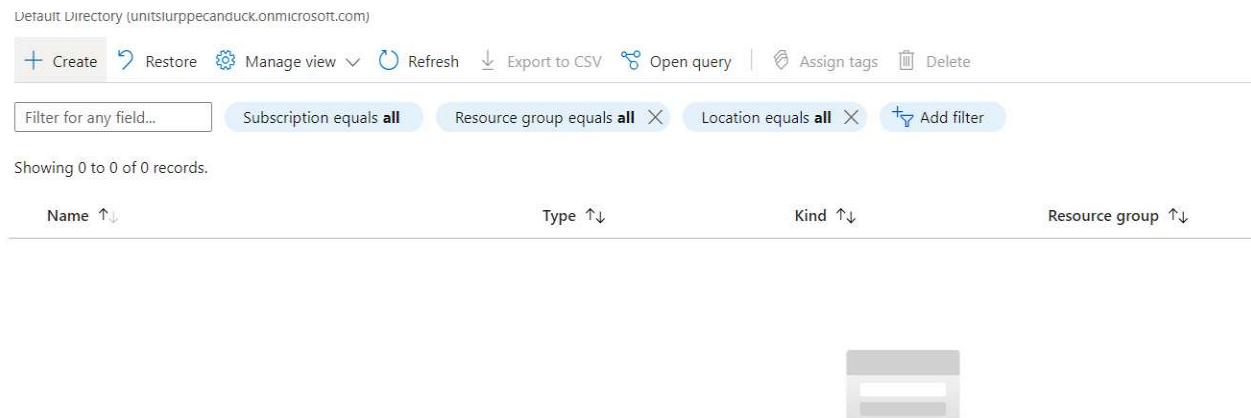

Choose Subscription and Resource Group

- Select your **Subscription**.
- Choose an existing **Resource Group** or click **Create new**.

Configure Storage Account

- Enter **Storage account name** (must be unique).
- Select **Region** (closest to your users for better performance).
- Choose **Performance** (Standard or Premium).
- Select **Redundancy** (LRS, GRS, etc.).

[Home](#) >

Create a storage account

Select the subscription in which to create the new storage account. Choose a new or existing resource group to organize and manage your storage account together with other resources.

Subscription *	Azure subscription 1
Resource group *	prod Create new
Instance details	
Storage account name * ⓘ	veeradon
Region * ⓘ	(US) Central US Deploy to an Azure Extended Zone
Primary service ⓘ	Azure Blob Storage or Azure Data Lake Storage Gen 2
Performance * ⓘ	☒ Standard: Recommended for most scenarios (general-purpose v2 account) ☐ Premium: Recommended for scenarios that require low latency.
Redundancy * ⓘ	☒ Make read access to data available in the event of regional unavailability.

[Previous](#)

[Next](#)

[Review + create](#)

Review and Create

- Click **Review + Create**.
- Click **Create** and wait for deployment to complete.

[Home](#) >

Create a storage account

[Basics](#) [Advanced](#) [Networking](#) [Data protection](#) [Encryption](#) [Tags](#) [Review + create](#)

[View automation template](#)

Basics

Subscription	Azure subscription 1
Resource group	prod
Location	Central US
Storage account name	veeradon
Primary service	Azure Blob Storage or Azure Data Lake Storage Gen 2
Performance	Standard
Replication	Read-access geo-redundant storage (RA-GRS)

Advanced

Enable hierarchical namespace	Disabled
Enable SFTP	Disabled
Enable network file system v3	Disabled
Allow cross-tenant replication	Disabled

[Previous](#)

[Next](#)

[Create](#)


- Storage account is created

Multicloud with devops by veera nareshit

Showing 1 to 1 of 1 records.

Name ↑↓	Type ↑↓	Kind ↑↓	Resource group ↑↓	Location ↑↓
 veeradon	Storage account	StorageV2	prod	Central US

- Open the storage account and go to settings and select configuration enable the blob anonymous access

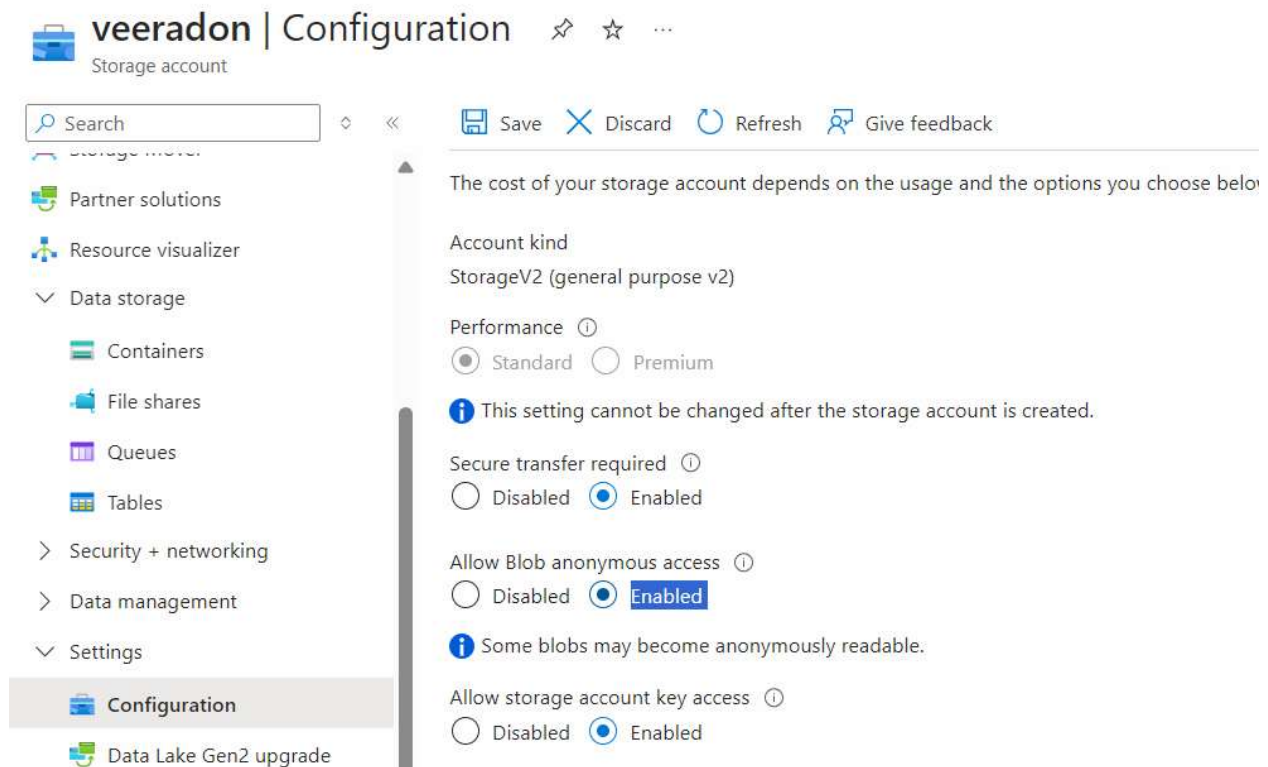

veeradon | Configuration

Storage account

Search

Save Discard Refresh Give feedback

The cost of your storage account depends on the usage and the options you choose below.

Account kind
StorageV2 (general purpose v2)

Performance ⓘ
☒ Standard ☐ Premium

ⓘ This setting cannot be changed after the storage account is created.

Secure transfer required ⓘ
☐ Disabled ☒ Enabled

Allow Blob anonymous access ⓘ
☐ Disabled ☒ **Enabled**

ⓘ Some blobs may become anonymously readable.

Allow storage account key access ⓘ
☐ Disabled ☒ Enabled

Go to Your Storage Account

- In the Azure portal, navigate to your newly created **Storage Account**.


Access Containers

- In the left menu, under **Data storage**, select **Containers**.


Create a New Container

- Click **+ Container**.
- Enter a **Name** for the container.
- Choose **Public access level** (Private, Blob, or Container).
- Click **Create**.

Multicloud with devops by veera nareshit

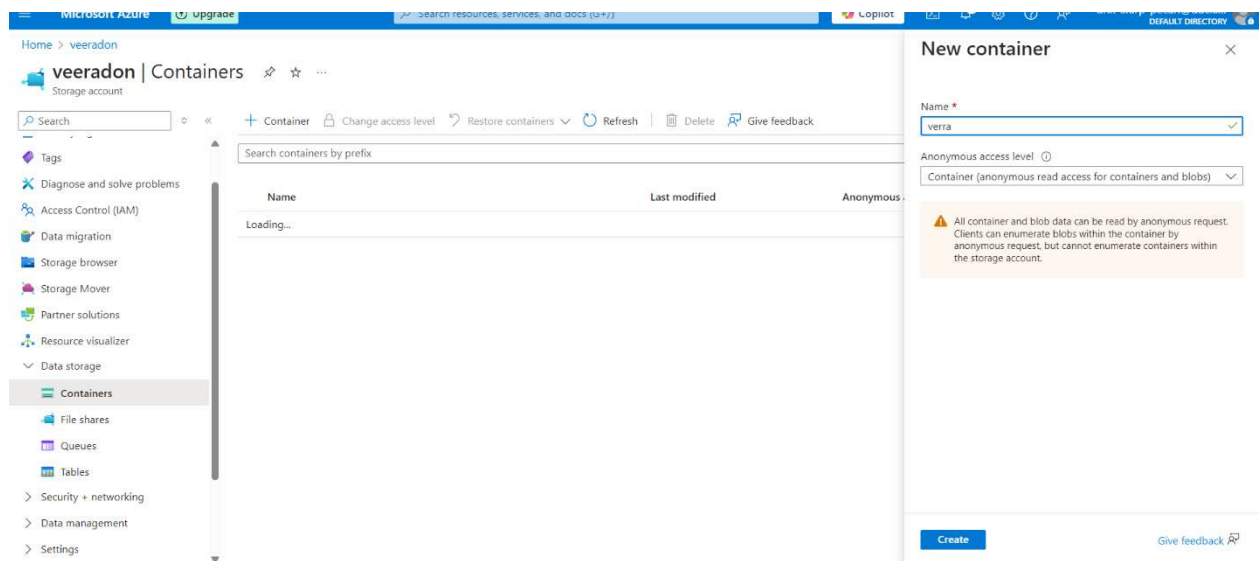


■ Container created

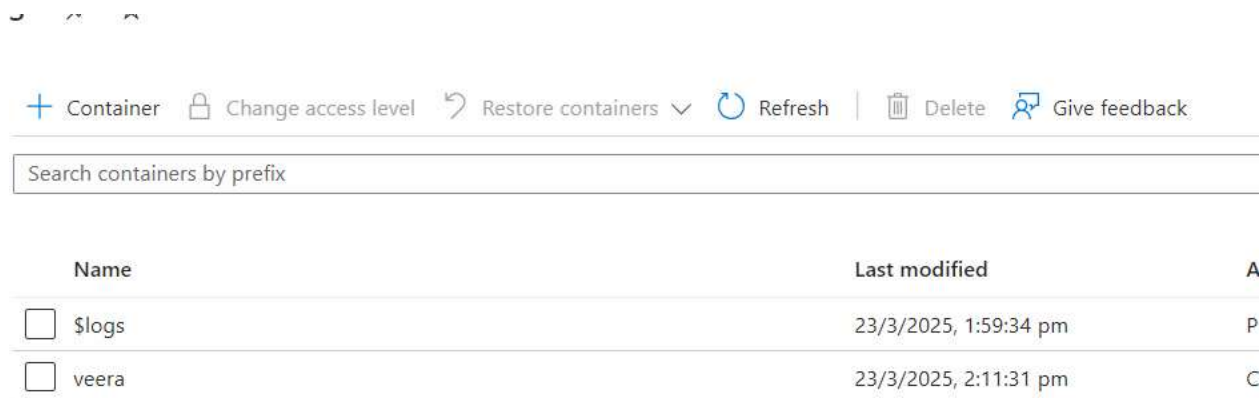


Upload or Access Data

- **Upload Files:** Click **Upload** inside the container.
- **Access via URL:** Use the **Blob URL** for accessing the data.


Multicloud with devops by veera nareshit

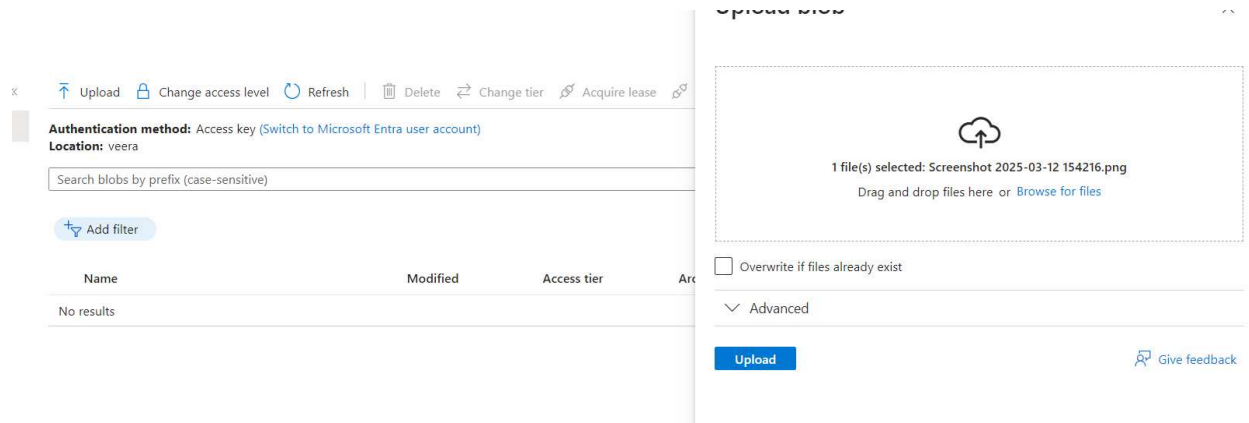

- **Access via URL:** Use the **Blob URL** for accessing the data.

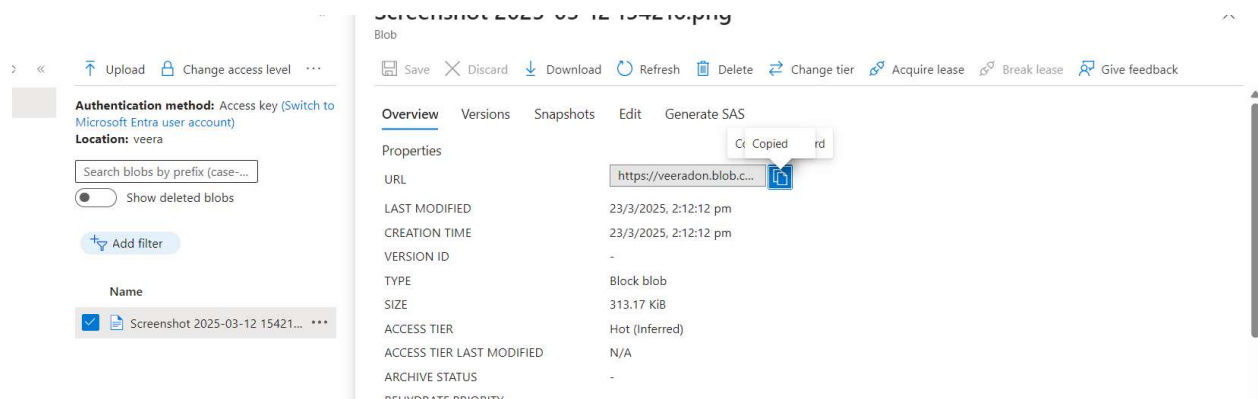

- You will get the output of your object in browser

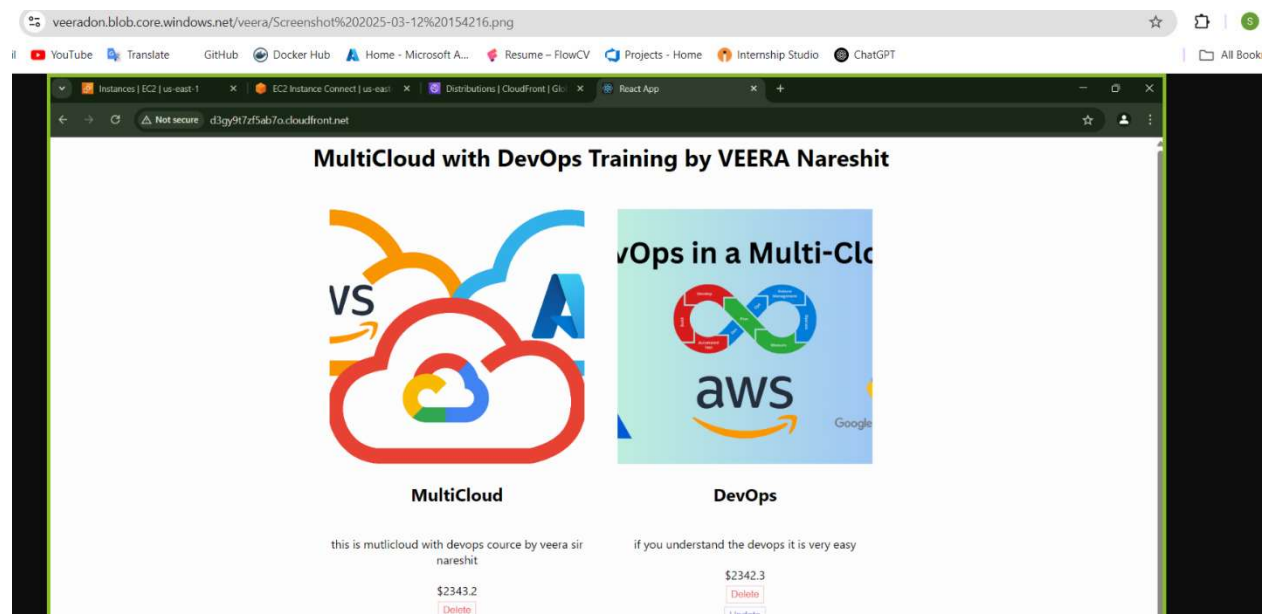

Multicloud with devops by veera nareshit