

SIT725 - TASK 2.2P


Express Web Servers

s224817232

Repo - github.com/sahancz/SIT725_s224817232

Running application

The browser interface is served by express from the public folder. For this run, the client sent a GET request with 10 and 20. The server returned the result 30.

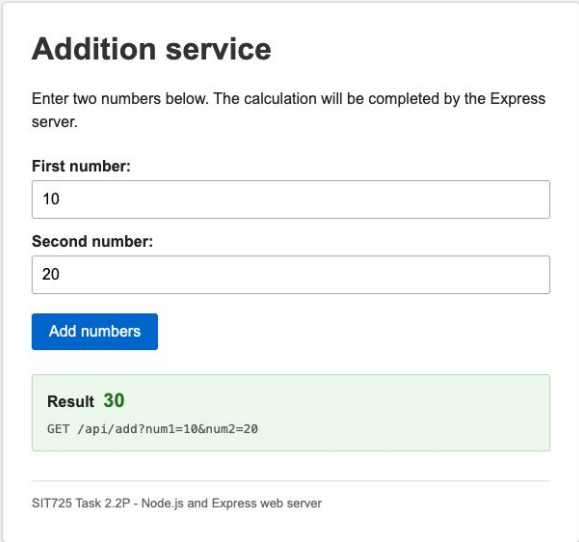

How to run

```
npm install
npm start
http://localhost:3000
ex: http://localhost:3000/api/add?num1=5&num2=7
```

Implementation evidence

The endpoint reads query parameters, validates that both are finite numbers and returns a JSON response. A 400 response is returned when input is missing or invalid.

```
app.get("/api/add", (req, res) => {
  const numbers = parseNumbers(req.query.num1, req.query.num2);

  if (!numbers) {
    return res.status(400).json({
      error: "Please provide two valid numbers using num1 and num2.",
      example: "/api/add?num1=5&num2=7"
    });
  }

  const { num1, num2 } = numbers;
  return res.json({
    num1, num2, operation: "addition", result: num1 + num2
  });
});
```

Project structure

Uploaded under 2.2P folder, I have followed the folder structure from task 1.

```
public/
  index.html
  script.js
  styles.css
test/
  server.test.js
.gitignore
package.json
README.md
server.js
```