

Lab Experiment 7: CI/CD using Jenkins, GitHub and Docker Hub

1. Aim

To design and implement a complete CI/CD pipeline using Jenkins, integrating source code from GitHub, and building & pushing Docker images to Docker Hub.

2. Objectives

- Understand CI/CD workflow using Jenkins (GUI-based tool)
- Create a structured GitHub repository with application + Jenkinsfile
- Build Docker images from source code
- Securely store Docker Hub credentials in Jenkins
- Automate build & push process using webhook triggers
- Use same host (Docker) as Jenkins agent

3. Theory

What is Jenkins? Jenkins is a web-based GUI automation server used to:

- Build applications
- Test code
- Deploy software

It provides:

- Dashboard (browser-based UI)
- Plugin ecosystem (GitHub, Docker, etc.)
- Pipeline as Code using Jenkinsfile

What is CI/CD?

- Continuous Integration (CI): Code is automatically built and tested after each commit
- Continuous Deployment (CD): Built artifacts (Docker images) are automatically delivered/deployed

Workflow Overview Developer -> GitHub -> Webhook -> Jenkins Build -> Docker Hub

4. Prerequisites

- Docker & Docker Compose installed
- GitHub account
- Docker Hub account
- Basic Linux command knowledge

5. Part A: GitHub Repository Setup (Source Code + Build Definition)

5.1 Create Repository

Create a repository on GitHub: my-app

5.2 Application Code

```
GNU nano 7.2 app.py *
from flask import Flask
app = Flask(__name__)

@app.route("/")
def home():
    return "Hello from CI/CD Pipeline!"
    #return "Hello from CI/CD Pipeline!, my sapid is 500121159"

app.run(host="0.0.0.0", port=80)

GNU nano 7.2 requirements.txt
flask
```

5.3 Dockerfile (Build Process)

```
GNU nano 7.2 Dockerfile
FROM python:3.10-slim

WORKDIR /app
COPY . .

RUN pip install -r requirements.txt

EXPOSE 80
CMD ["python", "app.py"]
```

Build Process Explanation

1. Source code pushed to GitHub
2. Jenkins pulls code
3. Dockerfile:
 - Creates environment
 - Installs dependencies
 - Packages app
4. Output Docker Image

5.4 Jenkinsfile (Pipeline Definition in GitHub)

```
GNU nano 7.2 Jenkinsfile
pipeline {
  agent any

  environment {
    IMAGE_NAME = "your-dockerhub-username/myapp"
  }

  stages {
    stage('Clone Source') {
      steps {
        git 'https://github.com/your-username/my-app.git'
      }
    }

    stage('Build Docker Image') {
      steps {
        sh 'docker build -t $IMAGE_NAME:latest .'
      }
    }

    stage('Login to Docker Hub') {
      steps {
        withCredentials([string(credentialsId: 'dockerhub-token', variable: 'DOCKER_TOKEN')]) {
          sh 'echo $DOCKER_TOKEN | docker login -u your-dockerhub-username --password-stdin'
        }
      }
    }
  }
}
```

6. Part B: Jenkins Setup using Docker (Persistent Configuration)

6.1 Create Docker Compose File

```
GNU nano 7.2 docker-compose.yml
version: '3.8'

services:
  jenkins:
    image: jenkins/jenkins:lts
    container_name: jenkins
    restart: always
    ports:
      - "8080:8080"
      - "50000:50000"
    volumes:
      - jenkins_home:/var/jenkins_home
      - /var/run/docker.sock:/var/run/docker.sock
    user: root

volumes:
  jenkins_home:
```


6.2 Start Jenkins

```
anirudh_chawla@localhost: ~/my-app $ docker compose up -d
WARN[0000] /home/anirudh_chawla/my-app/docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion
[+] up 1/1
✔ Container jenkins Started 0.3s
```

Access: <http://localhost:8080>

6.3 Unlock Jenkins

`docker exec -it jenkins cat /var/jenkins_home/secrets/initialAdminPassword`

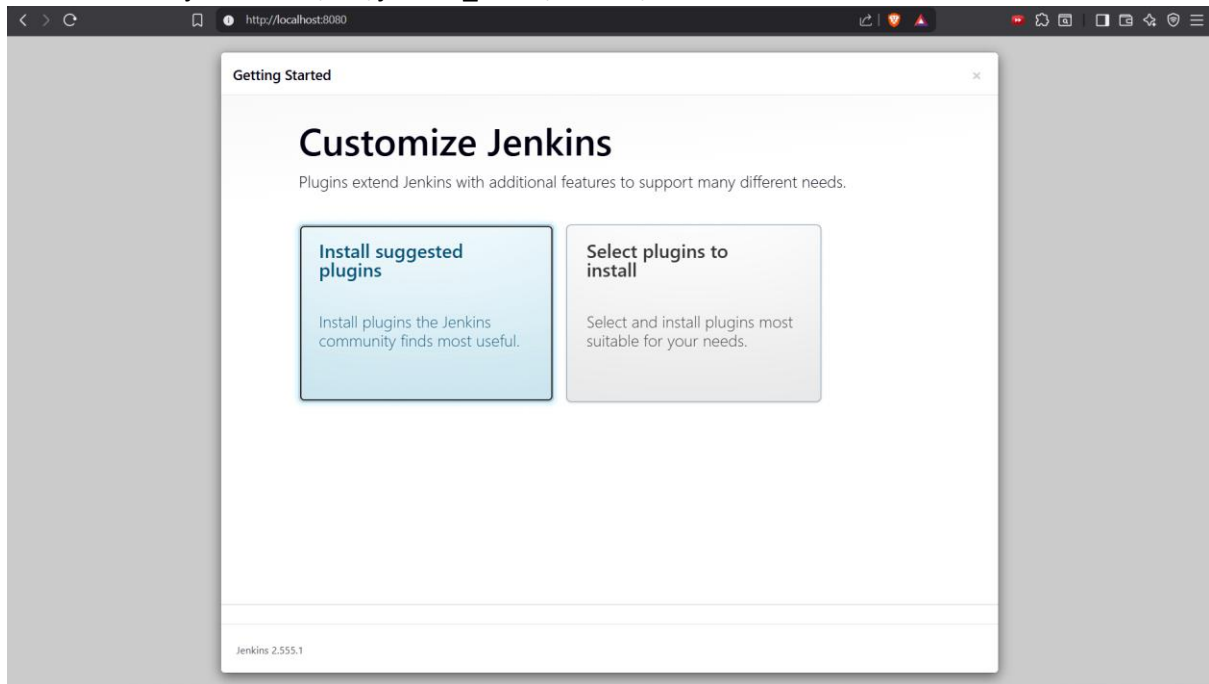

6.4 Initial Setup


- Install suggested plugins
- Create admin user


7. Part C: Jenkins Configuration

7.1 Add Docker Hub Credentials

Path: Manage Jenkins -> Credentials -> Add Credentials


- Type: Secret Text
- ID: dockerhub-token
- Value: Docker Hub Access Token
-

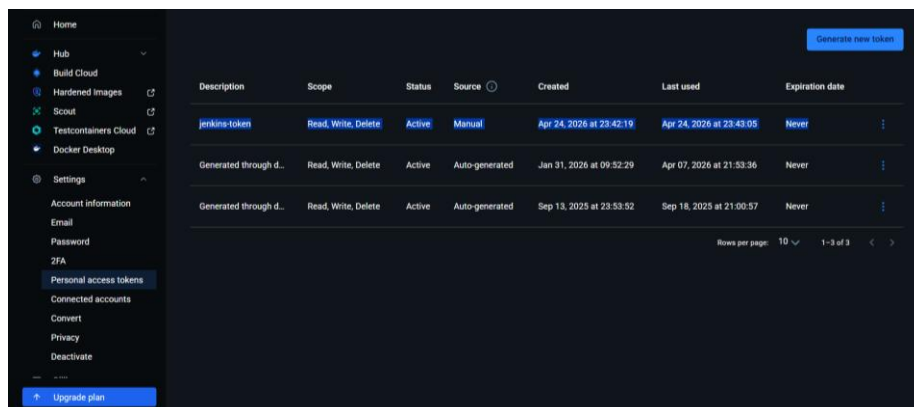

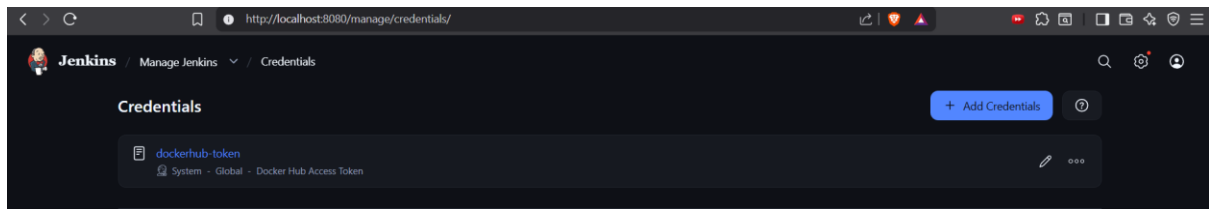

7.2 Create Pipeline Job

1. New Item -> Pipeline
2. Name: ci-cd-pipeline
3. Configure:
 - Pipeline script from SCM
 - SCM: Git
 - Repo URL: your GitHub repo
 - Script Path: Jenkinsfile

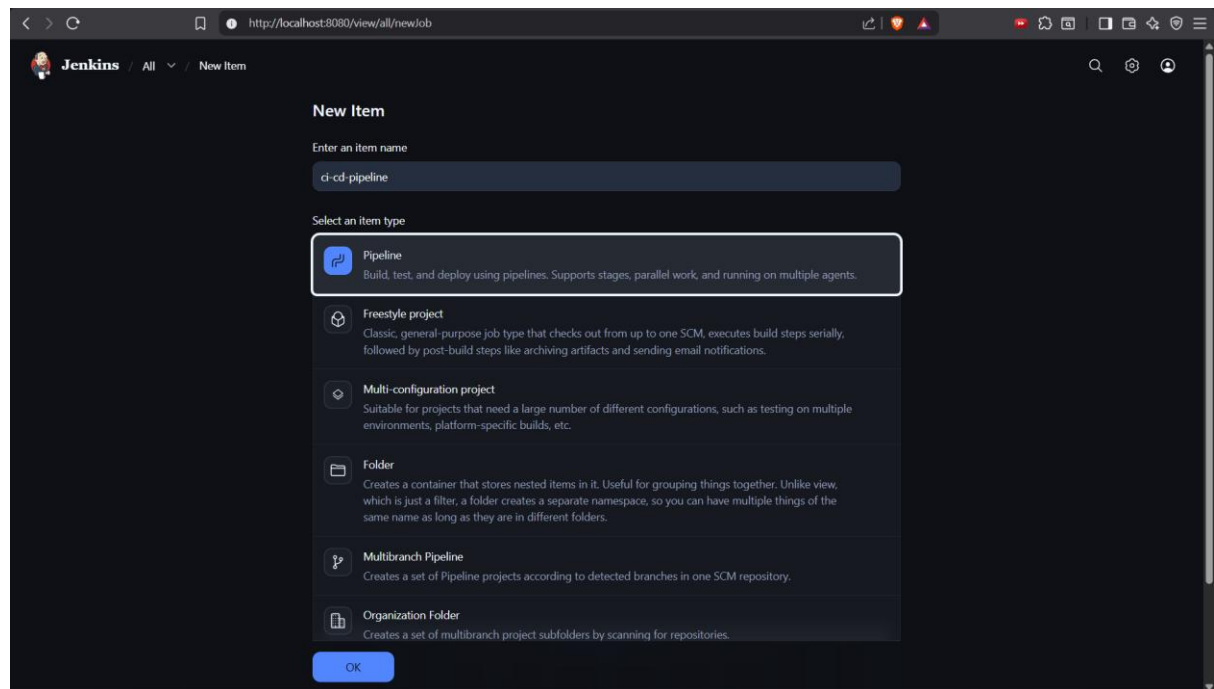


8. Part D: GitHub Webhook Integration

8.1 Configure Webhook

In GitHub: Settings -> Webhooks -> Add Webhook



- Payload URL: `http://:8080/github-webhook/`
- Events: Push events

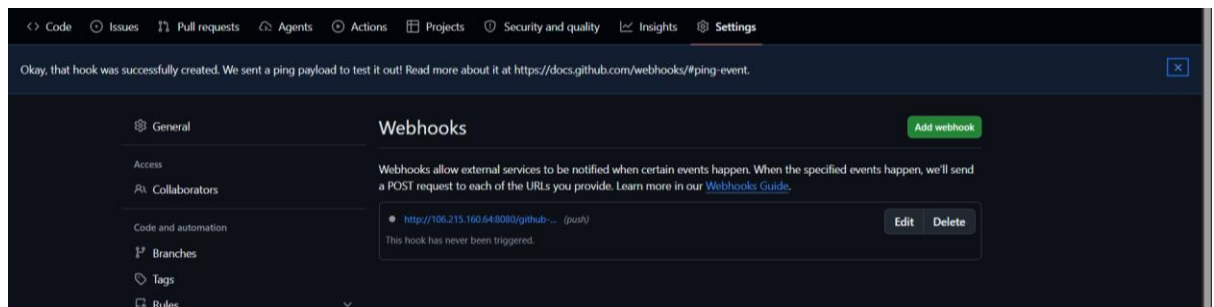

DEMO

```
root@c30a39beda59: /my-app# docker exec -it jenkins bash
apt install -y docker.io
Get:1 http://deb.debian.org/debian trixie InRelease [140 kB]
Get:2 http://deb.debian.org/debian trixie-updates InRelease [47.3 kB]
Get:3 http://deb.debian.org/debian-security trixie-security InRelease [43.4 kB]
Get:4 http://deb.debian.org/debian trixie/main amd64 Packages [9671 kB]
Get:5 http://deb.debian.org/debian trixie-updates/main amd64 Packages [5412 B]
Get:6 http://deb.debian.org/debian-security trixie-security/main amd64 Packages [127 kB]
Fetched 10.0 MB in 2s (4100 kB/s)
2 packages can be upgraded. Run 'apt list --upgradable' to see them.
Installing:
  docker.io

Installing dependencies:
  apparmor          libapparmor1      libmnl0            libpython3.13-minimal  python3-minimal
  containerd        libbpf1           libmodule-find-perl  libpython3.13-stdlib   python3-protobuf
  criu              libcap2-bin       libnet1            libreadline8t64        python3-pycriu
  dbus              libcompell        libnetfilter-conntrack3  libsort-naturally-perl  python3.13
  dbus-bin          libcryptsetup12   libnftnlk0         libsystemd-shared       python3.13-minimal
  dbus-daemon       libdbus-1-3       libnftables1       libterm-readkey-perl    readline-common
  dbus-session-bus-common  libdevmapper1.02.1  libnftnl11        libtirpc-common         runc
  dbus-system-bus-common  libelf1t64        libnl-3-200        libtirpc3t64           systemd
  dbus-user-session  libintl-perl      libnss-systemd     libxtables12            systemd-cryptsetup
  dmsetup           libintl-xs-perl   libpam-cap         linux-sysctl-defaults  systemd-sysv
  docker-buildx     libip4tc2         libpam-systemd     media-types             systemd-timesyncd
  docker-cli        libip6tc2         libproc-processtable-perl  needrestart             xz-utils
  gettext-base     libjansson4       libprotobuf-c1     netbase
  iproute2          libjson-c5        libprotobuf32t64   nftables
```

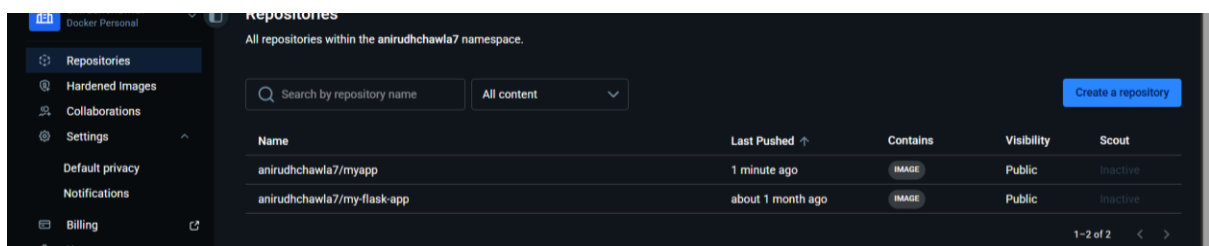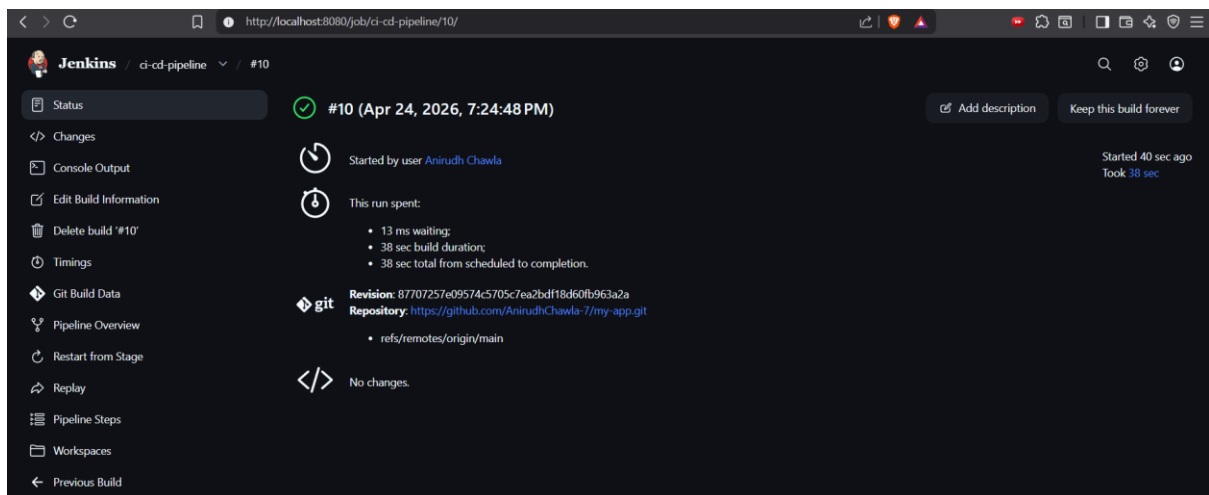

9. Part E: Execution Flow (Stage-wise Explanation)

- Stage 1: Code Push - Developer updates code in GitHub
- Stage 2: Webhook Trigger - GitHub sends event to Jenkins
- Stage 3: Jenkins Pipeline Execution
 - Stage: Clone - Pulls latest code from GitHub
 - Stage: Build - Docker builds image using Dockerfile
 - Stage: Auth - Jenkins logs into Docker Hub using stored token
 - Stage: Push - Image pushed to Docker Hub
- Stage 4: Artifact Ready - Docker image available globally

10. Role of Same Host Agent

- Jenkins runs inside Docker
- Docker socket mounted: /var/run/docker.sock
- Effect: Jenkins directly controls host Docker. Builds and pushes images without separate agent.

11. Observations

- Jenkins GUI simplifies CI/CD management
- GitHub acts as source + pipeline definition
- Docker ensures consistent builds

- Webhook enables automation

12. Result

Successfully implemented a complete CI/CD pipeline where:

- Source code and pipeline are maintained in GitHub
- Jenkins automatically detects changes
- Docker image is built on host agent
- Image is securely pushed to Docker Hub

13. Viva Questions

1. What is the role of Jenkinsfile?
2. How does Jenkins integrate with GitHub?
3. Why is Docker used in CI/CD?
4. What is a webhook?
5. Why store Docker Hub token in Jenkins credentials?
6. What is the benefit of using same host as agent?

14. Key Notes

- Jenkins is GUI-based but pipeline is code-driven
- Always use credentials store (never hardcode secrets)
- Webhook makes CI/CD fully automatic
- This setup is ideal for learning and small deployments

Understanding Jenkins Pipeline Syntax (Simplified Explanation)

Jenkins pipelines (written in a Jenkinsfile) follow a clear structure of blocks and steps.

1. Basic Pipeline Structure

```
pipeline { agent any stages { stage('Build') { steps { sh 'echo Hello' } } } }
```

2. Key Terms Explained

- pipeline {} - Root block. Everything is written inside this.
- agent any - Defines where the pipeline runs (any available node).
- stages {} - Groups all phases of pipeline. Logical separation (Clone, Build, Test, Deploy).
- stage('Name') - A single step/phase in pipeline. Visible in Jenkins GUI as blocks.
- steps {} - Contains actual commands to execute.

Common Steps

- git '<https://github.com/user/repo.git>' - Clones source code from GitHub

- `sh 'echo Hello'` - Runs Linux commands inside agent. Equivalent to terminal command.
 - `echo "Build started"` - Prints message in Jenkins console log.
3. The Challenging Part: `withCredentials` You need to login to Docker Hub, but you should NOT write password directly in code. Jenkins stores it securely.

Step-by-Step Meaning:

1. Store Secret in Jenkins with ID: `dockerhub-token`
2. `withCredentials` Block temporarily injects secret into environment variable.
`string(credentialsId: 'dockerhub-token', variable: 'DOCKER_TOKEN')`
 - `string` = Type of secret (text token)
 - `credentialsId` = Name used in Jenkins
 - `variable` = Temporary variable name
3. What Happens Internally: Jenkins does `DOCKER_TOKEN=your_actual_secret_value`
4. Using It in `sh`: `sh 'echo $DOCKER_TOKEN | docker login -u username --password-stdin'`

Simplified Analogy:

- Locker (Jenkins Credentials) -> You ask by ID (`dockerhub-token`) -> Jenkins gives temporary key (`DOCKER_TOKEN`) -> You use it then it disappears.
4. Key Takeaways
- `pipeline` -> `stages` -> `stage` -> `steps` = structure
 - `sh` = run commands
 - `git` = fetch code
 - `withCredentials` = securely use secrets
 - Secrets are temporary and protected