

- worth 16x16 words:Transformers for image recognition at scale. In International Conference on Learning Representations,2021.1,2,3,4,5,6,9
- [21] Xianzhi Du, Tsung-Yi Lin, Pengchong Jin, Golnaz Ghiasi, Mingxing Tan, Yin Cui, Quoc V Le, and Xiaodan Song. Spinetnet: Learning scale-permuted backbone for recognition and localization. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 11592-11601,2020.7
- [22] Hao-Shu Fang, Jianhua Sun, Runzhong Wang, Minghao Gou, Yong-Lu Li, and Cewu Lu. Instaboost Boosting instance segmentation via probability map guided copy-pasting. In Proceedings of the IEEE/CVF International Conference on Computer Vision, pages 682-691,2019.6.9
- [23] Jun Fu, Jing Liu, Hailie Tian, Yong Li, Yongjun Bao, Zhiwei Fang, and Hanqing Lu. Dual attention network for scene segmentation. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, pages 3146-3154,2019.3.7
- [24] Jun Fu, Jing Liu, Yuhang Wang, Yong Li, Yongjun Bao, Jin-hui Tang, and Hanqing Lu. Adaptive context network for scene parsing. In Proceedings of the IEEE/CVF International Conference on Computer Vision, pages 6748-6757, 2019.7
- [25] Kunihiko Fukushima. Cognitron: A self-organizing multi-layered neural network. *Biological cybernetics*, 20(3):121-136, 1975.3
- [26] Golnaz Ghiasi, Yin Cui, Aravind Srinivas, Rui Qian, Tsung-Yi Lin, Ekin D. Cubuk, Quoc V. Le, and Barret Zoph. Simple segmentation. arXiv preprint arXiv:2012.07177, 2020.2.7
- [27] Jiayuan Gu, Han Hu, Liwei Wang, Yichen Wei, and Jifeng Dai. Learning region features for object detection. In Proceedings of the European Conference on Computer Vision (ECCV), 2018.3
- [28] Kai Han, An Xiao Enhua Wu, Jianyuan Guo, Chunjing Xu, and Yunhe Wang. Transformer in transformer. arXiv preprint arXiv:2103.00112, 2021.3
- [29] Kaiming He, Georgia Gkioxari, Piotr Dollár, and Ross Girshick. Mask r-cnn. In Proceedings of the IEEE international conference on computer vision, pages 2961-2969, 2017.6
- [30] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In Proceedings of the IEEE conference on computer vision and pattern recognition, pages 770-778, 2016.1,2,4
- [31] Elad Hoffer, Tal Ben-Nun, Itay Hubara, Niv Giladi, Torsten Hoefler, and Daniel Soudry. Augment your batch: Improving generalization through instance repetition. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 8129-8138, 2020.6.9
- [32] Han Hu, Jiayuan Gu, Zheng Zhang, Jifeng Dai, and Yichen Wei. Relation networks for object detection. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, pages 3588-3597, 2018.3,5
- [33] Han Hu, Zheng Zhang, Zhenda Xie, and Stephen Lin. Local relation networks for image recognition. In Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV), pages 3464-3473, October 2019.2,3,5
- [34] Gao Huang, Zhuang Liu, Laurens Van Der Maaten, and Kilian Q. Weinberger. Densely connected convolutional networks. In Proceedings of the IEEE conference on computer vision and pattern recognition, pages 4700-4708, 2017.1,2
- [35] Gao Huang, Yu Sun, Zhuang Liu, Daniel Sedra, and Kilian Q. Weinberger. Deep networks with stochastic depth. In European conference on computer vision, pages 646-661. Springer, 2016.9
- [36] David H. Hubel and Torsten N. Wiesel. Receptive fields binocular interaction and functional architecture in the cat's visual cortex. *The Journal of Physiology*, 160(1):106-154, 1962.3
- [37] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. arXiv preprint arXiv:1412.6980, 2014.5.9
- [38] Alexander Kolesnikov, Lucas Beyer, Xiaohua Zhai, Joan Puigcerver, Jessica Yung, Sylvain Gelly, and Neil Houlsby. Big transfer (bit) General visual representation learning. arXiv preprint arXiv:1912.11370, 2019.6
- [39] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E. Hinton. Imagenet classification with deep convolutional neural networks. In Advances in neural information processing systems, pages 1097-1105, 2012.1,2
- [40] Yann LeCun, Leon Bottou, Yoshua Bengio, Patrick Haffner, et al. Gradient-based learning applied to document recognition. Proceedings of the IEEE, 86(11):2278-2324, 1998.
- [41] Yann LeCun, Patrick Haffner, Leon Bottou, and Yoshua Bengio. Object recognition with gradient-based learning. In Shape, contour and grouping in computer vision, pages 319-345. Springer, 1999.3
- [42] Tsung-Yi Lin, Piotr Dollár, Ross Girshick, Kaiming He, Bharath Hariharan, and Serge Belongie. Feature pyramid networks for object detection. In The IEEE Conference on Computer Vision and Pattern Recognition (CVPR), July 2017.2
- [43] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C. Lawrence Zitnick. Microsoft coco: Common objects in context. In European conference on computer vision, pages 740-755. Springer, 2014.5
- [44] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In International Conference on Learning Representations, 2019.6,9,10
- [45] Boris T. Polyak and Anatoli B. Juditsky. Acceleration of stochastic approximation by averaging. *SIAM journal on control and optimization*, 30(4):838-855, 1992.6.9
- [46] Siyuan Qiao, Liang-Chih Chen, and Alan Yuille. Detectors Detecting objects with recursive feature pyramid and switchable atrous convolution. arXiv preprint arXiv:2006.02334, 2020.2,7
- [47] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision, 2021.1

	downsp.rate (output size)	Swin-T	Swin-S	Swin-B	Swin-L		
stage 1	4x 5656	concat4x4.96-d.LN win.sz.7x7. dim 96.head 3	x2	concat4x4.96-d.LN win.sz.7x7 dim 96.head 3	X2	concat4x4.128-d.LN win.sz.7x7 dim 128.bead4	
		concat22.192-dLN win.sz.7x7 dim 192.head 6	x2	concat2x2192-d.LN win.sz.7x7 dim 192.head 6	x2	concat2x2.256-d.LN win.sz.7x7 dim256.bead 8	
stage2	2828	concat22.384-dLN win.sz.7x7 dim 192.head 6	x2	concat22.384-d.LN win.sz.7x7 dim 384.head 12	x2	concat22.384-dLN win.sz.7x7 dim 384.head 12	
		concat22.768-dLN win.sz.7x7. dim 384.head 12	X6	concat22.768-d.LN win.sz.7x7, dim 384.head 12	x18	concat22.768-dLN win.sz.7x7. dim 768.head 24	
stage3	16 1414	concat22.1536-dLN win.sz.7x7. dim 768.head 24	x2	1.LN	concat22.1024-dLN win.sz7x7 dim 1024.bead 32	X2	concat22.1536-dLN win.sz.7x7 dim 1536.head48
		concat22.768-dLN win.sz.7x7. dim 768.head 24	x2	win.sz7x7 dim 768.head 24	x2	concat22.768-dLN win.sz.7x7 dim 1536.head48	

Table 7. Detailed architecture specifications.

model as initialization. We adopt stochastic depth with ratio of 0.2 for all Swin Transformer models

#### A2.3.Semantic segmentation on ADE20K

ADE20K [83] is a widely-used semantic segmentation dataset, covering a broad range of 150 semantic categories. It has 25K images in total, with 20K for training, 2K for validation, and another 3K for testing. We utilize UperNet [69] in mmsegmentation [16] as our base framework for its high efficiency.

In training, we employ the AdamW [44] optimizer with

a scheduler that uses linear learning rate decay, and a linear warmup of 1,500 iterations. Models are trained on 8 GPUs with 2 images per GPU for 160K iterations. For augmentations, we adopt the default setting in mmsegmentation of random horizontal flipping, random re-scaling within ratio range 0.5-2.0 and random photometric distortion. Stochastic depth with ratio of 0.2 is applied for all Swin Transformer models. Swin-T, Swin-S are trained on the standard setting as the previous approaches with an input of 512x512. Swin-B and Swin-L with indicate that these two models are pre-trained on ImageNet-22K, and trained with the input of 640x640.

In inference, a multi-scale test using resolutions that are [0.5, 0.75, 1.0, 1.25, 1.5, 1.75] of that in training is employed. When reporting test scores, both the training images and validation images are used for training, following common practice [71].

#### A3.More Experiments

##### A3.1.Image classification with different input size

Table 8 lists the performance of Swin Transformers with different input image sizes from 224x2 to 384x2. In general, a larger input resolution leads to better top-1 accuracy but with slower inference speed.

input size	Swin-T		Swin-S		Swin-B	
	ace	top-1 throughput (image/s)	ace	top-1 throughput (image/s)	acc	top-1 throughput (image/s)
224	81.3	755.2	83.0	436.9	83.3	278.1
256a	81.6	580.9	83.4	336.7	83.7	208.1
3202	82.1	342.0	83.7	198.2	84.0	132.0
3842	82.2	219.5	83.9	127.6	84.5	84.7

Table 8. Swin Transformers with different input image size on ImageNet-1K classification

Backbone	Optimizer	Ap		AP		APrnk	APnok
		SGD	45.0	62.9	48.8		
R50	AdamW	46.3	64.3	50.5	40.1	61.7	43.4
	SGD	47.8	65.9	51.9	40.4	62.9	43.5
X101-32x4d	AdamW	48.1	66.5	52.4	41.6	63.9	45.2
	SGD	48.8	66.9	53.0	41.4	63.9	44.7
X101-64x4d	AdamW	48.3	66.4	52.3	41.7	64.0	45.1

Table 9. Comparison of the SGD and AdamW optimizers for ResNe(X)t backbones on COCO object detection using the Cascade Mask R-CNN framework

#### A3.2.Different Optimizers for ResNe(X)t on COCO

Table 9 compares the AdamW and SGD optimizers of the ResNeXt backbones on COCO object detection. The Cascade Mask R-CNN framework is used in this comparison. While SGD is used as a default optimizer for Cascade Mask R-CNN framework, we generally observe im-

particular for smaller backbones. We thus use AdamW for ResNeXt backbones when compared to the proposed Swin Transformer architectures.

#### A3.3.Swin MLP-Mixer

We apply the proposed hierarchical design and the shifted window approach to the MLP-Mixer architectures [61], referred to as Swin-Mixer. Table 10 shows the performance of Swin-Mixer compared to the original MLP-Mixer architectures MLP-Mixer [61] and a follow-up ap-

		ImageNet	COCO		ADE20k
	Backbone	top-1 top-5	Apbus	Apnek	mIoU
sliding window	Swin-T	81.495.6	50.2	43.5	45.8
Performer [14]	Swin-T	79.094.2			
shifted window	Swin-T	81.3 95.6	50.5	43.7	46.1

Table 6. Accuracy of Swin Transformer using different methods for self-attention computation on three benchmarks.

sentation and has linear computational complexity with respect to input image size. Swin Transformer achieves the state-of-the-art performance on COCO object detection and ADE20K semantic segmentation, significantly surpassing previous best methods. We hope that Swin Transformer's strong performance on various vision problems will encourage unified modeling of vision and language signals.

As a key element of Swin Transformer, the shifted window based self-attention is shown to be effective and efficient on vision problems, and we look forward to investigating its use in natural language processing as well.

#### Acknowledgement

We thank many colleagues at Microsoft for their help in particular. Li Dong and Furu Wei for useful discussions Bin Xiao, Lu Yuan and Lei Zhang for help on datasets

#### A1.Detailed Architectures

The detailed architecture specifications are shown in Table 7, where an input image size of 224x224 is assumed for all architectures. "Concat n X n" indicates a concatenation of n X n neighboring features in a patch. This operation results in a downsampling of the feature map by a rate of n. "96-d" denotes a linear layer with an output dimension of 96. "win. sz. 7 x 7" indicates a multi-head self-attention module with window size of 7x7.

#### A2.Detailed Experimental Settings

##### A2.1.Image classification on ImageNet-1K

The image classification is performed by applying a global average pooling layer on the output feature map of the last stage, followed by a linear classifier. We find this strategy to be as accurate as using an additional class token as in ViT [20] and DeiT [63] in evaluation. The top-1 accuracy using a single crop is reported.

Regular ImageNet-1K training The training settings mostly follow [63]. For all model variants, we adopt a default input image resolution of 224x224. For other resolutions such as 384x384, we fine-tune the models trained at 224x224 resolution, instead of training from scratch, to reduce GPU consumption.

When training from scratch with a 224x224 input, we employ an AdamW [37] optimizer for 300 epochs using a cosine decay learning rate scheduler with 20 epochs of linear warm-up. A batch size of 1024, an initial learning rate of 0.001, a weight decay of 0.05, and gradient clipping with a max norm of 1 are used. We include most of the augmentation and regularization strategies of [63] in training including RandAugment [17], Mixup [77], Cutmix [75], random erasing [82] and stochastic depth [35], but not repeated augmentation [31] and Exponential Moving Average (EMA) [45] which do not enhance performance. Note that this is contrary to [63] where repeated augmentation is crucial to stabilize the training of ViT. An increasing degree of stochastic depth augmentation is employed for larger models, i.e. 0.2, 0.3, 0.5 for Swin-T, Swin-S, and Swin-B, respectively.

For fine-tuning on input with larger resolution, we employ an AdamW 37 optimizer for 30 epochs with a constant learning rate of 10-, and the same data augmentation and regularizations as the first stage except for setting the stochastic depth ratio to 0.1.

##### ImageNet-22K pre-training

We also pre-train on the larger ImageNet-22K dataset, which contains 14.2 million images and 22K classes. The training is done in two stages. For the first stage with 224 input, we employ an AdamW optimizer for 90 epochs using a linear decay learning rate scheduler with a 5-epoch linear warm-up. A batch size of 4096, an initial learning rate of 0.001, and a weight decay of 0.01 are used. In the second stage of ImageNet-1K fine-tuning with 224x384 input, we train the models for 30 epochs with a batch size of 1024, a constant learning rate of 10-, and a weight decay of 10-8.

##### A2.2.Object detection on COCO

For an ablation study, we consider four typical object detection frameworks: Cascade Mask R-CNN [29, 6] ATSS [79], RepPoints v2 [12], and Sparse RCNN [56]. mmdetection [10]. For these four frameworks, we utilize the same settings: multi-scale training [8, 56] resizing the input such that the shorter side is between 480 and 800 while the longer side is at most 1333). AdamW [44] optimizer (initial learning rate of 0.0001, weight decay of 0.05 and batch size of 16), and 3x schedule (36 epochs with the learning rate decayed by 10 at epochs 27 and 33).

For system-level comparison, we adopt an improved HTC [9] denoted as HTC++ with instaboost [22], stronger multi-scale training [7] resizing the input such that the shorter side is between 400 and 1400 while the longer side is at most 1600). 6x schedule (72 epochs with the learning rate decayed at epochs 63 and 69 by a factor of 0.1), soft-NMS [5], and an extra global self-attention layer appended at the output of last stage and ImageNet-22K pre-trained

	ImageNet		COCO		ADE20k
	top-1	top-5	Apbo	Apmat	mIoU
w/o shifting	80.2	95.1	47.7	41.5	43.3
shifted windows	81.3	95.6	50.5	43.7	46.1
no pos.	80.1		49.2	42.6	43.8
abs.pos.	80.5	95.2	49.0	42.4	43.2
abs.+rel.pos.	81.3	95.6	50.2	43.4	44.0
rel.pos.w/o app	79.3	94.7	48.2	41.9	44.1
rel.pos.	81.3	95.6	50.5	43.7	46.1

Table 4 Ablation study on the shifted windows approach and different position cmbedding methods on three benchmarks.using the Swin-T architecture. w/o shifting: all self-attention modules adopt regular window partitioning without shurnig:abs.pos: absolute position embedding term of ViT rel. pos.: the default settings with an additional relative position bias term (see Eq.(4) app.: the first scaled dot-product term in Eq.(4)

categories. It has 25K images in total, with 20K for training 2K for validation, and another 3K for testing. We utilize UperNet [69] in mmseg [16 as our base framework for its high efficiency. More details are presented in the Appendix

Results Table 3 lists the mIoU, model size (#param) FLOPs and FPS for different method/backbone pairs. From these results, it can be seen that Swin-S is +5.3 mIoU higher (49.3 vs. 44.0) than DeiT-S with similar computation cost. It is also +4.4 mIoU higher than ResNet-101, and +2.4 mIoU higher than ResNeSt-101 [78 Our Swin-L model with ImageNet-22K pre-training achieves 53.5 mIoU on the val set, surpassing the previous best model by +3.2 mIoU (50.3 mIoU by SETR (S1 which has a larger model size)

#### 4.4.Ablation Study

In this section, we ablate important design elements in the proposed Swin Transformer, using ImageNet-1 K image classification. Cascade Mask R-CNN on COCO object detection, and UperNet on ADE20K semantic scgmentation.

Shifted windows Ablations of the shifted window approach on the three tasks are reported in Table 4. Swin-T with the shifted window partitioning outperforms the counterpart built on a single window partitioning at each stage by +1.1% top-1 accuracy on ImageNet-1K, +2.8 box AP/+2.2 mask AP on COCO, and +2.8 mIoU on ADE20K. The results indicate the effectiveness of using shifted windows to build connections among windows in the preceding layers. The latency overhead by shifted window is also small, as shown in Table 5.

Relative position bias Table 4 shows comparisons of different position embedding approaches. Swin-T with relative position bias yields +1.2%/+0.8% top-1 accuracy on ImageNet-1K, +1.3/+1.5 box AP and +1.1/+1.3 mask AP

method	MSA in a stage ms)					Arch.(FPS)	
	S1	S2	S3	S4	T	B	
sliding window (naive)	122.5	38.3	12.1	7.6	183	109	77
sliding window (kernel)	7.6	4.7	2.7	81	488283187		
Performer [14]	4.8	2.8	1.8	1.5	638370241		
window (w/o shifting)	2.8	1.7	1.2	0.9	770444280		
shifted window (padding)	3.3	2.3	61	2.2	670371236		
shifted window (cyclic)	3.0	1.9	1.3	1.0	755437278		

Table 5 Real speed of different self-attention computation methods and implementations on a V100 GPU.

on COCO, and +2.3/+2.9 mIoU on ADE20K in relation to those without position encoding and with absolute position embedding, respectively, indicating the effectiveness of the relative position bias. Also note that while the inclusion of absolute position cmbedding improves image classification accuracy +0.4%), it harms object detection and semantic segmentation-0.2 box/mask AP on COCO and -0.6 mIoU on ADE20K).

While the recent ViT/DeiT models abandon translation invariance in image classification even though it has long been shown to be crucial for visual modeling, we find that inductive bias that encourages certain translation invariance is still preferable for general-purpose visual modeling, particularly for the dense prediction tasks of object detection and semantic segmentation.

Different self-attention methods The real speed of different self-attention computation methods and implementations are compared in Table 5. Our cyclic implementation is more hardware efficient than naive padding, particularly for deeper stages. Overall, it brings a 13%, 18% and 18% speed-up on Swin-T, Swin-S and Swin-B, respectively

- The self-attention modules built on the proposed shifted window approach are 40.8x/2.5x/20.2x/2.5 9.3x21x, and 7.6x/1.8x more efficient than those of sliding windows in naive/kernel implementations on four network stages, respectively. Overall, the Swin Transformer architectures built on shifted windows are 4.1/1.5/4.0/1.5 3.6/1.5 times faster than variants built on sliding windows for Swin-T, Swin-S, and Swin-B, respectively. Table 6 compares their accuracy on the three tasks, showing that they are similarly accurate in visual modeling

Compared to Performer [14], which is one of the fastest Transformer architectures see [60], the proposed shifted window based self-attention computation and the overall Swin Transformer architectures are slightly faster (see Table 5), while achieving +2.3% top-1 accuracy compared to Performer on ImageNet-1K using Swin-T (see Table 6).

#### 5.Conclusion

This paper presents Swin Transformer, a new vision Transformer which produces a hierarchical feature repre-

Method	(a) Various frameworks						ADE20K		val mIoU	test score	#param.	FLOPs	FPS					
	Backbone	Aph	AP	#param.	FLOPs	FPS	Method	Backbone										
Cascade	R-50	46.3	64.3	50.5	82M	739G	18.0	DANet [23]	ResNet-101	45.2	69M	1119G	15.2					
Mask R-CNN	Swin-T	50.5	69.3	54.9	86M	745G	15.3	DLab.v3+ [11]	ResNet-101	44.1	63M	1021G	16.0					
ATSS	R-50	43.5	61.9	47.0	32M	205G	28.3	ACNet [24]	ResNet-101	45.9	38.5							
	Swin-T	47.2	66.5	51.3	36M	215G	22.3	DNL [71]	ResNet-101	46.0	56.2	69M	1249G	14.8				
RepPointsV2	R-50	46.5	64.6	50.3	42M	274G	13.6	OCRNet [73]	ResNet-101	45.3	56.0	56M	923G	19.3				
	Swin-T	50.0	68.5	54.2	45M	283G	12.0	UperNet [69]	ResNet-101	44.9	-	86M	1029G	20.1				
Sparse	R-50	44.5	63.4	48.2	106M	166G	21.0	OCRNet [73] HRNet-w48		45.7	71M	664G	12.5					
R-CNN	Swin-T	47.9	67.3	52.3	110M	172G	18.4	DLab.v3+[1] ResNeSt-10l		46.9	55.1	66M	1051G	11.9				
b) Various backbones w. Cascade Mask R-CNN						paramFLOPsFPS		DLab.v3+[11] ResNeSt-200		484	88M	1381G	8.1					
DeiT-S	48.067.251.7	41.4	64.2	44.3	80M	889G	10.4	SETR [81]	T-Large	50.3	61.7	308M						
R50	46.364.350.5	40.1	61.7	43.4	82M	739G	18.0	UperNet	DeiT-S'	44.0	52M	1099G	16.2					
Swin-T	50.569.354.9	43.7	66.6	47.1	86M	745G	15.3	UperNet	Swin-T	46.1	GOM	945G	18.5					
X101-32	48.1	66.552.4	41.6	63.9	45.2	101M	819G	12.8	UperNet	Swin-S	49.3	SIM	1038G	15.2				
Swin-S	51.870.456.3	44.7	67.9	48.5	107M	838G	12.0	UperNet	Swin-B	51.6	121M	1841G	8.7					
X101-64	48.3	66.452.3	41.7	64.0	45.1	140M	972G	10.4	UperNet	Swin-L	53.5	62.8	234M	3230G	6.2			
Swin-B	51.9	70.956.5	45.0	68.4	48.7	145M	982G	11.6										
(e) System-level Comparison																		
Method	mini-val		test-dev		#param.FLOPs													
	Apbox	Apmnk	Apbox	Apmnk														
RepPointsV2*[12]	52.1																	
GCNet* [7]	51.8	44.7	52.3	45.4			1041G											
RelationNet++*[13]	52.7																	
SpineNet-190 [21]	52.6	52.8		164M		1885G												
ResNeSt-200*[78]	52.5	53.3		47.1														
EfficientDet-D7 59	54.4	55.1		77M		410G												
DetectoRS*[46]	55.7																	
YOLOv4 P7*4]	55.8																	
Copy-paste [26]	55.9	47.2	56.0	47.4	185M	1440G												
X101-64 HTC++)	52.3	46.0	155M		1033G													
Swin-B(HTC++)	56.4	49.1	160M		1043G													
Swin-L(HTC++)	57.1	49.5	57.7	50.2	284M		1470G											
Swin-L(HTC++)*	58.0	50.4	58.7	51.1	284M													

**Table 2. Results on COCO object detection and instance segmentation.** It denotes that additional deconvolution layers are used to produce hierarchical feature maps. \* indicates multi-scale testing

vNets, i.c. ResNe(Xt) and previous Transformer networks e.g. DeiT. The comparisons are conducted by changing only the backbones with other settings unchanged. Note that while Swin Transformer and ResNe(Xt) are directly applicable to all the above frameworks because of their hierarchical feature maps, DeiT only produces a single resolution of feature maps and cannot be directly applied. For fair comparison, we follow [81] to construct hierarchical feature maps for DeiT using deconvolution layers

Comparison to ResNeXt Table 2a) lists the results of Swin-T and ResNet-50 on the four object detection frameworks. Our Swin-T architecture brings consistent +3.4~4.2 box AP gains over ResNet-50, with slightly larger model size, FLOPs and latency.

Table 2(b) compares Swin Transformer and ResNeX

**Table 3. Results of semantic segmentation on the ADE20K val** and test set. indicates additional deconvolution layers are used to produce hierarchical feature maps. indicates that the model is pre-trained on ImageNet-22K

under different model capacity using Cascade Mask R-CNN. Swin Transformer achieves a high detection accuracy of 51.9 box AP and 45.0 mask AP, which are significant gains of +3.6 box AP and +3.3 mask AP over ResNeXt101-64x4d, which has similar model size, FLOPs and latency. On a higher baseline of 52.3 box AP and 46.0 mask AP using an improved HTC framework, the gains by Swin Transformer are also high, at +41 box AP and +3.1 mask AP (see Table 2(c)). Regarding inference speed, while ResNe(Xt) is built by highly optimized Cudnn functions, our architecture is implemented with built-in PyTorch functions that are not all well-optimized. A thorough kernel optimization is beyond the scope of this paper.

Comparison to DeiT The performance of DeiT using the Cascade Mask R-CNN framework is shown in Table 2b). The results of Swin-T are +2.5 box AP and +2.3 mask AP higher than DeiT-S with similar model size (86M vs. 80M) and significantly higher inference speed (15.3 FPS vs. 10.4 FPS). The lower inference speed of DeiT is mainly due to its quadratic complexity to input image size.

Comparison to previous state-of-the-art Table 2c compares our best results with those of previous state-of-the-art models. Our best model achieves 58.7 box AP and 51.1 mask AP on COCO test-dev, surpassing the previous best results by +2.7 box AP (Copy-paste [26]) without external data) and +2.6 mask AP (DetectoRS [46]).

#### 4.3. Semantic Segmentation on ADE20K

Settings ADE20K [83] is a widely-used semantic segmentation dataset, covering a broad range of 150 semantic

weight decay of 0.05 are used. We include most of the augmentation and regularization strategies of [63] in training, except for repeated augmentation [31] and EMA [45], which do not enhance performance. Note that this is contrary to [63] where repeated augmentation is crucial to stabilize the training of ViT.

Pre-training on ImageNet-22K and fine-tuning on ImageNet-1K. We also pre-train on the larger ImageNet-22K dataset, which contains 14.2 million images and 22K classes. We employ an AdamW optimizer for 90 epochs using a linear decay learning rate scheduler with a 5-epoch linear warm-up. A batch size of 4096, an initial learning rate of 0.001, and a weight decay of 0.01 are used. In ImageNet-1K fine-tuning we train the models for 30 epochs with a batch size of 1024, a constant learning rate of 10<sup>-4</sup> and a weight decay of 10<sup>-8</sup>.

Results with regular ImageNet-1K training presents comparisons to other backbones, including both Transformer-based and ConvNet-based, using regular ImageNet-1K training.

Compared to the previous state-of-the-art Transformer-based architecture, i.e., DeiT [63], Swin Transformers noticeably surpass the counterpart DeiT architectures with similar complexities: +1.5% for Swin-T (81.3%) over DeiT-S (79.8%) using 224 input, and +1.5%/1.4% for Swin-B (83.3%/84.5%) over DeiT-B (81.8%/83.1%) using 224/384 input, respectively.

Compared with the state-of-the-art ConvNets, i.e., RegNet [48] and EfficientNet [58], the Swin Transformer achieves a slightly better speed-accuracy trade-off. Noting that while RegNet [48] and EfficientNet [58] are obtained via a thorough architecture search, the proposed Swin Transformer is adapted from the standard Transformer and has strong potential for further improvement.

Results with ImageNet-22K pre-training train the larger-capacity Swin-B and Swin-L on ImageNet-22K. Results fine-tuned on ImageNet-1K image classification are shown in Table 1b). For Swin-B, the ImageNet-22K pre-training brings 1.8%~1.9% gains over training on ImageNet-1K from scratch. Compared with the previous best results for ImageNet-22K pre-training, our models achieve significantly better speed-accuracy trade-offs: Swin-B obtains 86.4% top-1 accuracy, which is 2.4% higher than that of ViT with similar inference throughput (84.7 vs. 85.9 images/sec and slightly lower FLOPs (47.0G vs. 55.4G). The larger Swin-L model achieves 87.3% top-1 accuracy, +0.9% better than that of the Swin-B model.

Table 1a)

We also pre

(a) Regular ImageNet-1K trained models

method	image size	#param.	FLOPs	throughput	ImageNet (image/s)	top-1 acc.
RegNetY-4G [48]	2244	21M	4.0G	1156.7	80.0	
RegNetY-8G [48]	2242	39M	8.0G	591.6	81.7	
RegNetY-16G [48]	2242	84M	16.0G	334.7	82.9	
EffNet-B3 [58]	300	12M	1.8G	732.1	81.6	
EffNet-B4 [58]	3802	19M	4.2G	349.4	82.9	
EffNet-B5 [58]	4562	30M	9.9G	169.1	83.6	
EffNet-B6 [58]	5282	43M	19.0G	96.9	84.0	
EffNet-B7 [58]	6002	66M	37.0G	55.1	84.3	
ViT-B/16 [20]	3842	86M	55.4G	85.9	77.9	
ViT-L/16 [20]	3842	307M	190.7G	27.3	76.5	
DeiT-S [63]	224	22M	4.6G	940.4	79.8	
DeiT-B [63]	2242	86M	17.5G	292.3	81.8	
DeiT-B [63]	3842	86M	55.4G	85.9		
Swin-T	224	29M	4.5G	755.2	81.3	
Swin-S	2242	50M	8.7G	436.9	83.0	
Swin-B	2242	88M	15.4G	278.1	83.5	
Swin-B	3842	88M	47.0G	84.7	84.5	

b) ImageNet-22K pre-trained models

method	image size	#param.	FLOPs	throughput	ImageNet (image/s)	top-1 acc.
R-101x3 [38]	384	388M	204.6G		84.4	
R-152x4 [38]	4802	937M	840.5G		85.4	
ViT-B/16 [20]	3842	86M	55.4G	85.9	84.0	
ViT-L/16 [20]	3842	307M	190.7G	27.3	85.2	
Swin-B	224	88M	15.4G	278.1	85.2	
Swin-B	3842	88M	47.0G	84.7		
Swin-L	3842	197M	103.9G	42.1	87.3	

Table 1 Comparison of different backbones on ImageNet-1K classification. Throughput is measured using the GitHub repository of [68] and a V100 GPU, following [63].

#### 4.2 Object Detection on COCO

Settings Object detection and instance segmentation experiments are conducted on COCO 2017, which contains 118K training, 5K validation and 20K test-dev images. An ablation study is performed using the validation set, and a system-level comparison is reported on test-dev. For the ablation study, we consider four typical object detection frameworks: Cascade Mask R-CNN 29.6 ATSS [79], RepPoints v2 [12], and Sparse RCNN [56] in mmdetection [10]. For these four frameworks, we utilize the same settings: multi-scale training [8, 56] resizing the input such that the shorter side is between 480 and 800 while the longer side is at most 1333. AdamW [44] optimizer (initial learning rate of 0.0001, weight decay of 0.05, and batch size of 16), and 3x schedule (36 epochs). For system-level comparison, we adopt an improved HTC [9] denoted as HTC++ with instaboost [22], stronger multi-scale training [7, 6] schedule (72 epochs), soft-NMS [5], and ImageNet-22K pre-trained model as initialization.

We compare our Swin Transformer to standard Con-

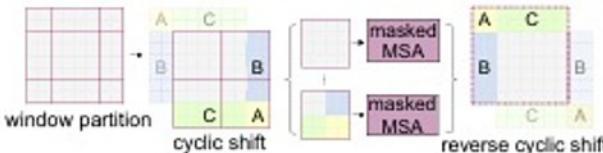


Figure 4. Illustration of an efficient batch computation approach for self-attention in shifted window partitioning

W-MSA and SW-MSA denote window based multi-head self-attention using regular and shifted window partitioning configurations respectively.

The shifted window partitioning approach introduces connections between neighboring non-overlapping windows in the previous layer and is found to be effective in image classification, object detection, and semantic segmentation as shown in Table 4.

#### Efficient batch computation for shifted configuration

An issue with shifted window partitioning is that it will result in more windows, from  $t \rightarrow t+1$

+1 in the shifted configuration, and some of the windows will be smaller than  $M \times M$ . A naive solution is to pad the smaller windows to a size of  $M \times M$  and mask out the padded values when computing attention. When the number of windows in regular partitioning is small, e.g. 2, the increased computation with this naive solution is considerable ( $2 \times 2 - 3$ , which is 2.25 times greater). Here, we propose a more efficient batch computation approach by cyclic-shifting toward the top-left direction, as illustrated in Figure 4. After this shift, a batched window may be composed of several sub-windows that are not adjacent in the feature map, so a masking mechanism is employed to limit self-attention computation to within each sub-window. With the cyclic-shift, the number of batched windows remains the same as that of regular window partitioning, and thus is also efficient. The low latency of this approach is shown in Table 5.

Relative position bias in computing self-attention, we follow [49] by including a relative position bias

BERMxM to each head in computing similarity:

$$\text{Attention}(Q, K, V) = \text{SoftMax}(QK^T / \sqrt{d} + B)V, \quad (4)$$

where  $Q, K, V \in \mathbb{R}^{M \times d}$  are the query, key, and value matrices;  $d$  is the query/key dimension, and  $M$  is the number of patches in a window. Since the relative position along each axis lies in the range  $-M+1, M-1$ , the parameter

values in  $B$  are taken from  $B$ .

<sup>4</sup>To make the window size  $(M, M)$  divisible by the feature map size of  $(h, w)$ , bottom-right padding is employed on the feature map if needed.

We observe significant improvements over counterparts without this bias term or that use absolute position embedding, as shown in Table 4. Further adding absolute position embedding to the input as in [20] drops performance slightly, thus it is not adopted in our implementation.

The learnt relative position bias in pre-training can be also used to initialize a model for fine-tuning with a different window size through bi-cubic interpolation [20, 63].

### 3.3. Architecture Variants

We build our base model called Swin-B, to have of model size and computation complexity similar to ViT-B/DeiT-B. We also introduce Swin-T, Swin-S, and Swin-L, which are versions of about 0.25x, 0.5x, and 2x the model size and computational complexity, respectively. Note that the complexity of Swin-T and Swin-S are similar to those of ResNet-50 (DeiT-S) and ResNet-101, respectively. The window size is set to  $M = 7$  by default. The query dimension of each head is  $d = 32$ , and the expansion layer of each MLP is  $o = 4$ , for all experiments. The architecture hyper-parameters of these model variants are:

Swin-T:  $C=96$ , layer numbers = 2, 2, 6, 2

Swin-S:  $C=96$ , layer numbers = 2, 2, 18, 2

Swin-B:  $C=128$ , layer numbers = 2, 2, 18, 2

Swin-L:  $C=192$ , layer numbers = 2, 2, 18, 2

where  $C$  is the channel number of the hidden layers in the first stage. The model size, theoretical computational complexity (FLOPs), and throughput of the model variants for ImageNet image classification are listed in Table 1.

## 4. Experiments

We conduct experiments on ImageNet-1K image classification [19], COCO object detection [43], and ADE20K semantic segmentation [83]. In the following, we first compare the proposed Swin Transformer architecture with the previous state-of-the-arts on the three tasks. Then, we analyze the important design elements of Swin Transformer.

### 4.1. Image Classification on ImageNet-1K

Settings For image classification, we benchmark the proposed Swin Transformer on ImageNet-1K [19], which contains 1.28M training images and 50K validation images from 1,000 classes. The top-1 accuracy on a single crop is reported. We consider two training settings:

Regular ImageNet-1K training. This setting mostly follows [63]. We employ an AdamW [37] optimizer for 300 epochs using a cosine decay learning rate scheduler and 20 epochs of linear warm-up. A batch size of 1024, an initial learning rate of 0.001, and a

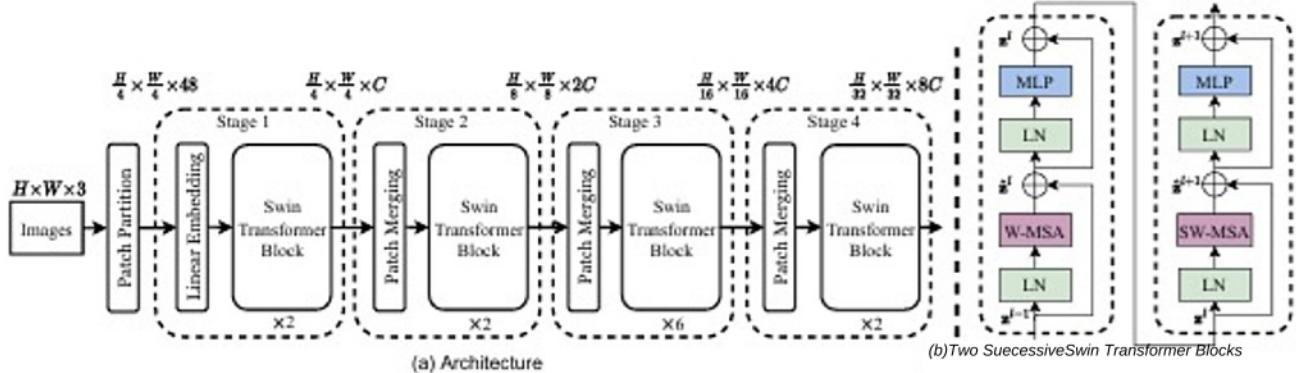


Figure 3. (a) The architecture of a Swin Transformer (Swin-T). (b) two successive Swin Transformer Blocks (notation presented with Eq. (3)). W-MSA and SW-MSA are multi-head self attention modules with regular and shifted windowing configurations respectively.

with the same feature map resolutions as those of typical convolutional networks, e.g. VGG [52] and ResNet 30]

As a result, the proposed architecture can conveniently replace the backbone networks in existing methods for various vision tasks.

**Swin Transformer block** Swin Transformer is built by replacing the standard multi-head self attention (MSA) module in a Transformer block by a module based on shifted windows (described in Section 3.2), with other layers kept the same. As illustrated in Figure 3b), a Swin Transformer block consists of a shifted window based MSA module, followed by a 2-layer MLP with GELU non-linearity in between. A LayerNorm (LN) layer is applied before each MSA module and each MLP, and a residual connection is applied after each module

### 3.2. Shifted Window based Self-Attention

The standard Transformer architecture [64] and its adaptation for image classification [20] both conduct global self-attention, where the relationships between a token and all other tokens are computed. The global computation leads to quadratic complexity with respect to the number of tokens, making it unsuitable for many vision problems requiring an immense set of tokens for dense prediction or to represent a high-resolution image.

**Self-attention in non-overlapped windows** For efficient modeling, we propose to compute self-attention within local windows. The windows are arranged to evenly partition the image in a non-overlapping manner. Supposing each window contains  $M \times M$  patches, the computational complexity of a global MSA module and a window-based one

on an image of  $h \times w$  patches are

$$\Omega(\text{MSA}) = 4hwC^2 + 2(hw)^2C, \quad (1)$$

$$\Omega(\text{W-MSA}) = 4hwC^2 + 2M^2hwC, \quad (2)$$

where the former is quadratic to patch number  $hw$ , and the latter is linear when  $M$  is fixed set to 7 by default. Global self-attention computation is generally unaffordable for a large  $hw$ , while the window-based self-attention is scalable.

**Shifted window partitioning in successive blocks** The window-based self-attention module lacks connections across windows, which limits its modeling power. To introduce cross-window connections while maintaining the efficient computation of non-overlapping windows, we propose a shifted window partitioning approach which alternates between two partitioning configurations in consecutive Swin Transformer blocks.

As illustrated in Figure 2, the first module uses a regular window partitioning strategy which starts from the top-left pixel, and the  $8 \times 8$  feature map is evenly partitioned into  $2 \times 2$  windows of size  $4 \times 4$ . Then, the next module adopts a windowing configuration that is shifted from that of the preceding layer, by displacing the windows by pixels from the regularly partitioned windows.

With the shifted window partitioning approach, consecutive Swin Transformer blocks are computed as

$$\begin{aligned} \hat{\mathbf{z}}^l &= \text{W-MSA} (\text{LN}(\mathbf{z}^{l-1})) + \mathbf{z}^{l-1}, \\ \mathbf{z}^l &= \text{MLP} (\text{LN}(\hat{\mathbf{z}}^l)) + \hat{\mathbf{z}}^l, \\ \hat{\mathbf{z}}^{l+1} &= \text{SW-MSA} (\text{LN}(\mathbf{z}^l)) + \mathbf{z}^l, \\ \mathbf{z}^{l+1} &= \text{MLP} (\text{LN}(\hat{\mathbf{z}}^{l+1})) + \hat{\mathbf{z}}^{l+1}, \end{aligned} \quad (3)$$

where  $\hat{\mathbf{z}}$  and  $\mathbf{z}$  denote the output features of the SW MSA module and the MLP module for block  $l$ , respectively.

<sup>3</sup>We omit SoftMax computation in determining complexity.

HRNet [65] and EfficientNet [58]. In addition to these architectural advances, there has also been much work on improving individual convolution layers, such as depth-wise convolution [70] and deformable convolution [18,84]. While the CNN and its variants are still the primary backbone architectures for computer vision applications, we highlight the strong potential of Transformer-like architectures for unified modeling between vision and language. Our work achieves strong performance on several basic visual recognition tasks, and we hope it will contribute to a modeling shift.

**Self-attention based backbone architectures** Also inspired by the success of self-attention layers and Transformer architectures in the NLP field, some works employ self-attention layers to replace some or all of the spatial convolution layers in the popular ResNet [33,50,80]. In these works, the self-attention is computed within a local window of each pixel to expedite optimization [33], and they achieve slightly better accuracy/FLOPs trade-offs than the counterpart ResNet architecture. However, their costly memory access causes their actual latency to be significantly larger than that of the convolutional networks [33]. Instead of using sliding windows, we propose to shift windows between consecutive layers, which allows for a more efficient implementation in general hardware.

**Self-attention/Transformers to complement CNNs** Another line of work is to augment a standard CNN architecture with self-attention layers or Transformers. The self-attention layers can complement backbones [67,7,3,71,23,74,55] or head networks [32,27] by providing the capability to encode distant dependencies or heterogeneous interactions. More recently, the encoder-decoder design in Transformer has been applied for the object detection and instance segmentation tasks [8,13,85,56]. Our work explores the adaptation of Transformers for basic visual feature extraction and is complementary to these works.

**Transformer based vision backbones** Our work is the Vision Transformer ViT [20] and its follow-ups [63,72,15,28,66]. The pioneering work of ViT directly applies a Transformer architecture on non-overlapping medium-sized image patches for image classification. It achieves an impressive speed-accuracy trade-off on image classification compared to convolutional networks. While ViT requires large-scale training datasets (e.g., JFT-300M) to perform well, DeiT [63] introduces several training strategies that allow ViT to also be effective using the smaller ImageNet-1K dataset. The results of ViT on image classification are encouraging, but its architecture is unsuitable for use as a general-purpose backbone network on dense vision tasks or when the input image

resolution is high, due to its low-resolution feature maps and the quadratic increase in complexity with image size. There are a few works applying ViT models to the dense vision tasks of object detection and semantic segmentation by direct upsampling or deconvolution but with relatively lower performance [2,81]. Concurrent to our work are some that modify the ViT architecture [72,15,28] for better image classification. Empirically, we find our Swin Transformer architecture to achieve the best speed-accuracy trade-off among these methods on image classification, even though our work focuses on general-purpose performance rather than specifically on classification. Another concurrent work [66] explores a similar line of thinking to build multi-resolution feature maps on Transformers. Its complexity is still quadratic to image size, while ours is linear and also operates locally, which has proven beneficial in modeling the high correlation in visual signals [36,25,41]. Our approach is both efficient and effective, achieving state-of-the-art accuracy on both COCO object detection and ADE20K semantic segmentation.

### 3. Method

#### 3.1. Overall Architecture

An overview of the Swin Transformer architecture is presented in Figure 3, which illustrates the tiny version (Swin-T). It first splits an input RGB image into non-overlapping patches by a patch splitting module, like ViT. Each patch is treated as a "token" and its feature is set as a concatenation of the raw pixel RGB values. In our implementation, we use a patch size of 4 × 4 and thus the feature dimension of each patch is 4 × 4 × 3 = 48. A linear embedding layer is applied on this raw-valued feature to project it to an arbitrary dimension (denoted as C).

Several Transformer blocks with modified self-attention computation (Swin Transformer blocks) are applied on these patch tokens. The Transformer blocks maintain the number

are referred to as "Stage 1".

To produce a hierarchical representation, the number of tokens is reduced by patch merging layers as the network gets deeper. The first patch merging layer concatenates the features of each group of 2 × 2 neighboring patches, and applies a linear layer on the 4C-dimensional concatenated features. This reduces the number of tokens by a multiple of 2 (i.e., 42 downsampling of resolution), and the output dimension is set to 2C. Swin Transformer blocks are applied afterwards for feature transformation, with the res-

and feature transformation is denoted as "Stage 2". The procedure is repeated twice, as "Stage 3" and "Stage 4", with output resolutions of  $\frac{W}{2^1}$ ,  $\frac{W}{2^2}$ , and  $\frac{W}{2^3}$ . These stages jointly produce a hierarchical representation,

backbone for computer vision, as it does for NLP and as CNNs do in vision. We observe that significant challenges in transferring its high performance in the language domain to the visual domain can be explained by differences between the two modalities. One of these differences involves scale. Unlike the word tokens that serve as the basic elements of processing in language Transformers, visual elements can vary substantially in scale, a problem that receives attention in tasks such as object detection [42,53,54]. In existing Transformer-based models [64,20], tokens are all of a fixed scale, a property unsuitable for these vision applications. Another difference is the much higher resolution of pixels in images compared to words in passages of text. There exist many vision tasks such as semantic segmentation that require dense prediction at the pixel level, and this would be intractable for Transformer on high-resolution images, as the computational complexity of its self-attention is quadratic to image size. To overcome these issues, we propose a general-purpose Transformer backbone, called Swin Transformer, which constructs hierarchical feature maps and has linear computational complexity to image size. As illustrated in Figure 1(a), Swin Transformer constructs a hierarchical representation by starting from small-sized patches (outlined in gray) and gradually merging neighboring patches in deeper Transformer layers. With these hierarchical feature maps, the Swin Transformer model can conveniently leverage advanced techniques for dense prediction such as feature pyramid networks FPN[42] or U-Net [51]. The linear computational complexity is achieved by computing self-attention locally within non-overlapping windows that partition an image outlined in red). The number of patches in each window is fixed, and thus the complexity becomes linear to image size. These merits make Swin Transformer suitable as a general-purpose backbone for various vision tasks, in contrast to previous Transformer based architectures [20] which produce feature maps of a single resolution and have quadratic complexity.

**A key design element of Swin Transformer is its shift of the window partition between consecutive self-attention layers** as illustrated in Figure 2. The shifted windows bridge the windows of the preceding layer, providing connections among them that significantly enhance modeling power see Table 4). This strategy is also efficient in regards to real-world latency: all query patches within a window share the same key set, which facilitates memory access in hardware. In contrast, earlier sliding window based self-attention approaches [33,50] suffer from low latency on general hardware due to different key sets for different query pixels. Our experiments show that the proposed

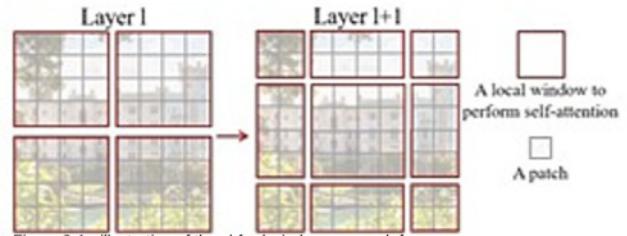


Figure 2. An illustration of the shifted window approach for computing self-attention in the proposed Swin Transformer architecture. In layer (left), a regular window partitioning scheme is adopted, and self-attention is computed within each window. In the next layer  $l+1$  (right), the window partitioning is shifted, resulting in new windows. The self-attention computation in the new windows crosses the boundaries of the previous windows in layer  $l$ , providing connections among them.

shifted window approach has much lower latency than the sliding window method, yet is similar in modeling power see Tables 5 and 6. The shifted window approach also proves beneficial for all-MLP architectures [61].

- The proposed Swin Transformer achieves strong performance on the recognition tasks of image classification, object detection and semantic segmentation. It outperforms the ViT/DeiT [20,63] and ResNeXt models [30,70] significantly with similar latency on the three tasks. Its 58.7 box AP and 51.1 mask AP on the COCO test-dev set surpass the previous state-of-the-art results by +2.7 box AP Copy-paste [26 without external data] and +2.6 mask AP DetectoRS [46]). On ADE20K semantic segmentation, it obtains 53.5 mIoU on the val set, an improvement of +3.2 mIoU over the previous state-of-the-art (SETR S1). It also achieves a top-1 accuracy of 87.3% on ImageNet-1K image classification.

It is our belief that a unified architecture across computer vision and natural language processing could benefit both fields, since it would facilitate joint modeling of visual and textual signals and the modeling knowledge from both domains can be more deeply shared. We hope that Swin Transformer's strong performance on various vision problems can drive this belief deeper in the community and encourage unified modeling of vision and language signals.

## 2. Related Work

CNN and variants CNNs serve as the standard network model throughout computer vision. While the CNN has existed for several decades [40], it was not until the introduction of AlexNet [39] that the CNN took off and became mainstream. Since then, deeper and more effective convolutional neural architectures have been proposed to further propel the deep learning wave in computer vision, e.g. VGG [52], GoogleNet [57], ResNet [30], DenseNet [34]

<sup>1</sup>The *query* and *key* are projection vectors in a self-attention layer.

<sup>2</sup>While there are efficient methods to implement a sliding-window based convolution layer on general hardware, thanks to its shared kernel

weights across a feature map, it is difficult for a sliding-window based self-attention layer to have efficient memory access in practice.

# Swin Transformer: Hierarchical Vision Transformer using Shifted Windows

Ze Liu

Yutong Lin

Yue Cao

Han Hu

Yixuan Wei

Zheng Zhang

Stephen Lin

Baining Guo

Microsoft Research Asia


{}

## Abstract

This paper presents a new vision Transformer, called Swin Transformer, that capably serves as a general-purpose backbone for computer vision. Challenges in adapting Transformer from language to vision arise from differences between the two domains, such as large variations in the scale of visual entities and the high resolution of pixels in images compared to words in text. To address these differences, we propose a hierarchical Transformer whose representation is computed with Shifted windows. The shifted windowing scheme brings greater efficiency by limiting self-attention computation to non-overlapping local windows while also allowing for cross-window connection. This hierarchical architecture has the flexibility to model at various scales and has linear computational complexity with respect to image size. These qualities of Swin Transformer make it compatible with a broad range of vision tasks, including image classification (87.3 top-1 accuracy on ImageNet-1K) and dense prediction tasks such as object detection (58.7 box AP and 51.1 mask AP on COCO test-dev) and semantic segmentation (53.5 mIoU on ADE20K val). Its performance surpasses the previous state-of-the-art by a large margin of +2.7 box AP and +2.6 mask AP on COCO, and +3.2 mIoU on ADE20K, demonstrating the potential of Transformer-based models as vision backbones. The hierarchical design and the shifted window approach also prove beneficial for all-MLP architectures. The code and models are publicly available at <https://github.com/microsoft/Swin-Transformer>.

## 1. Introduction

Modeling in computer vision has long been dominated by convolutional neural networks (CNNs). Beginning with AlexNet [39] and its revolutionary performance on the ImageNet image classification challenge, CNN architectures have evolved to become increasingly powerful through

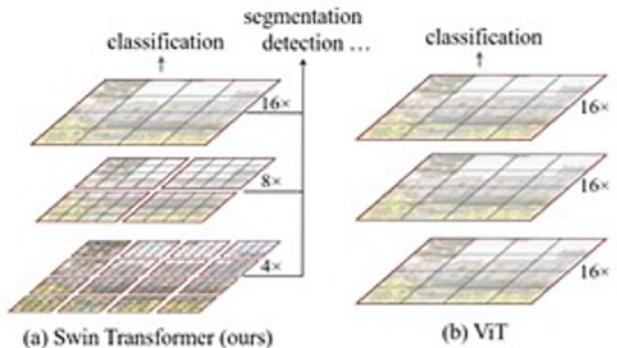

*Figure 1.* (a) The proposed Swin Transformer builds hierarchical feature maps by merging image patches (shown in gray) in deeper layers and has linear computation complexity to input image size due to computation of self-attention only within each local window (shown in red). It can thus serve as a general-purpose backbone for both image classification and dense recognition tasks. (b) In contrast, previous vision Transformers [20] produce feature maps of a single low resolution and have quadratic computation complexity to input image size due to computation of self-attention globally.

greater scale [30, 76], more extensive connections [34], and more sophisticated forms of convolution [70, 18, 84]. With CNNs serving as backbone networks for a variety of vision tasks, these architectural advances have led to performance improvements that have broadly lifted the entire field.

On the other hand, the evolution of network architectures in natural language processing (NLP) has taken a different path, where the prevalent architecture today is instead the Transformer [64]. Designed for sequence modeling and translation tasks, the Transformer is notable for its use of attention to model long-range dependencies in the data. Its tremendous success in the language domain has led researchers to investigate its adaptation to computer vision, where it has recently demonstrated promising results on certain tasks, specifically image classification [20] and joint vision-language modeling [47].

In this paper, we seek to expand the applicability of Transformer such that it can serve as a general-purpose

<sup>\*</sup>Equal contribution. <sup>†</sup>Interns at MSRA. <sup>‡</sup>Contact person.