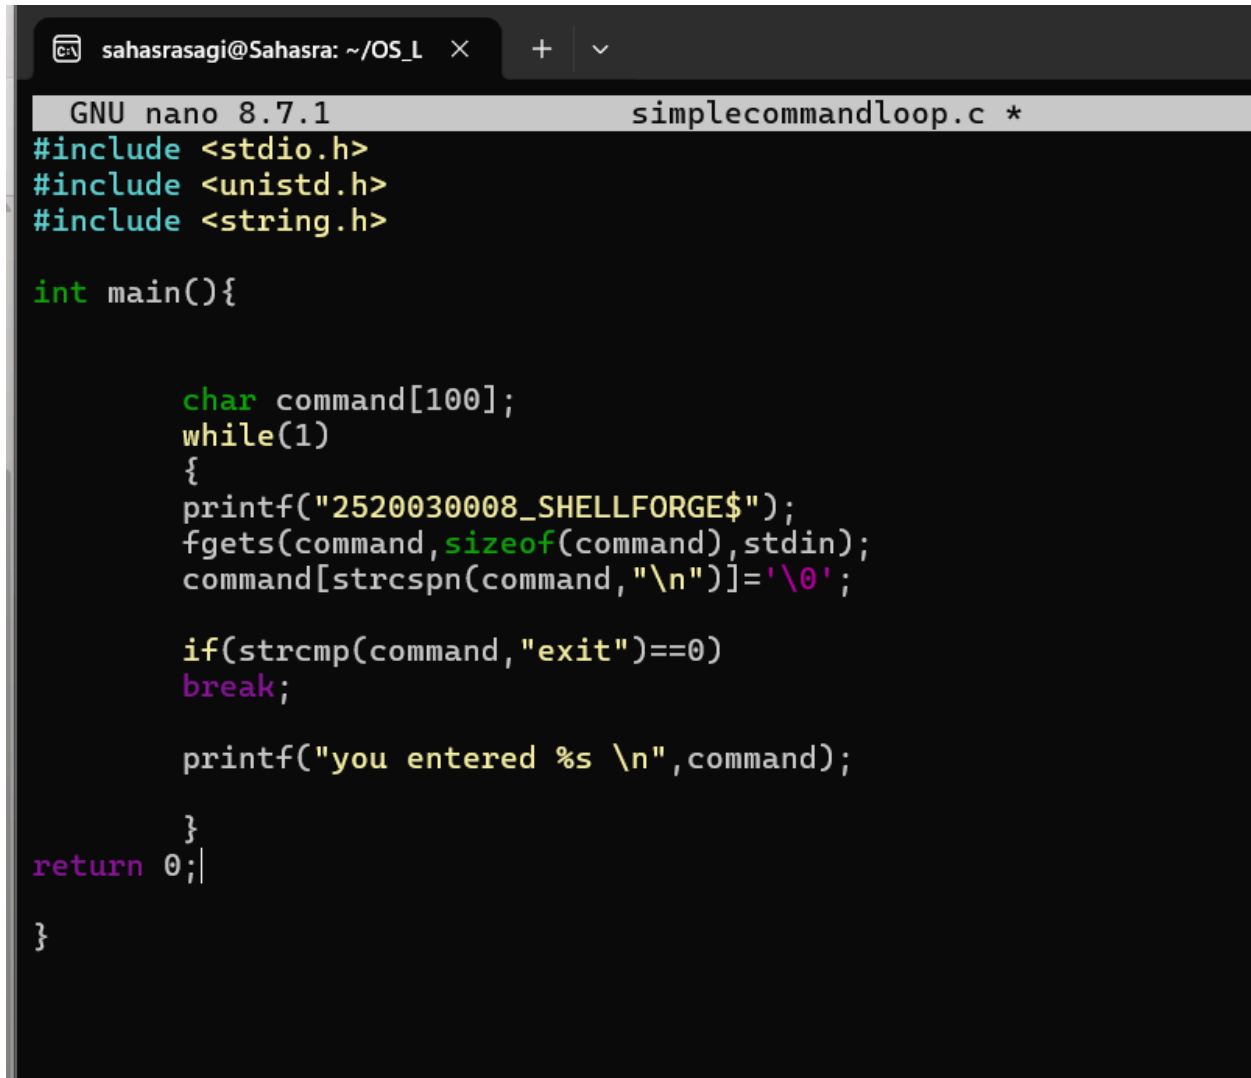


Name: Sagi Sahasra Srihasa
Roll : 2520030008

Program;

A screenshot of a terminal window with a dark background. The terminal title bar shows 'sahasrasagi@Sahasra: ~/OS_L' and a tab icon. Below the title bar, the nano editor header displays 'GNU nano 8.7.1' and the filename 'simplecommandloop.c *'. The code is written in a syntax-highlighted style: preprocessor directives are in cyan, keywords in green, string literals in yellow, and control flow in purple. The code implements a simple shell loop that prompts the user with '2520030008_SHELLFORGE\$' and echoes their input. It includes a break condition for the command 'exit'.

```
#include <stdio.h>
#include <unistd.h>
#include <string.h>

int main(){

    char command[100];
    while(1)
    {
        printf("2520030008_SHELLFORGE$");
        fgets(command,sizeof(command),stdin);
        command[strcspn(command,"\n")]='\0';

        if(strcmp(command,"exit")==0)
            break;

        printf("you entered %s \n",command);
    }
    return 0;
}
```

```
sahasrasagi@Sahasra:~/OS_Lab$ nano simplecommandloop.c
sahasrasagi@Sahasra:~/OS_Lab$ gcc simplecommandloop.c -o simplecommandloop
sahasrasagi@Sahasra:~/OS_Lab$ ./simplecommandloop
2520030008_SHELLFORGE$ls
you entered ls
2520030008_SHELLFORGE$pwd
you entered pwd
2520030008_SHELLFORGE$help
you entered help
2520030008_SHELLFORGE$ls -l
you entered ls -l
2520030008_SHELLFORGE$mkdir skill
you entered mkdir skill
2520030008_SHELLFORGE$exit
sahasrasagi@Sahasra:~/OS_Lab$ |
```