

# **MINI PYTHON COMPILER**

## **A MINI PROJECT REPORT**

*Submitted by*

**RISHABH SINGH SAHIL [RA2011003011334]**

**ABHISHEK VERMA [RA2011003011341]**

Under the guidance of

**Dr. Kowsigan M.**

(Assistant Professor, Department of Computing Technologies)

*In partial satisfaction of the requirements for the degree of*

**BACHELOR OF TECHNOLOGY**

in

**COMPUTER SCIENCE & ENGINEERING**



**SCHOOL OF COMPUTING**

**COLLEGE OF ENGINEERING AND TECHNOLOGY**

**SRM INSTITUTE OF SCIENCE AND TECHNOLOGY**

**KATTANKULATHUR - 603203**

**APRIL 2023**



**SRM**  
INSTITUTE OF SCIENCE & TECHNOLOGY  
Deemed to be University u/s 3 of UGC Act, 1956

COLLEGE OF ENGINEERING & TECHNOLOGY  
SRM INSTITUTE OF SCIENCE & TECHNOLOGY  
S.R.M. NAGAR, KATTANKULATHUR – 603 203

## BONAFIDE CERTIFICATE

Certified that this project report “**Mini Python Compiler**” is the Bonafide work of “**Rishabh Singh Sahil (RA2011003011334) and Abhishek Verma (RA2011003011341)**” of III Year/VI Sem B. Tech (CSE) who carried out the mini project work under my supervision for the course **18CSC304J- Compiler Design** in SRM Institute of Science and Technology during the academic year 2022-2023(Even sem).

---

(SIGNATURE)

---

(DEPARTMENT SEAL)

**Dr. Kowsigan M.**

**Assistant Professor**

**Department of Computing Technologies**

## TABLE OF CONTENTS


Chapter No.	Title	Page No.
1.	INTRODUCTION	01
2.	ARCHITECTURE OF LANGUAGE	03
3.	DIFFERENT MODULES OF PROJECT	04
4.	CONTEXT FREE GRAMMAR	05
5.	DESIGN STRATEGY <ul style="list-style-type: none"><li>● SYMBOL TABLE CREATION</li><li>● ABSTRACT SYNTAX TREE</li><li>● INTERMEDIATE CODE GENERATION</li><li>● CODE OPTIMIZATION</li><li>● ERROR HANDLING</li><li>● TARGET CODE GENERATION</li></ul>	07
6.	IMPLEMENTATION DETAILS <ul style="list-style-type: none"><li>● SYMBOL TABLE CREATION</li><li>● ABSTRACT SYNTAX TREE</li><li>● INTERMEDIATE CODE GENERATION</li><li>● CODE OPTIMIZATION</li><li>● ASSEMBLY CODE GENERATION</li><li>● ERROR HANDLING</li><li>● BUILD AND RUN THE PROGRAM</li></ul>	09
7.	RESULTS AND SHORTCOMINGS	14
8.	SNAPSHOTS	15
9.	CONCLUSIONS	23
10.	FUTURE ENHANCEMENT	24
REFERENCES		25

## INTRODUCTION

The Mini-Compiler, contains all phases of compiler has been made for the language Python by using C language (till intermediate code optimization phase) and we used Python language itself for target code generation as well. The constructs that have been focused on are 'if-else' and 'while' statements. The optimizations handled for the intermediate code are 'packing temporaries' and 'constant propagation'. Syntax and semantic errors have been handled and syntax error recovery has been implemented using Panic Mode Recovery in the lexer.

The screenshots of the sample input and target code output are as follows:

### Sample Input:

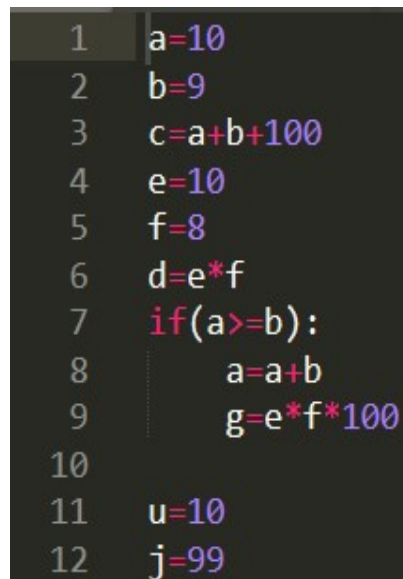A screenshot of a code editor with a dark background. It shows 12 lines of Python code. Line 1: a=10, Line 2: b=9, Line 3: c=a+b+100, Line 4: e=10, Line 5: f=8, Line 6: d=e\*f, Line 7: if(a>=b):, Line 8: a=a+b, Line 9: g=e\*f\*100, Line 10: (empty), Line 11: u=10, Line 12: j=99. The code is color-coded: numbers are grey, assignment operators are white, and variable names and values are purple. The 'if' statement is red, and its body is indented with two spaces.

```
1 a=10
2 b=9
3 c=a+b+100
4 e=10
5 f=8
6 d=e*f
7 if(a>=b):
8     a=a+b
9     g=e*f*100
10
11 u=10
12 j=99
```

Fig. 1.1

**Sample Output:**

This the target code which is generated after ICG

```
MOV R0, #10
MOV R1, #9
MOV R2, #119
MOV R3, #8
MOV R4, #80
l0:
MOV R5, #0
BNEZ R5, l1
MOV R6, #19
MOV R7, #8000
l1:
MOV R8, #99
ST b, R1
ST c, R2
ST e, R0
ST f, R3
ST d, R4
ST a, R6
ST g, R7
ST u, R0
ST j, R8
```

**Fig. 1.2**

## ARCHITECTURE OF LANGUAGE

For this mini-compiler, the following aspects of the Python language syntax have been covered:

- Constructs like 'if-else' and 'while' and the required indentation for these loops.
- Nested loops
- Integer and float data types

Specific error messages are displayed based on the type of error. Syntax errors are handled using the `yyerror ()` function, while the semantic errors are handled by making a call to a function that searches for a particular identifier in the symbol table. The line number is displayed as part of the error message.

As a part of error recovery, panic mode recovery has been implemented for the lexer. It recovers from errors in variable declaration. In case of identifiers, when the name begins with a digit, the compiler neglects the digit and considers the rest as the identifier name.

Languages used to develop this project:

- C
- YACC
- LEX
- PYTHON

## DIFFERENT MODULES OF PROJECT

### 1. Different Folders:

- **Token and Symbol Table**: This folder contains the code that outputs the tokens and the symbol table.
- **Abstract Syntax Tree**: This folder contains the code that displays the abstract syntax tree.
- **Intermediate Code Generation**: This folder contains the code that generates the symbol table before optimizations and the intermediate code.
- **Optimised ICG**: This folder contains the code that generates the symbol table after optimizations, the quadruples table and the optimized intermediate code.
- **Target Code**: This folder contains the code that displays the assembly code/target code.

### 2. Different Files:

- **proj.l**: It is the Lexical analyzer file which defines all the terminals of the productions stated in the yacc file. It contains regular expressions.
- **proj1.y**: Yacc file is where the productions for the conditional statements like if-else and while and expressions are mentioned. This file also contains the semantic rules defined against every production necessary. Rules for producing three address code is also present.
- **final.py**: It is the python file which converts the ICG to target code using regex.
- **inp.py**: The input python code which will be parsed and checked for semantic correctness by executing the lex and yacc files along with it.

# CONTEXT-FREE GRAMMAR

## 1. REGEX

- digits  $\rightarrow [0-9]$
- num  $\rightarrow \text{digits}+(\backslash.\text{digits})?([Ee][+|-]? \text{digits})?$
- id  $\rightarrow [a-zA-Z][a-zA-Z0-9]^*$
- integer  $\rightarrow [0-9]^+$
- string  $\rightarrow [a-z | A-Z | 0-9 | \text{special}]^*$
- special  $\rightarrow [! " \# \$ \% \& \backslash ( ) ^ * + , - . / : ; < = > ? @ [ \backslash \backslash ] ^ \_ \backslash \{ | \} \sim]$

## 2. GRAMMAR

- P  $\rightarrow S$
- S  $\rightarrow \text{Simple S} | \text{Compound S} | \text{epsilon}$
- Simple  $\rightarrow \text{Assignment LB} | \text{Cond LB} | \text{Print LB} | \text{break} | \text{pass} | \text{continue Assignment -}$   
 $\rightarrow \text{id opassgn E1} | \text{id opassgn cond} | \text{id listassgn Arr} | \text{id strassgn Str}$
- E1  $\rightarrow E1 \text{ op1 } E2 | E2$
- E2  $\rightarrow E2 \text{ op2 } E3 | E3$
- E3  $\rightarrow E4 \text{ op3 } E3 | E4$
- E4  $\rightarrow \text{num} | \text{id} | (E1)$
- opassgn  $\rightarrow = | /= | *= | += | -=$  op1  $\rightarrow + | -$
- op2  $\rightarrow / | *$
- op3  $\rightarrow **$
- LB  $\rightarrow \backslash n$
- listassgn  $\rightarrow =$  strassgn  $\rightarrow = | += | -=$
- Arr  $\rightarrow [\text{list}] | [\text{list}] \text{ mul} | [\text{list}] \text{ add} | \text{mat mat} \rightarrow [\text{listnum}] | [\text{liststr}]$
- list  $\rightarrow \text{listnum} | \text{liststr} | \text{Range listnum} \rightarrow \text{num, listnum} | \text{epsilon} | \text{num liststr} \rightarrow \text{Str, liststr} | \text{epsilon} | \text{Str}$



- mul -> \* integer
- add -> + Arr
- Range -> range (start, stop, step) start -> integer | epsilon
- stop -> integer
- step -> integer | epsilon
- Str -> string | string mul | string addstr
- addstr -> + string
- Compound -> if\_else LB | while\_loop LB
- if\_else -> if condition: LB IND else | if condition: LBIND
- | if condition: S | if condition: S else
- else -> else: LB IND | else: S
- while\_loop -> while condition: LB IND | while condition: S
- condition -> cond | (cond)
- cond -> cond opor cond1 | cond1 cond1 -> cond1 opand cond2 | cond2 cond2 -> opnot cond2 | cond3
- cond3 -> (cond) | relexp | bool
- relexp -> relexp relop E1 | E1 | id | num relop -> < | > | <= | >= | == | != | in | not in bool -> True | False
- opor -> || | or
- opand -> && | and
- opnot -> not | ~
- IND -> indent S dedent
- indent -> \t
- dedent -> -\t
- Print -> print (toprint) | print (toprint, sep ) | print ( toprint,sep,end)
- | print (toprint, end) toprint -> X | X, toprint | epsilon X -> Str | Arr | id | num
- sep -> sep = Str
- end -> end = Str

## DESIGN STRATEGY

### 1. SYMBOL TABLE CREATION

Linked list is being used to create the symbol table. The final output shows the label, value, scope, line number and type. We have created three functions to generate the symbol table. They are:

- **Insert:** It pushes the node onto the linked list.
- **Display:** It displays the symbol table.
- **Search:** It searches for a particular label in the linkedlist.

### 2. ABSTRACT SYNTAX TREE

This is being implemented using a structure that has three members which hold the data, left pointer and right pointer respectively. The functions that aid in creating and displaying this tree are:

- **Build Tree:** It is used to create a node of this structure and add it to the existing tree.
- **Print Tree:** This function displays the abstract syntax tree using pre-order traversal.

### 3. INTERMEDIATE CODE GENERATION

We have used the stack data structure to generate the intermediate code that uses some functions, which are called based on some conditions.

### 4. CODE OPTIMIZATION

A data structure known as quadruple is used to optimize the code. This data structure holds the details of each of the assignment, label and goto statements.

### 5. ERROR HANDLING

- **Syntax Error:** If the token returned does not satisfy the grammar, then yyerror () is used to display the syntax error along with the line number.

- **Semantic Error:** If there is an identifier in the RHS of an assignment statement, the symbol table is searched for that variable. If the variable does not exist in the symbol table, this is identified as a semantic error and is displayed.
- **Error Recovery:** Panic Mode Recovery is used as the error recovery technique, where if the variable declaration has been done with a number at the start, it ignores the number and considers the rest as the variable name. This has been implemented using regex.

## 6. TARGET CODE GENERATION

The optimised intermediate code is read from a text file, line after line, and goes through a series of if-else loops to generate the target code. A hypothetical target machine model has been used as the target machine and the limit on the number of reusable registers has been set to 13, numbered from R0 to R12.

A hypothetical machine model has been used that follows the following instruction set architecture:

**1) Load/Store Operations:**  
ST <loc>, R  
LD R, <loc>

**2) Move Operations:**  
MOV R<sub>d</sub>, #<num>

**3) Arithmetic Operations:**  
<ADD/SUB/MUL/DIV> R<sub>d</sub>, R<sub>1</sub>, R<sub>2</sub>

**4) Compare Operations:**  
CMP<cond> R<sub>d</sub>, R<sub>1</sub>, R<sub>2</sub>

Fig 2.1

<cond>: **E** for ==, **NE** for !=, **G** for >, **L** for <, **GE** for >= or **LE** for <=

**5) Logical Operations:**  
NOT R<sub>d</sub>, R  
<AND/OR> R<sub>d</sub>, R<sub>1</sub>, R<sub>2</sub>

**6) Conditional Branch:**  
BNEZ R<sub>d</sub>, label

**7) Unconditional Branch:**  
BR label

Fig 2.2

## IMPLEMENTATION DETAILS

### SYMBOL TABLE CREATION

The following snapshot shows the structure declaration for symbol table:

```
struct symbtabs
{
    char label[20];
    char type[20];
    int value;
    char scope[20];
    int lineno;
    struct symbtabs *next;
};
```

Fig. 3.1

These are the functions used to generate the symbol table:

```
void insert(char* l,char* t,int v,char* s,int ln);
struct symbtabs* search(char lab[]);
void display();
```

Fig. 3.2

These snapshots are taken from proj1.y file in Token and Symbol table folder.

## ABSTRACT SYNTAX TREE

The following data structure is used to represent the abstract syntax tree:

```
typedef struct Abstract_syntax_tree
{
    char *name;
    struct Abstract_syntax_tree *left;
    struct Abstract_syntax_tree *right;
}node;
```

**Fig. 3.3**

The following functions build and display the syntax tree:

```
node* buildTree(char *,node *,node *);
void printTree(node *);
```

**Fig. 3.4**

These snapshots are taken from proj1.y file in Abstract syntax tree folder.

## INTERMEDIATE CODE GENERATION

The following arrays act as stacks and are used for the generation of intermediate code:

```
char label[2]="l"; // labels
int l_ = 0;        //count of labels(l1,l2,...)
char l__[100] = {'\0'}; //labels
char st[100][10];  //stack used in icg generation
int top=0;         //top of stack
int i_ = 0;        //count of temp variables in icg
char i__[100] = {'\0'}; //temp variables (t1,t2,...)
char temp[2]="t";
char ICG[10000]=""; //icg
char try1[5][10];
char try[5][10];
```

Fig. 3.5

The following functions push onto the stack and generate the intermediate code, when called based on various conditions:

```
void push(char*);
void codegen(int val, char* aeval_);
void codegen_assign();
void codegen2();
void codegen3();
```

Fig. 3.6

These snapshots are taken from proj1.y file in ICG folder.

## CODE OPTIMISATION

The data structure quadruple declaration has been shown below:

```
typedef struct quadruples
{
    char *op;
    char *arg1;
    char *arg2;
    char *res;
}quad;
```

Fig. 3.7

The following functions are used to add to the quadruples table and display it onto the terminal:

```
void displayquad();
char addquad(char*,char*,char*,char*);
```

Fig. 3.8

These snapshots are taken from proj1.y file in Optimized ICG folder.

## TARGET CODE GENERATION

A global dictionary holds the mapping between each constant/identifier and the corresponding register that holds that constant/identifier. There also is a global list that holds the identifiers that need to be stored towards the end of the program.

There are two functions which are used for register allocation. The 'getreg ()' function gets the next free/unallocated register and uses the 'fifo ()' function in cases when all the registers are used up. The 'fifo ()' function uses the 'First in First Out' method to free a register and return it to the 'getreg ()' function.

These functions are as follows:

```
def fifo():
    global fifo_reg
    global fifo_return_reg
    for k,v in var.copy().items():
        if(v == 'R'+str(fifo_reg) ):
            fifo_return_reg = v
            var.pop(k)
            if(k in store_seq):
                store_seq.remove(k)
                print("ST ", k, ', ', v, sep='')
    fifo_reg = int(fifo_return_reg[1:]) + 1
    return fifo_return_reg
```

Fig. 3.9

```
def getreg():
    for i in range(0,13):
        if reg[i]==0:
            reg[i]=1
            return 'R'+str(i)
    register = fifo()
    return register
```

Fig. 3.10

These snapshots are taken from final.py file in Target Code folder.



## ERROR HANDLING

The following snapshot shows the error handling function for syntax errors:

```
int yyerror(){
    printf("\n-----SYNTAX ERROR : at line number %d -----\\n",yylineno-1);
    error = 1;
    v=0;
    return 0;
}
```

**Fig. 3.11**

The following snapshot shows semantic error handling functionality:

```
t_ptr=search($1);
if(t_ptr==NULL)
{
    printf("\n-----|ERROR : variable %s undeclared-----\\n",$1);
    error = 1;
}
```

**Fig. 3.12**

These above snapshots are taken from proj1.y file in Symbol table folder.

The regex for panic mode recovery implemented in the lexer is as follows:

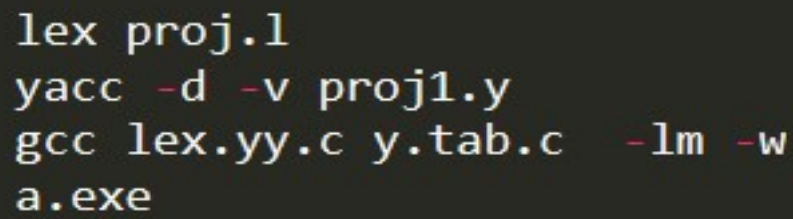
```
[0-9;!,@#]*/(({alpha}|"_")({alpha}|{digits}|"_")*)
```

**Fig. 3.13**

The above snapshots are taken from proj.l file in Symbol table folder.

### **BUILD AND RUN THE PROGRAM:**

The following screenshot displays what commands need to be executed to build and run the program:

A screenshot of a terminal window with a dark background and light-colored text. It shows four lines of commands: 'lex proj.l', 'yacc -d -v proj1.y', 'gcc lex.yy.c y.tab.c -lm -w', and 'a.exe'.

```
lex proj.l  
yacc -d -v proj1.y  
gcc lex.yy.c y.tab.c -lm -w  
a.exe
```

**Fig. 3.14**

The above commands need to be executed on the terminal which is inside the project folder that contains the code for the compiler.

## RESULTS AND SHORTCOMINGS

The mini-compiler built in this project works perfectly for the 'if-else' and 'while' constructs of Python language. Our compiler can be executed in different phases by building and running the code separated in the various folders. The final code displays the output of all the phases on the terminal, one after the other. First, the tokens are displayed, followed by a 'PARSE SUCCESSFUL' message. Then abstract syntax tree is printed. Next, the symbol table along with the intermediate code is printed without optimization. Finally, the symbol table and the intermediate code after optimization is displayed after the quadruples table. The final output is the target code, written in the instruction set architecture followed by the hypothetical machine model introduced in this project. This is for inputs with no errors. But in case of erroneous inputs, the token generation is stopped on error encounter and the corresponding error message is displayed.

This mini-compiler has the following shortcomings:

- User defined functions are not handled.
- Importing libraries and calling library functions is not taken care of.
- Datatypes other than integer and float, example strings, lists, tuples, dictionaries, etc. have not been considered.
- Constructs other than 'while' and 'if-else' have not been added in the compiler program.

## SNAPSHOTS

### TEST CASE 1 (Correct input):

#### Input:

```
1  a=10
2  b=9
3  c=a+b+100
4  e=10
5  f=8
6  d=e*f
7  if(a>=b):
8      a=a+b
9      g=e*f*100
10
11 u=10
12 j=99
```

Fig. 4.1

#### Tokens and Symbol Table:

```
ID equal int
ID equal int
ID equal ID plus ID plus int
ID equal int
ID equal int
ID equal ID mul ID
if special_start ID greaterthanequal ID special_end colon
indent ID equal ID plus ID
indent ID equal ID mul ID mul int

ID equal int
ID equal int
-----PARSE SUCCESSFUL-----

-----SYMBOL TABLE-----
-----
LABEL  TYPE      VALUE  SCOPE  LINENO
a      IDENTIFIER  19     local  8
b      IDENTIFIER  9      global 2
c      IDENTIFIER  119    global 3
e      IDENTIFIER  10     global 4
f      IDENTIFIER  8      global 5
d      IDENTIFIER  80     global 6
g      IDENTIFIER  8000   local  9
u      IDENTIFIER  10     global 11
j      IDENTIFIER  99     global 12
```

Fig. 4.2

**Abstract Syntax Tree:**

```
-----Abstract Syntax Tree-----
( SEQ ( = a 10 )( SEQ ( = b 9 )( SEQ ( = c ( + ( + a b ) 100 ))( SEQ ( = e 10 )( SEQ ( = f 8 )( SEQ ( = d
( * e f ))( SEQ ( IF ( >= a b )( SEQ ( = a ( + a b ))( SEQ ( = g ( * ( * e f ) 100 )) NULL )))( SEQ ( = u
10 )( SEQ ( = j 99 ) NULL ))))))))
```

**Fig. 4.3**

**Symbol Table and Unoptimized Intermediate Code:**

```
-----SYMBOL TABLE before Optimisations-----
-----
LABEL  TYPE      VALUE  SCOPE  LINENO
a      identifier  9      local  8
b      identifier  9      global 2
t0     identifier  19     -      2
t1     identifier  119    -      3
c      identifier  119    global 3
e      identifier  10     global 4
f      identifier  8      global 5
t2     identifier  80     -      6
d      identifier  80     global 6
t3     identifier  0      -      6
t4     identifier  9      -      8
t5     identifier  80     -      8
t6     identifier  8000   -      9
g      identifier  8000   local  9
u      identifier  10     local  11
j      identifier  99     local  12

-----ICG without optimisation-----
a=10
b=9
t0=a+b
t1=t0+100
c=t1
e=10
f=8
t2=e*f
d=t2
l0 : t3=a>b
if not t3 goto l1
t4=a+b
a=t4
t5=e*f
t6=t5*100
g=t6
l1 : u=10
j=99
```

**Fig. 4.4**

### Symbol Table, Quadruples Table and Optimised Intermediate Code:

-----SYMBOL TABLE after Optimisations-----				
LABEL	TYPE	VALUE	SCOPE	LINENO
a	identifier	19	local	8
b	identifier	9	global	2
t0	identifier	19	-	2
t1	identifier	119	-	3
c	identifier	119	global	3
e	identifier	10	global	4
f	identifier	8	global	5
t2	identifier	80	-	5
d	identifier	80	global	6
t3	identifier	1	-	6
t4	identifier	0	-	6
t5	identifier	8000	-	8
g	identifier	8000	local	9
u	identifier	10	local	11
j	identifier	99	local	12

-----QUADRUPLES-----				
op	arg1	arg2	result	
=	10		a	
=	9		b	
+	a	b	t0	
+	t0	100	t1	
=	t1		c	
=	10		e	
=	8		f	
*	e	f	t2	
=	t2		d	
Label			l0	
>=	a	b	t3	
goto			l1	
=	t0		a	
*	t2	100	t5	
=	t5		g	
Label			l1	
=	10		u	
=	99		j	

Fig. 4.5

```

ICC with optimisations(Packing temporaries & Constant Propagation)
a = 10
b = 9
t0 = 10 + 9
t1 = 19 + 100
c = 119
e = 10
f = 8
t2 = 10 * 8
d = 80
l0:
t3 = 10 >= 9
t4 = not 1
if 0 goto l1
a = 19
t5 = 80 * 100
g = 8000
l1:
u = 10
j = 99

```

Fig. 4.6

**Target Code:**

```
MOV R0, #10
MOV R1, #9
MOV R2, #119
MOV R3, #8
MOV R4, #80
l0:
MOV R5, #0
BNEZ R5, l1
MOV R6, #19
MOV R7, #8000
l1:
MOV R8, #99
ST b, R1
ST c, R2
ST e, R0
ST f, R3
ST d, R4
ST a, R6
ST g, R7
ST u, R0
ST j, R8
```

**Fig. 4.7**

## TEST CASE 2 (Syntax Error):

Input:

```
1  a=10
2  b=9
3  c=a+b+100
4  e+10  // error
5  f=8
6  d=e*f
7  if(a>=b):
8      a=a+b
9      g=e*f*100
10
11  u=10
12  j=99
```

Fig. 5.1

Output:

```
ID equal int
ID equal int
ID equal ID plus ID plus int
ID plus
-----SYNTAX ERROR : at line number 4 -----
```

Fig. 5.2



### TEST CASE 3 (Semantic Error):

**Input:**

```
1  a=10
2  b=b+9 //error
3  c=a+b+100
4  e=10
5  f=8
6  d=e*f
7  if(a>=b):
8      a=a+b
9      g=e*f*100
10
11  u=10
12  j=99
```

Fig. 6.1

**Output:**

```
ID equal int
ID equal ID
-----ERROR : b Undeclared at line number 2-----
```

Fig. 6.2

## TEST CASE 4 (Error Recovery):

Input:

```
1  a=10
2  b=b+9 //error
3  c=a+b+100
4  e=10
5  f=8
6  d=e*f
7  if(a>=b):
8      a=a+b
9      g=e*f*100
10
11 u=10
12 j=99
```

Fig. 7.1

Output:

```
plus int
ID equal ID plus ID plus int
ID equal int
ID equal int
ID equal ID mul ID
if special_start ID greaterthanequal ID special_end colon
indent ID equal ID plus ID
indent ID equal ID mul ID mul int

ID equal int
ID equal int
-----PARSE SUCCESSFUL-----
```

Fig. 7.2

## CONCLUSIONS

Making a full complete compiler is a very difficult task and it takes lots of time to make it. So, we have successfully made a mini compiler which performs following operations:

- This is a mini-compiler for python using lex and yacc files which takes in a python program and according to the context free grammar written, the program is validated.
- Regular Expressions are written to generate the tokens.
- Symbol table is created to store the information about the identifiers.
- Abstract syntax tree is generated and displayed according to the pre-order tree traversal.
- Intermediate code is generated, and the data structure used for optimization is Quadruples. The optimization techniques used are constant propagation and packing temporaries.
- The optimised intermediate code is then converted to the Target code using a hypothetical machine model.
- Error handling and recovery implemented take care of erroneous inputs.

## **FUTURE ENHANCEMENTS**

This mini-compiler can be enhanced to a complete compiler for the Python language by making a few improvements. User defined functions can be handled and the functionality of importing libraries and calling library functions can be taken care of. Datatypes other than integer, example strings, lists, tuples, dictionaries, etc. can be included and constructs other than 'while' and 'if-else', like 'for' can be added in the compiler program. The output can be made to look more enhanced and beautiful. The overall efficiency and speed of the program can be improved by using some other data structures, functions or approaches.

## REFERENCES

- **Lex and Yacc:** <http://cse.iitkgp.ac.in/~bivasm/notes/LexAndYaccTutorial.pdf>
- **Introduction about Flex and Bison:** <http://dinosaur.compilertools.net/>
- **Full Grammar Specification:** <https://docs.python.org/3/reference/grammar.html>
- **Introduction to Yacc:** <https://www.inf.unibz.it/~artale/Compiler/intro-yacc.pdf>
- **Intermediate Code Generation:** <https://2k8618.blogspot.com/2011/06/intermediate-code-generator-for.html?m=0>
- **Target Code Generation:**  
<https://web.cs.ucdavis.edu/~pandey/Teaching/ECS142/Lects/final.codegen.pdf>  
<https://www.javatpoint.com/code-generation>
- **A Code Generator to translate Three-Address intermediate code to MIPS assembly code:** <https://www2.cs.arizona.edu/~debray/Teaching/CSc453/DOCS/3addr2spim.pdf>