FedEx Ground® Economy
Epic Label Specification Guide

January 2024

VER 5.1.05.03

Table of Contents

Table of Contents 2
Introduction 3
Compliance 3
Customer Support 3
Changes 3
References 4
Barcode Symbology 4
FedEx 1D Barcode Physical Specification 4
Barcode Print Image Requirements 4
Thermal Printer Specification 5
Laser Printer Specification 5
Barcode Layout – FedEx Ground® 1D Barcode 6
FedEx 1D Barcode Content Specification 7
Product Index 7
Application Data 7
Tracking Number 8
FedEx 1D Barcode Discrimination 8
Product Index Range Allocation and Encode Algorithm 9
Application Data Format Specification 10
- **Table 5-3: Application Data Format Specification** 10
- **Figure 5-1: Example Application Data Format 3 Calculations** 10
- **Figure 5-2: FedEx Check Digit Calculation Detail** 11

Sample FedEx 1D Barcode 11
Barcode Requirements for USPS 12
Barcode Symbology 12
FedEx Ground® Economy Barcode 12
Barcode Layout – e-VS 13
FedEx Ground® Economy Barcode Data Structure 14
FedEx Ground Economy – MOD 10 Check Digit Calculation 16
FedEx Ground Economy– Barcode Printing Requirements and Guidelines 17
- Bar Dimensions 17
- Quiet Zone 17
- Reflectance 17
- Barcode Quality 17
- Label Stock 17
- Label Size 17

Permit Imprint Indicia 18
Ancillary Endorsements 18
Label Evaluation Process 19
Label Submission Checklist 20
Label Layout Zones 21
Label Examples 25
- Parcel Select (Customer Reference) 25
- PS Lightweight (Customer Reference) 26
- Bound Printed Matter (Customer Reference) 27

Appendix A Figures and Table 28
Figure 3-1: FedEx 1D Barcode Content Layout 28
Figure 5-1: Example Application Data Format 3 Calculations 28
Table 2-1: FedEx 1D Label Thermal Print Specification 29
Table 2-2: FedEx 1D Label Laser Printer Specifications 29
Table 3-1: FedEx 1D Barcode Content Description 30
Table 4-1: FedEx 1D Barcode Discrimination 30
Table 5-1: Product Index Range Allocations and Range Encode Algorithm Description 30
Table 5-2: FedEx Ground Product Index Multi-codes (SCNC) 31
Table 5-3: Application Data Format Specification 31
Table 5-4: FedEx Ground FedEx 1D Barcode 31
Appendix B Ancillary Endorsement Matrix 32
Appendix C Text Elements for PNG/DIP/PDF 33

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Introduction

This document contains the specifications for creating FedEx Ground® Economy (formerly known as FedEx SmartPost® service offering) shipping labels. All packages tendered to FedEx Ground® are required to contain a shipping label that conforms to the specifications detailed within this document.

The objective of this document is to define the labeling requirements which facilitate the most efficient package movement through FedEx Ground® operations.

Compliance

All shippers are expected to be in full compliance.

Customer Support

Please contact FedEx Ground® Economy customer support with questions related to this document, label formats, testing, or implementation:

Email: SP_Labels@fedex.com

Changes

1. Implementing changes to the FedEx Ground® Economy (formerly known as FedEx SmartPost® service offering) new Epic label format to provide shippers with a dual label comprised of both FedEx Ground and USPS required shipping elements.
2. Allow for all FedEx Ground® Economy shippers to generate a FedEx Ground tracking number at label creation.
3. Better reflect that FedEx Ground is primarily performing final-mile delivery.

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

References

Barcode Symbology

ANSI X3.182 Barcode Print Quality Guideline

ANSI/AIM BC4-1999, ISS – Code 128

FedEx 1D Barcode Physical Specification

The FedEx 1D barcode shall meet or exceed all requirements specified in the “ANSI X3.182 Barcode Print Quality Guideline” and “ANSI/AIM BC4-1999, ISS – Code 128”. These specifications are available from the American National Standards Institute (ANSI) and Automatic Identification Manufacturers (AIM) organizations.

AIM North America
125 WARRENDALE BAYNE RD, STE 100
WARRENDALE, PA 15086-7570
Phone: (724) 934-5688
http://www.aim-na.org/

ANSI – American National Standards Institute
25 W 43RD ST, 4TH FL.
NEW YORK, NY 10036-7414
Phone: (212) 642-4900
http://www.ansi.org/

FedEx 1D barcode physical specification compliance ensures that all FedEx scanning systems can accurately and reliably decode the FedEx 1D barcode information. Deviations from these specifications are not allowed.

Barcode Print Image Requirements

Excessive print defects such as spots and voids shall be kept to minimum. These defects could be the result of toner flaking due to high print speed and/or mismatched paper stock and printer consumables.

Accepted Print

Accepted print methods are direct thermal or thermal transfer. Dot-matrix printed labels are not permitted. Thermal Printer Specifications are listed on the next page.

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Thermal Printer Specification

In addition to the "ANSI/AIM BC4-1999, ISS – Code 128" specification, direct thermal and thermal transfer printed labels shall comply with FedEx 1D Label Thermal Print Specifications listed below.

Table 2-1: FedEx 1D Label Thermal Print Specifications

Spec	Attribute	Specification
T.1	Printer Types	Direct Thermal or Thermal Transfer
T.2	Print Head Resolution	203 dots/inch
T.3	Label Size	Width = 4"; Length = variable Minimum FedEx 1D area is 4" wide by 2.5" high (101.6mm by 63.5mm)
T.4	Direct Thermal Label Facestock	RICOH FX direct thermal facestock series Appleton Optima T-700 direct thermal facestock
T.5	Spectral Response	700nm (semi-infrared) and below
T.6	Minimum ANSI Print Quality Grade	B
T.7	Bar Element Tolerance	+/- 0.10X (maximum bar shrinkage/bar growth)
T.8	Barcode Element Color	Black
T.9	Background Color	White
T.10	FDX 1D Barcode Symbology	CODE-128C
T.11	X-Dimension (narrow element width)	0.015" (15mil : 3 dots)
T.12	Aspect Ratio (bar height to length)	29% or 1.00" whichever is greater
T.13	Quiet Zones (sides)	10X or greater
T.14	Quiet Zones (top/bottom)	0.10" or greater

Laser Printer Specification

In addition to the "ANSI/AIM BC4-1999, ISS – Code 128" specification, laser or inkjet printed labels shall comply with the FedEx 1D Label Laser Print Specifications listed below.

Table 2-2: FedEx 1D Label Laser Print Specifications

Spec	Attribute	Specification
L.1	Printer Types	Laser or InkJet
L.2	Print Head Resolution	300 dots/inch and above
L.3	Label Size	Printer make and model dependent. Minimum FedEx 1D area is 4" wide by 2.5" high (101.6mm by 63.5mm)
L.4	Label Type	Plain paper or plain paper with pressure sensitive adhesive backing
L.6	Minimum ANSI Print Quality Grade	B
L.7	Bar Element Tolerance	+/- 0.10X (maximum toner / ink spread)
L.8	Barcode Element Color	Black
L.9	Background Color	White
L.10	FDX 1D Barcode Symbology	CODE-128C
L.11	X-Dimension (narrow element width)	0.015" (15mil nominal) +/- 5% maximum
L.12	Aspect Ratio (bar height to length)	29% or 1.00" whichever is greater
L.13	Quiet Zones (sides)	10X or greater
L.14	Quiet Zones (top/bottom)	0.10" or greater

All barcode elements (both black and white) shall be of equal width to within +/- 0.10X of each other. For example: CODE-128 symbols are made up of 4 different element widths: 1X, 2X, 3X, and 4X. All 1X element width (both black and white) shall be of the same dimension. All bar elements shall be exactly the multiple of the X-Dimension (narrow bar width) for both the black and white elements throughout the code.

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Barcode Layout – FedEx Ground® 1D Barcode

The following layout must be used when the FedEx Ground® 1D Barcode contains a SCNC Code of “21” and “31”. Definitions of SCNC Codes can be found on Page 9 Table 5-2 of this document.

All FedEx Ground Economy labels are required to have a FedEx EPIC barcode.

Center everything shown below vertically within Zone D (Refer to page 21 for Label Layout Zones)

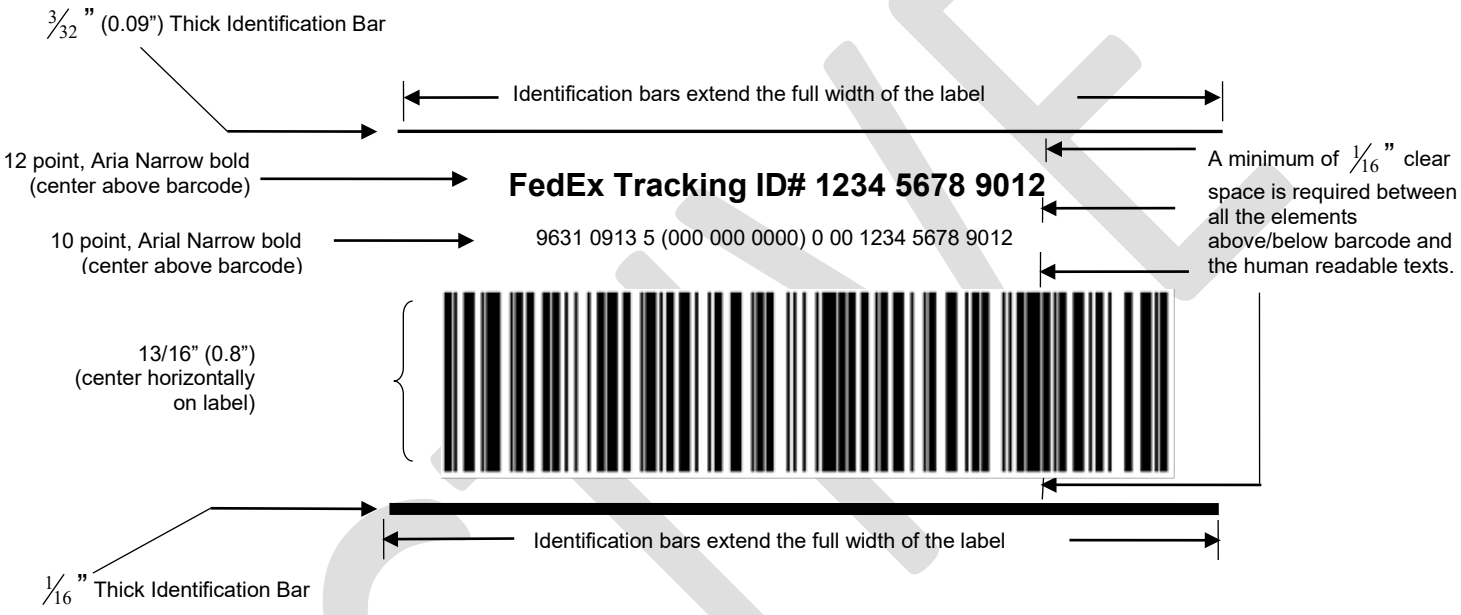

The barcode layout shown above is not drawn to scale; for illustration purposes only.

Note: The 2-digit value following the 96 will be 31 or 21

- 7-Digit Ground Shipper Number (GSN) the default for the Ground Economy SCNC will be 21.
- The 7-digit GSN is masked with 10 zero’s in parentheses and a zero for shipper number check digit after the parenthesis. The ground shipper number encoded in the 1D barcode is the 7-digit GSN preceded by 3 zero’s.

- 9-Digit Account Number (EAN) the default for the Ground Economy SCNC will be 31.
- The 9-digit EAN is masked with 10 zero’s in parenthesis and a zero for shipper number check digit after the parenthesis. The 9-digit account number is encoded in the 1D barcode preceded by one zero

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

FedEx 1D Barcode Content Specification

The FedEx 1D barcode uses Code 128C symbology and is 34-digits (i.e. 17-symbols) long. The FedEx 1D barcode content layout is illustrated in the Figures 3-1, 5-1 and 5-2 below and described in Tables 3-1 to 5-8 below. The three designated data elements are space allocations that can be used to encode different types of data appropriate for each data element with some constrained flexibility. Sub-sections 3.1, 3.2 and 3.3 provide details regarding the FedEx 1D barcode data elements: Product Index, Application Data and Tracking Number.

An example of the constrained flexibility design is the 14-digit tracking number data element space allocation allows for up to a 14-digit FedEx tracking number to be encoded in the FedEx 1D barcode. This does not necessarily mean that all FedEx tracking numbers encoded in the FedEx 1D barcodes shall be 14-digits. Other FedEx tracking numbers less than 14-digits will be encoded in the 14-digit tracking number data element. Section 3.3 describes the tracking number data element and Section 5.3 of the Appendix specifies the different FedEx tracking number length encode rules.

Figure 3-1: FedEx 1D Barcode Content Layout

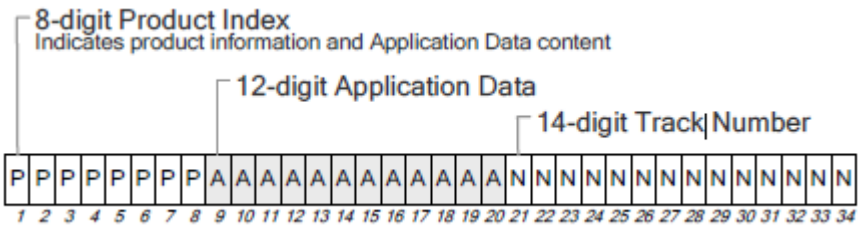

Table 3-1: FedEx 1D Barcode Content Description

Element Name	Description	Length (digits)	Position		Range
			Start	Stop	
Product Index	8-digit number indicates product information, multicode, and Application Data content, layout, and encoding.	8	1	8	100M
Application Data	12-digit number contains application specific data.	12	9	20	1T
Tracking number	A 14-digit number consisting of a managed 13-digit unique tracking number and a 1-digit check digit	14	21	34	10T

Product Index

The Product Index is an 8-digit number which is used to encode product information (i.e. base-service, optional-services, packaging-type, form-ID, etc.), multicode indicator, and the Application Data format. The multicode indicator designates if there are secondary FedEx recognized and used barcodes on the shipment label. Product Index ranges can be designated to serve different business needs and can have different encode algorithms. The ranges and encode rules are specified in Section 5.1 of the Appendix

Application Data

Application Data is a 12-digit space allocation that may contain no additional information or a number of *application* specific data elements. An *application* may be all shipments for a FedEx operating company, a geographic or product volume segment for a FedEx operating company or other to-be-determined application. The Product Index indicates the Application Data format and content. The Application Data formats are specified in Section 5.2 of the Appendix.

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Tracking Number

Tracking number is a 14-digit space allocation that can encode FedEx Ground tracking numbers equal to or less than 14-digits in the FedEx 1D barcode. Section 5.3 of the Appendix specifies the encode and decode rules for different FedEx tracking number lengths. Customers and 3rd parties who seek to scan, interpret and use the tracking number encoded in FedEx 1D barcode should implement support for FedEx tracking numbers up to 14-digits and also be able to decode tracking numbers that are less than 14-digits (e.g. 12-digit tracking numbers and tracking numbers less than 12-digits). Customers and 3rd parties who already scan, interpret and use FedEx Ground “96” 1D barcodes with a 15-digit tracking number should not reduce the tracking number size support as FedEx Ground “96” barcodes may exist in the FedEx Ground system for an indefinite period of time.

FedEx 1D Barcode Discrimination

The FedEx 1D barcode has the following characteristics which can be used to discriminate it from other barcodes.

Table 4-1: FedEx 1D Barcode Discrimination

Barcode Characteristic	Value
Symbology	Code 128C
Length:	17 symbols (34-digits)
FedEx Tracking number Check Digit	34th digit

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Product Index Range Allocation and Encode Algorithm

Table 5-1 indicates the Product Index range allocations and range encode algorithm for the range.

Table 5-1: Product Index Range Allocations and Range Encode Algorithm Description

<table>
<tr><th colspan="2">Range</th><th rowspan="2">Allocation</th><th rowspan="2">Range Encode Algorithm Description</th></tr>
<tr><th>Start</th><th>Stop</th></tr>
<tr><td>00,000,000</td><td>09,999,999</td><td>open</td><td>n/a</td></tr>
<tr><td>10,000,000</td><td>19,999,999</td><td>FedEx Express</td><td>Product Indexes in this range are determined via a data table lookup keyed on individual product elements (e.g. base-service, optional-service, packaging-type, form-Id, multicode, etc). Scanning applications needing the individual product elements to implement a business process will require access to an updatable reverse index data table.</td></tr>
<tr><td>20,000,000</td><td>89,999,999</td><td>open</td><td>n/a</td></tr>
<tr><td>90,000,000</td><td>99,999,999</td><td>FedEx Ground</td><td>Product Indexes is this range shall be created by concatenating the following three data elements:
<table>
<tr><th rowspan="2">Size</th><th colspan="2">Position</th><th rowspan="2">Description</th></tr>
<tr><th>Start</th><th>Stop</th></tr>
<tr><td>2</td><td>1</td><td>2</td><td>Literal “96”</td></tr>
<tr><td>2</td><td>3</td><td>4</td><td>Multicode indicator (also referred to as SCNC) indicates the combination of barcodes on the shipment label and the Application Data format. Table 5-2 below includes a list of all defined SCNCs for the FedEx 1D barcode with the associated secondary FedEx recognized and used symbol and Application Data format.</td></tr>
<tr><td>4</td><td>5</td><td>8</td><td>4-digit FedEx Ground Service code. The FedEx Ground Service Codes will be encoded as right justified, left padded with zeroes as necessary. FedEx Ground Service Codes are specified in a separate document titled, “FedEx Ground Service Codes”.</td></tr>
</table></td></tr>
</table>

Table 5-2 defines all FedEx 1D barcode multicode values which are included FedEx Ground 8-digit Product Indexes as specified in Table 5-1.

Table 5-2: FedEx Ground Product Index Multi-codes (SCNC)

SCNC	Primary FedEx Symbol	Secondary FedEx Recognized and Used Symbol	Application Data Format
21 *	FedEx 1D	None	3
22	FedEx 1D	FedEx 2D(1)	3
23	FedEx 1D	SSCC-18(2)	3
24	FedEx 1D	USPS DelCon(3) or IMPB(4)	3
31 *	FedEx 1D	None	3
32	FedEx 1D	FedEx 2D	3
33	FedEx 1D	SSCC-18	3
34	FedEx 1D	USPS DelCon or IMPB	3

(1) “FedEx 2D” is the FedEx 2D Barcode which is a PDF-417 symbol
(2) “SSCC-18” is the GS1-128 Serial Shipping Container Code which is a transportation industry standard 18 digit number used to identify logistics units.
(3) “USPS DelCon” is the United States Postal Service Delivery Confirmation Barcode
(4) “USPS IMPB” is the United States Postal Service Intelligent Mail Postal Barcode
* Support Ground Economy Only

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Application Data Format Specification

Table 5-3 specifies the defined Application Data formats, content name and description, size range and digits, and barcode start and stop positions. The Application Data format is specified by the Product Index.

Table 5-3: Application Data Format Specification

Format	Format Description	Content		Size		Position		Notes
		Name	Description	Range	Digits	Start	Stop	
3	Supports FedEx Ground "96" barcode business functions	Product Index Check Digit*	FedEx proprietary Product Index check digit.	10	1	9	9	*The Application Data Format 3 check digits are computed the same as the FedEx Tracking number. See Figure 5-1 Example Application Data Format 3 Calculations
		Shipper Number	Right justified FedEx Ground Shipper Number, left fill with zeros.	10B	10	10	19	
		Shipper Number Check Digit*	FedEx proprietary FedEx Ground Shipper Number check digit	10	1	20	20	

Figure 5-1: Example Application Data Format 3 Calculations

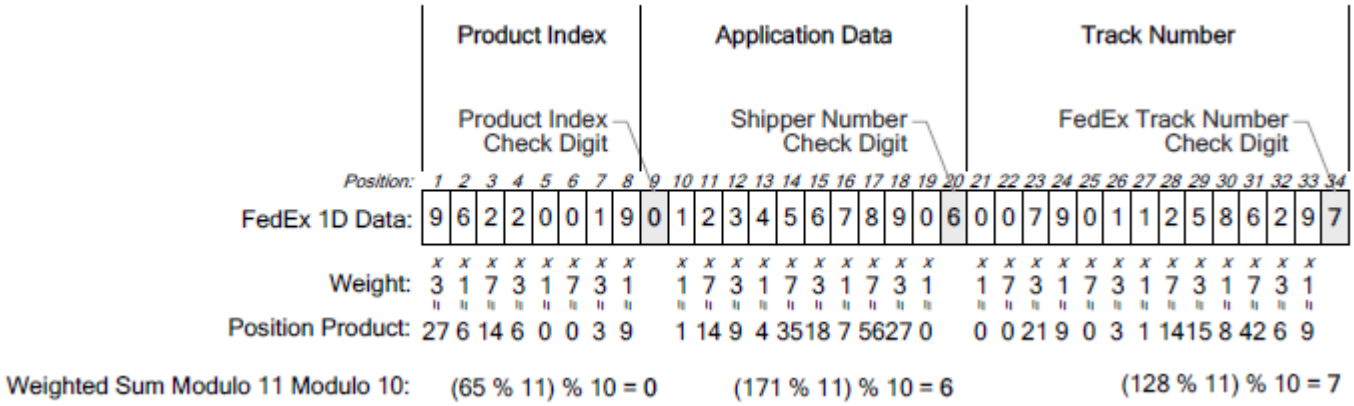

The Application Data Format 3 check digits are computed the same as the FedEx Tracking number. Figure 5-2 below is a detailed explanation of
the FedEx check digit calculation. The calculation is modulo 10 of modulo 11 of the weighted sum of the positions defined above for each check
digit. The weighting is a 1-3-7 alternating sequence starting with the weight of 1 on the least significant digit (farthest right).

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Figure 5-2: FedEx Check Digit Calculation Detail

Find the FedEx check digit for 0079011258629.

Weighted Product: (0*1) + (0*7) + (7*3) + (9*1) + (0*7) + (1*3) + (1*1) + (2*7) + (5*3) + (8*1) + (6*7) + (2*3) + (9*1)

Sum: 0 + 0 + 21 + 9 + 0 + 3 + 1 + 14 + 15 + 8 + 42 + 6 + 9 = 128

Modulo* 11: 128 / 11 = 11 remainder 7

Modulo* 10: 7 / 10 = 0 remainder 7

FedEx check digit is: 7

Number with check digit: 00790112586297

*The modulo operation finds the remainder of division of one number by another. The first modulo 11 finds the remainder of the sum divided by 11 and the second modulo 10 finds the remainder of the result of the first modulo 11 operation divided by 10.

Sample FedEx 1D Barcode

Table 5-8: FedEx Ground FedEx 1D Barcode

Attribute	Value
Barcode	
Barcode String	962200190123456789060079011258629 7
Tracking number	790112586297
FedEx OpCo	Ground
Destination	Not available

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Barcode Requirements for USPS

Barcode Symbology

The FedEx Ground® Economy barcodes must be printed using the GS1-128 barcode symbology utilizing Code Set C.

The FedEx Ground® Economy label must contain exactly one GS1-128 barcode containing both the “420” and “92” Application Identifiers (AI), which are reserved for the FedEx Ground® Economy barcode.

The GS1-128 barcode symbology is formerly known as the UCC/EAN Code 128 barcode symbology. In 2006 the Uniform Code Council (UCC) changed their name to GS1 US, and consequently the UCC/EAN-128 barcode was renamed to GS1-128. This was a name change only; therefore, the GS1-128 specification is identical to the UCC/EAN-128 specification.

FedEx Ground® Economy Barcode

The FedEx Ground® Economy barcode must contain one concatenated barcode as shown on the next page.

The Application Identifier (420) and ZIP Code (5 Digit) must be suppressed (not printed) within the human-readable representation of the barcode data.

Note: The barcode itself still contains the 420 and ZIP info.
The human-readable numbers representing the tracking number must be printed and centered below the tracking barcode. The numbers must be visually grouped as shown in the example:

Example: 9261 2128 2123 7512 3456 79

“Concatenated barcode” simply means the barcode contains both a parcel identification code (PIC) used for tracking and a postal routing code.

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Barcode Layout – e-VS

The following layout must be used when the FedEx Ground® Economy barcode contains a Service Type Code of “612” and “748”. Definitions of Service Type Codes can be found on Page 18 of this document.

Center everything shown below vertically within Zone F (Refer to page 21 for Label Layout Zones)

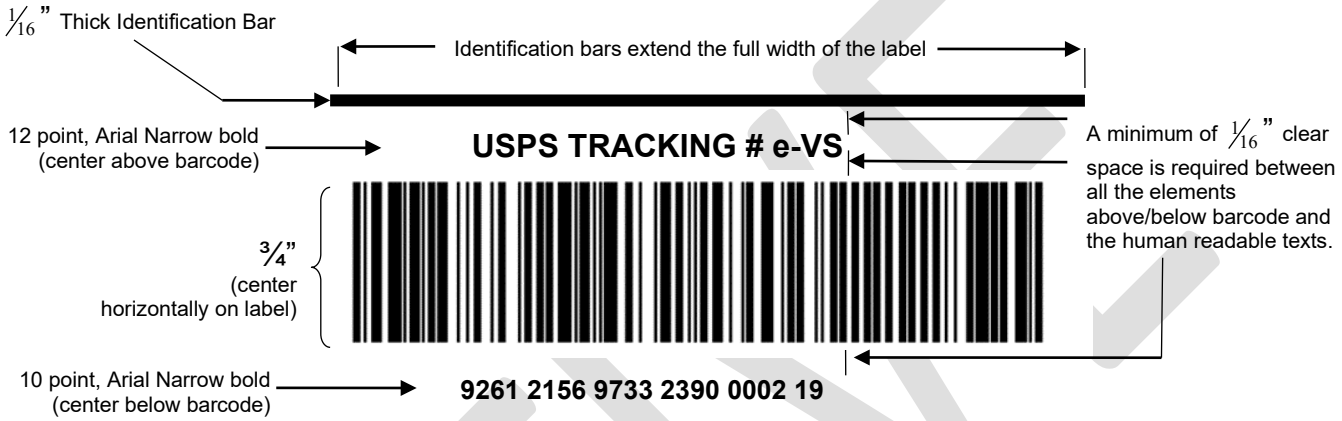

The barcode layout shown above is not drawn to scale; for illustration purposes only.

***Note:** The barcode picture in the diagram which is the barcode that is required by the USPS. USPS, e-VS, PARCEL SELECT, and USPS TRACKING are trademarks owned by the United States Postal Service.*

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

FedEx Ground® Economy Barcode Data Structure

The FedEx Ground® Economy tracking barcode is constructed using twelve data elements. Some elements are inherent to the GS1-128 barcode symbology while others are supplied by the shipper printing the barcode.

Example: The tracking number **420328249261212821237512345679** is deconstructed below for the purposes of illustrating the twelve data elements necessary to print the tracking barcode.

Block 1	Block 2	Block 3	Block 4	Block 5	Block 6	Block 7	Block 8	Block 9	Block 10	Block 11	Block 12
GS1-128 Symbology **Start Code C**	**FNC1**	**420**	**32824**	**FNC1**	**92**	**612**	**128212375**	**1234567**	**9**	GS1-128 Symbology MOD 103 Check Digit	GS1-128 Symbology Stop Code

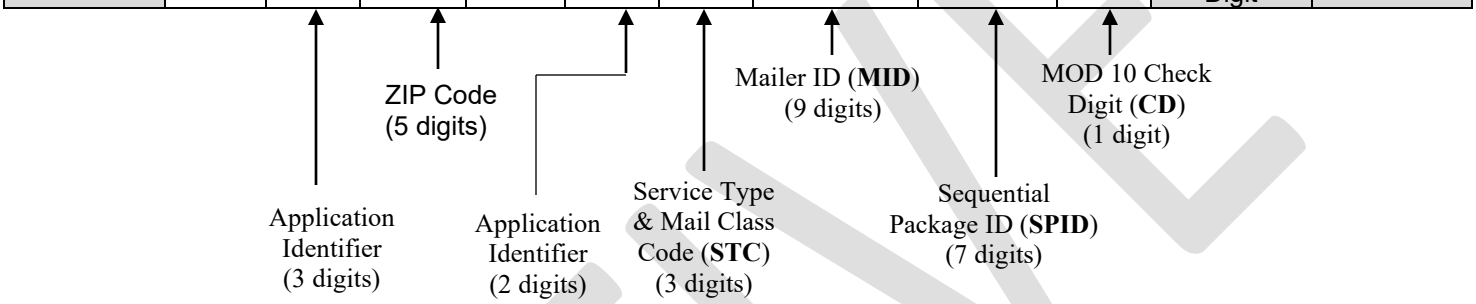

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

The Package Identification Code (PIC) is defined as the combination of Blocks 6, 7, 8, 9, and 10. The shipper must not repeat any PIC for a period of 6 months after its first use.

Block 1: Start Code C indicates the start of the barcode and sets the character sub set to “C”.

Block 2: The FNC1 (Function 1) character is used to identify the barcode symbology as GS1- 128.

Block 3: The “420” Application Identifier is a 3-digit code identifying the next data segment as a postal code.

Block 4: U.S. Domestic Packages
Block 4 must contain a valid 5-digit U.S. ZIP code when the label contains a U.S. destination To and the USPS Deliver To address. The 5-digit U.S. destination ZIP code used in this field must match the 5-digit ZIP code printed in the human-readable To and the USPS Deliver To address of Zone B and E.

Block 5: The FNC1 (Function 1) is part of the GS1-128 barcode symbology and is not a human readable character, nor is it manually keyed or transmitted as data.

Block 6: The “92” Application Identifier is a 2-digit code used to identify a PIC.

Block 7: The Service Type Code (STC) specifies the FedEx Ground Economy service. The valid codes are:

612 – Parcel Select with Delivery Confirmation service
748 – Parcel Select Lightweight (PS LIGHTWEIGHT) with Delivery Confirmation service
419 – Bound Printed Matter (Prsrt BPM) with Delivery Confirmation service
490 – Media Mail (Media Mail) with Delivery Confirmation service

Block 8: The Mailer Identification number (“MID”) is a 9-digit number assigned by the USPS to identify a mail/package owner.

Customer agrees that the Mailer Identification numbers (“MID”) assigned to Customer by the USPS for use with FedEx Ground® Economy shipping shall not be used for any other purpose. If such a MID is used for any packages traveling by another shipping method, FedEx may terminate the Customer Agreement immediately and Customer agrees to reimburse FedEx for all improperly assessed USPS postage and any FedEx costs associated with such packages.

In the event that any package which bears the MID was not scanned by FedEx Ground, FedEx Ground shall have the right to invoice Customer for such package at the average rate per package billed to Customer during the week in which FedEx Ground Economy last received packages from customer.

Block 9: The Sequential Package ID is assigned by the shipper but must be exactly 7 digits. Example: The Sequential Package ID of “1” would be represented as “0000001” when creating the barcode.

Block 10: The MOD 10 check digit is calculated from Block 6, Block 7, Block 8, and Block 9 only.

Block 11: The MOD 103 Check Digit is inherent to the GS1-128 barcode symbology and is not a human readable character, nor is it manually keyed or transmitted as data.

Block 12: The Stop Code is inherent to the GS1-128 barcode symbology and is not a human readable character, nor is it manually keyed or transmitted as data.

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

FedEx Ground Economy – MOD 10 Check Digit Calculation

Step 1
Label each digit of the PIC with a number from 1 to 22 signifying the digits' position. **The position numbering should start at 1 beginning with the check digit and moving right to left.**

Example: Calculate the check digit of PIC **9261212821237512345 67x** where **X** is the check digit to be calculated.

Position	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
PIC	9	2	6	1	2	1	2	8	2	1	2	3	7	5	1	2	3	4	5	6	7	**X**

Step 2
Add all the PIC digits together located in the even numbered positions.
7 + 5 + 3 + 1 + 7 + 2 + 2 + 2 + 2 + 6 + 9
Example: 46

Step 3
Multiply the result in Step 2 by the number 3.
Example: 46 x 3 = 138

Step 4
Add all the PIC digits together located in the odd numbered positions. Skip position 1.
6 + 4 + 2 + 5 + 3 + 1 + 8 + 1 + 1 + 2
Example: 33

Step 5
Add the results for Step 3 and Step 4.
Example: 138 + 33 = 171

Step 6
The check digit (value of X) is the smallest number which, when added to the result obtained in Step 5, gives a number that is a multiple of 10.
Example: 171 + X = 180 (where 180 is the next multiple of 10)
X = 9 (the check digit in the example is 9)

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

FedEx Ground Economy– Barcode Printing Requirements and Guidelines

Bar Dimensions

Min X-Dimension: 14 mil (0.014 inch)
Max X-Dimension: 17 mil (0.017 inch)
Bar height: $\frac{3}{4}$ inch

Note: The minimum width of the narrow bars and narrow spaces is frequently referred to as the X Dimension. Ranges are provided to accommodate different printer types. ***The printers that best fit FedEx Ground Economy label guidelines are 203 dpi.***

Quiet Zone

A minimum quiet zone equal to 10 times the average width of the narrow bar or space must be maintained on either side of the barcode. It is recommended that a quiet zone of $\frac{3}{8}$ inch exist on the left and right sides of the barcode. A quiet zone of $\frac{1}{16}$ inch must exist above and below the barcode.

Reflectance

The minimum white space reflectance must be greater than 50%, and the maximum bar reflectance must be less than 25%. The minimum print reflectance difference is 40%. The measurements are made using a U.S. Postal Service approved barcode verifier.

Barcode Quality

The print quality of the tracking barcodes must be at least 70 percent grade A or B following the standards established by the American National Standards Institute (ANSI) and no barcode may measure lower than ANSI grade C.

Label Stock

White label stock only. (Near infrared for all direct thermal printing)

Note: *Label stock must be completely blank and must be the labels that will actually be used to apply to the package. Customer or FedEx branded label stock is allowed with prior FedEx Ground approval.*

Label Size

The standard FedEx Ground Economy shipping label is a self-adhesive label measuring 4 inches wide by 6 inches long. A self-adhesive label longer than 6 inches is acceptable provided the top 6 inches conforms to the layouts contained within this document.

Please contact Customer Support prior to label design if specific shipping needs dictate any of the following:

- A self-adhesive label will not be used.
- Labels will be enclosed in a window envelope.
- Barcodes on the label will be covered by any type of clear plastic, film, or tape.
- Labels will be placed in a clear plastic pouch.
- A shipping label measuring less than 4 inches wide or less than 6 inches in length.
- Labels will contain graphics/logos.

Note: Supported Label Size and Type are as follows:

Thermal
STOCK_4x6, STOCK_4X8, STOCK_4X9
STOCK_4 x 6.75 Leading or Trailing doc-tab
STOCK_4x8 Leading or Trailing doc-tab
STOCK_4x9 Leading or Trailing doc-tab

Paper
PAPER_4x 6
PAPER_4x 6.75 (4x6 layout)
PAPER_4x 8 (4x6 layout)
PAPER_4x 9 (4x6 layout)
PAPER_7X4.75 (4x6 Layout rotated 90 degree)
PAPER_8.5X11_BOTTOM_HALF_LABEL (4x6 Layout rotated 90 degree)
PAPER_8.5X11_TOP_HALF_LABEL (4x6 Layout rotated 90 degree)

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Permit Imprint Indicia

The indicia authorized for use by the USPS for use on FedEx Ground® Economy labels are shown below.

Delivery Confirmation Indicia

Parcel Select packages must use the following indicia: **FGE Service Type Code = 612** **FXG Class of Service Code = 913** PARCEL SELECT U.S. POSTAGE PAID FedEx Ground e-VS	Parcel Select Lightweight packages must use the following indicia: **FGE Service Type Code = 748** **FXG Class of Service Code = 914** PS LIGHTWEIGHT U.S. Postage Paid FedEx Ground e-VS
Media Mail packages must use the following indicia: **FGE Service Type Code = 490** **FXG Class of Service Code = 916** MEDIA MAIL U.S. Postage & Fees Paid FedEx Ground e-VS	Bound Printed Matter packages must use the following indicia: **FGE Service Type Code = 419** **FXG Class of Service Code = 915** PRSRT BPM U.S. Postage & Fees Paid FedEx Ground e-VS

Ancillary Endorsements

Note: Ancillary Endorsements listed below only applied to packages delivered via USPS; Packages delivered by FedEx Ground/Home Delivery will be returned to the shipper only.

Carrier Leave if No Response is a release that authorizes the USPS to leave a package in an unsecured location such as a porch or stairway if it does not fit in the mailbox and the recipient is not available to accept the package. This statement should be spaced below the Identification bar with an 8 point Arial type font.

FedEx Ground® Economy only supports one Ancillary Endorsements to be printed on the label.

The following Ancillary Endorsements are valid for use on all FedEx Ground Economy labels.

- Address Service Requested
- Change Service Requested
- Forwarding Service Requested
- Return Service Requested

- The use of one of the following Ancillary Endorsements is **recommended** for packages with an actual weight equal to or greater than 1.00 pound:
  - Address Service Requested
  - Change Service Requested
  - Forwarding Service Requested
  - Return Service Requested

- The use of one of the following Ancillary Endorsements is **recommended** for packages with an actual weight of less than 1.00 pound for spec-based customers (FedEx Automation and FedEx Compatible Solution Providers can use one of the two endorsements marked with an asterisk *):
  - Address Service Requested *
  - Change Service Requested
  - Forwarding Service Requested
  - Return Service Requested *

The definition of all endorsements can be found in Appendix B Ancillary Endorsement Matrix

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Label Evaluation Process

Each shipper or vendor printing a FedEx Ground Economy label must obtain label approval for all new and modified labels *before* the labels are allowed to appear on any packages tendered to FedEx Ground.

The FedEx Ground Economy label approval process is as follows:

1. Shipper contacts their FedEx account executive and requests to print their own FedEx Ground Economy labels.
2. FedEx account executive supplies the shipper with the most updated FedEx Ground Economy Label Specification Guide, and Outbound Label Quick Start Guide.
3. Shipper designs a preliminary label layout and emails a copy to FedEx Ground Economy customer support: **SP_Labels@fedex.com**

   Note: Final label approval will be granted only after physical labels have been submitted to FedEx Ground Economy. Electronic copies of labels cannot be used for label approval.
4. A FedEx Ground® label analyst will review the preliminary label layout and provide analysis.
5. When all preliminary layout design issues and questions have been addressed the FedEx Ground® label analyst will request test labels be sent to:

   FedEx Ground Economy
   Attn: Label Approval/PQCES Dept.
   16555 W Rogers Dr.
   New Berlin, WI 53151
6. Shipper submits test labels for each Mailer ID (MID) number being used. Please refer to the section titled "*Label Submission Checklist*" within this document for a list of items that are required to be submitted.

   Note: Final label approval will be granted only after physical labels have been submitted to FedEx Ground. Electronic copies of labels cannot be used for label approval.
7. Labels will be analyzed in order of receipt and an email stating any required changes will be sent.
8. Steps #6 and #7 are repeated until all required changes have been made.
9. Once the labels meet all specification requirements an email will be sent stating that labels are approved for use in the FedEx Ground operations.

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Label Submission Checklist

Step #1: All label submissions, including those submitted for retesting, must adhere to the general submission requirements listed below. **When all general requirements have been met proceed to Step #2.**

General submission requirements for all label approvals:

☐ A completed Label Certification Coversheet

☐ *A minimum of 10 labels from main physical printer and 5 labels from each additional printer must be submitted.*

☐ *All labels submitted for approval must contain tracking numbers with unique Package Identification Codes (PIC). PICs must not be repeated during any part of the testing process.*

☐ *All labels submitted must be printed on actual blank label stock. Customer or FedEx branded labels are allowed with prior FedEx Ground approval.*

☐ ***Every label submitted must be accompanied with the same physical means of attaching it to a package that will be used by the shipper if self-adhesive labels are not used. (E.g. labels attached to a package via a window envelope must be submitted with window envelopes properly sized)***

☐ *A minimum of two data transmissions submitted electronically showing properly incrementing Manifest ID Numbers, customer assigned Mailer ID, non-repeating tracking numbers, tracking numbers containing valid check digits, a combination of all the barcode service type codes being used, and a combination of all services being used.*

Step #2: All label submissions, including those submitted for retesting, must include the following labels: **Step #2 is mandatory.**

Proceed to Step #3 when all requirements within this step have been met.

Submit the following items for every label approval:

U.S. Domestic Labels using the Confirmation Service Barcode Layout. Service Type Code = (STC)

- ☐ Five labels using the Parcel Select service. ***(*STC = 612, *required*)***
- ☐ Five labels using the Parcel Select Lightweight Mail service. ***(*STC = 748, *required*)***
- ☐ Five labels using the Presorted Bound Printed Matter service. ***(*STC= 419, *optional, submit only if used)***
- ☐ Five labels using the Media Mail service. ***(*STC = 490, *optional, submit only if used)***

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Label Layout Zones

The FedEx Ground Economy label is a collection of zones containing specific information. The zone layout is shown below is for the 4 x 6 label. Larger stock size labels will follow the same zone requirements.

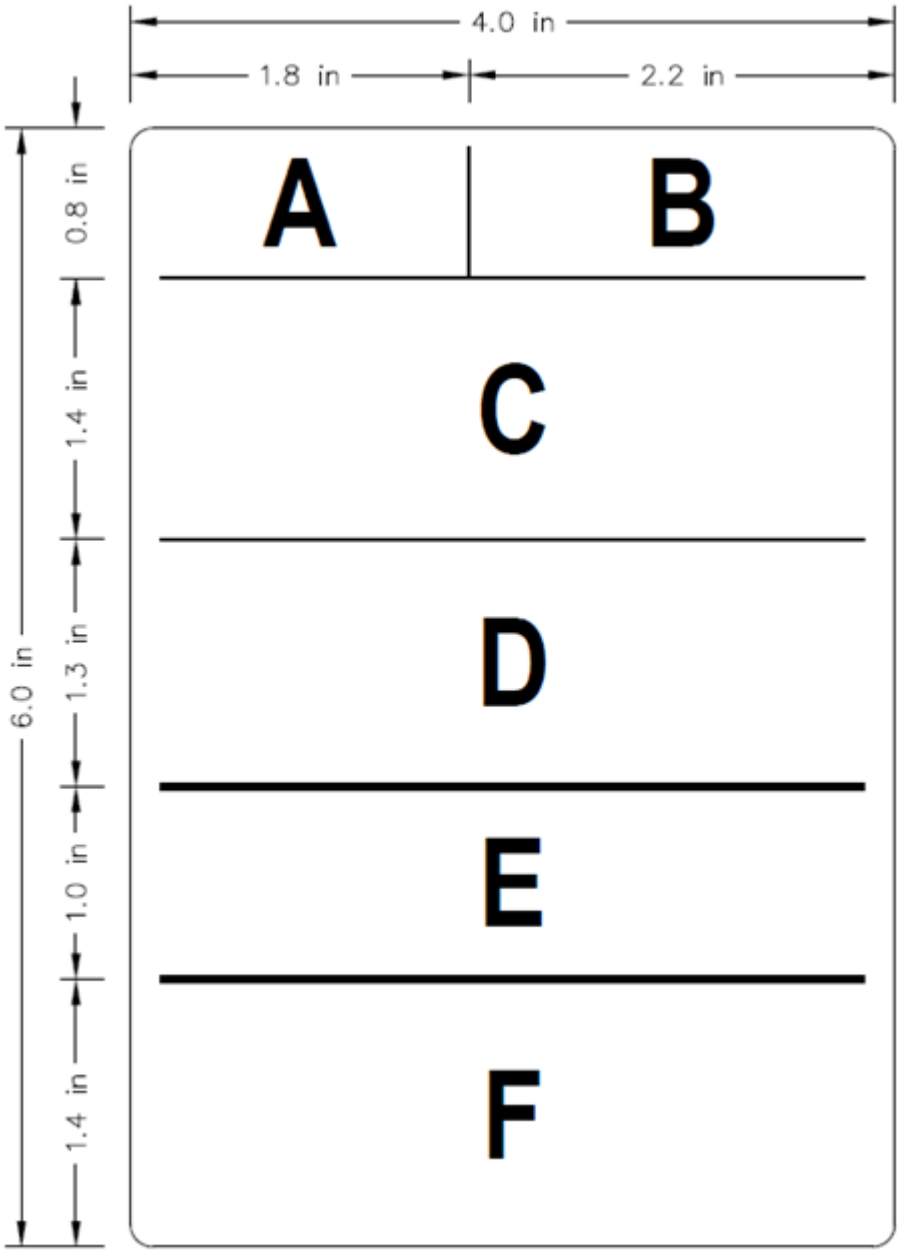

Note1: Label not drawn to scale.
Note2: Dashed zone lines are shown for visual reference only and should not print on the actual label.
Note3: All zone measurements are to be taken from left to right or top to bottom starting with the upper left corner of the physical label.

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Label Zone	Purpose	Requirements
A	Ship From (return) address	1. The first line of Zone A must read "**FROM**" using all capital letters and an Arial Narrow **bold** 7 point font. 2. A maximum of five address lines can appear directly below " FROM:" using an Arial Narrow **bold** 7-point font. 3. A Company Name and Shipper Person Name can appear directly below the "FROM" on line 1 and 2. 4. A maximum of two Address lines (lines 1 and 2). 5. Each Company Name, Shipper Person Name and Address line has a maximum length of 30 characters (including spaces). 6. The city, state and ZIP Code will appear below the address lines. The city has a maximum of 20 characters (including spaces), and, and ZIP Code has a maximum of 5 characters. 7. All text lines must be left justified within label zone A. 8. A vertical ¾ inches line separator must be between Zone A and Zone B.
B	Ship To (destination) address	1. Zone B must contain the text "**TO:**" using all capital letters and an Arial Narrow **bold** 7-point font. 2. The words "TO**:**" must be left justified within Zone B. 3. A maximum of five address lines can appear directly below of the 4. TO**:**" text using an Arial Narrow **bold** 9-point font. ***Note*:** Only five address line fields can be transmitted to FedEx Ground Economy via an electronic data transmission. 5. A Company Name and Recipient Name (lines 1and 2) can appear directly below the word "TO". 6. A Company and Recipient Address (lines 1 and 2) can appear below line 2 of Company Name and Recipient Name. 7. Each Company/Recipient Name and Recipient address lines has a maximum length of 30 characters (including spaces). 8. The city, state and ZIP Code will appear below the address lines. The city has a maximum of 20 characters (including spaces). 9. All address lines must be left justified.
C	Customer Reference Barcode/Future Space for PDF417 "2D" Barcode Customer Use Section/ Company Identifier Letter Brand Logo/ CLS Version Identifier	Zone C may contain one of the following: 1. A customer reference barcode. 2. A blank space (Future space for PDF417 "2D" Barcode). 3. In absence of a customer reference barcode or blank space, the customer may want to have in this section their own text or its own internal barcode. ***Note:*** If the customer uses this space for customer reference or their own internal barcode, they will need to modify their label again in the future when the PDF417 "2D" Barcode is printed in this area. **Customer Reference Barcode (Optional)** 1. Customer reference barcode may not be in GS1-128 symbology. If the customer reference is in GSI 128 symbology it cannot start with "420, "9", "91", "92", or "96". 2. A maximum length of 25 characters (included spaces). 4. Placement of the Brand Logo for FedEx Ground (Graphic). **Note:** If not using the FedEx Ground Brand Logo, the word "FedEx" must be printed using an Arial Narrow **bold** 16-point font and the word "Ground" must be printed below and to the right of the text "FedEx" using Aril Narrow **bold** 7-point font. 5. The clear space of $\frac{1}{16}$ inches must exit between the horizontal separator line and the top of FedEx Ground Graphic. 6. The clear space of at least $\frac{3}{16}$ inches must exit on the right side of the FedEx Ground Graphic. 7. The clear space of at least $\frac{1}{16}$ inches must exit between the right side of the Customer Reference barcode and the left side of the FedEx Ground Graphic.

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

		8. The clear space of $\frac{1}{16}$ inches must exit below the last line of the FedEx Ground Graphic and the top line of the visual indicator box. 9. Visual Indicator. A capital letter "S" must be printed inside a $\frac{4}{8}$ inches wide by $\frac{5}{8}$ inch tall box. The box must be drawn with a solid line having an $\frac{1}{16}$ inch thickness. 10. The letter "S" must be centered vertically and horizontally within the box. 11. The letter "S" must not touch the box. The letter "S" should be printed using an Arial Narrow **bold** 47-point font. 12. The clear space between the left side of the visual indicator box and the right of the Customer Reference barcode must be at least $\frac{1}{8}$ inches. 13. The software manufacturer, product abbreviation, and product version must be printed vertically in the far right side of Zone C using an Arial Narrow **bold 7** point in the format of "*mfg-product-version*". Example: FDX-xxxxClient-vxxx.x.x ***Note*:** The customer 5-digit FedEx Ground Economy account number can be used for the manufacturer if the customer is printing labels from their own software. FedEx Compatible Solution Providers **must** increment the version number. 14. The clear space between the right side of the software manufacturer, product abbreviation, and product version and the right edge of the physical label must be $\frac{1}{16}$ inches. 15. The clear space between the right side of visual indicator box and the left side of the software manufacturer, product abbreviation, and product version must be $\frac{1}{16}$ inches. 16. A Horizontal 0.10 inches' line separator must be above and below Zone C.
D	FedEx Ground 1D (34-digit barcode)	1. Zone D must contain the human readable FedEx Track ID, Barcode Number and 1D barcode and centered. 2. See the section titled "Barcode Layout –FedEx Ground® 1D Barcode" within this document for details pertaining to the FedEx Ground Economy barcode. 3. The verbiage "FedEx Tracking ID# 1234 5678 9012" must be printed in the top area of the Zone D block. 4. FedEx Tracking ID# must be printed using an Arial Narrow **bold 1**2-point font. 5. The full 34-digit FedEx Ground 1D human readable must be print above the 1D barcode and using an Arial Narrow **bold** 10-point font. 6. The FedEx Ground 1D barcode must be printed in zone D with a bar height of $\frac{13}{16}$ (0.8") inches tall and overall X-dimension of 15 mil. 7. The quiet zone of 0.10 inches or greater is required on the left/right side of the barcode and the edge of the physical label. 8. A minimum of $\frac{1}{16}$ inches is required between all the elements within Zone D 9. All human-readable text within Zone D must be centered above barcode.
E	Indicia Ancillary Endorsement USPS Delivery Address	**Indicia:** 1. The Indicia consists of four or five lines of text enclosed by a box drawn with a solid line. The number of text lines is determined by the class of service. 2. All text lines must be centered horizontally within the box. 3. All text lines must be centered vertically within the box. 4. The Indicia must be at a minimum 1.00 inch wide by ⅝ inch tall. 5. All text must be printed using an Arial Narrow **bold 8**-point font. 6. See the section titled "Permit Imprint Indicias" within this document for the list of Indicias that are approved for FedEx Ground Economy labels. *Pay special attention to the use of punctuation and upper/lower case letters. Exact verbiage and formatting must match the examples found in the section titled "Permit Imprint Indicias".* 7. The clear space between the right line of the Indicia box and the right

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

		edge of the physical label must be at least 1/16 inches. 8. The clear space between the top line of the Indicia box and the bottom of the separator line must be at least 1/16 inches. **Ancillary endorsement:** 1. The Ancillary endorsement must be printed using an Arial Narrow **bold** 8 point font. 2. Carrier Leave If No Response should be printed directly below the horizontal separator line and leaving at least 1/16 inches of clear space between the separator line and the top of the text. 3. Text must be left justified within label zone E. 4. See the section titled "Ancillary Endorsements" within this document for a list of ancillary endorsements allowed on FedEx Ground Economy labels and when they are required. *Pay special attention to the use of upper and lower case letters.* 5. At least an 1/8 inch of clear space must exist on below the endorsement. **USPS Delivery Address:** 6. The text" USPS DELIVER TO:" must be printed below the Ancillary Endorsement using all capital letters and an Arial Narrow **bold 10** point font. 7. Text must be left justified within label zone E 8. The USPS recipient name. Only one line for recipient name is allow with a maximum of 30 characters in length (including spaces) using an Arial Narrow **bold** 10 point font. 9. The recipient address lines must appear directly below to the right of the text "USPS DELIVER TO:" 10. The USPS recipient address lines 1 and 2 have maximum of 30 characters in length (including spaces) using an Arial Narrow **bold 10**-point font. 11. The USPS recipient city, state and ZIP Code have maximum of 30 characters in length (including spaces) and all text must be using an Arial Narrow **bold 10**-point font. 12. A clear space of least 1/16 inches must exist at the bottom of the USPS Address line and the top of the horizontal separator line.
F	FedEx Ground Economy tracking barcode	1. Zone F must contain a FedEx Ground Economy barcode. 2. See the section titled "Barcode Requirements" within this document for details pertaining to the FedEx Ground Economy barcode. 3. All human-readable text within Zone E must be centered above or below the tracking barcode and must not extend beyond either edge of the barcode. 4. The Application Identifier (420) and ZIP Code (5 Digit) must be suppressed (not printed) within the human-readable representation of the barcode data. ***Note:*** The barcode itself still contains the 420 and ZIP info. 5. The human-readable numbers representing the tracking number must be printed and centered below the tracking barcode. The numbers must be visually grouped as shown in the example: Example: 9261 2128 2123 7512 3456 79 ***Note:*** Space must exist between the following digits: 4th and 5th, 8th and 9th, 12th and 13th, 16th and 17th, 20th and 21st. 6. No parentheses may be placed around the 92 AI. 7. The clear space between the left/right side of the barcode and the left/right edge of the physical label must be at least 3/8 inches. 8. The clear space between bottom of the tracking numbers and the edge of the physical label must be at least 1/16 inches.

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Label Examples

Parcel Select (Customer Reference)

Parcel Select with Delivery Confirmation service,
FedEx Ground Economy Service Type Code = 612

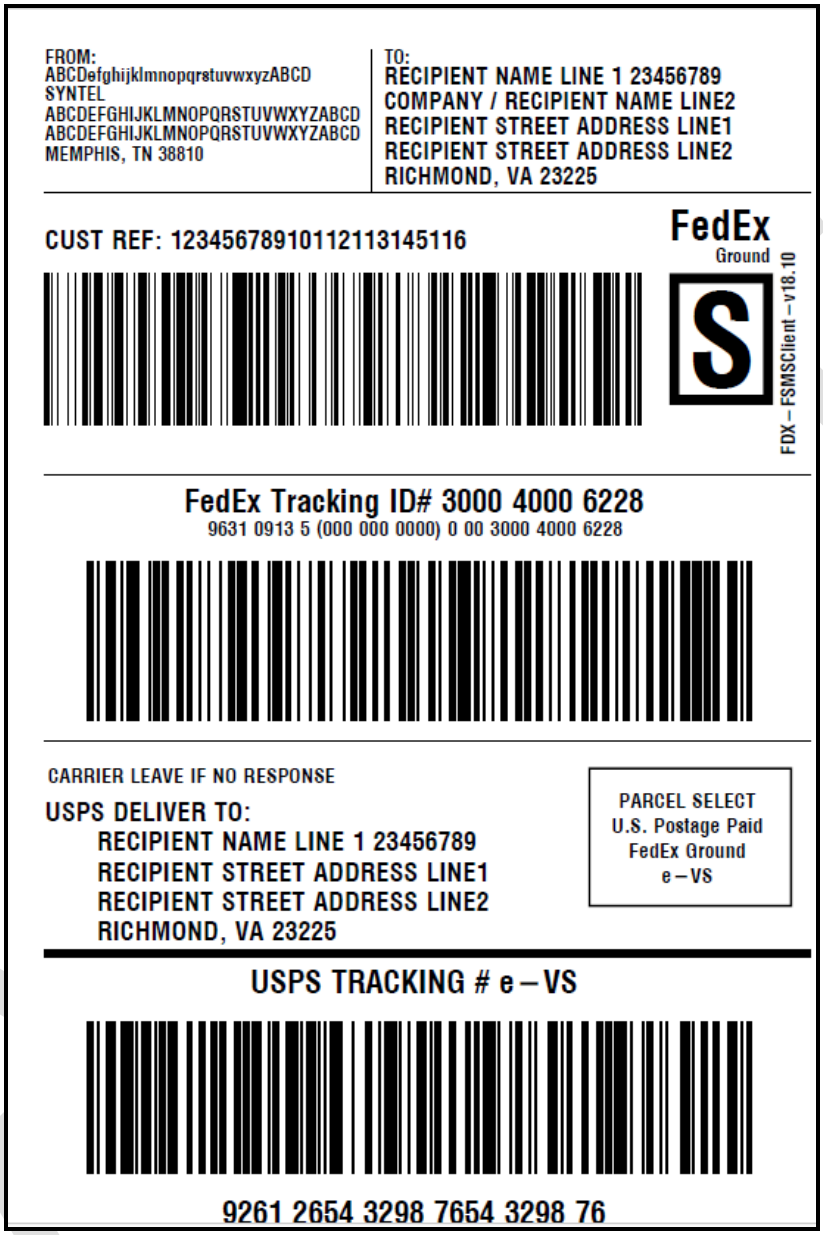

Note: Label not drawn to scale.

Spec based customers optional:
Customer Reference Barcode (optional)

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

PS Lightweight (Customer Reference)

PS Lightweight with Delivery Confirmation service,
FedEx Ground Economy Service Type Code = 748

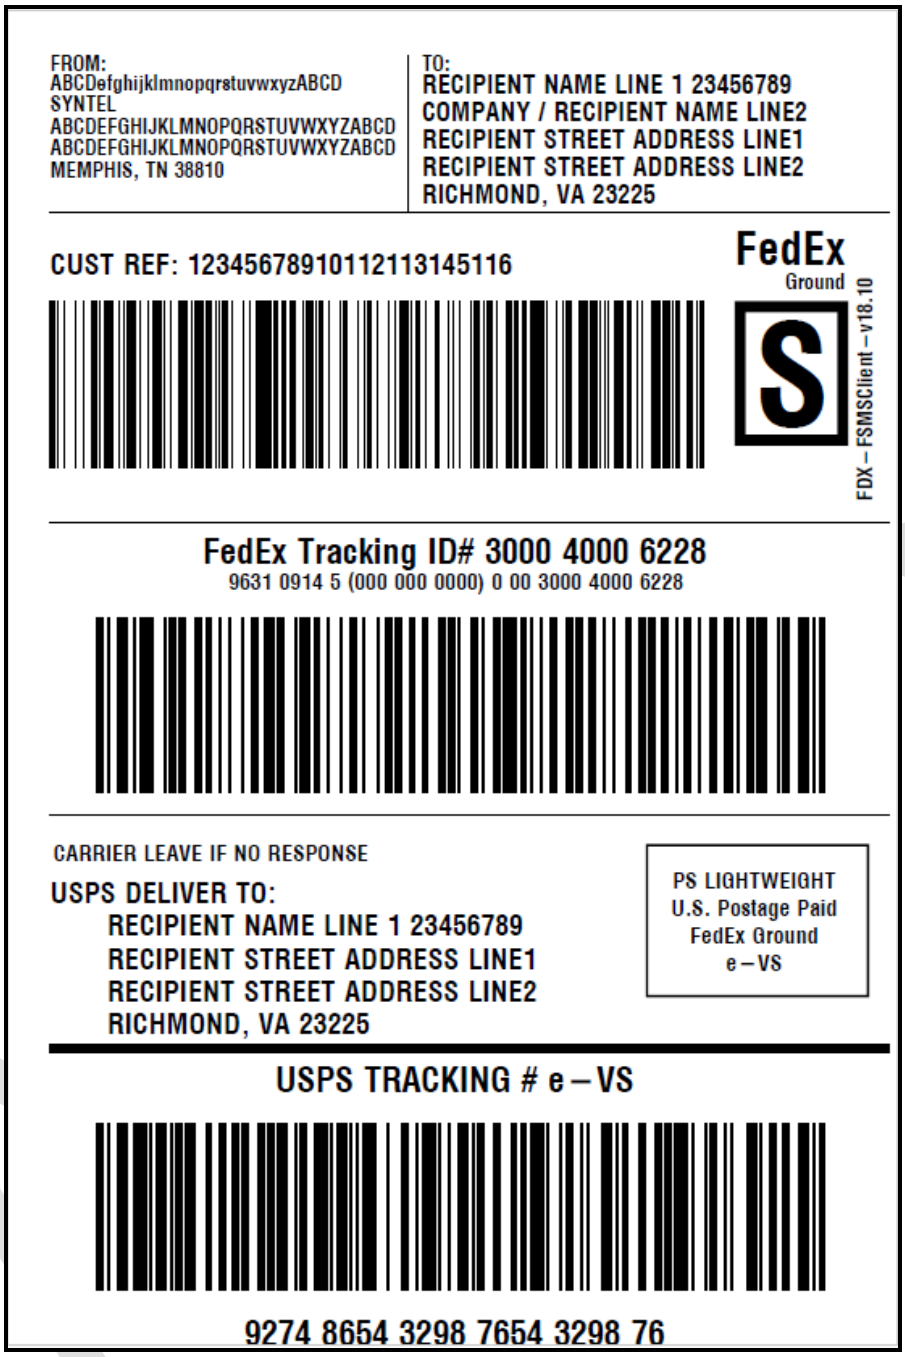

Note: Label not drawn to scale.

Spec based customers:
Customer Reference Barcode (optional)

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Bound Printed Matter (Customer Reference)

Bound Printed Matter with Delivery Confirmation service,
FedEx Ground Economy Service Type Code = 419

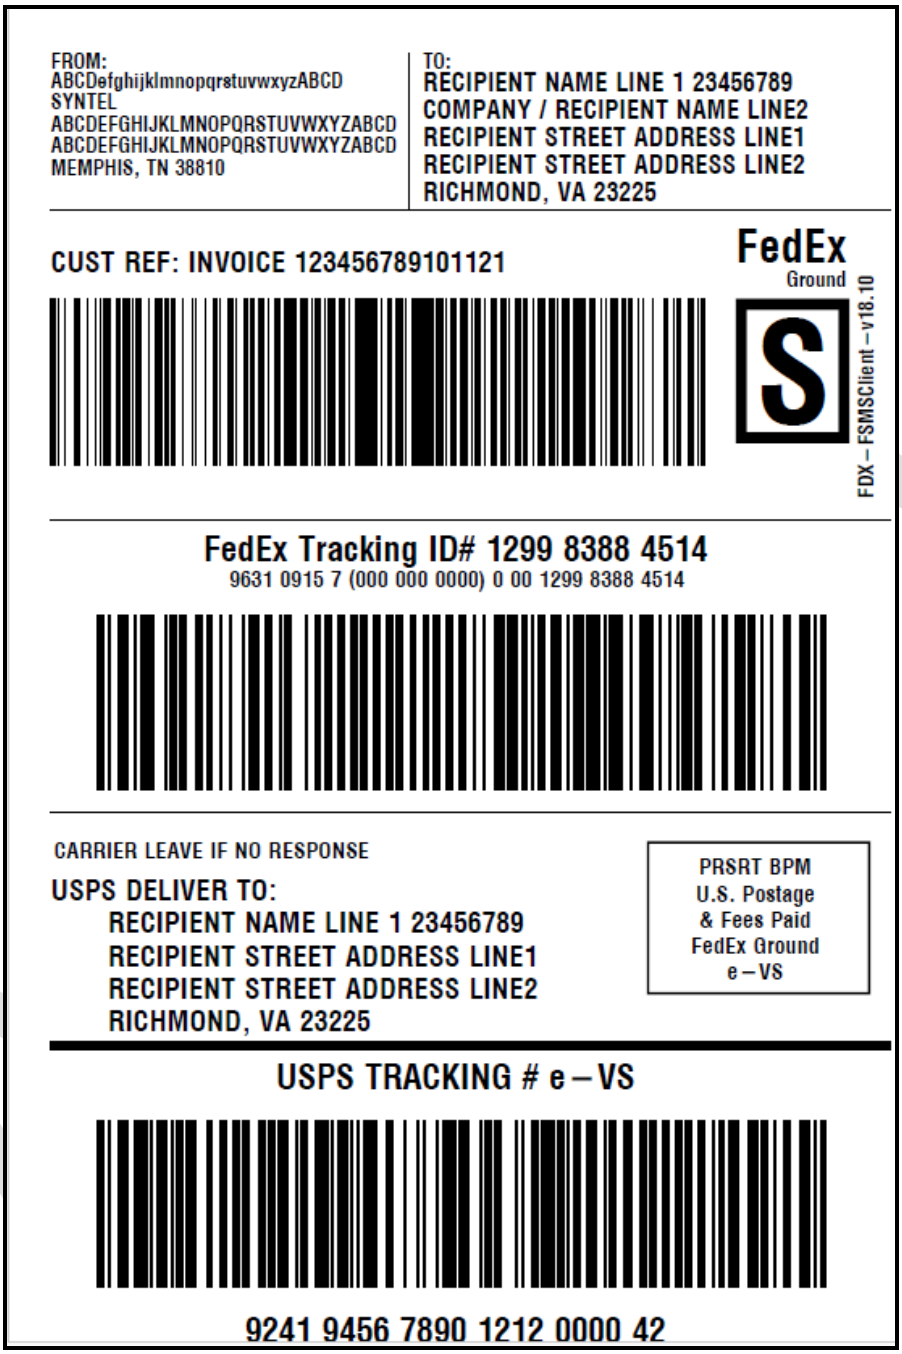

Note: Label not drawn to scale.

Spec based customers:
Customer Reference Barcode (optional)

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Appendix A Figures and Table

Figure 3-1: FedEx 1D Barcode Content Layout

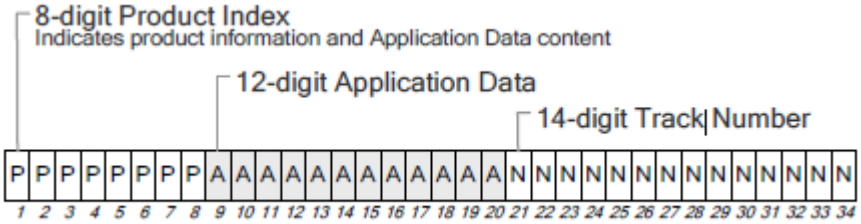

Figure 5-1: Example Application Data Format 3 Calculations

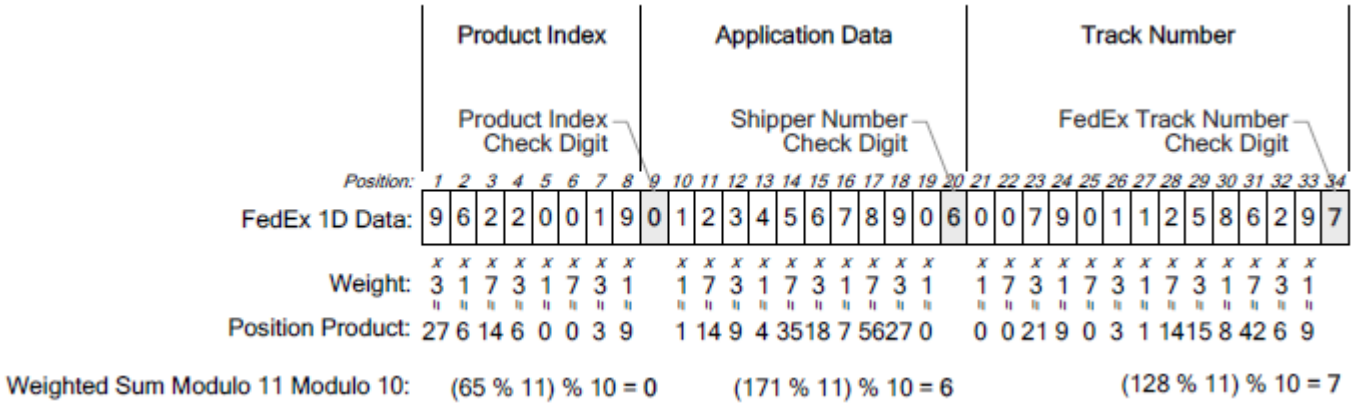

Figure 5-2: FedEx Check Digit Calculation Detail

Find the FedEx check digit for 0079011258629.

Weighted Product: (0*1) + (0*7) + (7*3) + (9*1) + (0*7) + (1*3) + (1*1) + (2*7) + (5*3) + (8*1) + (6*7) + (2*3) + (9*1)

Sum: 0 + 0 + 21 + 9 + 0 + 3 + 1 + 14 + 15 + 8 + 42 + 6 + 9 = 128

Modulo* 11: 128 / 11 = 11 remainder 7

Modulo* 10: 7 / 10 = 0 remainder 7

FedEx check digit is: 7

Number with check digit: 00790112586297

*The modulo operation finds the remainder of division of one number by another. The first modulo 11 finds the remainder of the sum divided by 11 and the second modulo 10 finds the remainder of the result of the first modulo 11 operation divided by 10.

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Table 2-1: FedEx 1D Label Thermal Print Specification

Spec	Attribute	Specification
T.1	Printer Types	Direct Thermal or Thermal Transfer
T.2	Print Head Resolution	203 dots/inch
T.3	Label Size	Width = 4"; Length = variable Minimum FedEx 1D area is 4" wide by 2.5" high (101.6mm by 63.5mm)
T.4	Direct Thermal Label Facestock	RICOH FX direct thermal facestock series Appleton Optima T-700 direct thermal facestock
T.5	Spectral Response	700nm (semi-infrared) and below
T.6	Minimum ANSI Print Quality Grade	B
T.7	Bar Element Tolerance	+/- 0.10X (maximum bar shrinkage/bar growth)
T.8	Barcode Element Color	Black
T.9	Background Color	White
T.10	FDX 1D Barcode Symbology	CODE-128C
T.11	X-Dimension (narrow element width)	0.015" (15mil : 3 dots)
T.12	Aspect Ratio (bar height to length)	29% or 1.00" whichever is greater
T.13	Quiet Zones (sides)	10X or greater
T.14	Quiet Zones (top/bottom)	0.10" or greater

Table 2-2: FedEx 1D Label Laser Printer Specifications

Spec	Attribute	Specification
L.1	Printer Types	Laser or InkJet
L.2	Print Head Resolution	300 dots/inch and above
L.3	Label Size	Printer make and model dependent. Minimum FedEx 1D area is 4" wide by 2.5" high (101.6mm by 63.5mm)
L.4	Label Type	Plain paper or plain paper with pressure sensitive adhesive backing
L.6	Minimum ANSI Print Quality Grade	B
L.7	Bar Element Tolerance	+/- 0.10X (maximum toner / ink spread)
L.8	Barcode Element Color	Black
L.9	Background Color	White
L.10	FDX 1D Barcode Symbology	CODE-128C
L.11	X-Dimension (narrow element width)	0.015" (15mil nominal) +/- 5% maximum
L.12	Aspect Ratio (bar height to length)	29% or 1.00" whichever is greater
L.13	Quiet Zones (sides)	10X or greater
L.14	Quiet Zones (top/bottom)	0.10" or greater

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Table 3-1: FedEx 1D Barcode Content Description

Element Name	Description	Length (digits)	Position		Range
			Start	Stop	
Product Index	8-digit number indicates product information, multicode, and Application Data content, layout, and encoding.	8	1	8	100M
Application Data	12-digit number contains application specific data.	12	9	20	1T
Tracking number	A 14-digit number consisting of a managed 13-digit unique tracking number and a 1-digit check digit	14	21	34	10T

Table 4-1: FedEx 1D Barcode Discrimination

Barcode Characteristic	Value
Symbology	Code 128C
Length:	17 symbols (34-digits)
FedEx Tracking number Check Digit	34th digit

Table 5-1: Product Index Range Allocations and Range Encode Algorithm Description

Range		Allocation	Range Encode Algorithm Description
Start	Stop		
00,000,000	09,999,999	*open*	*n/a*
10,000,000	19,999,999	FedEx Express	Product Indexes in this range are determined via a data table lookup keyed on individual product elements (e.g. base-service, optional-service, packaging-type, form-Id, multicode, etc). Scanning applications needing the individual product elements to implement a business process will require access to an updatable reverse index data table.
20,000,000	89,999,999	*open*	*n/a*
90,000,000	99,999,999	FedEx Ground	Product Indexes is this range shall be created by concatenating the following three data elements:

Size	Position		Description
	Start	Stop	
2	1	2	Literal "96"
2	3	4	Multicode indicator (also referred to as SCNC) indicates the combination of barcodes on the shipment label and the Application Data format. Table 5-2 below includes a list of all defined SCNCs for the FedEx 1D barcode with the associated secondary FedEx recognized and used symbol and Application Data format.
4	5	8	4-digit FedEx Ground Service code. The FedEx Ground Service Codes will be encoded as right justified, left padded with zeroes as necessary. FedEx Ground Service Codes are specified in a separate document titled, "FedEx Ground Service Codes".

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Table 5-2: FedEx Ground Product Index Multi-codes (SCNC)

SCNC	Primary FedEx Symbol	Secondary FedEx Recognized and Used Symbol	Application Data Format
21	FedEx 1D	None	3
22	FedEx 1D	FedEx 2D(1)	3
23	FedEx 1D	SSCC-18(2)	3
24	FedEx 1D	USPS DelCon(3) or IMPB(4)	3
31 *	FedEx 1D	None	3
32 *	FedEx 1D	FedEx 2D	3
33	FedEx 1D	SSCC-18	3
34	FedEx 1D	USPS DelCon or IMPB	3

(1) "FedEx 2D" is the FedEx 2D Barcode which is a PDF-417 symbol
(2) "SSCC-18" is the GS1-128 Serial Shipping Container Code which is a transportation industry standard 18 digit number used to identify logistics units.
(3) "USPS DelCon" is the United States Postal Service Delivery Confirmation Barcode
(4) "USPS IMPB" is the United States Postal Service Intelligent Mail Postal Barcode
* Support Ground Economy Only

Table 5-3: Application Data Format Specification

Format	Format Description	Content		Size		Position		Notes
		Name	Description	Range	Digits	Start	Stop	
3	Supports FedEx Ground "96" barcode business functions	Product Index Check Digit*	FedEx proprietary Product Index check digit.	10	1	9	9	*The Application Data Format 3 check digits are computed the same as the FedEx Tracking number. See Figure 5-1 Example Application Data Format 3 Calculations
		Shipper Number	Right justified FedEx Ground Shipper Number, left fill with zeros.	10B	10	10	19	
		Shipper Number Check Digit*	FedEx proprietary FedEx Ground Shipper Number check digit	10	1	20	20	

Table 5-4: FedEx Ground FedEx 1D Barcode

Attribute	Value
Barcode	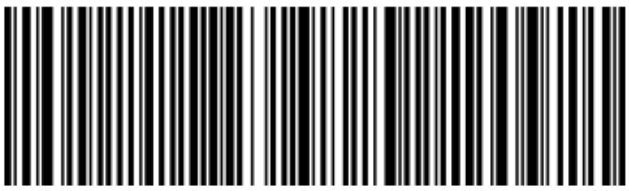
Barcode String	962200190123456789060079011258629 7
Tracking number	790112586297
FedEx OpCo	Ground
Destination	Not available

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Appendix B Ancillary Endorsement Matrix

Understanding the USPS Ancillary Endorsements
Note: *Ancillary Endorsements listed below only applied to packages delivered via USPS; Packages delivered by FedEx Ground will be returned to the shipper only.*

Release	Parcel Select (1 Lb. and Over)	Parcel Select Lightweight (Less Than 1 Lb.)
Carrier Leave If No Response	Carrier Leave If No Response is a release that authorizes the USPS to leave the package in an unsecured location such as a porch or stairways if it does not fit in the mailbox and the recipient is not available to accept the package. It is separate from and can be used in conjunction with one of the four ancillary endorsements below because it only applies to packages that are deliverable as addressed. It must appear in the top endorsement position if used in conjunction with an ancillary endorsement.	
	Labels produced via FedEx Ship Manager® can only display one ancillary endorsement OR Carrier Leave If No Response.	Cannot be used for labels produced by FedEx Ship Manager since an ancillary endorsement has to be selected.

Endorsement/ Mail Class	Parcel Select (1 Lb. and Over)	Parcel Select Lightweight (Less Than 1 Lb.)
Address Service Requested	Package forwarded postage due plus $3 charge paid by recipient. If undeliverable, package returned to shipper and charged at Parcel Select barcoded non-presort price plus $3 service charge. Shipper receives notification of new address. Address correction fee charged.	Package forwarded at appropriate single-piece price. If undeliverable, will be returned to shipper and charges will apply. Shipper receives notification of new address. Either Address Service or Return Service endorsement is required on Parcel Select Lightweight with Delivery Confirmation Barcode. Address Correction fee charged.
Return Service Requested	Package returned at Parcel Select barcoded non-presort price plus $3 service fee. New address or reason for non-delivery provided.	Package returned at appropriate single-piece price. New address or reason for non-delivery provided. Either Address Service or Returns Service endorsement is required on Parcel Select Lightweight with Delivery Confirmation Barcode.
Change Service Requested	Package disposed of by USPS. Shipper receives notification of new address. There is a charge per notice sent — see USPS Notice 123 for exact rates.	Package disposed of by USPS. Shipper receives notification of new address (charge per notice sent – see USPS Notice 123). **Cannot be used for Parcel Select Lightweight pieces with Delivery Confirmation Barcode for FedEx Automation or Compatible Solution Providers.**
Forwarding Service Requested	Package forwarded postage due plus $3 charge paid by recipient. If undeliverable, package returned to shipper and charged at Parcel Select barcoded non-presort price plus $3 service charge. Shipper does not receive notification of new address.	Package forwarded at appropriate single-piece price. If undeliverable, will be returned to shipper and charges will apply. Shipper does not receive notification of new address. **Cannot be used for Parcel Select Lightweight pieces with Delivery Confirmation Barcode for FedEx Automation or Compatible Solution Providers.**

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.

Appendix C Text Elements for PNG/DIP/PDF

TEXT ELEMENTS		PNG/DIB/PDF	
Element Description	Notes	Font Parameters	
		Font Name	Point Size
FROM:		Arial Narrow Bold	7
SHIPPER PERSON NAME		Arial Narrow Bold	7
SHIPPER COMPANY NAME		Arial Narrow Bold	7
SHIPPER STREET ADDRESS LINE 1		Arial Narrow Bold	7
SHIPPER STREET ADDRESS LINE 2		Arial Narrow Bold	7
SHIPPER CITY, STATE ZIP		Arial Narrow Bold	7
TO:		Arial Narrow Bold	7
RECIPIENT PERSON NAME		Arial Narrow	9
RECIPIENT COMPANY NAME		Arial Narrow	9
RECIPIENT STREET ADDRESS LINE 1		Arial Narrow	9
RECIPIENT STREET ADDRESS LINE 2		Arial Narrow	9
RECIPIENT CITY, STATE ZIP		Arial Narrow	9
FedEx Ground Logo Image		n/a	n/a
FedEx	use if not using FedEx Ground logo image	Arial Narrow Bold	16
Ground	use if not using FedEx Ground logo image	Arial Narrow Bold	7
OpCo Identifier: S		Arial Narrow Bold	47
Client and version detail	Rotated 90 degrees CCW	Arial Narrow	7
FedEx TRACKING ID# 1234 5678 9012	ZPL: Center justified in a 93.625 mm (749 dot) wide field block	Arial Narrow Bold	12
FDX1D barcode human readable translation	ZPL: Center justified in a 93.625 mm (749 dot) wide field block	Arial Narrow Bold	10
Note: Barcode human readable translation shall be formatted as: NNNN NNNN N (NNN NNN NNNN) N NN NNNN NNNN NNNN			
Ancillary Endorsement E.g.: CARRIER LEAVE IF NO RESPONSE, ADDRESS SERVICE REQUESTED etc.		Arial Narrow Bold	8
USPS DELIVER TO:		Arial Narrow Bold	10
USPS Recipient Name		Arial Narrow	10
USPS Recipient Street Address Line 1		Arial Narrow	10
USPS Recipient Street Address Line 2		Arial Narrow	10
USPS Recipient Ciity, State ZIP		Arial Narrow	10
USPS Barcode Banner Text: USPS TRACKING # e-VS	ZPL: Center justified in a 93.625 mm (749 dot) wide field block	Arial Narrow Bold	12
USPS barcode human readable translation	ZPL: Center justified in a 93.625 mm (749 dot) wide field block	Arial Narrow Bold	12
Reference barcode human readable translation		Arial Narrow Bold	9

ACTIVE

Only for use by FedEx authorized personnel, customers, or agents and FedEx Ground® Economy software Solution Providers. Do not forward, copy, or distribute to any unauthorized person. Contact customer support for the most current version of this document prior to implementing. The latest version supersedes all previous versions.