

Version No
2.0

VAAPI SERVICES
A DEVELOPER, USER'S GUIDE

Table of Contents

1. INTRODUCTION.....	4
1.1 WHAT'S IN THIS MANUAL.....	4
1.2 INTRODUCTION.....	5
1.2.1 AUDIENCE	5
1.2.2 SYMBOLS AND CONVENTIONS.....	5
2. SERVICE METHOD INFORMATION	5
2.1 Prerequisite Keys To Run APIs	5
2.2 CHECK SERVICE	6
2.3 CHECK SERVICE NO CORS.....	6
2.4 LOGIN	6
2.5 GET CLIENTS	8
2.6 GET ORGS.....	9
2.7 INIT SESSION	9
2.8 VERIFY SESSION TOKEN.....	11
2.9 CHECK ACCESS.....	11
2.10 LOGOUT	12
2.11 GET DOCUMENT NUMBER.....	12
2.12 GET PRIMARY KEY	12
2.13 GET RECORD.....	13
2.14 GET RECORD V2	14
2.15 GET RECORD V3 (For Paging)	15
2.16 INSERT RECORD WITH PID (Using Query with given Primary Key)	16
2.17 INSERT RECORD WITH PID M1 (Using Query with given Primary Key and for candidate key tables)	17
2.18 INSERT RECORD (Insert Record using Query)	18
2.19 INSERT RECORD M1 (Insert record using Query).....	18
2.20 UPDATE OR DELETE RECORD (Update or Delete record using Query)	19
2.21 DELETE RECORD M2.....	20
2.22 INSERT BYTE	21
2.23 UPDATE BYTE	23
2.24 READ BYTE.....	24
2.25 INSERT IMAGE.....	25
2.26 UPDATE IMAGE	26
2.27 READ IMAGE	27
2.28 INSERT VALUES AND UPDATE TREE (Using M-Class with String Values)	27

2.29	INSERT RECORD M2 (Using M-Class with String values)	29
2.30	INSERT RECORD M3 (Using M-Class with Object type values)	30
2.31	UPDATE TREE	31
2.32	UPDATE RECORD M2 (Update Record using Query)	32
2.33	GET PARAMETERS	33
2.34	RUN PROCESS	34
2.35	RUN PROCESS BY SEARCH KEY	35
2.36	CHANGE PASSWORD	36
2.37	UPDATE RECORD (Using M-Class with String Values)	37
2.38	UPDATE RECORD M3 (Update Record using M-Class with Object type Values)	38
2.39	GET TOKEN AUTHENTICATION	39
2.40	SAVE FILE IN TEMP USING BYTE ARRAY	40
2.41	SAVE ATTACHMENT ENTRIES	41
2.42	DELETE ATTACHMENT	42
2.43	GET ATTACHMENT	42
2.44	GET ROLES	44
2.45	GET API TOKEN	44
2.46	VERIFY TOKEN	45
2.47	INSERT MULTIPLE RECORDS	46
2.48	DELETE MULTIPLE RECORDS	47
2.49	UPDATE MULTIPLE RECORDS	48
3.	ACTIVITY METHOD INFORMATION	49
3.1	CREATE CHAT	50
3.2	GET CHAT	50
3.3	Get Chat By ID	51
3.4	Create Task	52
3.5	Get Task	53
3.6	GetTaskByID	55
3.7	AttachTaskToLead	56
3.8	AttachTaskToRecord	57
3.9	CreateAppointment	58
3.10	GetAppointment	60
3.11	GetAppointmentByID	61
3.12	CreateAppointmentTranscript	62
3.13	GetAppointmentTranscript	63
3.14	CreateCall	64
3.15	GetCall	65

3.16	GetCallByID	67
3.17	CreateEmail	67
3.18	GetEmail.....	69
3.19	GetEmailByID	70
3.20	GetEmailDetail	71
3.21	GetEmailAttachment	72
4.	CHECKLIST METHOD INFORMATION	73
4.1	GetChecklist	73
4.2	GetQuestionList	74
4.3	GetScreenCheckList	75
4.4	GetCheckListResponse.....	76
4.5	UpdateResponseLine	81
4.6	UpdateResponse	82
5.	RESPONSES INFORMATION.....	83
5.1	REPOSSES (JSON FORMAT).....	84

1. INTRODUCTION

1.1 WHAT'S IN THIS MANUAL

It provides the information about the different methods available in the VA-API Service. API services module appears to be a system that allows users to access various APIs using access keys and authentication secret keys.

The API Services Module is a robust and scalable framework designed to provide seamless access to a wide range of services through APIs. Users are granted access by utilizing access keys and authentication secret keys, ensuring secure and authorized interactions. This module offers flexibility by supporting multiple methods for different API services.

1.2 INTRODUCTION

Onfinity provides VA-API service for clients.

In this document, let's assume the API is hosted on the link mentioned below

Exp. <https://OnfinitySample.com>

In testing or production environment, user has to replace the above-mentioned URL with the actual URL.

1.2.1 AUDIENCE

1.3.	1.3.1.2
1	Developer

1.2.2 SYMBOLS AND CONVENTIONS

	Example
	Note
	Caution
	Recommendation

2. SERVICE METHOD INFORMATION

User can consume API Services in their application by calling exposed methods on server side. These service methods are parameterized and only authenticated user can access the information and for that user need to pass access key and secret key in the header while calling the API.

2.1 Prerequisite Keys To Run APIs

To call APIs user need AccessKey and SecretKey. Both keys are mandatory to pass to run the API.

For AccessKey you need to contact Onfinity Support.

For Secret key please follow the link mentioned below

<https://viennaadvantage.atlassian.net/wiki/spaces/VA/pages/750944281/Creating+an+API+Secret+Key?atlOrigin=eyJpIjoiODUwZGE2Y2Y0ZjZmNDkxZGE2MjY5YjE5NjU4Nzg4YjEiLCJwIjoiYyJ9>

2.2 CHECK SERVICE

This method allows users to check/verify VAAPI Services. If services are working fine then it returns true and otherwise false.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Auth/CheckService>

Signature: `public bool CheckService()`

Response: Returns Data in bool (true/false) format.

2.3 CHECK SERVICE NO CORS

This method is used to check service without cors filter. If services are working then it returns true and otherwise false.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Auth/CheckServiceNoCors>


Signature: `public bool CheckServiceNoCors()`

Response: Returns Data in bool (true/false) format


2.4 LOGIN

The Login API facilitates user authentication by validating the provided **username and password**. When user submits valid credentials then system returns the user's role details. If the credentials are incorrect then API will return an error message. This API requires a **POST** request and it is designed to ensure secure authentication with sensitive access key passed through the request headers in an encrypted format.

Request Format (In Json): The Login API accepts POST request that requires the body to be in JSON format. In the body the request should include the userName and password parameters as shown. Additionally, the access key must be passed as a header in the request. Below is the **JSON format** for the API request, which must be sent as a POST request.

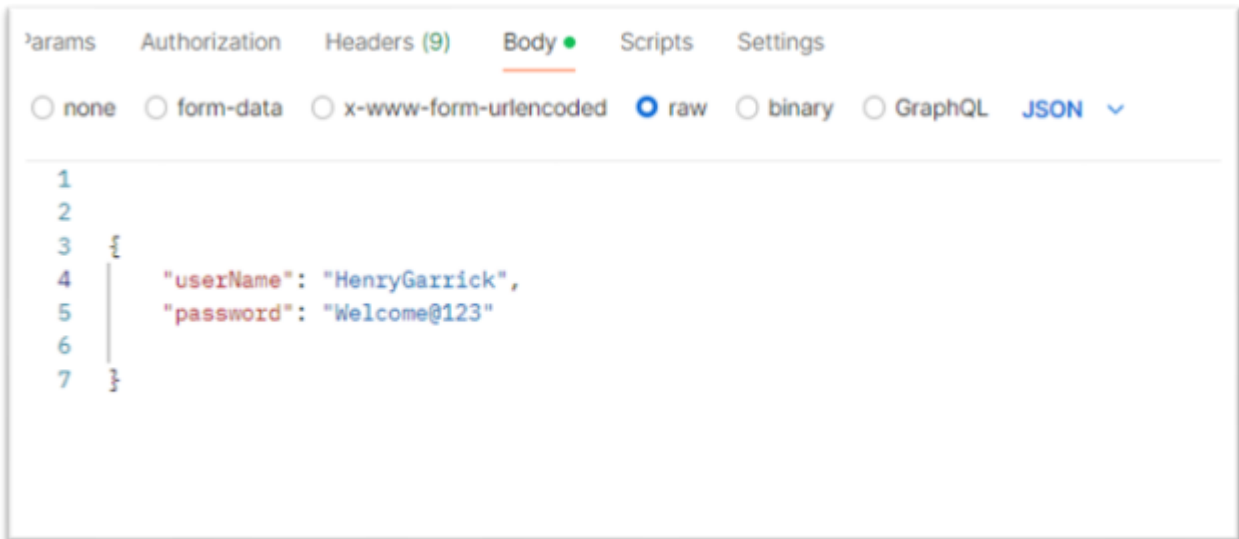

Body of the API request in JSON format

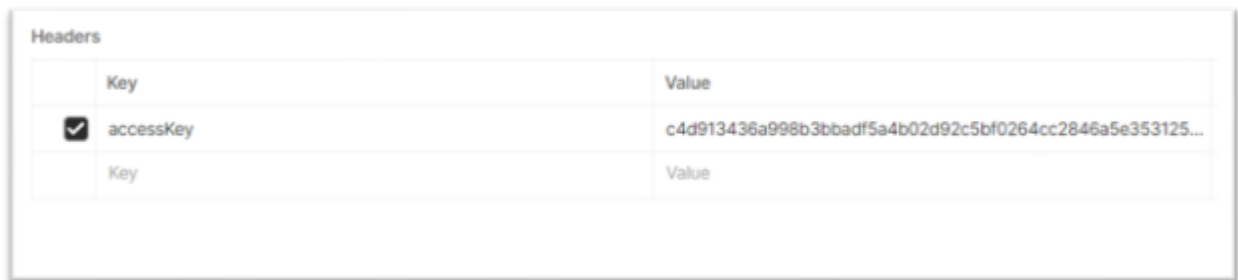

Headers of the API request in JSON format

Endpoint: <https://OnfinitySample.com/api/VAAPI/Auth/Login>

Signature: `public object Login(dynamic value)`

Parameter	Description
userName	Enter your UserName
password	Enter your Password

Response: Returns Data in JSON format.

Sample Request Below:

```

{
  "password": "Vienna@123",
  "userName": "Aadarsh"
}

```

Sample Response below:

```

{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "AD_USER_ID": 1005527,

```

```

        "AD_ROLE_ID": 1000118,
        "name": "IdeasInc Admin"
    },
    {
        "AD_USER_ID": 1005527,
        "AD_ROLE_ID": 1000124,
        "name": "Purchase Executive"
    }
]
}

```

In case user has access to multiple roles, it will return multiple records, in each record AD_User_ID is same with AD_Role_ID and Role Name details.

2.5 GET CLIENTS

This method is used to get the Client details based on Login User and Role. It will return the Client details linked with parameter Role.

API Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The body should include the **AD_Role_ID** parameter. Additionally, the access key must be included in the request headers for authentication.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Auth/GetClients>

Signature: `public object GetClients(dynamic value)`

Parameter	Description
AD_Role_ID	Pass the Role Id

Response: Returns Data in JSON format.

Sample Request Below:

```

{
    "AD_Role_ID": "1000124"
}

```

Sample Response below:

```

{
    "code": 200,
    "result": "Success",
    "data": [
        {
            "userlevel": " CO",
            "connectionprofile": null,
            "AD_CLIENT_ID": 1000005,
            "name": "IdeasInc"
        }
    ]
}

```


2.6 GET ORGS

This function gets the list of Organizations based on Login User and Role. It will return the List of Organizations for selected Role and Client to which the user has access.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The body should include the AD_Role_ID, AD_Client_ID and AD_User_ID parameter. Additionally, the access Key must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Auth/GetOrgs>

Signature: `public object GetOrgs(dynamic value)`

Parameter	Description
AD_Role_ID	Pass Role ID of the user
AD_Client_ID	Pass client ID of the user
AD_User_ID	Pass the user ID of the user

Response: Returns Data in JSON format.

Sample Request Below:

```
{
  "AD_Role_ID": 1000124,
  "AD_Client_ID": 1000005,
  "AD_User_ID": 1005527
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "ad_org_id": 0,
      "name": "*",
      "issummary": "N"
    },
    {
      "ad_org_id": 1000020,
      "name": "HQ",
      "issummary": "N"
    },
    {
      "ad_org_id": 1000023,
      "name": "Store",
      "issummary": "N"
    }
  ]
}
```

2.7 INIT SESSION

This function is used to generate a valid secret key along with its expiration time. If the provided details are correct then a valid secret key will be generated, otherwise, an error will be returned.

Request Format (In Json): The API accepts **POST** request, where the request body must be in JSON format. The body should include the following parameters: AD_Client_ID, AD_Org_ID, AD_User_ID, AD_Role_ID, requestAddr, tokenExpTimeInMinutes and idleTime. Additionally, the accessKey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Auth/InitSession>

Signature: `public object InitSession(dynamic value)`

Parameter	Description
AD_Client_ID	Enter the Client ID
AD_Org_ID	Enter the Org ID
AD_User_ID	Enter the User ID
AD_Role_ID	Enter the Role ID
requestAddr	Enter the Request Address
tokenExpTimeInMinutes	Enter Token Expire Time In Minutes
idleTime	Enter Idle Time

Response: Returns Data in JSON format.

Sample Request Below:

```
{
  "AD_Client_ID": 1000005,
  "AD_Org_ID": 1000008,
  "AD_Role_ID": 1000124,
  "AD_User_ID": 1005527,
  "idleTime": 1000800,
  "requestAddr": "https://OnfinitySample.com/",
  "tokenExpTimeInMinutes": 1000800
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "37396491d8da418f96fb1e319a2c9c76"
}
```

If above information is correct then it will generate a Secret Key which will be valid for the expiration time passed in the parameter, and will be recalculated for the idle time accordingly.

2.8 VERIFY SESSION TOKEN

This method is used to verify secret key, if the secret key is valid then it gives a valid session Id and if token is incorrect or invalid then it returns “**Invalid Secret Key**” message in response.

Request Format (In Json): The body of POST API request in JSON format. It includes secretKey as a parameter.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Auth/VerifySessionToken>

Signature: `public object VerifySessionToken(dynamic value)`

Parameter	Description
secretKey	Enter the valid Secret Key

Response: Returns data in string format.

Sample Request Below:

```
{  
  "secretKey": "5f7d45b0d4b7465b842f0955ce169434"  
}
```

Sample Response below:

```
"1006689"
```

2.9 CHECK ACCESS

This method is used to check and verify screen, table access.

Request Format (In Json): The body of POST API request in JSON format. It includes secret key as parameter.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Auth/CheckAccess>

Signature: `public string CheckAccess(dynamic value)`

Parameter	Description
secretKey	Enter the valid Secret Key

Response: Return data in string format.

Payload Example:

```
{  
  "secretKey": "5f7d45b0d4b7465b842f0955ce169434"  
}
```

Sample Response below:

```
"1006689"
```

2.10 LOGOUT

This method is used to logout the user.

Request Format (In Json): It requires secretKey to be passed in the request headers.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Auth/LogOut>

Signature: `public bool LogOut()`

Response: Returns bool type(Y/N).

2.11 GET DOCUMENT NUMBER

This method is used to get document number on the basis of client Id and valid tableName. It will return next Document number of table name passed in the parameter.

Request Format (In Json): The API accepts **GET** request, where the request body must be in JSON format. The body should include the following parameters: AD_Client_ID and tableName.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/GetDocumentNumber>

Signature: `public object GetDocumentNumber(int AD_Client_ID, string tableName)`

Parameter	Description
AD_Client_ID	Enter the Client ID
tableName	Enter the table Name

Response: Returns Data in JSON format.

Sample Request Below:

```
{
  "AD_Client_ID": 1000005,
  "tableName": "M_Product"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "1000001"
}
```

2.12 GET PRIMARY KEY

This function is used to get the primary key of the table. It will return next primary key of the table name passed in the parameter.

Request Format (In Json): The API accepts **GET** request, where the request body must be in JSON format. The body should include the following parameter i.e. tableName.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/GetPrimaryKey>

Signature: `public object GetPrimaryKey(string tableName)`

Parameter	Description
tableName	Enter Table Name

Response: Returns Data in JSON format.

Payload Example:

```
{
  "tableName": "M_Product"
}
```

Sample Response below:

```
{
  "id": 1051342,
  "identifier": "",
  "code": 200,
  "result": "Success",
  "data": 1051342
}
```

2.13 GET RECORD

This function is used to get records from the table. In SQL query parameter user has to write an SQL query (SELECT query).

Request Format (In Json): The API accepts **GET** request, where the request body must be in JSON format. The body should include the following parameters: selectQuery and tableName.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/GetRecord>

Signature: `public object GetRecord(string selectQuery, string tableName)`

Parameter	Description
selectQuery	Enter the SQL Query to get record
tableName	Enter Table Name

Response: Returns Data in JSON format.

Sample Request Below:

```
{
  "tableName": "C_BPartner",

```

```

    "selectQuery": "SELECT Name, Value FROM C_BPartner"
}

```

Sample Response below:

```

{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "name": "Johan Martin",
      "value": "JohanMartin"
    },
    {
      "name": "Ikshit",
      "value": "Ikshit"
    }
  ]
}

```

2.14 GET RECORD V2

This method is used to get records based on the query passed in the parameter. In SQL query parameter user has to pass SQL query (SELECT query).

Request Format (In Json): The API accepts a **POST** request, where the request body must be in JSON format. The **request body** should include the following parameters: selectQuery and tableName.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/GetRecordV2>

Signature: public object GetRecordV2(dynamic value)

Parameter	Description
selectQuery	Enter the SQL Query to fetch records
tableName	Enter table name which you want to get

Response: Returns Data in JSON format.

Sample Request Below:

```

{
  "tableName": "C_BPartner",
  "selectQuery": "SELECT Name, Value FROM C_BPartner"
}

```

Sample Response below:

```

{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "name": "Johan Martin",
      "value": "JohanMartin"
    },
    {

```

```

        "name": "Ikshit",
        "value": "Ikshit"
    }
}

```

In selectQuery parameter, the database keywords should be in UpperCase, column names and table names should be in pascal notation.

2.15 GET RECORD V3 (For Paging)

This function is used to get records from the table based on the query passed in the parameter. In SQL query parameter user has to write an SQL query (SELECT query), along with other parameters “pageNo” and “pageSize”.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters: selectQuery, tableName, pageNo and pageSize.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/GetRecordV3>

Signature: `public object GetRecordV3(dynamic value)`

Parameter	Description
selectQuery	Enter the SQL Query to fetch record
tableName	Enter table name which you want to get
pageNo	Enter Page No
pageSize	Enter Page Size

In selectQuery parameter, the database keywords should be in UpperCase, column names and table names should be in pascal notation.

SELECT * FROM TableA

Response: Returns Data in JSON format.

Sample Request Below:

```

{
    "tableName": "C_BPartner",
    "selectQuery": "SELECT Name, Value FROM C_BPartner",
    "pageNo": 1,
    "pageSize": 50
}

```

Sample Response below:

```

{
    "code": 200,
    "result": "Success",
    "data": [
        {

```

```

        "name": "Johan Martin",
        "value": "JohanMartin"
    },
    {
        "name": "Ikshit",
        "value": "Ikshit"
    }
]
}

```

User has to pass *pageSize* and *pageNo* as parameters e.g. if value of *pageSize* is 50 and *pageNo* is 1, then according to the parameters passed, API will return first 50 records from the table name passed in the parameter as the parameter for *pageNo* is 1, if user pass the value for *pageNo* as 2, API will return next 50 records and so on.

2.16 INSERT RECORD WITH PID (Using Query with given Primary Key)

This method is used to insert record with primary key, you need to pass 0 as the PID parameter. The database will automatically generate a primary key when the record is inserted. If not inserted, then it will return a string containing keyword “NotInserted” along with error message.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters: *selectQuery*, *tableName* and *pid*.



The *accessKey* and *secretkey* must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/InsertRecordWithPid>

Signature: `public object InsertRecordWithPid(dynamic value)`

Parameter	Description
<i>selectQuery</i>	Query to create record in the database
<i>tableName</i>	Enter table name which you want to get
<i>pid</i>	Enter the Primary Key

Response: Returns Data in JSON format.

Sample Request Below:

```

{
    "selectQuery": "INSERT INTO CM_ChatEntry (AD_Client_ID, AD_Org_ID, AD_User_ID, CM_ChatEntry_ID, CM_Chat_ID, CharacterData, CreatedBy, UpdatedBy, IsActive, ConfidentialType) VALUES (1000005,1000008,1005338, @pk,1000033,'Hello',1005338,1005338,'Y','A')",
    "tableName": "CM_ChatEntry",
    "pid": 0
}

```

Sample Response below:

```

{
    "id": 1000320,
    "identifier": "1000320",
    "code": 200,
    "result": "Success",
    "data": 1000320
}

```


}

On “pid” parameter you have to pass 0 and database will automatically generate primary key on insertion. User has to pass “@pk” in the query so that it will insert the record in the system and database will generate the primary key.

2.17 INSERT RECORD WITH PID M1 (Using Query with given Primary Key and for candidate key tables)

This method is used to insert a record. When you insert a record, you need to pass 0 as the PID parameter. The database automatically creates a primary key when the record is inserted. If not inserted, then it will return a string containing keyword “NotInserted” along with error message.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters: selectQuery, tableName and pid.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/InsertRecordWithPidM1>

Signature: public object InsertRecordWithPidM1(dynamic value)

Parameter	Description
selectQuery	Query to create record in the database
tableName	Enter Table Name
pid	Enter the Primary Key

Response: Returns Data in JSON format.

Sample Request Below:

```
{
  "selectQuery": "INSERT INTO CM_ChatEntry (AD_Client_ID, AD_Org_ID, AD_User_ID,
CM_ChatEntry_ID, CM_Chat_ID, CharacterData, CreatedBy, UpdatedBy, IsActive,
ConfidentialType) VALUES (1000005,1000008,1005338, @pk,1000033,'Hello',1005338,1005338,'Y',
'A')",
  "tableName": "CM_ChatEntry",
  "pid": 0
}
```

Sample Response below:

```
{
  "id": 1000323,
  "identifier": "1000323",
  "code": 200,
  "result": "Success",
  "data": 1000323
}
```

On “pid” parameter you have to pass 0 and database will automatically generate primary key on insertion. User has to pass “@pk” in the query so that it will insert the record in the system and database will generate the primary key.

2.18 INSERT RECORD (Insert Record using Query)

This method is used to insert records in the table. If table has one column as primary key then it will return Primary Key if record inserted. If not inserted, then it will return a string containing keyword “NotInserted” along with error message.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters: selectQuery and tableName.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/InsertRecord>

Signature: public object InsertRecord(dynamic value)

Parameter	Description
selectQuery	Enter the SQL Query to fetch record
tableName	Enter Table Name

Response: Returns Data in JSON format.

Sample Request Below:

```
{
  "selectQuery": "INSERT INTO CM_ChatEntry (AD_Client_ID, AD_Org_ID, AD_User_ID,
CM_ChatEntry_ID, CM_Chat_ID, CharacterData, CreatedBy, UpdatedBy, IsActive,
ConfidentialType) VALUES
(1000005,1000008,1005338,1000322,1000033,'Hello',1005338,1005338,'Y', 'A')",
  "tableName": "CM_ChatEntry"
}
```

Sample Response below:

```
{
  "id": 1000324,
  "identifier": "1000324",
  "code": 200,
  "result": "Success",
  "data": 1000324
}
```

User has to pass “@pk” in the query so that it will insert the record in the system and database will generate the primary key.

2.19 INSERT RECORD M1 (Insert record using Query)

This method is used to insert record in the table. If table has one column as primary key then it will return Primary Key once record inserted. If not inserted, then it will return a string containing keyword “NotInserted” along with error message.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters: selectQuery and tableName.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/InsertRecordM1>

Signature: `public object InsertRecordM1(dynamic value)`

Parameter	Description
selectQuery	SQL Query to insert record Ex: - INSERT INTO Test (AD_Client_ID, AD_Org_ID, Description, IsActive, Name, Test_ID) VALUES (1000000, 0, 'description', 'Y', 'Name', @pk); Note: @pk should be inserted as value of primary key which will be replaced by the next primary key of table name
tableName	Enter Table Name

Response: Returns Data in JSON format.

Sample Request Below:

```
{
  "selectQuery": "INSERT INTO CM_ChatEntry (AD_Client_ID, AD_Org_ID, AD_User_ID,
CM_ChatEntry_ID, CM_Chat_ID, CharacterData, CreatedBy, UpdatedBy, IsActive,
ConfidentialType) VALUES (1000005,1000008,1005338, @pk,1000033, 'Hello',1005338,1005338, 'Y',
'A')",
  "tableName": "CM_ChatEntry"
}
```

Sample Response below:

```
{
  "id": 1000325,
  "identifier": "1000325",
  "code": 200,
  "result": "Success",
  "data": 1000325
}
```

User has to pass “@pk” in the query so that it will insert the record in the system and database will generate the primary key.

2.20 UPDATE OR DELETE RECORD (Update or Delete record using Query)

This method is used to update and delete record from the table. In select Query parameter user has to pass correct update or Delete query. If Query execute in database, then it returns 1 and otherwise “NotUpdatedOrDeleted”.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters: selectQuery, tableName and pid.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/UpdateORDeleteRecord>

Signature: `public object UpdateORDeleteRecord(dynamic value)`

Parameter	Description
selectQuery	Pass update or delete query
tableName	Enter table name
pid	Enter the ID which you want to update or delete

Response: Returns data in JSON format.

Sample Request Below:

```
{
  "pid": "-1",
  "selectQuery": "UPDATE CM_ChatEntry SET ConfidentialType = 'N' WHERE CM_ChatEntry_ID = 1000325",
  "tableName": "CM_ChatEntry"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "1"
}
```

User has to pass “@pk” in the query so that it will update or delete the record in the system against the primary key passed in the pid parameter. In the response data will be returned as the number of records affected.

2.21 DELETE RECORD M2

This method is used to delete record on the basis of record ID. If Record is deleted successfully then it returns “RecordDeleted” message otherwise “NotDeleted”.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters: tableName and record_ID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/DeleteRecordM2>

Signature: public object DeleteRecordM2(dynamic value)

Parameter	Description
tableName	Enter table name
record_ID	Enter record ID which you want to delete

Response: Returns data in JSON format.

Sample Request Below:

```
{
  "record_ID": "1000325",
  "tableName": "CM_ChatEntry"
}
```

```
}
```

Sample Response below:

```
{  
  "code": 200,  
  "result": "Success",  
  "data": "RecordDeleted"  
}
```

2.22 INSERT BYTE

This method is used to insert byte data.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters: selectQuery, tableName, file and fileType.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/InsertByte>

Signature: `public object InsertByte(dynamic value)`

Parameter	Description
selectQuery	Enter the SQL Query
tableName	Pass the name of the table to which new record is inserting
file	Pass file in form of Byte Array. Insert null if don't have any file
fileType	Pass file type dot (e.g. .docx etc.)

Response: Returns Data in JSON format.

Sample Request Below:

```
{  
  "file": [  
    137,  
    80,  
    78,  
    71,  
    13,  
    10,  
    26,  
    10,  
    0,  
    0,  
    0,  
    13,  
    73,  
    72,  
    68,  
  ]  
}
```

```

82,
0,
0,
0,
243,
0,
0,
0,
178,
8,
6,
0,
0,
0,
151,
242,
249,
246,
0,
0,
0,
1,
115,
82,
71,
66,
0,
174,
206,
0,
0,
0,
73,
69,
78,
68,
174,
66,
96,
130
],
"fileType": ".png",
"selectQuery": "INSERT INTO VA055_DigiSignStatus
(VA055_DIGITALSIGNATURE_ID,AD_Client_ID,AD_Org_ID,CreatedBy,IsActive,VA055_ISDefault,VA055_
Reason,VA055_ReasonStatusImage,VA055_DigiSignStatus_ID)  values
(1005336,1000005,1000008,1005338,'Y','N','AA',@fileName,@pk)",
"tableName": "VA055_DigiSignStatus"
}

```

Sample Response below:

```

{
  "id": 1000011,
  "identifier": "1000011",

```

```

"code": 200,
"result": "Success",
"data": 1000011
}

```

2.23 UPDATE BYTE

This method is used to update byte in table against the record id. It will return number of records updated, if there is any issue while updation then it will return “-2”.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters: selectQuery, id, tableName, file and fileType.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/UpdateByte>

Signature: public object UpdateByte(dynamic value)

Parameter	Description
selectQuery	Pass update query. Ex:- UPDATE Test SET NAME=@fileName WHERE Test_ID=@pk
id	Pass primary key of record. Id must be newly generated and cannot be 0. This value will be assigned to primary key (@pk)
tableName	Enter the Table Name
file	Pass file in form of Byte Array. Insert null if don't have any file
fileType	Pass file type with dot (e.g .docx etc)

Response: Returns data in JSON format.

Sample Request Below:

```

{
  "selectQuery": "UPDATE M_Product SET AD_Image_ID=@fileName WHERE M_Product_ID=1004315",
  "fileType": ".png",
  "file": [137, 80, 78, 71, 13, 10, 26, 10, 0, 0, 0, 13, 73, 72, 68, 82, 0, 0, 0, 243, 0,
0, 0, 178, 8, 6, 0, 0, 0, 151, 242, 249, 246, 0, 0, 0, 1, 115, 82, 71, 66, 0, 174, 206, 28,
233, 0, 0, 16, 180, 73, 68, 65, 84, 120, 94, 237, 157, 255, 185, 222, 182, 13, 133, 153,
13, 154, 9, 234, 110, 208, 13, 220, 108, 208, 13, 156, 110, 224, 78, 144, 100, 2, 119, 132,
100, 146, 38, 19, 180, 243, 111, 4, 11, 88, 148, 188, 50, 102, 215, 4, 246, 220, 55, 163,
141, 141, 237, 245, 50, 114, 108, 51, 100, 134, 152, 107, 201, 101, 21, 179, 120, 239, 121,
215, 120, 215, 4, 182, 62, 111, 70, 27, 219, 174, 155, 90, 91, 214, 223, 244, 234, 25, 98,
174, 181, 138, 87, 246, 88, 91, 109, 84, 137, 118, 109, 28, 106, 244, 205, 41, 181, 207,
150, 223, 133, 65, 64, 250, 223, 107, 138, 81, 98, 70, 109, 31, 122, 222, 137, 68, 42, 98,
150, 57, 106, 21, 233, 14, 135, 95, 57, 251, 52, 183, 30, 87, 153, 138, 56, 223, 43, 187,
31, 230, 205, 69, 78, 68, 174, 66, 96, 130],
  "id": "1004315",
  "tableName": "M_Product"
}

```

```
}
```

Sample Response below:

```
{  
  "code": 200,  
  "result": "Success",  
  "data": "1"  
}
```

In @pk should be inserted as value of primary key which will be replaced by the next primary key sent as 2nd parameter (int id) by web Api. @fileName will be inserted as name of file which will be auto generated by service.

2.24 READ BYTE

This method is used to Read Byte. If found file then it will return byte [] in object or return “Null” if the file is not found.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters: recordID tableName and fileNameColumn.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/ReadByte>

Signature: public object ReadByte(dynamic value)

Parameter	Description
recordID	Pass record id of table
tableName	Enter Table Name
fileNameColumn	Pass column name which contains filename

Response: Returns Data in JSON format.

Sample Payload:

```
{  
  "recordID":1005345,  
  "tableName": "AD_User",  
  "fileNameColumn": "AD_Image_ID"  
}
```

Sample Response:

```
{  
  "code": 200,  
  "result": "Success",  
  "data": null  
}
```


2.25 INSERT IMAGE

This method is used to insert the Image into system. It will return Primary Key if record inserted or 0 if not inserted and -1 if query does not contain @pk and @filename.

Request Format (In Json): The API accepts POST request where the request body must be in JSON format. The **request body** should include the following parameters: selectQuery, tableName, file and fileType.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/InsertImage>

Signature: public object InsertImage(dynamic value)

Parameter	Description
selectQuery	Enter the SQL Query
tableName	Pass the name of the table to which new record is inserting
file	Pass file in form of Byte Array. Insert null if don't have any file
fileType	Pass file type with dot (e.g .png etc)

INSERT INTO Test (AD_Client_ID, AD_Org_ID, Description, IsActive, Name, FileName, Test_ID) VALUES (1000000, 0, 'description', 'Y', 'Name', @fileName, @pk)

Response: Returns Data in JSON format.

Sample Request Below:

```
{ "file": [137, 80, 78, 71, 13, 10, 26, 10, 0, 0, 0, 13, 73, 72, 68, 82, 0, 0, 0, 243, 0, 0, 0, 178, 8, 6, 0, 0, 0, 151, 242, 249, 246, 0, 0, 0, 1, 115, 82, 71, 66, 0, 174, 206, 0, 0, 0, 73, 69, 78, 68, 174, 66, 96, 130], "fileType": ".png", "selectQuery": "INSERT INTO VA055_DigiSignStatus (VA055_DIGITALSIGNATURE_ID,AD_Client_ID,AD_Org_ID,CreatedBy,IsActive,VA055_ISDefault,VA055_Reason,VA055_ReasonStatusImage,VA055_DigiSignStatus_ID) values (1005336,1000005,1000008,1005338,'Y','N','AA',@fileName,@pk)", "tableName": "VA055_DigiSignStatus" }
```

Sample Response below:

```
{ "id": 1000011, "identifier": "DELL Laptop", "code": 200, "result": "Success", "data": 1000011 }
```

2.26 UPDATE IMAGE

This method is used to update Image in the table. It will return number of records updated, -2 if any issues in execute query, -3 if issues with Extension and -4 if issues with file.

Request Format (In Json): The API accepts POST request where the request body must be in JSON format.

The **request body** should include the following parameters: selectQuery, tableName, file, filetype and id.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/UpdateImage>

Signature: `public object UpdateImage(dynamic value)`

Parameter	Description
selectQuery	Pass update query
tableName	Enter Table Name
file	Pass file in form of Byte Array. Insert null if don't have any file
fileType	Pass file type with dot (e.g .png etc)
id	Enter the ID

Response: Returns data in JSON format

UPDATE Test SET Name=@fileName WHERE Test_ID=@pk

Note: @pk should be inserted as value of primary key, which will be replaced by the next primary key sent as 2nd parameter (int id) by web API. @fileName will be inserted as name of file which will be auto generated by web API.

Sample Request Below:

```
{
  "selectQuery": "UPDATE M_Product SET AD_Image_ID=@fileName WHERE M_Product_ID=1004315",
  "fileType": ".png",
  "file": [137, 80, 78, 71, 13, 10, 26, 10, 0, 0, 0, 13, 73, 72, 68, 82, 0, 0, 0, 243, 0,
0, 0, 178, 8, 6, 0, 0, 0, 151, 242, 249, 246, 0, 0, 0, 1, 115, 82, 71, 66, 0, 174, 206, 28,
233, 0, 0, 16, 180, 73, 68, 65, 84, 120, 94, 237, 157, 255, 185, 222, 182, 13, 133, 153,
13, 154, 9, 234, 110, 208, 13, 220, 108, 208, 13, 156, 110, 224, 78, 144, 100, 2, 119, 132,
100, 146, 38, 19, 180, 243, 111, 4, 11, 88, 148, 188, 50, 102, 215, 4, 246, 220, 55, 163,
141, 141, 237, 245, 50, 114, 108, 51, 100, 134, 152, 107, 201, 101, 21, 179, 120, 239, 121,
215, 120, 215, 4, 182, 62, 111, 70, 27, 219, 174, 155, 90, 91, 214, 223, 244, 234, 25, 98,
174, 181, 138, 87, 246, 88, 91, 109, 84, 81, 98, 70, 109, 31, 122, 222, 137, 68, 42, 98,
150, 57, 106, 21, 233, 14, 135, 95, 57, 251, 52, 183, 30, 87, 153, 138, 56, 223, 43, 187,
31, 230, 205, 69, 78, 68, 174, 66, 96, 130],
  "id": "1004315",
  "tableName": "M_Product"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "1"
}
```

2.27 READ IMAGE

This method is used to read Image. It will return byte array or base 64 string based on the return type parameter if file found or return “Null” if there is no file.

Request Format (In Json): The API accepts POST request where the request body must be in JSON format. The **request body** should include the following parameters: fileNameColumn, recordID and tableName.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/ReadImage>

Signature: `public object ReadImage(dynamic value)`

Parameter	Description
fileNameColumn	Pass column name which contain image
recordID	Pass record Id of table name
tableName	Enter Table Name

Response: Returns data in JSON format.

Sample Payload:

```
{
  "recordID": 1005345,
  "tableName": "AD_User",
  "fileNameColumn": "AD_Image_ID"
}
```

Sample Response:

```
{
  "code": 200,
  "result": "Success",
  "data": ""
}
```

2.28 INSERT VALUES AND UPDATE TREE (Using M-Class with String Values)

This method is used to update values/records and update tree. It will return Primary Key of record if inserted along with "Tree Updated" OR "Tree Not Updated". If not inserted, then it will return a string containing keyword “NotInserted” along with error message.

Request Format (In Json): The API accepts POST request where the request body must be in JSON format. The **request body** should include the following parameters colName, tableName, fileName, values, includeStandardCols, saveFileInDisk, parent_ID and seqNo.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/InsertValuesAndUpdateTree>

Signature: public object InsertValuesAndUpdateTree(dynamic value)

Parameter	Description
colName	Array containing name of columns in which values to be inserted
tableName	Enter Name of Table in which you want to insert record
fileName (pass empty string)	Enter the File Name (pass empty string)
values	Array containing values of columns
includeStandardCols	If it is TRUE, then VAAPI service will check for each standard column (UpdatedBy, CreatedBy, Updated, Created and IsActive) in array provided by you. if any column not found then that column will be inserted by VAAPI service automatically. If False, then service will check if you are providing value for each column of window or not. If not, it will return message "ColumnsNotMatching"
saveFileInDisk (pass false)	Enter yes /no value. (bool type) (pass false)
parent_ID	Record ID of new parent
seqNo	Set sequence at which current record will be displayed under parent Node

Response: Returns Data in JSON format

Sample Request Below:

```
{
  "colName": ["Name", "C_BP_Group_ID"],
  "values": ["ABC", 103],
  "includeStandardCols": false,
  "saveFileInDisk": false,
  "fileName": "",
  "parent_ID": 1008454,
  "seqNo": 10,
  "tableName": "C_BPartner"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "1000098. Tree Updated"
}
```

```
}
```

2.29 INSERT RECORD M2 (Using M-Class with String values)

This method is used to insert record in the table. It will return Primary Key of record if inserted. If not inserted, then it will return a string containing keyword “NotInserted” along with error message. Web API will accept a POST request for this method.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters colName, tableName, fileName, values, includeStandardCols and saveFileInDisk.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/InsertRecordM2>

Signature: `public object InsertRecordM2(dynamic value)`

Parameter	Description
colName	Array containing name of columns in which values to be inserted
tableName	Name of Table in which you want to insert
fileName (pass empty string)	Enter the File Name (pass empty string)
values	Array of String Containing values of columns
includeStandardCols	If it is TRUE, then VAAPI service will check for each standard column (UpdatedBy, CreatedBy, Updated, Created and IsActive) in array provided by you. if any column not found then that column will be inserted by VAAPI service automatically. If False, then service will check if you are providing value for each column of window or not. If not, it will return message “ColumnsNotMatching”
saveFileInDisk (pass false)	Enter true or false (pass false)

Response: Returns Data in JSON format.

Sample Request Below:

```
{
  "colName": [
    "VA072_ClaimSub_ID",
    "C_Currency_ID",
    "VA072_FromDate",
    "VA072_ToDate",
    "VA072_SubClaimType_ID",
    "VA072_StartTime",
    "VA072_EndTime",
```

```

        "Amount",
        "Description",
        "VA072_SubClaimType"
    ],
    "fileName": "",
    "includeStandardCols": true,
    "saveFileInDisk": false,
    "tableName": "VA072_ClaimSubLine",
    "values": [
        "1000555",
        "304",
        "2025-06-02T00:00:00.000Z",
        "2025-06-02T00:00:00.000Z",
        "1000020",
        "2025-06-02T10:02:29.503Z",
        "2025-06-02T11:02:29.503Z",
        "26",
        "This is a claim line",
        "HP"
    ]
}

```

Sample Response below:

```

{
    "id": 1000442,
    "identifier": "1000555",
    "code": 200,
    "result": "Success",
    "data": 1000442
}

```

2.30 INSERT RECORD M3 (Using M-Class with Object type values)

This method is used to insert record in the table. It will return Primary Key of record if inserted. If not inserted, then it will return a string containing keyword “NotInserted” along with error message. Web API will accept a POST request for this method.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters colName, tableName, fileName, values, includeStandardCols and saveFileInDisk.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/InsertRecordM3>

Signature: `public object InsertRecordM3(dynamic value)`

Parameter	Description
colName	Array containing name of columns in which values to be inserted

tableName	Enter name of Table in which you want to insert
fileName (pass empty string)	Enter the File Name (pass empty string)
values	Array of Object containing values of columns
includeStandardCols	If it is TRUE, then service will check for each standard column (UpdatedBy, CreatedBy, Updated, Created and IsActive) in array provided by you. if any column not found then that column will be inserted by service automatically. If False, then service will check if you are providing value for each column of window or not. If not, it will return message "ColumnsNotMatching"
saveFileInDisk (pass false)	Enter true or false (pass false)

Response: Returns data in JSON format.

Sample Request Below:

```
{
  "colName":
  ["Name","Value","M_Product_Category_ID","ProductType","C_TaxCategory_ID","C_Uom_ID"],
  "fileName": "",
  "includeStandardCols": true,
  "saveFileInDisk": false,
  "tableName": "M_Product",
  "values": [ "Pencil","Pencil987",109,"I",1000005,100]
}
```

Sample Response below:

```
{
  "id": 1004522,
  "identifier": "Pencil",
  "code": 200,
  "result": "Success",
  "data": 1004522
}
```

2.31 UPDATE TREE

This method is used to update tree. It will return "Tree Updated" if tree updated successfully otherwise it will return "Tree Not Updated".

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters tableName, AD_Client_ID, AD_Org_ID, node_ID, parent_ID and seqNo.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/UpdateTree>

Signature: `public string UpdateTree(dynamic value)`

Parameter	Description
-----------	-------------

tableName	Enter name of Table whose tree is to be updated
AD_Client_ID	Client in which user is working
AD_Org_ID	Organization in which user is working
node_ID	Record ID of current record which is to be updated in Tree
parent_ID	Record ID of new parent
seqNo	Set sequence at which current record will be displayed under parent Node

Response: Returns data in JSON format.

Sample Request Below:

```
{
  "tableName": "C_Bpartner",
  "AD_Client_ID": 1000005,
  "AD_Org_ID": 1000008,
  "node_ID": 1000956,
  "parent_ID": 1000789,
  "seqNo ": 10
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "Tree Updated"
}
```

2.32 UPDATE RECORD M2 (Update Record using Query)

This method is used to update record. It will return Primary Key of record if updated. If not updated, then it will return a string containing keyword “NotUpdated” along with error message.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters i.e. tableName, colName, values and sqlWhere.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/UpdateRecordM2>

Signature: `public object UpdateRecordM2(dynamic value)`

Parameter	Description
tableName	Name of Table in which you want to update
colName	Array containing name of columns in which values to be inserted
values	Array of String containing values of columns

sqlWhere	Pass SQL where clause to which you want to update the values
----------	--

Response: Returns data in JSON format.

Sample Request below:

```
{
  "colName": ["value"],
  "values": ["10000022"],
  "sqlWhere": "M_Product_ID=1004315",
  "id": 0,
  "tableName": "M_Product"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "1"
}
```

In the sample response above, value in data key i.e. “2”, denotes the number of records updated.

sqlWhere parameter will be used without the keyword “WHERE”. Ex: AD_Client_ID=11 AND AD_Org_ID=11

2.33 GET PARAMETERS

This function is used to get the parameter values for the job (process). It returns AD_Process_ID and List of Parameters if any for that Job (Process). If the Job does not have any parameters, then it will return null into List of Parameters.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters i.e. processValue, AD_Client_ID and AD_Org_ID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/GetParameters>

Signature: public object GetParameters(dynamic value)

Parameter	Description
processValue	Pass the Search Key of the Job for which user want to fetch the parameters
AD_Client_ID	Enter Client ID
AD_Org_ID	Enter Org ID

Response: Returns Data in JSON format.

Sample Request below:

```
{
  "processValue": "VA075_GenerateQuotation",
  "AD_Client_ID": 1000005,
  "AD_Org_ID": 1000008
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": {
    "aD_Process_ID": 1000547,
    "params": [
      {
        "name": "OrderDocumentNo",
        "type": "NVARCHAR2(50)",
        "value": null
      },
      {
        "name": "C_DocType_ID",
        "type": "NUMBER(10)",
        "value": null
      },
      {
        "name": "VA075_ValidTillDate",
        "type": "DATE",
        "value": null
      },
      {
        "name": "VA075_ClosureDate",
        "type": "DATE",
        "value": null
      },
      {
        "name": "VA075_ConvertSO",
        "type": "CHAR(1)",
        "value": null
      }
    ],
    "keyValid": null,
    "sessionValid": null
  }
}
```

2.34 RUN PROCESS

This method is used to execute Job (Process). It will Run the Job and returns the Job Message upon execution.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters i.e. processValue, Record_ID and Param.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/RunProcess>

Signature : `public object RunProcess(dynamic value)`

Parameter	Description
AD_Process_ID	Pass the Job ID provided by Onfinity after validating the Job
Record_ID	Pass zero to Record ID if it is Menu Job. Otherwise pass Record ID for which you want to run the Job
Param	Pass Values to the List of Parameter if required for the Job

Response: Returns data in JSON format.

Sample Request below:

```
{
  "AD_Process_ID": 1000733,
  "Param": [
    {
      "Name": "C_BPartner_ID",
      "Value": 1007094
    },
    {
      "Name": "VA064_RunAssignment_ID",
      "Value": 1001454
    }
  ],
  "Record_ID": 1000798
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "Process executed successfully"
}
```

2.35 RUN PROCESS BY SEARCH KEY

This function is used to run job by Search Key/value instead by the Job ID. It will Run the Job and returns the Job Message upon execution.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters SearchKey, Record_ID and Param.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/RunProcessBySearchKey>

Signature: `public object RunProcessBySearchKey(dynamic data)`

Parameter	Description
SearchKey	Pass the Search key/Value of the Job provided in Job & Report screen
Record_ID	Pass zero to Record ID if it is Menu Process. Otherwise pass Record ID for which you want to run the Job
Param	Pass Values to the List of Parameter if required for the Job

Response: Returns data in JSON format.

Sample Request below:

```
{
  "Param": [
    {
      "Name": "TaskStatus",
      "Value": "09"
    }
  ],
  "Record_ID": 1000031,
  "SearchKey": "VA075_UpdateFSRStatus"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "Process executed successfully"
}
```

2.36 CHANGE PASSWORD

This function is used to change Password of the user (own password). It will Run the Reset Your Password Job of Onfinity and return the Job Message.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters AD_Process_ID, Record_ID, oldp and newp.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/ChangePassword>

Signature: `public object ChangePassword(dynamic value)`

Parameter	Description
-----------	-------------

AD_Process_ID	Pass the Process ID provided by Onfinity after validating the Process
Record_ID	Pass zero in Record ID
oldp	Pass the old password to validate the user.
newp	Pass the new password you want to update.

Response: Returns data in JSON format.

Sample Request below:

```
{
  "Record_ID": 0,
  "AD_Process_ID": 1000089,
  "oldp": "Vienna@1234",
  "newp": "Vienna@12345"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "Process executed successfully"
}
```

2.37 UPDATE RECORD (Using M-Class with String Values)

This method is used to update records in the table. It will return primary Key of record if updated. If not updated, then it will return a string containing keyword “NotUpdated” along with error message. Web API will accept a POST request for this method.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters tableName, colName, values and record_ID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/UpdateRecord>

Signature: public object UpdateRecord(dynamic value)

Parameter	Description
tableName	Name of Table in which you want to update
colName	Array containing name of columns in which values to be inserted
values	Array of String Containing values of columns
record_ID	Record ID to which you want to update the values

Response: Returns data in JSON format.

Sample Request Below:

```
{
  "colName": [
    "VA086_IsHalfDay",
    "VA086_HalfDayValue"
  ],
  "record_ID": 1006893,
  "tableName": "VA086_AbsenceDetails",
  "values": [
    "N",
    null
  ]
}
```

Sample Response below:

```
{
  "id": 1005016,
  "identifier": "Aloe Vera Shampoo",
  "code": 200,
  "result": "Success",
  "data": 1005016
}
```

2.38 UPDATE RECORD M3 (Update Record using M-Class with Object type Values)

This method is used to update record. It will return primary Key of record if updated. If not updated, then it will return a string containing keyword “NotUpdated” along with error message.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format.

The **request body** should include the following parameters tableName, colName, values and record_ID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/UpdateRecordM3>

Signature: `public object UpdateRecordM3(dynamic value)`

Parameter	Description
tableName	Enter name of Table in which you want to update.
colName	Array containing name of columns in which values to be inserted
values	Array of Object Containing values of columns
record_ID	Record ID to which you want to update the values.

Response: Returns data in JSON format.

Sample Request below:

```
{
  "colName": [
    "Name",
    "ProductType"
  ],
  "record_ID": 1004669,
  "tableName": "M_Product",
  "values": [
    "Books",
    "S"
  ]
}
```

Sample Response below:

```
{
  "id": 1004669,
  "identifier": "Books",
  "code": 200,
  "result": "Success",
  "data": 1004669
}
```

2.39 GET TOKEN AUTHENTICATION

This method is used to get authentication token. It will return token if the username and password are correct and set expiry time and onetime token settings for the user passed in the parameter. Will return -1, if wrong login credentials or there is no role defined for the user which you passed in the parameter.

Request Format (In Json): The API accepts a POST request, where the request body must be in JSON format. The **request body** should include the following parameters username, password, expirySec and oneTimeToken.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/GetAuthToken>

Signature: `public object GetAuthToken(dynamic value)`

Parameter	Description
username	Pass the username (UserID) for login.
password	Pass the password for login.
expirySec	Pass value in seconds for which user is allowed to login with the token generated. If value is passed as 0, then it will check for 'AUTH_TOKEN_EXPIRE_SEC' in system config window, if entry not found there, then default expirySec value is 15
oneTimeToken	Pass either true or false, if passed true, which means token will be valid only once within the expiry seconds range, else if it is false, then token is valid multiple times till the expiry time is reached

Response: Returns data in JSON format.

Sample Request below:

```
{
  "username": "1005338",
  "password": "Vienna@11",
  "expirySec": "10",
  "oneTimeToken": false
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "1k2298khkhkgk56jhgggi89gggg"
}
```

2.40 SAVE FILE IN TEMP USING BYTE ARRAY

This method is used to save files in temporary directory for further attaching the file with the record.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters fileName and folderKey.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/SaveFileInTempUsingByteArray>

Signature: `public object SaveFileInTemp(string fileName, string folderKey, byte[] file)`

Parameter	Description
fileName	Enter the username
folderKey	Enter the password
file	Byte array of file

Response: Returns data in JSON format.

Sample Request below:

```
{
  "fileName": "sample.txt",
  "folderKey": "1720776532273",
  "file" :
  "SUQzAwAAACQ4SVRJVDIAAAAZAAAAUmFuZ3JlemEgKFJpc2t5amFUVVC5Db00pVFBFMQAAABsAAABBDGlmIEFzbGFTIC
  hSaXNreWphVFQuQ29NKVRBTEIAAAAZAAAAUmFuZ3JlemE"
}
```

Sample Response:

```
{
  "code": 200,
  "result": "Success",
}
```



```

    "data": "0"
}

```

2.41 SAVE ATTACHMENT ENTRIES

This method is used to Save attachment data based on the destination location.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameters AD_Table_ID, Record_ID, files, folderKey, AD_Attachment_ID, NewRecord_ID, fileLocation and IsDMSAttachment.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/SaveAttachmentEntries>

Signature: `public object` SaveAttachmentEntries(`dynamic` value)

Parameters	Description
AD_Table_ID	Table ID to which you want to get Attachment
Record_ID	Record ID to which you want to get Attachment
files	Enter files name here
folderKey	Enter folder key
AD_Attachment_ID	Enter attachment ID
NewRecord_ID	New record ID
fileLocation	Enter file location
IsDMSAttachment	Enter true/false

Response: Returns data in Json format.

Sample Request below:

```

{
  "AD_Attachment_ID": 0,
  "AD_Table_ID": 1001252,
  "IsDMSAttachment": false,
  "NewRecord_ID": 0,
  "Record_ID": 1011043,
  "fileLocation": "FT",
  "files": "[{\"Name\":\"temp_1746425415535300525_17340120.pdf\", \"Size\":47656}]",
  "folderKey": "1748606716658"
}

```

Sample Response:

```

{
  "code": 200,
  "data": {
    "ad_attachment_ID": 1353941,
    "error": ""
  }
}

```

```

    },
    "result": "Success"
}

```

2.42 DELETE ATTACHMENT

This method is used to delete attachment.

Request Format (In Json): The API accepts POST request, where the request body must be in JSON format. The **request body** should include the following parameter i.e. AttachmentLines.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/DeleteAttachment>

Signature: `public object DeleteAttachment(dynamic value)`

Parameter	Description
AttachmentLines	Enter the attachment line IDs, which you want to delete

Response: Returns data in JSON format.

Sample Request below:

```

{
    "AttachmentLines": 1000254
}

```

Sample Response below:

```

{
    "code": 200,
    "result": "Success",
    "data": "3"
}

```

2.43 GET ATTACHMENT

This method is used to get attachment.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include AD_Table_ID and Record_ID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/GetAttachment>

Signature: `public object GetAttachment(dynamic value)`

Parameter	Description
AD_Table_ID	Enter the table ID
Record_ID	Enter the record which you want to get.

Response: Returns data in JSON format.

Sample Request below:

```
{
  "AD_Table_ID": 1001252,
  "Record_ID": 1011041
}
```

Sample Response:

```
{
  "code": 200,
  "result": "Success",
  "data": {
    "Attachment": {
      "p_ctx": {},
      "s_docWFMsg": "",
      "_lines": [
        {
          "Line_ID": 1180897,
          "FileName": "260525_16592130.jpg",
          "Size": 304464.0,
          "Filetype": ".jpg"
        },
        {
          "Line_ID": 1180898,
          "FileName": "260525_17014520.jpg",
          "Size": 302191.0,
          "Filetype": ".jpg"
        }
      ],
      "FolderKey": null,
      "Force": true,
      "Error": "",
      "AD_Client_ID": 0,
      "Password": null,
      "AD_Attachment_ID": 1353934,
      "ModelAction": null,
      "CreateNewRecord": false
    },
    "FLocation": {
      "values": [
        {
          "Key": "DB",
          "Name": "Database"
        },
        {
          "Key": "FT",
          "Name": "FTP Location"
        },
        {
          "Key": "ID",
          "Name": "IDP"
        },
        {
          "Key": "OS",
          "Name": "OCI Object Storage"
        },
        {
          "Key": "SR",
          "Name": "Server File System"
        }
      ]
    }
  }
}
```

```

        "Key": "WS",
        "Name": "Web Service"
    },
    ],
    "selectedvalue": "FT"
}
}
}

```

2.44 GET ROLES

This method is used to get roles based on the user ID and password.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include UserId and Password.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/GetRoles>

Signature: `public object` GetRoles (`dynamic` value)

Parameter	Description
UserId	Enter the user ID
Password	Enter the password in encrypted form.

Response: Returns data in JSON format.

Sample Request below:

```

{
    "UserId": "1005338",
    "Password": "Vienna@11"
}

```

Sample Response below:

```

{
    "code": 200,
    "result": "Success",
    "data": [
        {
            "name": "Johan Martin",
            "AD_Role_ID": "1000025"
        },
        {
            "name": "Ikshit",
            "AD_Role_ID": "1000067"
        }
    ]
}

```

2.45 GET API TOKEN

This method is used to get API token.

Request Format (In Json): The API accepts a POST request that requires the body to be in JSON format. In the body, the request should include AD_CLIENT_ID, AD_Org_ID, AD_Role_ID, AD_User_ID, TokenExpireTimeInMinutes and Password.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Below is the **JSON format** for the API request, which must be sent as a POST request

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/GetApiToken>

Signature: `public object GetApiToken(dynamic value)`

Parameter	Description
AD_CLIENT_ID	Enter the client ID
AD_ORG_ID	Enter the organization ID
AD_Role_ID	Enter the role ID
AD_User_ID	Enter the user ID
TokenExpireTimeInMinutes	Enter token expire time in minute
Password	Enter valid password

Response: Returns Data in object format.

Sample Request Below:

```
{
  "assetID": 1000897,
  "AD_CLIENT_ID": 1000005,
  "AD_ORG_ID": 1000008,
  "AD_User_ID": 1005338,
  "AD_Role_ID": 1000118,
  "TokenExpireTimeInMinutes": "1000800",
  "Password": "Vienna@11"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": {
    "token": "47302560638844424285363895",
    "tokenExpireOn": "2027-04-28T06:27:08.5363895+02:00"
  }
}
```

2.46 VERIFY TOKEN

This method is used to verify token.

Request Format (In Json): The API accepts a POST request that requires the body to be in JSON format. In the body, the request should include MethodName and Token.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/VerifyToken>

Signature: public object VerifyToken (dynamic value)

Parameter	Description
MethodName	Enter the method name
Token	Enter valid Secret Key

Response: Returns Data in JSON format

Sample Request Below:

```
{
  "MethodName": "InsertByte",
  "Token": "e9ebdc9c307e4fa4b3ee8237bbe53afd"
}
```

Sample Response:

```
{
  "code": 200,
  "result": "Success",
  "data": {
    "isTokenValid": false
  }
}
```

2.47 INSERT MULTIPLE RECORDS

This method is used to insert multiple records. If the user pass “ApplyDBTrx” parameter as true and there are no issues while saving records, it returns the Record IDs as a response. If there are any issues at the time of saving any record, it returns an error message and rolls back all the inserted records. If the user pass “ApplyDBTrx” parameter as false and there are no issues during saving of records, it returns the IDs of saved records. If there is an issue in any record while saving, it inserts the remaining records successfully and returns the IDs of the inserted records along with error messages for the records that were not inserted.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include tableName, colName, values, includeStandardCols, saveFileInDisk, filename and ApplyDBTrx.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/InsertMultipleRecordM3>

Signature: public object InsertMultipleRecordM3(dynamic value)

Parameter	Description
tableName	Enter the table Name
colName	Enter the column Name in which you want to insert data.
values	Enter the array of object values, which you want to insert.
includeStandardCols	If it is TRUE, then service will check for each standard column (UpdatedBy, CreatedBy, Updated, Created and IsActive) in array provided by you. if any column not found then that column will be inserted by service automatically. If False, then service will check if you are providing value for each column of window or not. If not, it will return message "ColumnsNotMatching".
saveFileInDisk (pass false)	Enter true or false. (pass false)
fileName (pass empty string)	Not Being Used. (pass empty string)
ApplyDBTrx	Enter 'True' if you want to apply a database transaction otherwise, enter 'False'.

Response: Returns Data in JSON format.

Sample Request below:

```
{
  "colName":
  ["Name","Value","M_Product_Category_ID","ProductType","C_TaxCategory_ID","C_Uom_ID"],
  "fileName": "appFileName",
  "includeStandardCols": true,
  "saveFileInDisk": false,
  "tableName": "M_Product",
  "values": [[ "Pencil","Pencil986",109,"I",1000005,100],
  [ "Pen","Pen",109,"I",1000005,100],
  [ "Book","Book",109,"I",1000005,100]],
  "ApplyDBTrx":true
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "1004524,1004525,1004526"
}
```

2.48 DELETE MULTIPLE RECORDS

This method is used to delete multiple records. If the user pass "ApplyDBTrx" parameter as true and there are no issues during deletion, it deletes all the records. If there is any issue while deletion of even one record, it returns an error message and rolls back all the deleted records. If the user pass "ApplyDBTrx" parameter as false and there are no issues during deletion, it deletes the records. If there is an issue with any record, it deletes the remaining records successfully and returns error messages for the records that were not deleted.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include tableName, record_IDs and ApplyDBTrx.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/DeleteMultipleRecordM2>

Signature: `public object DeleteMultipleRecordM2(dynamic value)`

Parameter	Description
tableName	Enter the table Name
record_IDs	Enter the Record Ids which you want to delete.
ApplyDBTrx	Enter 'True' if you want to apply a database transaction otherwise, enter 'False'

Response: Returns Data in JSON format.

Sample Request below:

```
{
  "tableName": "M_Product",
  "ApplyDBTrx": true,
  "record_IDs": [1004524,1004525]
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "RecordDeleted"
}
```

2.49 UPDATE MULTIPLE RECORDS

This method is used to update multiple records. If the user pass “ApplyDBTrx” parameter as true and there are no issues during updating, it returns the Record IDs as a response. If an issue arises, it returns an error message and rolls back all the updated records. If the user pass “ApplyDBTrx” parameter as false and there are no issues during updation, it returns the ID. If there is an issue with any records while updation, it updates the remaining records successfully and returns the IDs of the updated records along with error messages for the records that were not updated.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the tableName, colName, values, includeStandardCols, saveFileInDisk, record_ID and ApplyDBTrx.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Service/UpdateMultipleRecordM3>

Signature: `public object UpdateMultipleRecordM3(dynamic value)`

Parameter	Description
tableName	Enter the table Name
colName	Enter the column Name in which you want to insert data
values	Enter the array of object values, which you want to insert
includeStandardCols	If it is TRUE, then service will check for each standard column (UpdatedBy, CreatedBy, Updated, Created and IsActive) in array provided by you. if any column not found then that column will be inserted by service automatically. If False, then service will check if you are providing value for each column of window or not. If not, it will return message "ColumnsNotMatching"
record_ID	Enter Record IDs which you want to update
ApplyDBTrx	Enter 'True' if you want to apply a database transaction otherwise, enter 'False'

Response: Returns Data in JSON format.

Sample Request Below:

```
{
  "colName": ["Name", "Value"],
  "includeStandardCols": true,
  "saveFileInDisk": false,
  "tableName": "M_Product",
  "values": [
    ["Pencils", "Pencils"],
    ["Pens", "Pens"],
    ["Books", "Books"]
  ],
  "ApplyDBTrx": true,
  "record_ID": [1004524, 1004525]
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "1004524,1004525"
}
```

3. ACTIVITY METHOD INFORMATION

User can consume API Services in their application by calling exposed methods on server side. These activity methods are parameterized and only authenticated user can access the information and for that user need to pass access key and secret key in the header while calling the API.

3.1 CREATE CHAT

This method is used to create or update chat on a record that user can also do from the action panel on the ERP link. This method provides an alternative to chat via the API. If there is no chat against the record this API method will start new chat otherwise if there is an existing chat on the record, this API method will continue the chat on the same chat thread.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the tableName, recordID and chatTxt.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/CreateChat>

Signature: public object CreateChat(dynamic value)

Parameter	Description
tableName	Enter the table Name
recordID	Enter the record ID against which you want to insert the chat
chatTxt	Enter the chat message in this parameter

Response: Returns Data in JSON format.

Sample request below:

```
{
  "chatTxt": "Hi, this is John, want to discuss order details",
  "recordID": 1000078,
  "tableName": "C_Order"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "1000051"
}
```

3.2 GET CHAT

This method is used to get chat.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like tableName and recordID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetChat>

Signature: `public object GetChat(dynamic value)`

Parameter	Description
tableName	Enter the table name
recordID	Enter the record ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "tableName": "C_Order",
  "recordID": 1000078
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "name": "Lokesh Chauhan",
      "characterData": " Hi, this is John, want to discuss order details",
      "fromUser": "Lokesh Chauhan",
      "id": 1000030,
      "tableID": 116,
      "recordID": 1000818,
      "created": "2025-02-03T12:24:18+05:30"
    }
  ]
}
```

3.3 Get Chat By ID

This method is used to get chat.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameter CM_ChatEntry_ID



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetChatByID>

Signature: `public object GetChatByID(dynamic value)`

Parameter	Description
CM_ChatEntry_ID	Enter the Chat ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "CM_ChatEntry_ID": 1000818
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "name": "Lokesh Chauhan",
      "characterData": " Hi, this is John, want to discuss order details",
      "fromUser": "Lokesh Chauhan",
      "id": 1000030,
      "tableID": 116,
      "recordID": 1000818,
      "created": "2025-02-03T12:24:18+05:30"
    }
  ]
}
```

3.4 Create Task

This method is used to create or update task on a record that user can also do from the action panel on the ERP link. This method provides an alternative to task via the API. If there is no task against the record this API method will start new task otherwise if there is an existing task on the record, this API method will continue the task on the same task thread.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like startDate, endDate, title and taskStatus and some optional parametes like description, result, priority, isClosed, appointmentsInfoID and assignToUser. If user want to update the existing record, then must have to pass appointmentsInfoID in body otherwise this method will create a new record



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/CreateTask>

Signature: public object CreateTask(dynamic value)

Parameter	Description
startDate	Enter the start date
endDate	Enter the end date
title	Enter the title text for the task, with which task will be created
taskStatus	Enter task status
appointmentsInfoID	Enter AppointmentInfo_ID If user want to update the existing record

description	Enter Description
result	Enter the result of task
priority	Enter priority of task
isClosed	Pass 1 if user do not want to close the task otherwise pass any number greater than one
assignToUser	Enter AD_User_ID
tableName	Enter DB Table name
recordID	Enter Record ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "startDate": "25-01-53",
  "endDate": "31-12-33",
  "title": "task created A1",
  "taskStatus":100,
  "tableName":"C_Lead",
  "assignToUser":1005429,
  "recordID":1000118,
  "result":"Done",
  "priority":"Normal",
  "isClosed":1,
  "appointmentsInfoID":1000482
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": 1000380
}
```

3.5 Get Task

This method is used to get task.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like tableName and recordID and some optional parametes like UserID and JsonWhereClause.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetTask>

Signature: `public object GetTask(dynamic value)`

Parameter	Description
-----------	-------------

tableName	Enter the table name from which you want to get data
recordID	Enter the record ID
UserID	Enter AD_User_ID
JsonWhereClause	Pass where clause in JSON format as shown in sample request where taskType: Enter AppointmentCategory_ID taskStatus: Enter one if user want to open the task otherwise pass any number greater than one for close the task page: Enter page number pageSize: Enter page size

Response: Returns Data in JSON format.

Sample request below:

```
{
  "UserID": 101,
  "tableName": "C_Lead",
  "recordID": 1000118,
  "JsonWhereClause": {
    "taskType": 111324,
    "taskStatus": 1,
    "page": 1,
    "pageSize": 100
  }
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "name": "Akshay",
      "fromUser": "Akshay",
      "subject": "task created asdasd",
      "isTaskClosed": "N",
      "startDate": "1953-01-25T05:30:00+05:30",
      "endDate": "2033-12-31T05:30:00+05:30",
      "attendeeInfo": "1006102",
      "description": null,
      "id": 1000380,
      "userID": 1006102,
      "tableID": 923,
      "recordID": 1000118,
      "created": "2025-05-29T11:25:00+05:30"
    }
  ]
}
```

```
}
```

3.6 GetTaskByID

This method is used to get task.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameter AppointmentsInfo_ID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetTaskByID>

Signature: `public object GetTaskByID(dynamic value)`

Parameter	Description
AppointmentsInfo_ID	Enter the AppointmentsInfo ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "AppointmentsInfo_ID": 1000340
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "name": "IdeasIncAdmin",
      "fromUser": "IdeasIncAdmin",
      "subject": "New Task L6",
      "isTaskClosed": "N",
      "startDate": "2024-01-16T00:00:00+05:30",
      "endDate": "2024-01-16T00:00:00+05:30",
      "attendeeInfo": "101",
      "description": "New Task for Testing L6",
      "id": 1000340,
      "userID": 101,
      "tableID": 0,
      "recordID": 0,
      "created": "2025-01-27T16:24:14+05:30"
    }
  ]
}
```

3.7 AttachTaskToLead

This method is used to create or update task with C_Lead table on a record that user can also do from the action panel on the ERP link. This method provides an alternative to task via the API. If there is no task against the record this API method will start new task otherwise if there is an existing task on the record, this API method will continue the task on the same task thread.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like startDate, endDate, title, recordID and taskStatus and some optional parameters like description, result, priority, isClosed and appointmentsInfoID. If user want to update the existing record, then must have to pass appointmentsInfoID in body otherwise this method will create a new record.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/V1/AttachTaskToLead>

Signature: `public object AttachTaskToLead (dynamic value)`

Parameter	Description
startDate	Enter the start date
endDate	Enter the end date
title	Enter the title text for the task, with which task will be created
taskStatus	Enter task status
recordID	Enter Record ID
appointmentsInfoID	Enter AppointmentInfo_ID If user want to update the existing record
description	Enter Description
result	Enter the result of task
priority	Enter priority of task
isClosed	Pass 1 if user do not want to close the task otherwise pass any number greater than one

Response: Returns Data in JSON format.

Sample request below:

```
{
  "startDate": "25-01-53",
  "endDate": "31-12-33",
  "title": "task created A1",
  "recordID":1000108,
  "taskStatus":100,
  "result":"Done",
  "priority":"Normal",
  "isClosed":1,
  "appointmentsInfoID":1000482
```



```
}
```

Sample Response below:

```
{  
  "code": 200,  
  "result": "Success",  
  "data": 1000381  
}
```

3.8 AttachTaskToRecord

This method is used to create or update task on a record that user can also do from the action panel on the ERP link. This method provides an alternative to task via the API. If there is no task against the record this API method will start new task otherwise if there is an existing task on the record, this API method will continue the task on the same task thread.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like tablename, startDate, endDate, title, recordID and taskStatus and some optional parameters like description, result, priority, isClosed and appointmentsInfoID. If user want to update the existing record, then must have to pass appointmentsInfoID in body otherwise this method will create a new record.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/AttachTaskToRecord>

Signature: `public object AttachTaskToRecord (dynamic value)`

Parameter	Description
tableName	Enter DB table name
recordID	Enter Record ID
startDate	Enter the start date
endDate	Enter the end date
title	Enter the title text for the task, with which task will be created
taskStatus	Enter task status
appointmentsInfoID	Enter ApppointmentInfo_ID If user want to update the existing record
description	Enter Description
result	Enter the result of task
priority	Enter priority of task
isClosed	Pass 1 if user do not want to close the task otherwise pass any number greater than one

Response: Returns Data in JSON format.

Sample request below:

```
{  
  
  "startDate": "25-01-53",  
  "endDate": "31-12-33",  
  "title": "task created A1",  
  "taskStatus":100,  
  "recordID":1000118,  
  "result":"Done",  
  "priority":"Normal",  
  "isClosed":1,  
  "tableName":"AD_Menu"  
  "appointmentsInfoID":1000482  
}
```

Sample Response below:

```
{  
  "code": 200,  
  "result": "Success",  
  "data": 1000381  
}
```

3.9 CreateAppointment

This method is used to create or update appointment on a record that user can also do from the action panel on the ERP link. This method provides an alternative to appointment via the API. If there is no appointment against the record this API method will start new appointment otherwise if there is an existing task on the record, this API method will continue the appointment on the same appointment thread.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like startDate, endDate and title and some optional parameters like description, result, priority, isClosed, appointmentsInfoID, tableName, record_ID, location, allDay, IsPrivate, RecurrenceID, RecurrenceRule, IsRead, recurrenceException, startTimezone, endTimezone, appointmentCategory, status, isCallAttendee, attendeeInfo, assignToUser. Make isSyncOnline true for adding some extra optional parameter like userAccountID, meetingUrl, appointment_UID and lastUpdated .If user want to update the existing record, then must have to pass appointmentsInfoID in body otherwise this method will create a new record.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/CreateAppointment>

Signature: `public object` CreateAppointment (`dynamic` value)

Parameter	Description
tableName	Enter DB table name
recordID	Enter Record ID

startDate	Enter the start date
endDate	Enter the end date
title	Enter the title text for the task, with which task will be created
description	Enter Description
result	Enter the result of task
priority	Enter priority of task
isClosed	Pass 1 if user do not want to close the task otherwise pass any number greater than one
location	Enter location
allDay	Enter true for all day
isPrivate	Enter true if make it private
recurrenceID	Enter recurrenceID
recurrenceRule	Enter recurrenceRule
isRead	Enter true for make it read
recurrenceException	Enter recurrenceException
startTimezone	Enter startTimezone
endTimezone	Enter endTimezone
appointmentCategory_ID	Enter appointmentCategory_ID
status	Enter status
isCallAttendee	Enter true for CallAttendee
attendeeInfo	Enter attendeeInfo
assignToUser	Enter AD_User_ID
isSyncOnline	Make it true for adding parameter userAccountID, meetingUrl ,appointment_UID and lastUpdated
userAccountID	Enter TokenRef_ID
meetingUrl	Enter meetingUrl
appointment_UID	Enter appointment_UID
lastUpdated	Enter lastUpdated date

Response: Returns Data in JSON format.

Sample request below:

```
{
  "startDate": "18-06-25",
  "endDate": "19-06-25",
  "title": "testB",
  "isRead": true,
  "allDay": false,
  "isPrivate": false,
  "location": "mohali",
  "recurrenceID": 0,
  "recurrenceRule": "test",
  "description": "for testing",
  "result": "pass",
  "priority": "normal",
  "recurrenceException": "",

```

```

        "appointmentCategory_ID":0,
        "status":3,
        "assignToUser":101,
        "isSyncOnline":true,
        "userAccountID":"1000010",
        "appointment_UID":"100001",
        "meetingUrl":"zoommeeting.ino",
        "lastUpdated":"19-06-25",
        "record_ID":1006196,
        "tableName":"AD_User",
        "isCallAttendee":true,
        "attendeeInfo":"102;1005344;1007923",
        "isClosed":true
    }

```

Sample Response below:

```

{
    "code": 200,
    "result": "Success",
    "data": 1000383
}

```

3.10 GetAppointment

This method is used to get appointment.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like tableName and recordID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetAppointment>

Signature: public object GetAppointment (dynamic value)

Parameter	Description
tableName	Enter the table name in which you want to get data
recordID	Enter the record ID

Response: Returns Data in JSON format.

Sample request below:

```

{
    "tableName": "AD_Menu",
    "recordID": 1000108
}

```

Sample Response below:

```

{
    "code": 200,
    "result": "Success",

```

```

"data": [
  {
    "name": "Akshay",
    "fromUser": "Akshay",
    "subject": "task created to lead",
    "startDate": "1953-01-29T05:30:00+05:30",
    "endDate": "2033-11-18T05:30:00+05:30",
    "meetingUrl": "",
    "attendeeInfo": "",
    "id": 1000377,
    "tableID": 116,
    "recordID": 1000108,
    "created": "2025-03-27T16:11:54+05:30"
  },
  {
    "name": "Akshay",
    "fromUser": "Akshay",
    "subject": "task created to lead",
    "startDate": "1953-01-29T05:30:00+05:30",
    "endDate": "2033-11-18T05:30:00+05:30",
    "meetingUrl": "",
    "attendeeInfo": "",
    "id": 1000382,
    "tableID": 116,
    "recordID": 1000108,
    "created": "2025-06-10T17:41:29+05:30"
  },
  {
    "name": "Akshay",
    "fromUser": "Akshay",
    "subject": "task created to lead",
    "startDate": "1953-01-29T05:30:00+05:30",
    "endDate": "2033-11-18T05:30:00+05:30",
    "meetingUrl": "",
    "attendeeInfo": "",
    "id": 1000375,
    "tableID": 116,
    "recordID": 1000108,
    "created": "2025-03-26T13:03:01+05:30"
  }
]
}

```

3.11 GetAppointmentByID

This method is used to get appointment.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameter AppointmentID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetAppointmentByID>

Signature: `public object` GetAppointmentByID (`dynamic` value)

Parameter	Description
AppointmentID	Enter Appointment ID

Response: Returns Data in JSON format.

Sample request below:

```
{  
  "AppointmentID": 1000372  
}
```

Sample Response below:

```
{  
  "code": 200,  
  "result": "Success",  
  "data": [  
    {  
      "name": "Akshay",  
      "fromUser": "Akshay",  
      "subject": "task created to lead",  
      "startDate": "1953-01-29T05:30:00+05:30",  
      "endDate": "2033-11-18T05:30:00+05:30",  
      "meetingUrl": "",  
      "attendeeInfo": "",  
      "id": 1000372,  
      "tableID": 923,  
      "recordID": 1000108,  
      "created": "2025-03-26T11:46:48+05:30"  
    }  
  ]  
}
```

3.12 CreateAppointmentTranscript

This method is used to create or update appointment on a record that user can also do from the action panel on the ERP link. This method provides an alternative to appointment transcript via the API. If there is no appointment transcript against the record this API method will start new appointment transcript otherwise if there is an existing appointment transcript on the record, this API method will continue the appointment transcript on the same appointment transcript thread.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like Transcript and AppointmentID. If user want to update the existing record, then must have to pass AppointmentTranscriptID in body otherwise this method will create a new record



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/CreateAppointmentTranscript>

Signature: `public object` CreateAppointmentTranscript (`dynamic` value)

Parameter	Description
Transcript	Enter the transcript
AppointmentID	Enter the AppointmentID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "Transcript": "testuser2 T2: For the year. testuser2 T2: Transcriptase. Suraj Singh: Google. testuser2 T2: OK",
  "AppointmentID": "1000381"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": 1000003
}
```

3.13 GetAppointmentTranscript

This method is used to get appointment.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameter AppointmentID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetAppointmentTranscript>

Signature: `public object` GetAppointmentTranscript (`dynamic` value)

Parameter	Description
AppointmentID	Enter Appointment ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "AppointmentID": 1000381
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "transcript": "testuser2 T2: For the year.testuser2 T2: Transcriptase. Suraj Singh: Google. testuser2 T2: OK",
      "appointmentsInfoID": 1000381,
      "appointmentTranscriptID": 1000001
    },
    {
      "transcript": "testuser2 T2: For the year.testuser2 T2: Transcriptase. Suraj Singh: Google. testuser2 T2: OK",
      "appointmentsInfoID": 1000381,
      "appointmentTranscriptID": 1000003
    },
    {
      "transcript": "testuser2 T2: For the year.testuser2 T2: Transcriptase. Suraj Singh: Google. testuser2 T2: OK",
      "appointmentsInfoID": 1000381,
      "appointmentTranscriptID": 1000002
    }
  ]
}
```

3.14 CreateCall

This method is used to create or update call on a record that user can also do from the action panel on the ERP link. This method provides an alternative to call via the API. If there is no call against the record this API method will start new call otherwise if there is an existing call on the record, this API method will continue the call on the same call thread.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like tableName, recordID, Name, FromUser, VA048_TO and Subject and some optional parameters like attachments and VA048_CallDetails_ID. If user want to update the existing record, then must have to pass VA048_CallDetails_ID in body otherwise this method will create a new record.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/CreateCall>

Signature: `public object CreateCall (dynamic value)`

Parameter	Description
tableName	Enter the table name in which you want to get data
recordID	Enter the record ID
Name	Enter Name
FromUser	Enter email ID of from user
VA048_TO	Enter email id where user want to send email
Subject	Enter subject
attachments	Enter attachments
VA048_CallDetails_ID	For update the existing call enter VA048_CallDetails_ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "tableName": "C_Lead",
  "recordID": 0,
  "Name": "JustCheckattachment",
  "VA048_TO": "check@gerger.io",
  "FromUser": "testing@yopmail.com",
  "Subject": "testA",
  "VA048_CallDetails_ID": 1000010,
  "attachments": "[{'Name': 'Rangreza_1.mp3',
'byteFile': 'SUQzAwAAACQ4SVRJVDIAAAAZAAAAUmFuZ3JlemEgKFJpc2t5amFUVVC5Db00pVFBFMQAAABsAAABBBdGl
mIEFzbGFTICkSaXNreWphVFQuQ29NKVRBTEIAAAAZAAAAUmFuZ3JlemE'}]"
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": 1000010
}
```

3.15 GetCall

This method is used to get call.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like tableName and recordID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetCall>

Signature: `public object GetCall (dynamic value)`

Parameter	Description
tableName	Enter the table name in which you want to get data
recordID	Enter the record ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "tableName": "C_Lead",
  "recordID": 0
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "name": "ToshibaAdmin",
      "fromUser": "testing@yopmail.com",
      "subject": "testA",
      "characterData": "",
      "hasAttachment": "N",
      "mailAddress": "testing@yopmail.com",
      "mailAddressCc": "check@gerger.io",
      "id": 1000010,
      "tableID": 923,
      "recordID": 0,
      "created": "2025-06-11T14:27:56+05:30"
    },
    {
      "name": "ToshibaAdmin",
      "fromUser": "testing@yopmail.com",
      "subject": "testA",
      "characterData": "",
      "hasAttachment": "N",
      "mailAddress": "testing@yopmail.com",
      "mailAddressCc": "check@gerger.io",
      "id": 1000009,
      "tableID": 923,
      "recordID": 0,
      "created": "2025-04-02T17:55:58+05:30"
    }
  ]
}
```

3.16 GetCallByID

This method is used to get call.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameter VA048_CallDetails_ID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetCallByID>

Signature: `public object` GetCallByID (`dynamic` value)

Parameter	Description
VA048_CallDetails_ID	Enter the call ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "VA048_CallDetails_ID": 1000010
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "name": "ToshibaAdmin",
      "fromUser": "testing@yopmail.com",
      "subject": "testA",
      "characterData": "",
      "hasAttachment": "N",
      "mailAddress": "testing@yopmail.com",
      "mailAddressCc": "check@gerger.io",
      "id": 1000010,
      "tableID": 923,
      "recordID": 0,
      "created": "2025-06-11T14:27:56+05:30"
    }
  ]
}
```

3.17 CreateEMail

This method is used to create or update mail on a record that user can also do from the action panel on the ERP link. This method provides an alternative to mail via the API. If there is no call against the record this API method will start new mail otherwise if there is an existing mail on the record, this API method will continue the mail on the same mail thread.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like tableName, recordID, mailUID, toEMail, fromEMail, textMsg, isAttachment and subject and some optional parameters like attachments and MailAttachment1_ID. If user want to update the existing record, then must have to pass MailAttachment1_ID in body otherwise this method will create a new record



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/CreateEMail>

Signature: `public object` CreateEMail (`dynamic` value)

Parameter	Description
tableName	Enter the table name in which you want to get data
recordID	Enter the record ID
mailUID	Enter mailUID
fromEMail	Enter email ID of from user
toEMail	Enter email id where user want to send email
subject	Enter subject
isAttachment	Enter "Y" if user want to attach some attachment with mail
textMsg	Enter mail content
attachments	Enter attachment
MailAttachment1_ID	For update existing mail enter MailAttachment1_ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "tableName": "MailAttachment1",
  "recordID": 0,
  "toEMail": "test@yopmail.com",
  "fromEMail": "testing@yopmail.com",
  "Subject": "testsubject1",
  "textMsg": "dear world",
  "isAttachment": "Y",
  "mailUID": 123456,
  "NewRecordID": 0,
  "MailAttachment1_ID": 1000053,
  "attachments": [
    {
      "Name": "groupinfo.txt",
      "byteFile":
        "bw0KICAgIHsNCiAgICAgICAgcHVibGljIHN0cmVuZyBHcm91cE5hbWUgeyBnZXQ7IHNldDsgfQ0KICAgICAgICBwdW
        JsaWMgc3RyaW5nIERlc2NyaXB0aW9uIHsgZ2V0OyBzZXQ7IH0NCiAgICAgICAgcHVibGljIHN0cmVuZyBxaw5kb3dOY
        W1lIHsgZ2V0OyBzZXQ7IH0NCiAgICAgICAgcHVibGljIHN0cmVuZyBGb3JtTnFtZSB7IGdldDsgc2V0OyB9DQogICAg
```

```

ICAgIHB1YmXpYyBzdHJpbmcgUHJvY2Vzc05hbWUgeyBnZXQ7IHNldDsgfQ0KICAgICAgICBwdWJsaWMgc3RyaW5nIFd
p"
    },
    {
        "Name": "documents.txt",
        "byteFile":
"ZGdlldE5hbWUgeyBnZXQ7IHNldDsgfQ0KICAgICAgICBwdWJsaWMgc3RyaW5nIFdvcmtmbG93TmFtZSB7IGdlldDsgc2
V0OyB9DQogICAgICAgIHB1YmXpYyBzdHJpbmcgZm9ybU5vdEJpbmRlZCB7IGdlldDsgc2V0OyB9DQogICAgICAgI
HB1YmXpYyBzdHJpbmcgZm9ybU5vdEJpbmRlZCB7IGdlldDsgc2V0OyB9DQogICAgICAgIHB1YmXpYyBzdHJpbmcgV2lk
Z2V0Tm90QmluZGVkIHsgZ2V0OyBzZXQ7IH0NCiAgICAgICAgcHVibGljIH0NCmluZyB3b3JrZmxvd05vdEJpbmRlZCB
7IGdlldDsgc2V0OyB9DQogICAgfQ0KDQogICAgcHVibGljIGNsYXNzIEtleVZhbA0KICAgIHsNCiAgICAgICAgcHVibG
ljIH0NCmluZyBOYWllIHsgZ2V0OyBzZXQ7IH0NCiAgICAgICAgcHVibGljIH0NCmluZyBJRCB7IGdlldDsgc2V0OyB9D
QogICAgfQ0KDQogICAgcHVibGljIGNsYXNzIFdpbmRvd1JvbGUNCiAgICB7DQogICAgICAgIHB1YmXpYyBib29sIElz
QWN0aXZlIHsgZ2V0OyBzZXQ7IH0NCiAgICAgICAgcHVibGljIGJvb2wgSXNSZWFKV3JpdGUgeyBnZXQ7IHNldDsgfQ0
KICAgIH0NCg0KfQ=="
    }
]
}

```

Sample Response below:

```

{
  "code": 200,
  "result": "Success",
  "data": 1017864
}

```

3.18 GetEmail

This method is used to get email.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like tableName and recordID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetEmail>

Signature: public object GetEmail (dynamic value)

Parameter	Description
tableName	Enter the table name in which you want to get data
recordID	Enter the record ID

Response: Returns Data in JSON format.

Sample request below:

```

{
  "tableName": "C_Lead",

```

```
    "recordID": 1000201
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "name": "IdeasIncAdmin",
      "fromUser": "",
      "subject": "letter sales order june10",
      "hasAttachment": "N",
      "mailAddress": "princebbn1996@gmail.com; puja.kumari@viennasolutio",
      "mailAddressCc": "",
      "id": 1009466,
      "tableID": 923,
      "recordID": 1000201,
      "created": "2024-03-21T18:00:21+05:30"
    },
    {
      "name": "IdeasIncAdmin",
      "fromUser": "",
      "subject": "letter sales order june10",
      "hasAttachment": "N",
      "mailAddress": "puja.kumari@viennasolutions.com",
      "mailAddressCc": "princebbn1996@gmail.com",
      "id": 1009467,
      "tableID": 923,
      "recordID": 1000201,
      "created": "2024-03-21T18:14:18+05:30"
    }
  ]
}
```

3.19 GetEmailByID

This method is used to get email.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameter MailAttachment1_ID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetEmailByID>

Signature: public object GetEmailByID (dynamic value)

Parameter	Description
MailAttachment1_ID	Enter Mail ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "MailAttachment1_ID": 1000053
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "name": "Check",
      "fromUser": "",
      "subject": "testing the email",
      "hasAttachment": "N",
      "mailAddress": "testing.dms1@gmail.com",
      "mailAddressCc": "",
      "id": 1000053,
      "tableID": 259,
      "recordID": 1013366,
      "created": "2016-04-29T12:53:25+05:30"
    }
  ]
}
```

3.20 GetEmailDetail

This method is used to get email detail with attachments.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameter MailAttachment1_ID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetEmailDetail>

Signature: `public object` GetEmailDetail (`dynamic` value)

Parameter	Description
MailAttachment1_ID	Enter Mail ID

Response: Returns Data in JSON format.

Sample request below:

```
{
  "MailAttachment1_ID": 1000102
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": {
    "title": "headphones",
    "to": "",
    "from": "",
    "date": "2017-09-27T11:51:39Z",
    "detail": "headphones are missing9/27/2017*",
    "bcc": "",
    "cc": "",
    "comments": null,
    "isMail": true,
    "isLetter": false,
    "attach": [
      {
        "name": "headphones.pdf",
        "id": 1000102,
        "attID": 0
      }
    ],
    "aD_Table_ID": 114,
    "record_ID": 1005480,
    "id": 1000102
  }
}
```

3.21 GetEmailAttachment

This method is used to get email detail and download attachments.

Request Format (In Json): The API accepts POST request that requires the body to be in JSON format. In the body, the request should include the mandatory parameters like tableName and MailAttachment1_ID.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Activity/GetEmailAttachment>

Signature: `public object GetEmailAttachment (dynamic value)`

Parameter	Description
tableName	Enter table name
MailAttachment1_ID	Enter Mail ID

Response: Returns Data in JSON format.

Sample request below:


```
{
  "tableName": "MailAttachment1",
  "MailAttachment1_ID": 1000104
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    "638852611186734168",
    "638852611188405185",
    "638852611189815537"
  ]
}
```

4. CHECKLIST METHOD INFORMATION

User can consume API Services in their application by calling exposed methods on server side. These checklist methods are parameterized and only authenticated user can access the information and for that user need to pass access key and secret key in the header while calling the API.

4.1 GetChecklist

This method is used to get all checklist.

Request Format (In Json): This API accepts GET request with no parameter passing.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Checklist/GetChecklist>

Signature: `public object GetChecklist ()`

Response: Returns Data in JSON format.

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "AD_Survey_ID": 1000003,
      "name": "Checklist for Hardware issues",
      "surveytype": "QN"
    },
    {
      "AD_Survey_ID": 1000004,
      "name": "New Customer Checklist",

```

```

        "surveytype": "QN"
    }
}
]
}

```

4.2 GetQuestionList

This Method is used to get all question of Specific check.

Request Format (In URL Params): The API accepts a GET request with the parameter CheckListID passed in the query string.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Checklist/GetQuestionList>

Signature: `public object GetQuestionList (int CheckListID)`

Parameter	Description
CheckListID	Enter checklist ID (int)

Sample Request:

<https://OnfinitySample.com/api/VAAPI/Checklist/GetQuestionList?CheckListID=1000005>

Response: Returns Data in JSON format.

Sample Response below:

```

{
  "code": 200,
  "result": "Success",
  "data": {
    "checkListID": 1000005,
    "questionList": [
      {
        "questionID": 1000015,
        "question": "Have experienced to serve in Govt Sector",
        "answerType": "OP",
        "lineNo": 10,
        "answer": {
          "ansID": 1000030,
          "ansTxt": "No",
          "lineNo": 20
        }
      },
      {
        "questionID": 1000009,
        "question": "Is vendor certified?",
        "answerType": "OP",
        "lineNo": 10,

```

```

        "answer": {
            "ansID": 1000028,
            "ansTxt": "No",
            "lineNo": 20
        }
    },
    {
        "questionID": 1000016,
        "question": "Max billing cycle",
        "answerType": "TX",
        "lineNo": 0,
        "answer": null
    }
]
}

```

4.3 GetScreenCheckList

This method is used to get checklist data for a specific screen and tab.

Request Format (In URL Params): The API accepts a GET request with the required parameters ScreenID and TabID passed in the query string.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Checklist/GetScreenCheckList>

Signature: `public object GetScreenCheckList (int ScreenID, int TabID)`

Parameter	Description
ScreenID	Enter the screen ID (int)
TabID	Enter the tab ID (int)

Sample Request:

<https://OnfinitySample.com/api/VAAPI/Checklist/GetScreenCheckList?ScreenID=1000366&TabID=1001349>

Response: Returns data in JSON format containing the checklist related to the provided screen and tab.

Sample Response below:

```

{
    "code": 200,
    "result": "Success",
    "data": [
        {
            "checkListID": 1000005,
            "checkListAssignedID": 1000011,

```

```

        "checkListName": "New Vendor Master Checklist",
        "isMandatoryToFill": true,
        "condition": [
            {
                "id": 1000014,
                "column": "4940",
                "operator": "==",
                "value": "1000037",
                "conjunction": "O"
            }
        ]
    },
    {
        "checkListID": 1000004,
        "checkListAssignedID": 1000010,
        "checkListName": "New Customer Checklist",
        "isMandatoryToFill": true,
        "condition": [
            {
                "id": 1000013,
                "column": "4940",
                "operator": "==",
                "value": "1000033",
                "conjunction": "O"
            }
        ]
    }
]
}

```

4.4 GetCheckListResponse

This method is used to get checklist responses for a specific record.

Request Format (In URL Params):

The API accepts a GET request with the required parameters ScreenID, TabID, CheckListID, and RecordID passed in the query string.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAP/Checklist/GetCheckListResponse>

Signature: `public object GetCheckListResponse (int ScreenID, int TabID, int CheckListID, int RecordID)`

Parameter	Description
ScreenID	Enter the screen ID (int)
TabID	Enter the tab ID (int)
CheckListID	Enter the checklist ID (int)

RecordID	Enter the record ID (int)
----------	---------------------------

Sample Request:

<https://OnfinitySample.com/api/VAAPI/Checklist/GetCheckListResponse?ScreenID=1000366&TabID=1001349&CheckListID=1000005&RecordID=1006741>

Response:

Returns data in JSON format containing the saved checklist responses for the specified screen, tab, checklist, and record.

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": [
    {
      "checkListID": 1000005,
      "checkListName": "New Vendor Master Checklist",
      "responseID": 1000029,
      "responseBy": 1005338,
      "responseDateTime": "2025-03-26T04:51:15",
      "responseLine": [
        {
          "questionID": 1000009,
          "question": "Is vendor certified?",
          "ans": [
            {
              "responseLineID": 1000076,
              "answerID": 1000028,
              "answerTxt": "No",
              "userResponse": "No"
            },
            {
              "responseLineID": 1000082,
              "answerID": 1000027,
              "answerTxt": "Yes",
              "userResponse": "Yes"
            }
          ]
        },
        {
          "questionID": 1000018,
          "question": "Explain client tail.",
          "ans": [
            {
              "responseLineID": 1000080,
              "answerID": 0,
              "answerTxt": "",
              "userResponse": "test 2"
            }
          ]
        }
      ]
    }
  ],
}
```

```

{
  "questionID": 1000015,
  "question": "Have experienced to serve in Govt Sector",
  "ans": [
    {
      "responseLineID": -1,
      "answerID": 1000030,
      "answerTxt": "No",
      "userResponse": ""
    },
    {
      "responseLineID": 1000077,
      "answerID": 1000029,
      "answerTxt": "Yes",
      "userResponse": "Yes"
    }
  ]
},
{
  "questionID": 1000016,
  "question": "Max billing cycle",
  "ans": [
    {
      "responseLineID": 1000078,
      "answerID": 0,
      "answerTxt": "",
      "userResponse": "test 2"
    }
  ]
},
{
  "questionID": 1000017,
  "question": "Give reference of any two existing Business Partner.",
  "ans": [
    {
      "responseLineID": 1000079,
      "answerID": 0,
      "answerTxt": "",
      "userResponse": "test 2"
    }
  ]
}
],
{
  "checkListID": 1000005,
  "checkListName": "New Vendor Master Checklist",
  "responseID": 1000028,
  "responseBy": 1005338,
  "responseDateTime": "2025-03-26T04:41:22",
  "responseLine": [
    {

```

```

"questionID": 1000009,
"question": "Is vendor certified?",
"ans": [
  {
    "responseLineID": -1,
    "answerID": 1000028,
    "answerTxt": "No",
    "userResponse": ""
  },
  {
    "responseLineID": -1,
    "answerID": 1000027,
    "answerTxt": "Yes",
    "userResponse": ""
  }
]
},
{
  "questionID": 1000018,
  "question": "Explain client tail.",
  "ans": [
    {
      "responseLineID": 1000075,
      "answerID": 0,
      "answerTxt": "",
      "userResponse": "asas"
    }
  ]
},
{
  "questionID": 1000015,
  "question": "Have experienced to serve in Govt Sector",
  "ans": [
    {
      "responseLineID": 1000072,
      "answerID": 1000030,
      "answerTxt": "No",
      "userResponse": "No"
    },
    {
      "responseLineID": -1,
      "answerID": 1000029,
      "answerTxt": "Yes",
      "userResponse": ""
    }
  ]
},
{
  "questionID": 1000017,
  "question": "Give reference of any two existing Business Partner.",
  "ans": [
    {

```

```

        "responseLineID": 1000074,
        "answerID": 0,
        "answerTxt": "",
        "userResponse": "12"
    }
}
]
}
]
},
{
    "checkListID": 1000005,
    "checkListName": "New Vendor Master Checklist",
    "responseID": 1000030,
    "responseBy": 1006102,
    "responseDateTime": "2025-04-03T10:20:33",
    "responseLine": [
        {
            "questionID": 1000009,
            "question": "Is vendor certified?",
            "ans": [
                {
                    "responseLineID": -1,
                    "answerID": 1000028,
                    "answerTxt": "No",
                    "userResponse": ""
                },
                {
                    "responseLineID": -1,
                    "answerID": 1000027,
                    "answerTxt": "Yes",
                    "userResponse": ""
                }
            ]
        },
        {
            "questionID": 1000015,
            "question": "Have experienced to serve in Govt Sector",
            "ans": [
                {
                    "responseLineID": -1,
                    "answerID": 1000030,
                    "answerTxt": "No",
                    "userResponse": ""
                },
                {
                    "responseLineID": -1,
                    "answerID": 1000029,
                    "answerTxt": "Yes",
                    "userResponse": ""
                }
            ]
        }
    ]
},

```



```

{
  "questionID": 1000016,
  "question": "Max billing cycle",
  "ans": [
    {
      "responseLineID": -1,
      "answerID": 0,
      "answerTxt": "",
      "userResponse": ""
    }
  ]
},
{
  "questionID": 1000017,
  "question": "Give reference of any two existing Business Partner.",
  "ans": [
    {
      "responseLineID": -1,
      "answerID": 0,
      "answerTxt": "",
      "userResponse": ""
    }
  ]
}
]
}
]
}

```

4.5 UpdateResponseLine

This method is used to update a checklist response line with the provided answer.

Request Format (In JSON Body):

The API accepts a POST request with the body in JSON format. The request body must include mandatory parameters like ResponseID, QuestionID, ResponseLineID, AnswerID, and AnswerTxt.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VAAPI/Checklist/UpdateResponseLine>

Signature: `public object UpdateResponseLine(UpdateResponseLineRequest lineRequest)`

Parameter	Description
ResponseID	ID of the checklist response
QuestionID	ID of the checklist question
ResponseLineID	ID of the response line to update
AnswerID	ID of the selected answer
AnswerTxt	Text answer

Sample Request:

```
{
  "ResponseID": 1000029,
  "QuestionID": 1000009,
  "ResponseLineID": 1000071,
  "AnswerID": 1000028,
  "AnswerTxt": "No"
}
```

Response: Returns data in JSON format confirming success or failure of the update operation.

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "Response updated successfully"
}
```

4.6 UpdateResponse

This method is used to create or update a checklist response along with multiple response lines.

Request Format (In JSON Body):

The API accepts a POST request with the body in JSON format. The request must include the main checklist response details and a list of response lines.



The accessKey and secretkey must be passed in the request headers to authenticate the request.

Endpoint: <https://OnfinitySample.com/api/VA-API/Checklist/UpdateResponse>

Signature: `public object UpdateResponse(UpdateResponseRequest updateResponse)`

Parameter	Description
ResponseID	ID of the checklist response
ScreenID	ID of the checklist question
TabID	ID of the response line to update
CheckListID	ID of the selected answer
RecordID	Text answer
ResponseLine	Array of checklist question responses

Each object in the ResponseLine array includes:

Parameter	Description
QuestionID	ID of the checklist question
ResponseLineID	ID of the response line (0 for new)
AnswerID	ID of the selected answer
AnswerTxt	Text of the answer

Sample Request:

```
{
  "ResponseID": 0,
  "ScreenID": 1000366,
  "TabID": 1001349,
  "CheckListID": 1000005,
  "RecordID": 1006741,
  "ResponseLine": [
    {
      "QuestionID": 1000009,
      "ResponseLineID": 0,
      "AnswerID": 1000027,
      "AnswerTxt": "Yes"
    },
    {
      "QuestionID": 1000015,
      "ResponseLineID": 0,
      "AnswerID": 1000029,
      "AnswerTxt": "Yes"
    },
    {
      "QuestionID": 1000016,
      "ResponseLineID": 0,
      "AnswerID": 0,
      "AnswerTxt": "Hello"
    },
    {
      "QuestionID": 1000018,
      "ResponseLineID": 0,
      "AnswerID": 0,
      "AnswerTxt": "Hello1"
    },
    {
      "QuestionID": 1000017,
      "ResponseLineID": 0,
      "AnswerID": 0,
      "AnswerTxt": "Hello2"
    }
  ]
}
```

Sample Response below:

```
{
  "code": 200,
  "result": "Success",
  "data": "Response updated successfully"
}
```

5. RESPONSES INFORMATION

5.1 REPONSES (JSON FORMAT)

- **Result – Success** – if call is successful (when request is completed successfully)
- **Result – Failed** – if call is failed (internal error, or any other response as below)
- **Data** – it's a list of key value containing information.
- **Code – 200** – ok with successful (when request completed successfully)
- **Code – 404** – resource not found (when asked resource not found)
- **Code – 401** – not authorized (when user is not authorized to access asked resource.)
- **Code – 500** – internal server error (mainly occurs when there is code error, server error.)



In case there is any error, along with error codes, data/id will be returned as empty.



- **Do not share access key with everyone but only with internal users.**
- **Do not share your secret key with anyone.**



- **Create separate secret keys for separate roles**