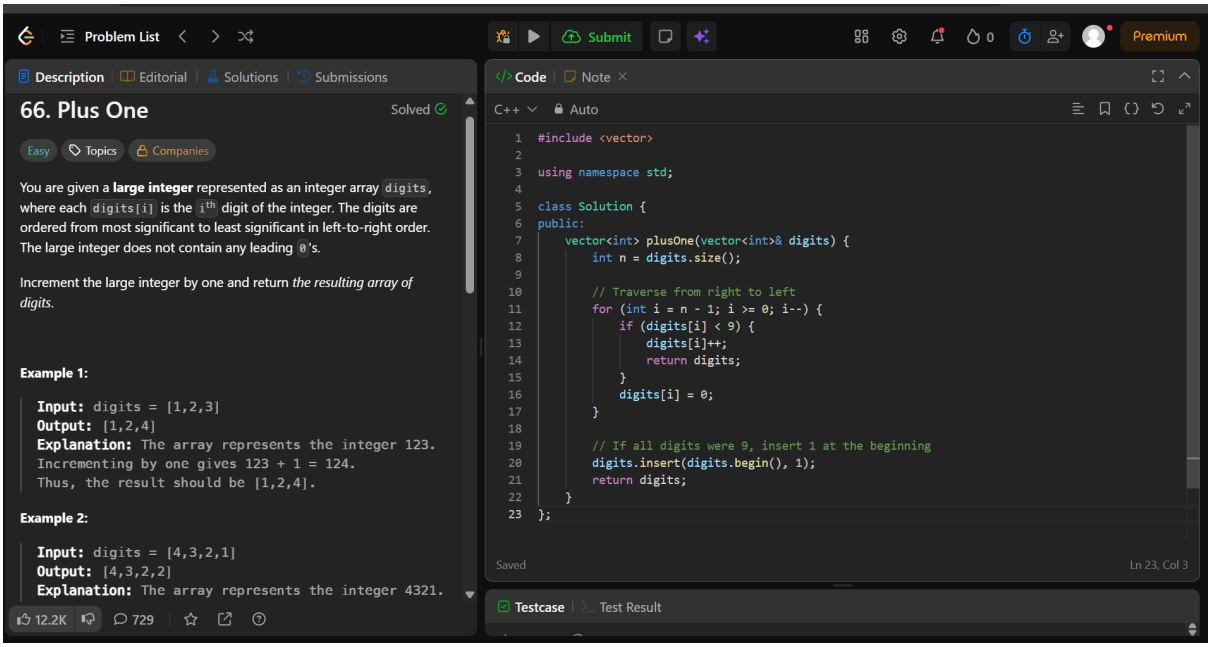

Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
66. Plus One
Solved
Easy
Topics
Companies
You are given a large integer represented as an integer array digits, where each digits[i] is the ith digit of the integer. The digits are ordered from most significant to least significant in left-to-right order. The large integer does not contain any leading 0's.
Increment the large integer by one and return the resulting array of digits.
Example 1:
Input: digits = [1,2,3]
Output: [1,2,4]
Explanation: The array represents the integer 123.
Incrementing by one gives 123 + 1 = 124.
Thus, the result should be [1,2,4].
Example 2:
Input: digits = [4,3,2,1]
Output: [4,3,2,2]
Explanation: The array represents the integer 4321.
12.2K
729
Code
Note
C++
Auto
#include <vector>
using namespace std;
class Solution {
public:
vector<int> plusOne(vector<int>& digits) {
int n = digits.size();
// Traverse from right to left
for (int i = n - 1; i >= 0; i--) {
if (digits[i] < 9) {
digits[i]++;
return digits;
}
digits[i] = 0;
}
// If all digits were 9, insert 1 at the beginning
digits.insert(digits.begin(), 1);
return digits;
}
};
Saved
Ln 23, Col 3
Testcase
Test Result

SHAHIL

29