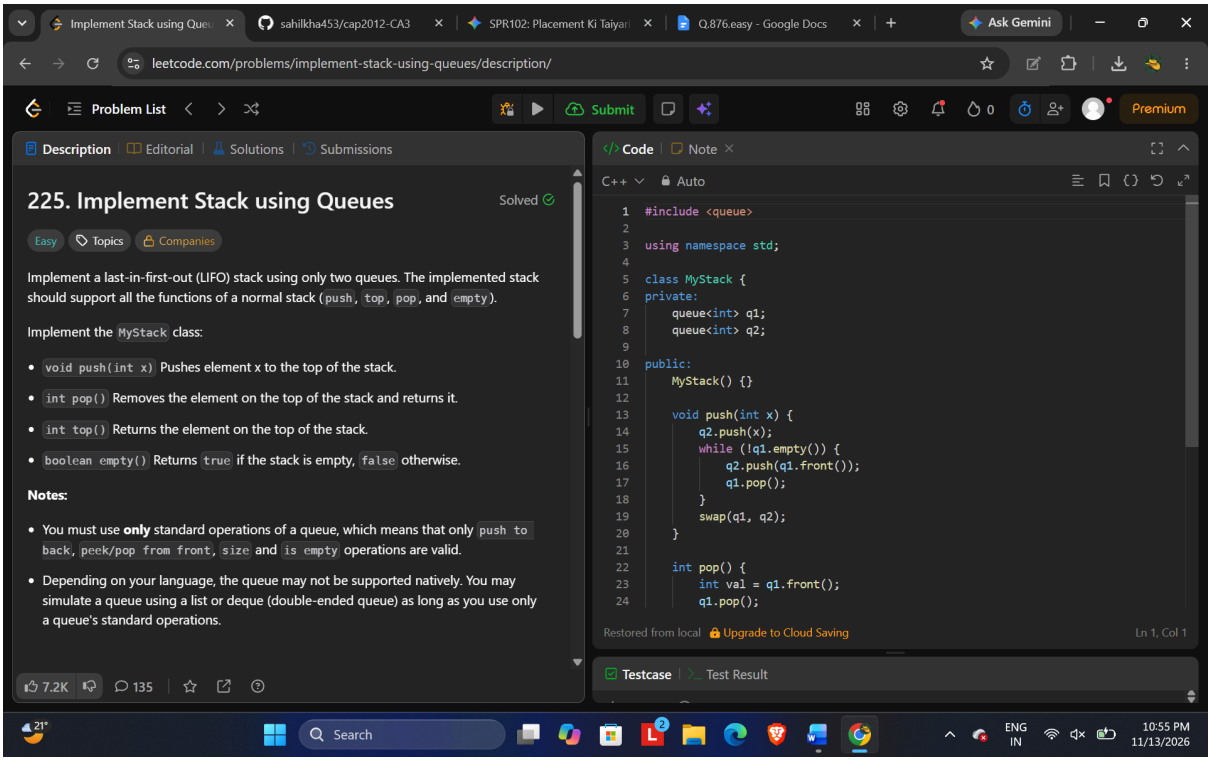

Implement Stack using Queu
sahilkha453/cap2012-CA3
SPR102: Placement Ki Taiyari
Q.876.easy - Google Docs
Ask Gemini
leetcode.com/problems/implement-stack-using-queues/description/
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
225. Implement Stack using Queues
Solved
Easy
Topics
Companies
Implement a last-in-first-out (LIFO) stack using only two queues. The implemented stack should support all the functions of a normal stack (push, top, pop, and empty).
Implement the MyStack class:
void push(int x) Pushes element x to the top of the stack.
int pop() Removes the element on the top of the stack and returns it.
int top() Returns the element on the top of the stack.
boolean empty() Returns true if the stack is empty, false otherwise.
Notes:
You must use only standard operations of a queue, which means that only push to back, peek/pop from front, size and is empty operations are valid.
Depending on your language, the queue may not be supported natively. You may simulate a queue using a list or deque (double-ended queue) as long as you use only a queue's standard operations.
7.2K
135
Code
Note
C++
Auto
#include <queue>
using namespace std;
class MyStack {
private:
queue<int> q1;
queue<int> q2;
public:
MyStack() {}
void push(int x) {
q2.push(x);
while (!q1.empty()) {
q2.push(q1.front());
q1.pop();
}
swap(q1, q2);
}
int pop() {
int val = q1.front();
q1.pop();
Restored from local
Upgrade to Cloud Saving
Ln 1, Col 1
Testcase
Test Result
Search
ENG
IN
10:55 PM
11/13/2026