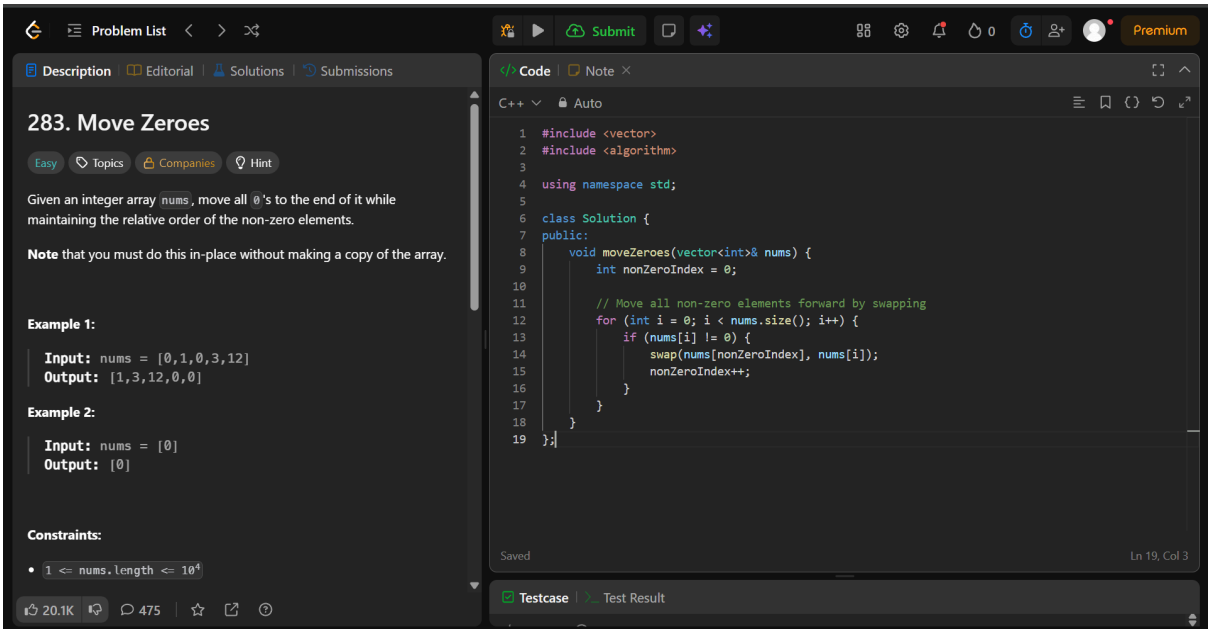

Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
283. Move Zeroes
Easy
Topics
Companies
Hint
Given an integer array nums, move all 0's to the end of it while maintaining the relative order of the non-zero elements.
Note that you must do this in-place without making a copy of the array.
Example 1:
Input: nums = [0,1,0,3,12]
Output: [1,3,12,0,0]
Example 2:
Input: nums = [0]
Output: [0]
Constraints:
1 <= nums.length <= 10^4
20.1K
475
Code
Note
C++
Auto
#include <vector>
#include <algorithm>
using namespace std;
class Solution {
public:
void moveZeroes(vector<int>& nums) {
int nonZeroIndex = 0;
// Move all non-zero elements forward by swapping
for (int i = 0; i < nums.size(); i++) {
if (nums[i] != 0) {
swap(nums[nonZeroIndex], nums[i]);
nonZeroIndex++;
}
}
}
};
Saved
Ln 19, Col 3
Testcase
Test Result

SHAHIL

29