

# Container Apps Provisioning using Pulumi

---

## Prerequisites

1. An Azure account.
  2. Azure CLI installed and configured with the appropriate Azure User or Service Principal.
  3. Pulumi Installed.
- 

## Steps

1. Create a Pulumi Project directory.
2. Open the PowerShell.
3. Change the directory to the above-created Pulumi Project.
4. Run the `pulumi new azure-python` command to initialize the *pulumi*.
5. Provide the appropriate values to prompts such as *project-name*, *project-description*, *stack-name*, *toolchain*, *region-name*, etc.
6. This will generate some Pulumi files in this directory.
7. Now we will install predefined Pulumi modules.
8. Activate the `venv` by running `venv\Scripts\activate`.
9. Run `pip install git+https://github.com/sahilphule/pulumi.git` to install the modules.
10. Deactivate the `venv` by running `deactivate`.
11. Now open the directory in the preferred IDE.
12. Create *commons* folder
13. Inside the folder create *init.py* file.
14. Import the following in the *init.py* file:
  - `from inflection_zone_pulumi.modules.azure.resource_group import resource_group`
  - `from inflection_zone_pulumi.modules.azure.vnet import vnet`
  - `from inflection_zone_pulumi.modules.azure.acr import acr`
  - `from inflection_zone_pulumi.modules.azure.mysql_flexible import mysql_flexible`
  - `from inflection_zone_pulumi.modules.azure.container_apps import container_app`
15. Click [code](#) for reference.
16. Definition of *init.py* is complete.
17. Now create the *values.py* file in the root folder of the above-created project directory.
18. Define the following values:
  - `resource_group_properties`
  - `vnet_properties`
  - `acr_properties`
  - `mysql_flexible_properties`
  - `container_app_properties`
19. Click [code](#) for reference.
20. The definition of *values.py* is complete.
21. Now navigate to the *main.py* file present in the root folder of the above-created project directory.
22. Clear the sample code if present.
23. Import the following:

- from commons import resource\_group, vnet, acr, mysql\_flexible, container\_app
- values

24. Define the following objects and pass the values & dependencies as an argument:

- RESOURCE\_GROUP
- VNET
- ACR
- MYSQL\_FLEXIBLE
- CONTAINER\_APP

25. Click [code](#) for reference.

26. Definition of *main.py* is complete.

---

## Provisioning the Infrastructure

Now we will provision the infrastructure by applying the above-created configuration files.


Ensure Azure CLI is configured with the appropriate Azure User or Service Principal.

Steps:


1. Open the PowerShell.
  2. Change the directory to the above-created Pulumi Project.
  3. Run the **pulumi up** command and if prompted, select **yes** to provision the infrastructure onto the Azure Cloud.
  4. Head to the Azure Console, and verify the created resources.
  5. Access the service onto the browser using the url received by running **pulumi stack output container-app-url**.
-

# Screenshots of Provisioned Infrastructure


## Resource Group Image

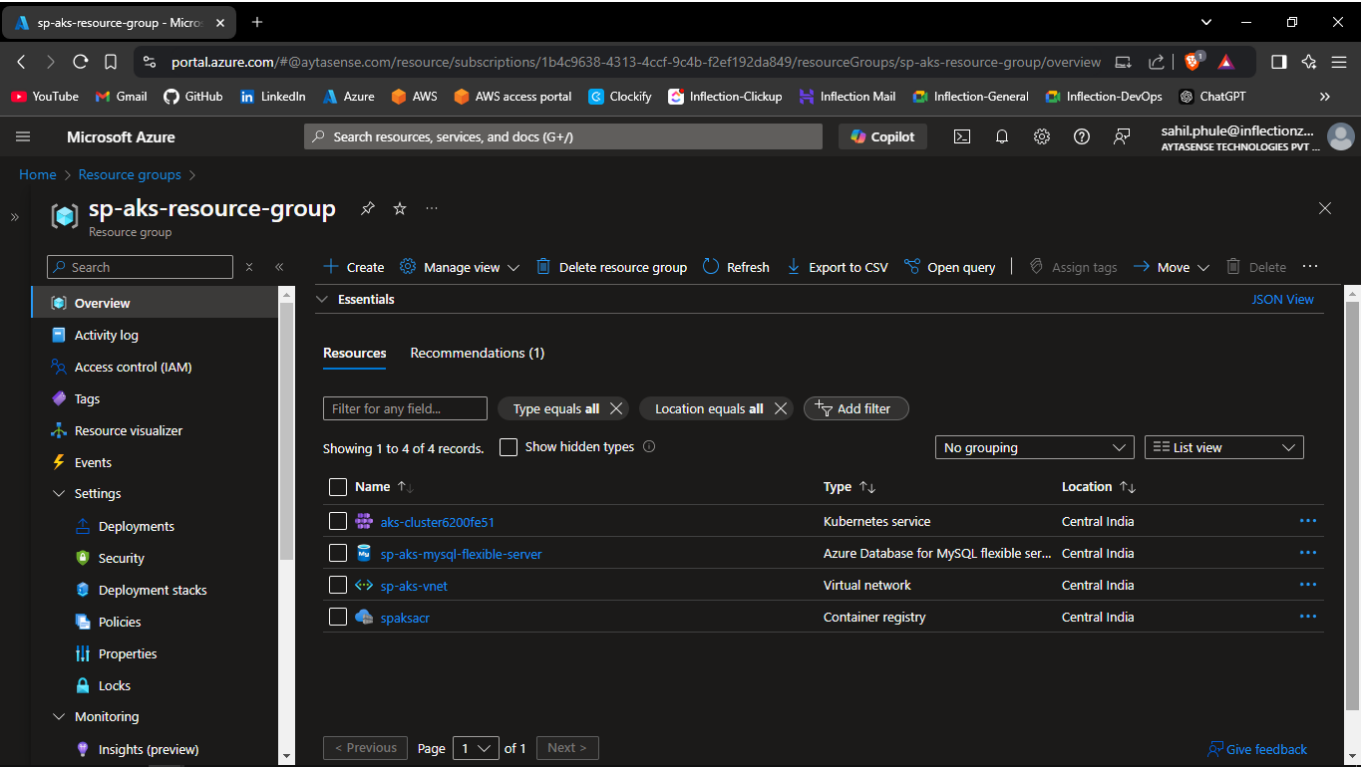


## VNet Image

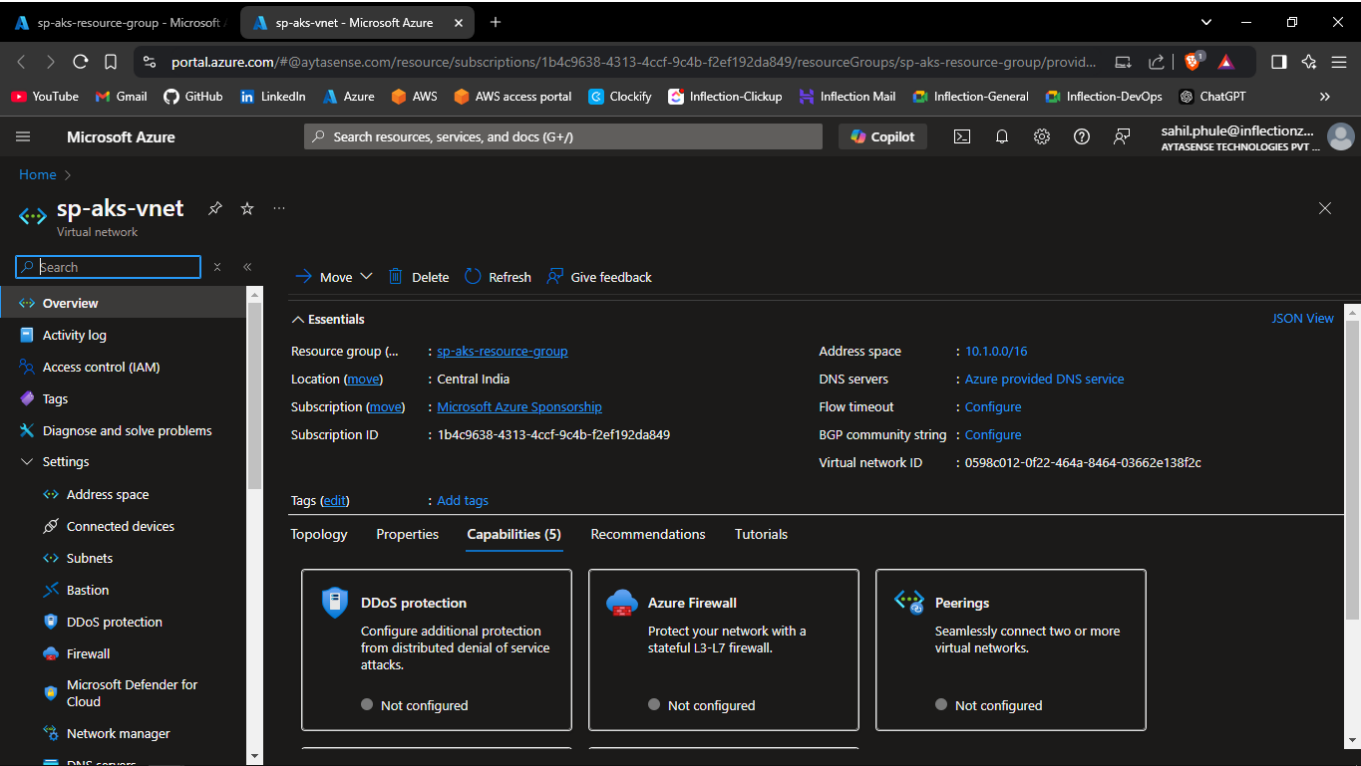


ACR Image

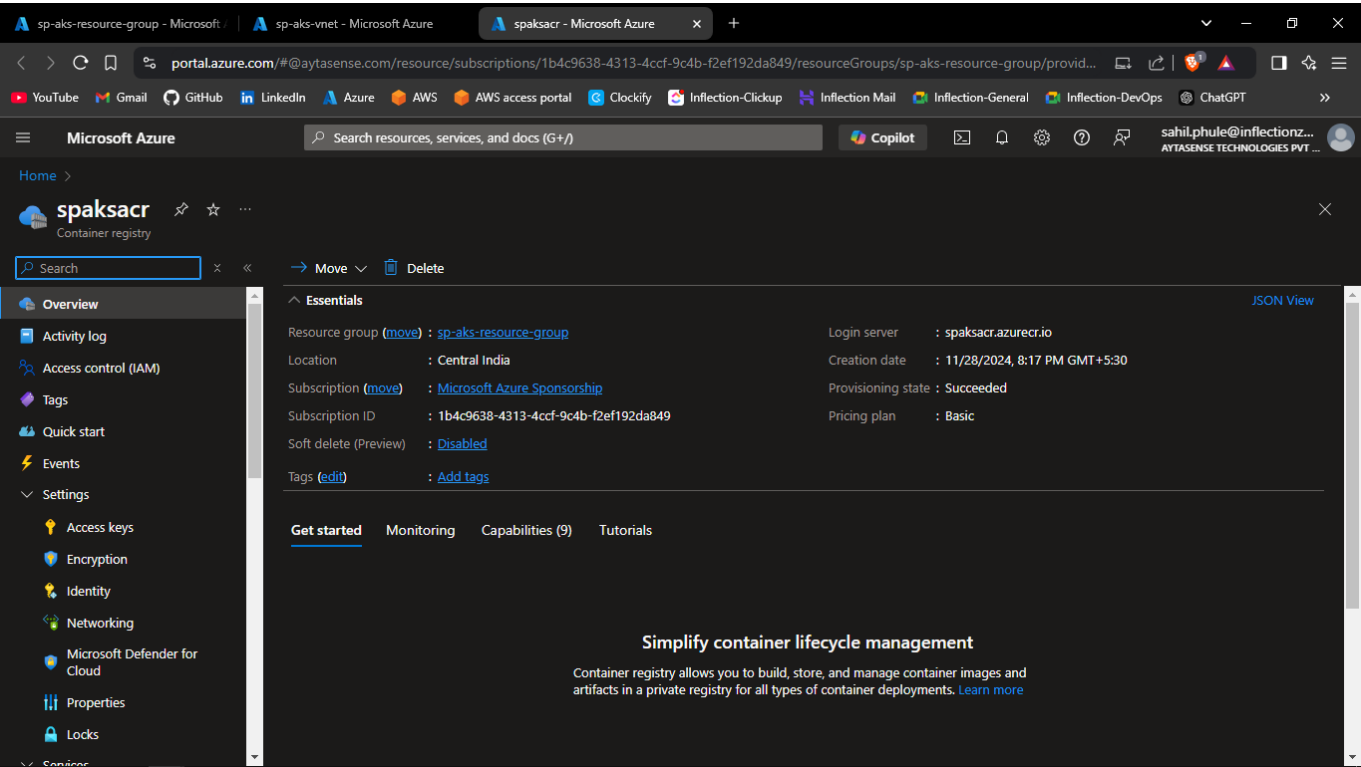

MySQL Flexible Image

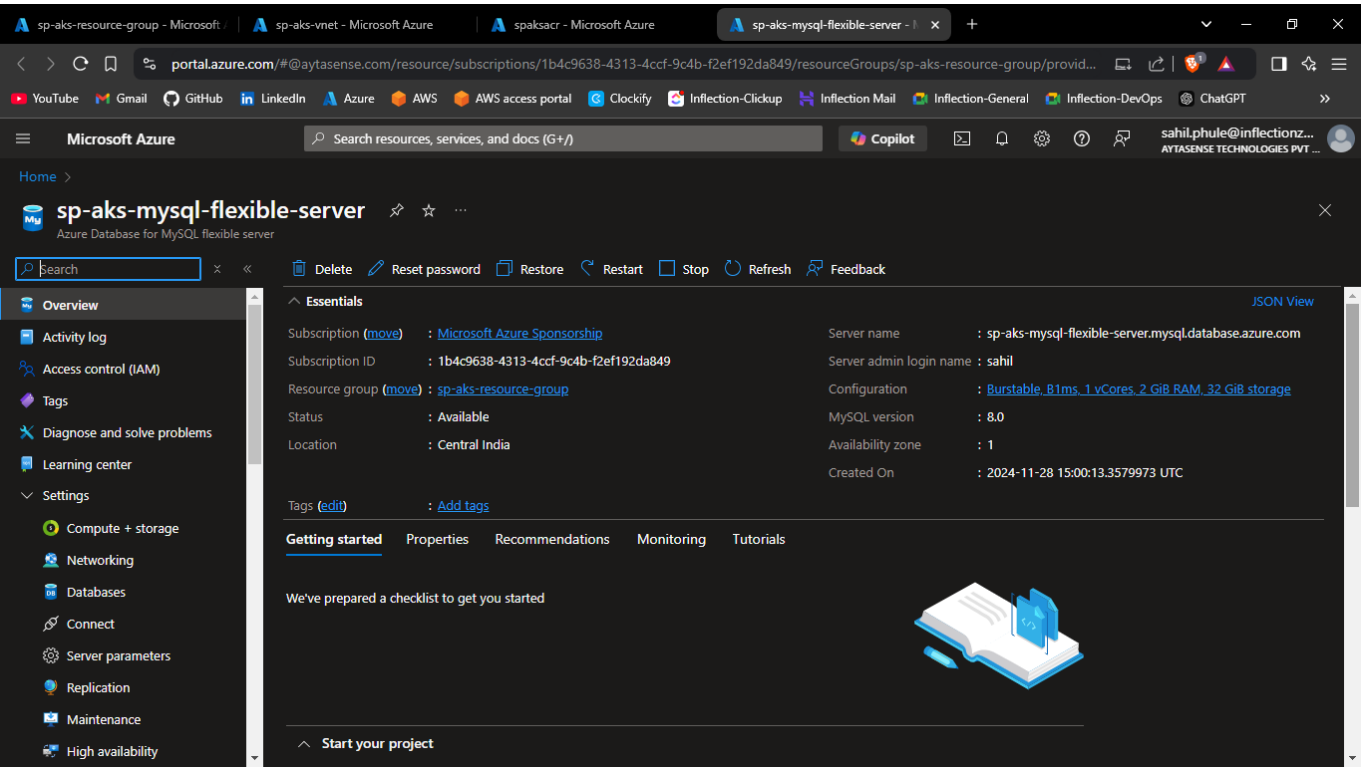

## Container App Image

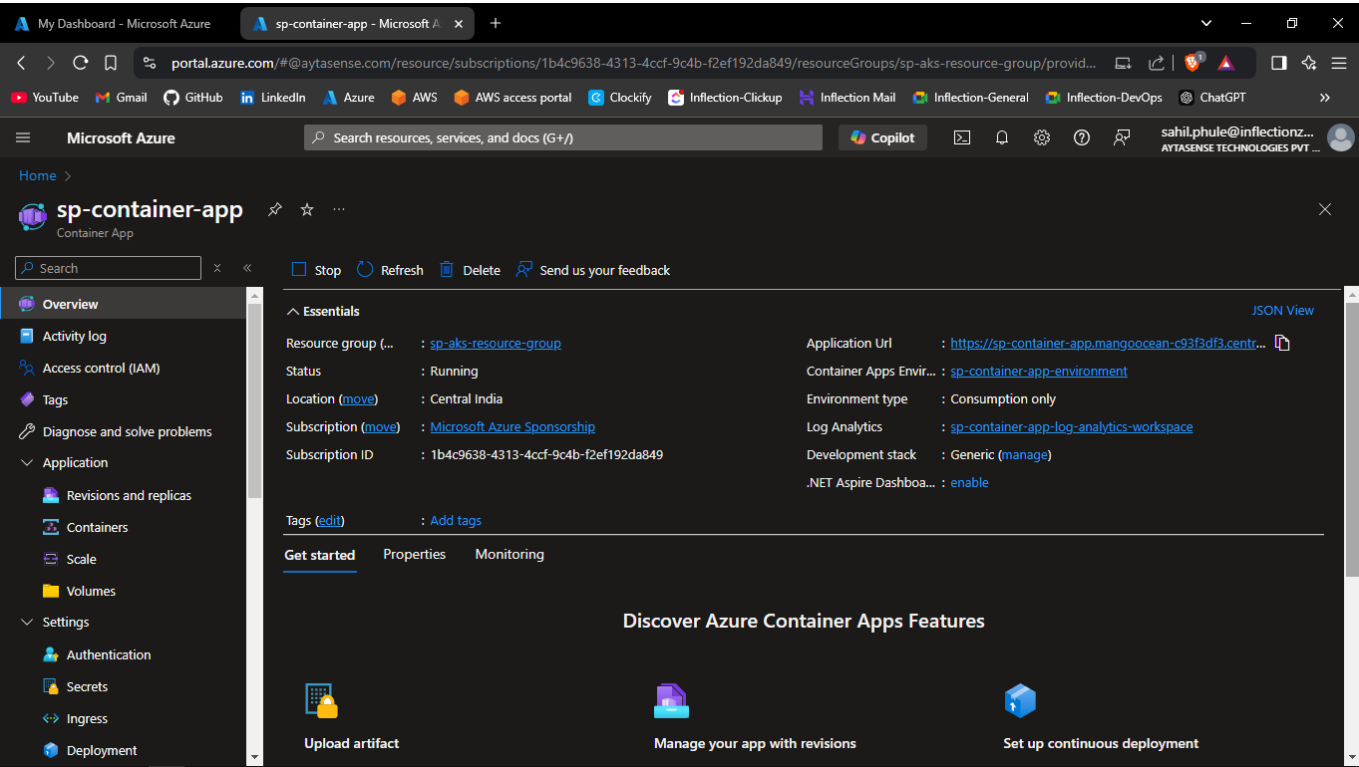

## Destroy the provisioned infrastructure

1. To destroy infrastructure, change the directory to the above-created Pulumi Project using `cd` command.
2. Run `pulumi destroy` & if prompted, select `yes`.
3. Infrastructure will be destroyed.