

# EKS Provisioning using Pulumi

---

- We will provision the EKS using Pulumi as an Infrastructure as Code.
  - We will deploy it in a custom Virtual Private Cloud for isolation.
  - We will also deploy RDS MySQL Instance to store the relational data and connect it to EKS.
- 

## Prerequisites

---

1. An AWS account with an IAM user having sufficient permissions.
  2. AWS CLI installed and configured with the IAM user.
  3. Pulumi Installed.
  4. Kubectl Installed.
- 

## Write Pulumi Configuration files

---

First, we will initiate and edit Pulumi configuration files for AWS resources using predefined Pulumi Library available on the internet.

## Steps

1. Create a Pulumi Project directory.
2. Open the PowerShell.
3. Change the directory to the above-created Pulumi Project.
4. Run the `pulumi new aws-python` command to initialize the *pulumi*.
5. Provide the appropriate values to prompts such as *project-name*, *project-description*, *stack-name*, *toolchain*, *region-name*, etc.
6. This will generate some Pulumi files in this directory.
7. Now we will install predefined Pulumi modules.
8. Activate the `venv` by running `venv\Scripts\activate`.
9. Run `pip install git+https://github.com/sahilphule/pulumi.git` to install the modules.
10. Deactivate the `venv` by running `deactivate`.
11. Now open the directory in the preferred IDE.
12. Create *commons* folder
13. Inside the folder create *init.py* file.
14. Import the following in the *init.py* file:
  - `from inflection_zone_pulumi.modules.aws.vpc import vpc`
  - `from inflection_zone_pulumi.modules.aws.rds import rds`
  - `from inflection_zone_pulumi.modules.aws.eks import eks`
15. Click [code](#) for reference.
16. Definition of *init.py* is complete.
17. Now create the *values.py* file in the root folder of the above-created project directory.
18. Define the following values:
  - `vpc_properties`

- `rds_properties`
- `bastion_properties`
- `eks_properties`

19. Click [code](#) for reference.

20. The definition of `values.py` is complete.

21. Now navigate to the **`main.py`** file present in the root folder of the above-created project directory.

22. Clear the sample code if present.

23. Import the following:

- `from commons import vpc, rds, eks`
- `values`

24. Define the following objects and pass the values as an argument:

- `VPC`
- `RDS`
- `EKS`

25. Click [code](#) for reference.

26. Definition of **`main.py`** is complete.

---

## Provisioning the Infrastructure

---

Now we will provision the infrastructure by applying the above-created configuration files.


Ensure AWS CLI is configured with appropriate IAM user credentials and enough permissions.

### Steps:


1. Open the PowerShell.
  2. Change the directory to the above-created Pulumi Project.
  3. Run the **`pulumi up`** command and if prompted, select **`yes`** to provision the infrastructure onto the AWS Cloud.
  4. Head to the AWS Console, and verify the created resources.
-

# Screenshots of Provisioned Infrastructure


## VPC Image

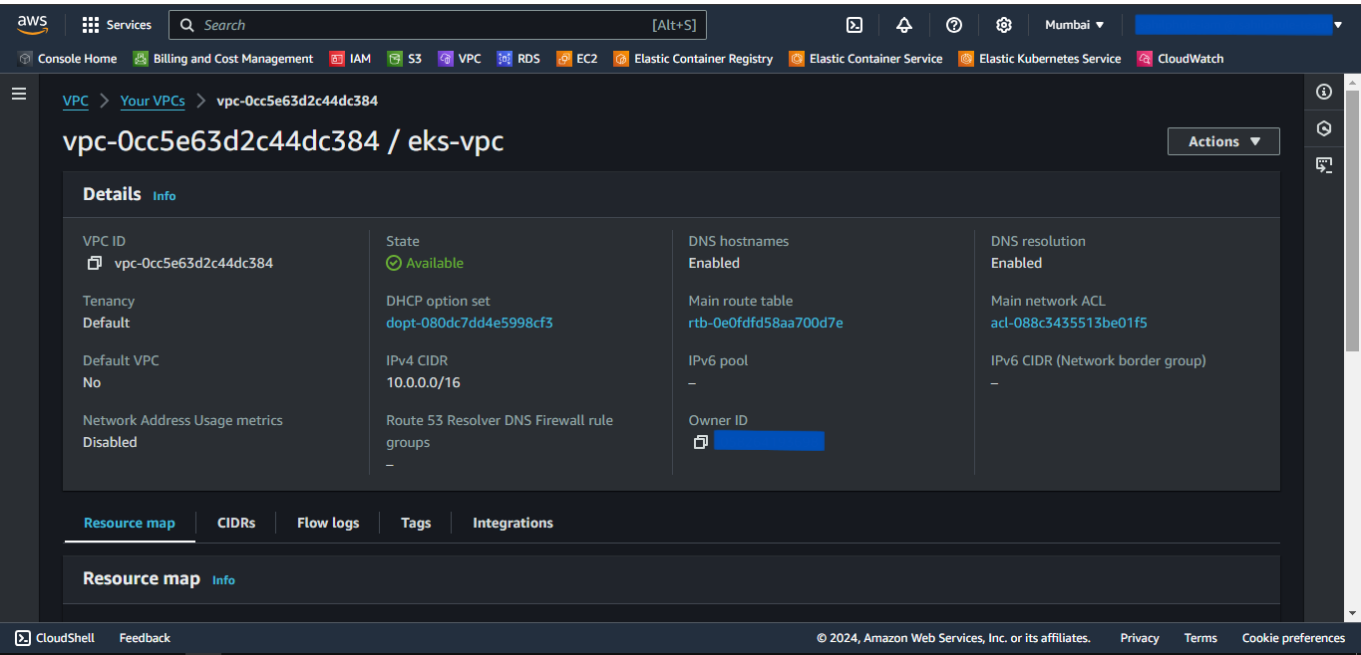


## RDS Image

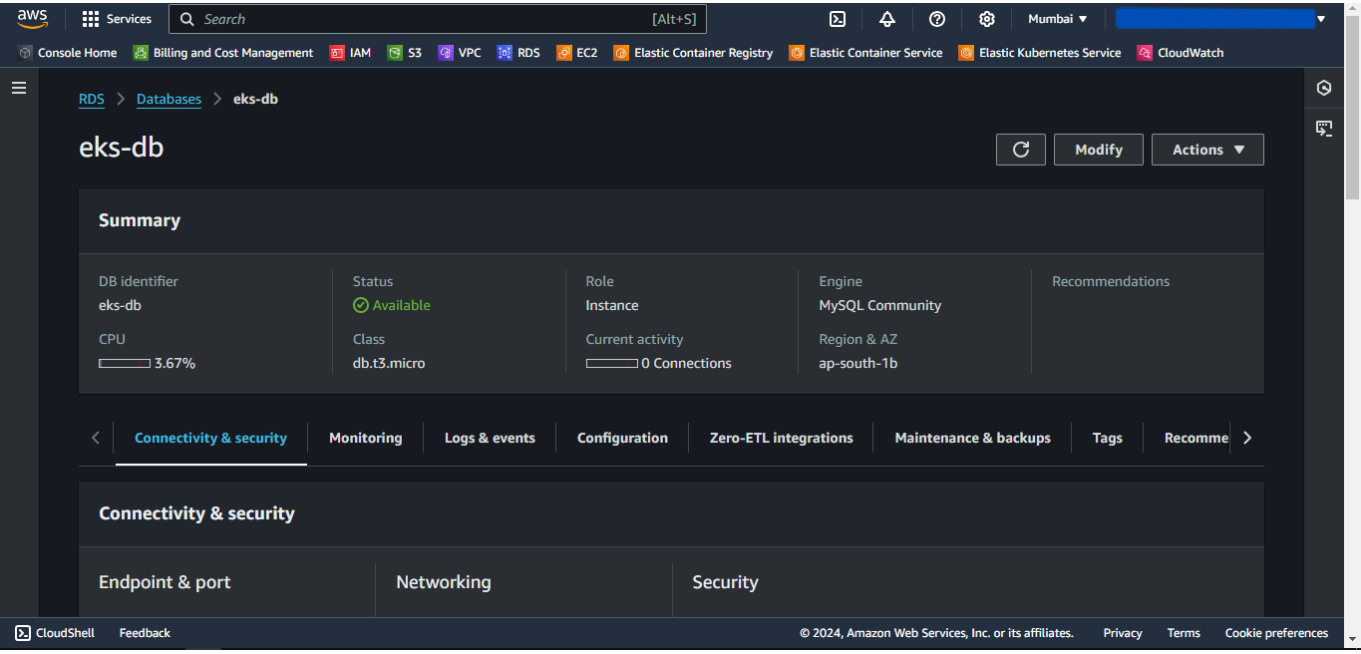


EKS Cluster Image

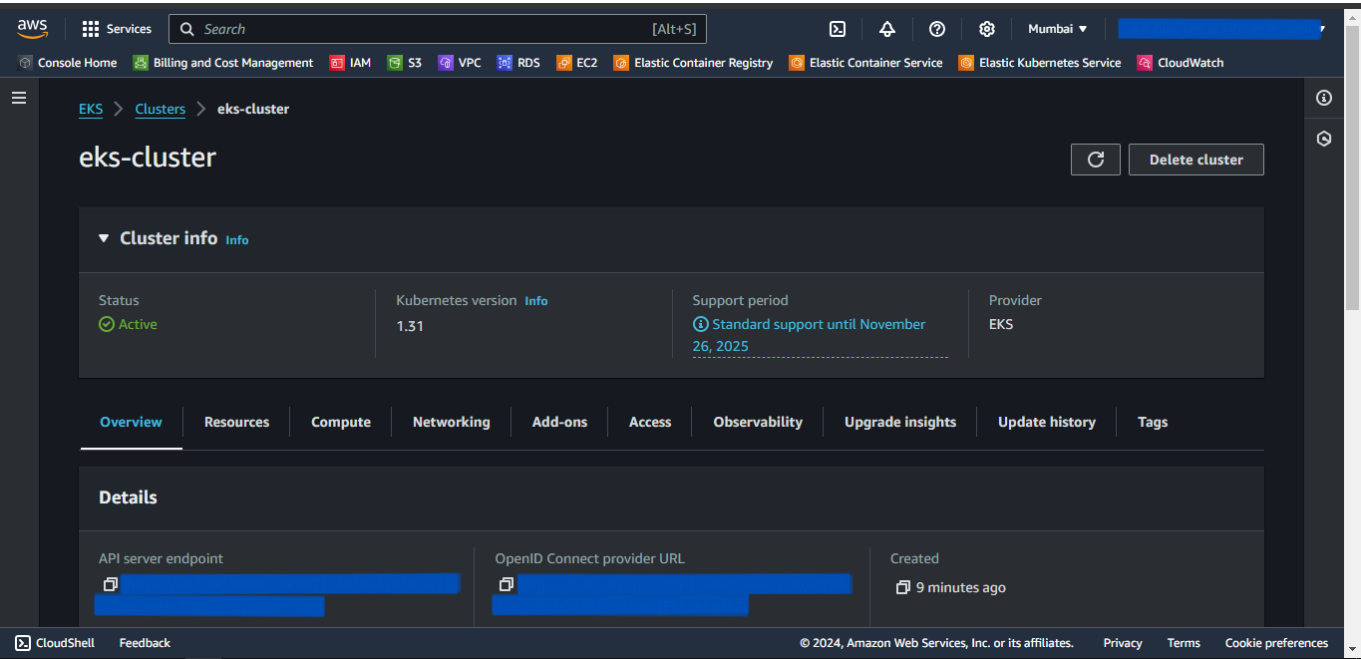

EKS Node Group Image

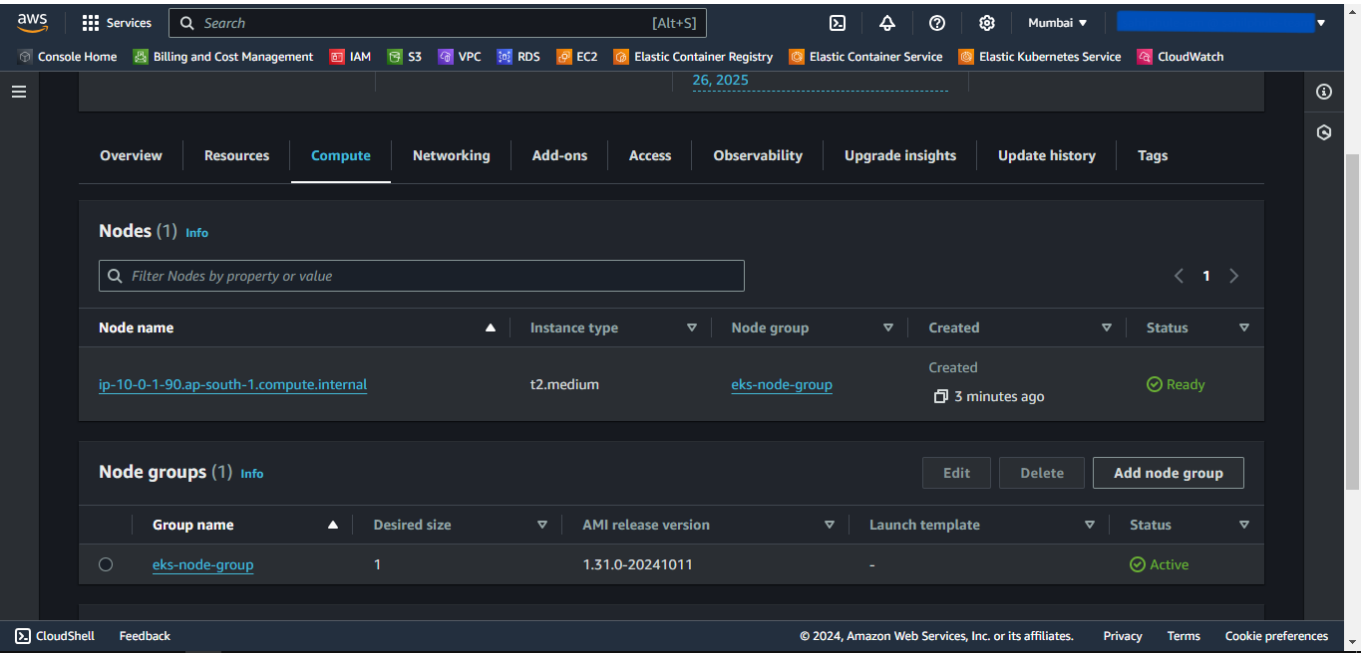

## EKS Nodes Image

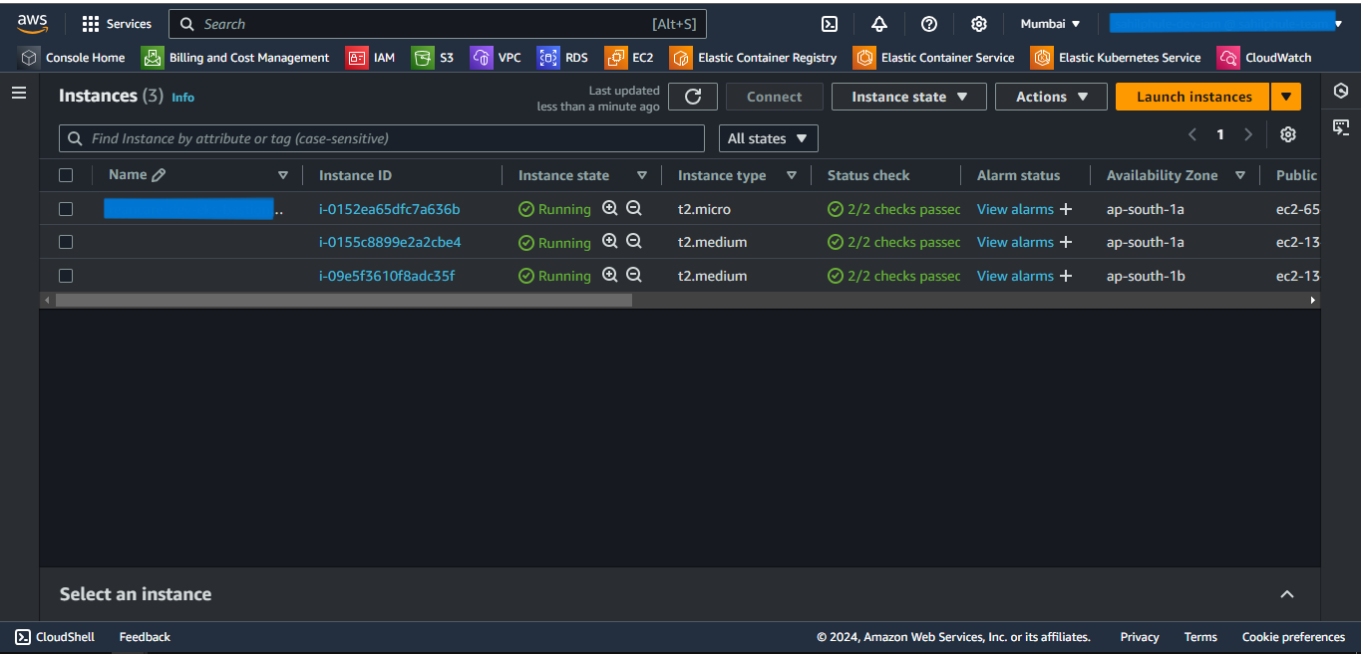

## Connect to EKS Cluster from Powershell

### Steps

1. Open a new Powershell window.
2. Run the following command to configure local kubectl with eks cluster

```
aws eks --region <region-name> update-kubeconfig --name <cluster-name>
```

Substitute *<region-name>* and *<cluster-name>* with the values defined in the above-created *values.py* file.

3. Now, apply the Kubernetes manifest files for the application.
4. To list them all, run `kubectl get all`.

## Connection to the RDS database through Bastion Host using MySQL Workbench

Now, we will use MySQL Workbench to connect and access the MySQL RDS Database through above created Bastion Host.

1. Open MySQL Workbench.
2. Click Add Connection.
3. Select connection method as **Standard TCP/IP over SSH**.


4. In SSH Hostname, enter *bastion-host-ip:22* where *bastion-host-ip* is received from **pulumi stack output bastion-host-ip** command.
5. In SSH Username, enter *ec2-user*.
6. In SSH Key File, select *bastion-key.pem* file passed in above *values.py* file from your local computer.
7. In MySQL Hostname, enter *DB\_HOST* where *DB\_HOST* is received from **pulumi stack output DB\_HOST**.
8. In the Password section, select *Store in Vault*, and enter the password passed in above-created *values.py* file.
9. Click *OK* and open the connection.
10. Now you can run MySQL commands to access databases and verify the successful connection of *eks-nodes*.

---


## Screenshots of MySQL Workbench

---

### Connection Page

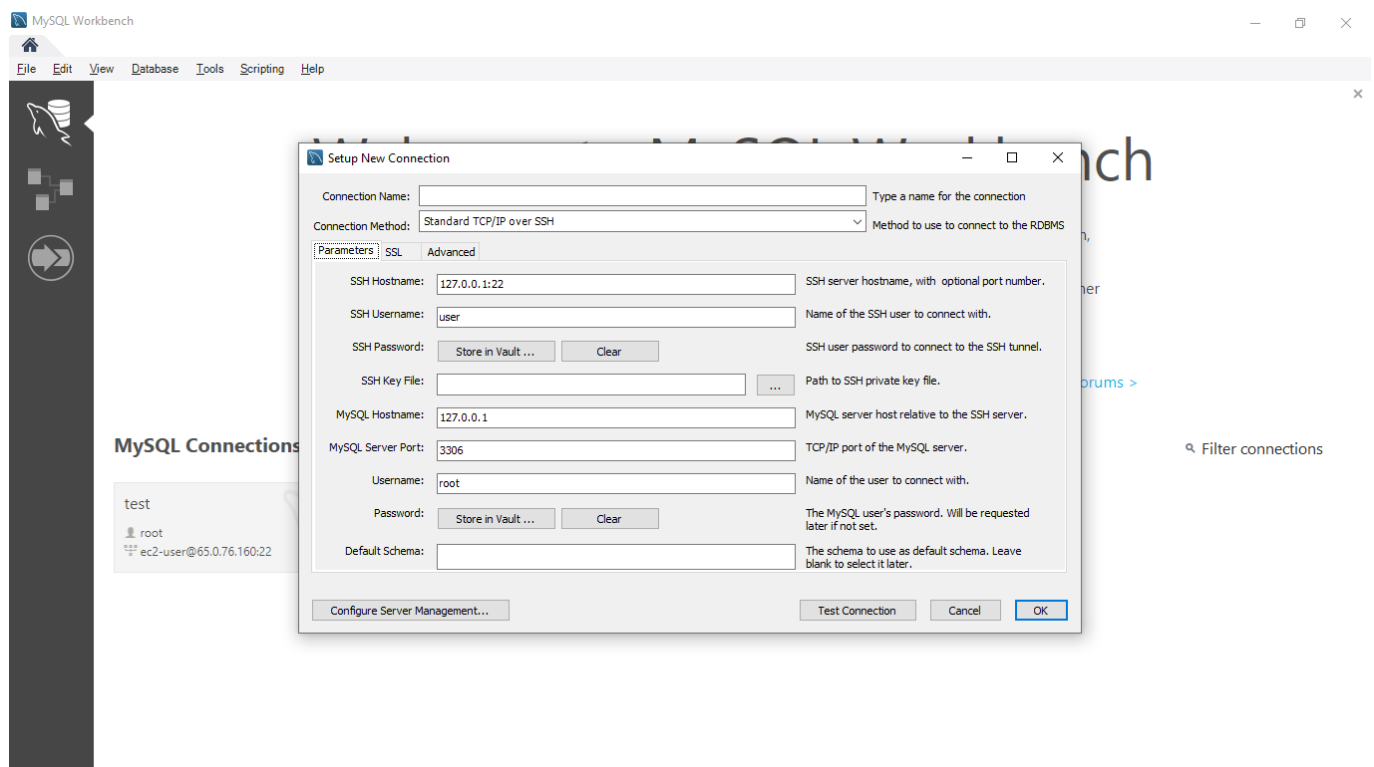

## Commands Page

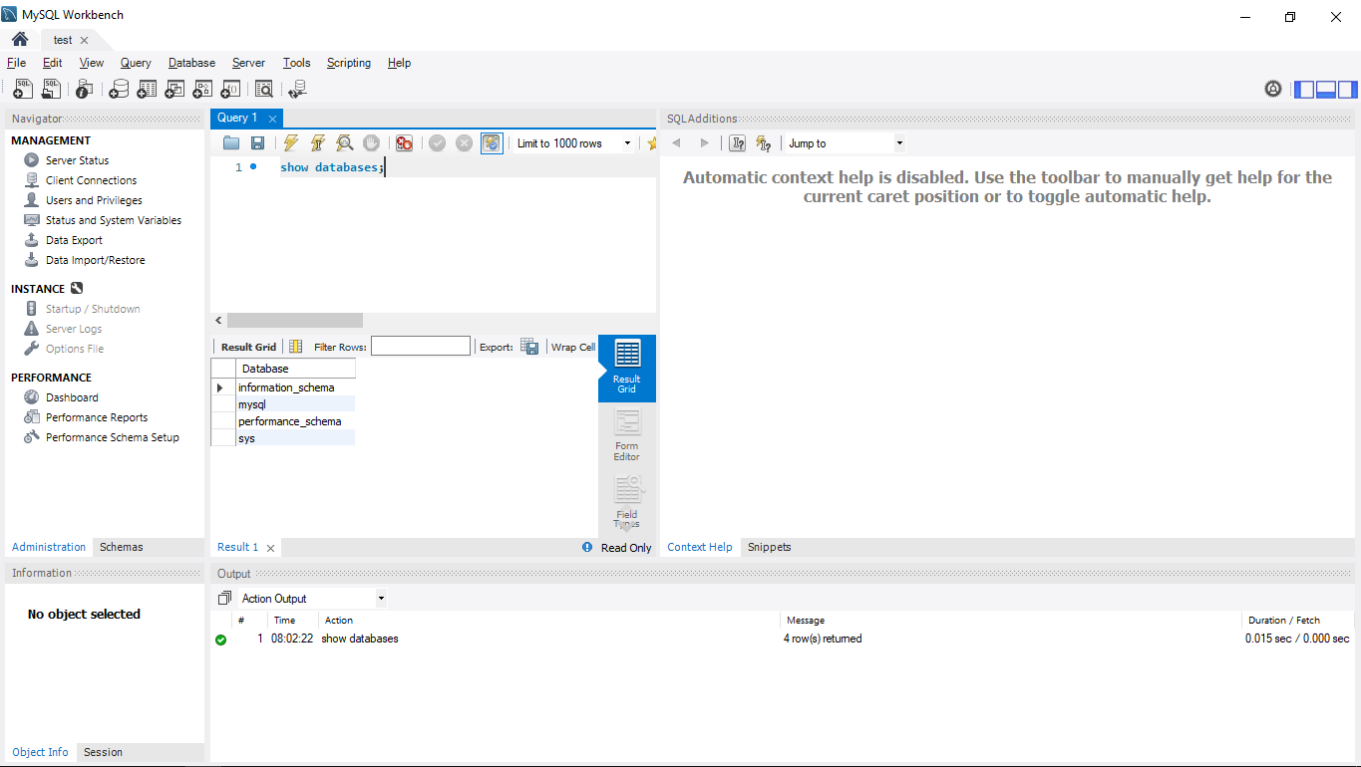

## Destroy the provisioned infrastructure

Lastly, we will destroy the above-created resources.

### Steps

1. First, delete all the Kubernetes Deployments.
2. To destroy infrastructure, open the Powershell Window and change the directory to the above-created Pulumi Project using the `cd` command.
3. Run `pulumi destroy` & if prompted, select `yes`.
4. Infrastructure will be destroyed.