
DHCP testing

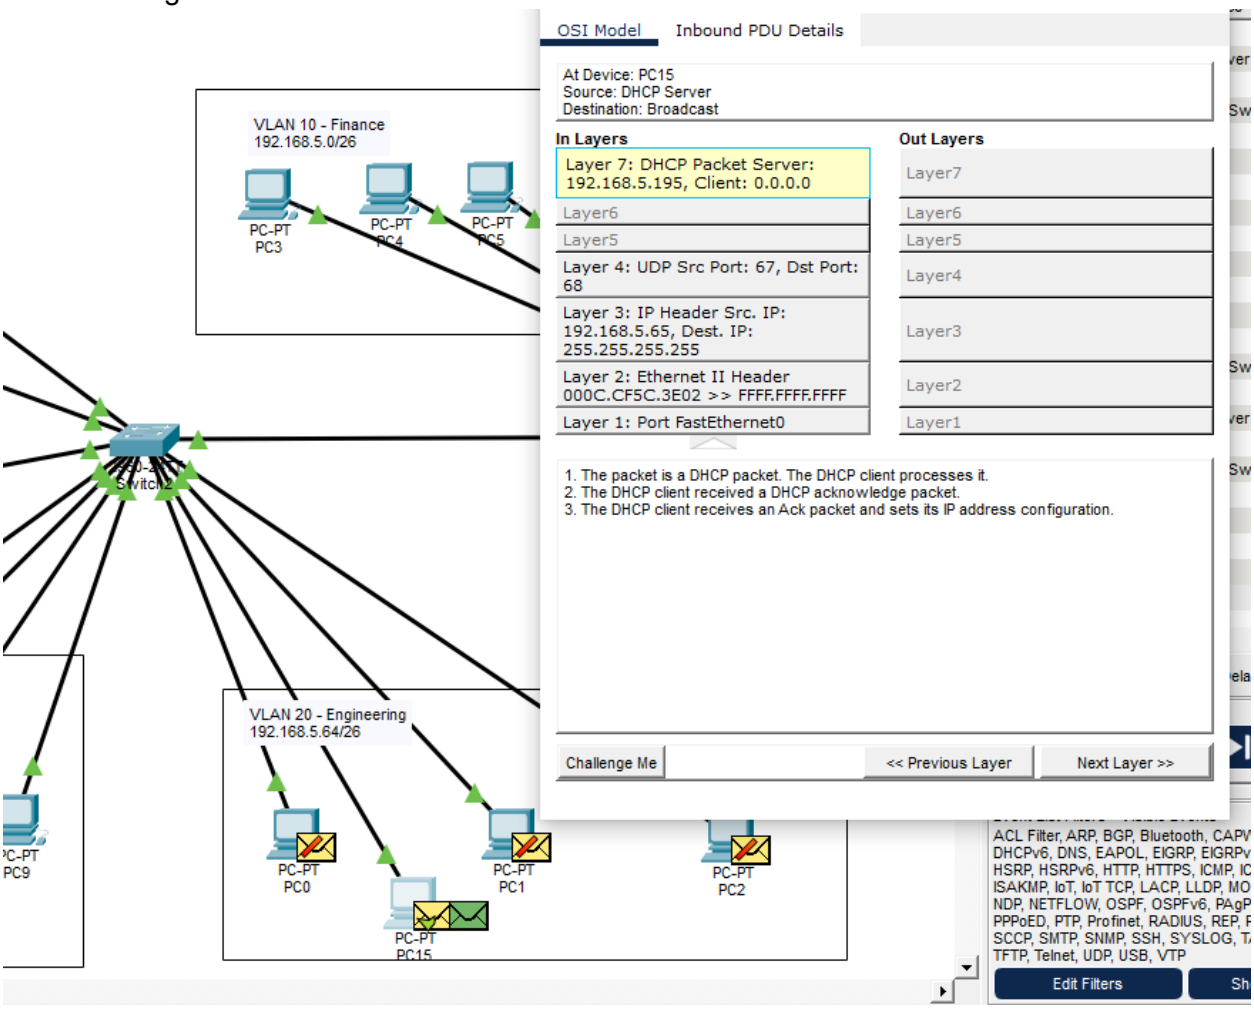

DHCP works without any issues

VLAN testing and ACL testing

Pinging VLAN 20's gateway 192.168.5.65/26 from 192.168.5.68/26,the ping should go through and reply should be sent back.

```
C:\>ping 192.168.5.65

Pinging 192.168.5.65 with 32 bytes of data:

Reply from 192.168.5.65: bytes=32 time=8ms TTL=255
Reply from 192.168.5.65: bytes=32 time<1ms TTL=255
Reply from 192.168.5.65: bytes=32 time<1ms TTL=255
Reply from 192.168.5.65: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.5.65:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 8ms, Average = 2ms

C:\>
```

Pinging another host in 192.168.5.64/26 network from 192.168.5.67/26, the ping should go through and a reply will be sent

```
Pinging 192.168.5.67 with 32 bytes of data:

Reply from 192.168.5.67: bytes=32 time<1ms TTL=128
Reply from 192.168.5.67: bytes=32 time=7ms TTL=128
Reply from 192.168.5.67: bytes=32 time<1ms TTL=128
Reply from 192.168.5.67: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.5.67:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 7ms, Average = 1ms
```

Pinging a host in another subnet from 192.168.5.67, should give the host unreachable ICMP error.

```
C:\>ping 192.168.5.3

Pinging 192.168.5.3 with 32 bytes of data:

Reply from 192.168.5.65: Destination host unreachable.
Reply from 192.168.5.65: Destination host unreachable.
Reply from 192.168.5.65: Destination host unreachable.
Reply from 192.168.5.65: Destination host unreachable.
```

```
Pinging 192.168.5.130 with 32 bytes of data:

Reply from 192.168.5.65: Destination host unreachable.
Reply from 192.168.5.65: Destination host unreachable.
Reply from 192.168.5.65: Destination host unreachable.
Reply from 192.168.5.65: Destination host unreachable.
```

ACLs are working as intended

```
Extended IP access list VLAN10
    10 deny ip 192.168.5.0 0.0.0.63 192.168.5.64 0.0.0.63
    20 deny ip 192.168.5.0 0.0.0.63 192.168.5.128 0.0.0.63
    30 deny ip 192.168.5.0 0.0.0.63 192.168.5.200 0.0.0.7 (4 match(es))
    40 permit udp any any eq bootps
    50 permit udp any eq bootpc any eq bootps
    60 permit ip any any
Extended IP access list VLAN20
    10 deny ip 192.168.5.64 0.0.0.63 192.168.5.0 0.0.0.63 (4 match(es))
    20 deny ip 192.168.5.64 0.0.0.63 192.168.5.128 0.0.0.63 (4 match(es))
    30 deny ip 192.168.5.64 0.0.0.63 192.168.5.200 0.0.0.7 (24 match(es))
    40 permit udp any any eq bootps
    50 permit udp any eq bootpc any eq bootps
    60 permit ip any any (12 match(es))
```

SSH testing

Only 192.168.5.201/29 should be able to SSH into the router and switches

```
C:\>ssh -l admin 192.168.5.205

Password:
% Login invalid


Password:



S1>
```

```
C:\>ssh -l admin 192.168.5.206

Password:



S2>
```


```
C:\>ssh -l  admin 192.168.5.209


Password:




R1>
```

Trying to SSH from 192.168.5.67 into Switches and routers

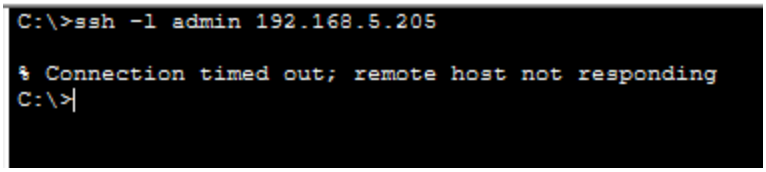

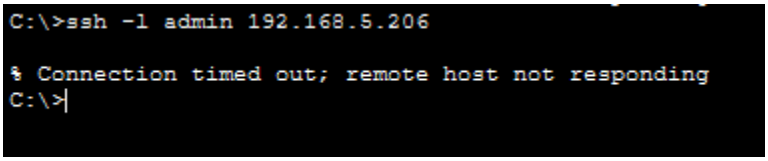

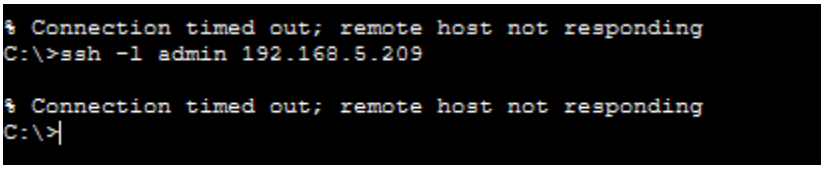

SSH and the No_SSH ACL are working as intended