

# Master Document

## Contents

<b>1</b>	<b>Section 1</b>	<b>1</b>
1.1	Including Plots . . . . .	1
<b>2</b>	<b>Example 1</b>	<b>2</b>
<b>3</b>	<b>Example 2</b>	<b>2</b>
<b>4</b>	<b>Example 3</b>	<b>2</b>

## 1 Section 1


This is a markdown document with two sections. The master.pdf should have

```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   :  2.00
## 1st Qu.:12.0    1st Qu.: 26.00
##  Median:15.0    Median : 36.00
##  Mean   :15.4    Mean    : 42.98
## 3rd Qu.:19.0    3rd Qu.: 56.00
##  Max.   :25.0    Max.    :120.00
```

### 1.1 Including Plots

You can also embed plots, for example:

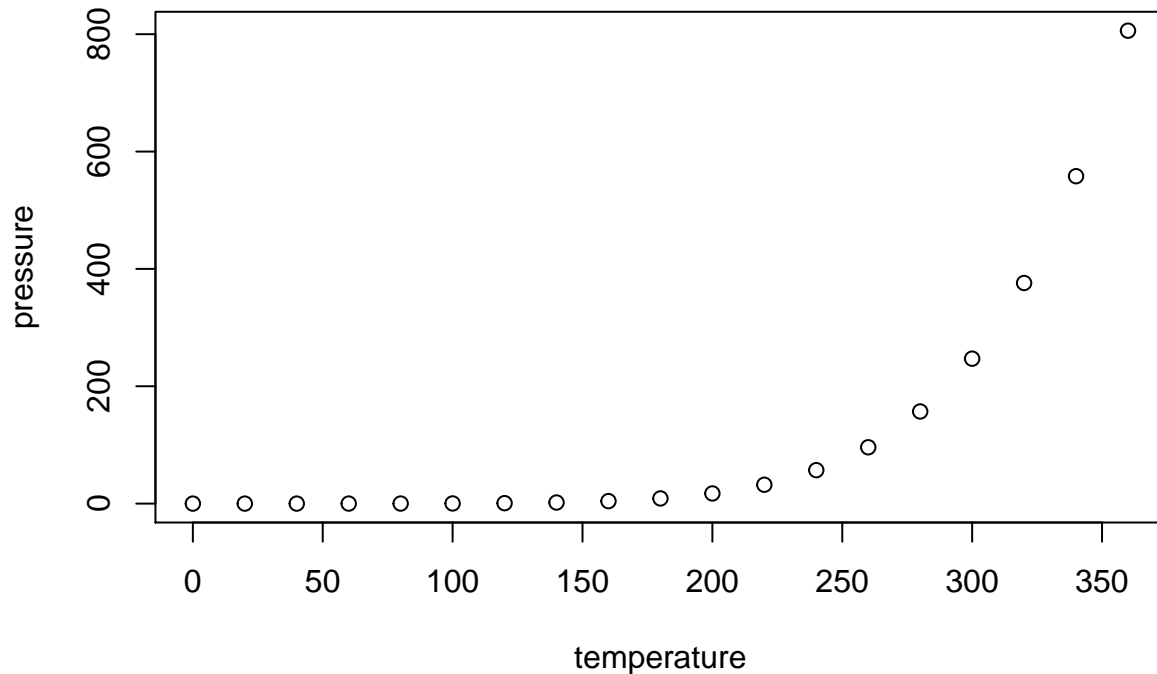

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.

## 2 Example 1

- At times I like to be stand alone document, with three sections.
- When included in master, my sections should really be sub-sections; help please?

## 3 Example 2

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   :  2.00
## 1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##   Mean  :15.4    Mean   : 42.98
## 3rd Qu.:19.0    3rd Qu.: 56.00
##   Max.  :25.0    Max.    :120.00
```

## 4 Example 3

You can also embed plots, for example:



Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.