


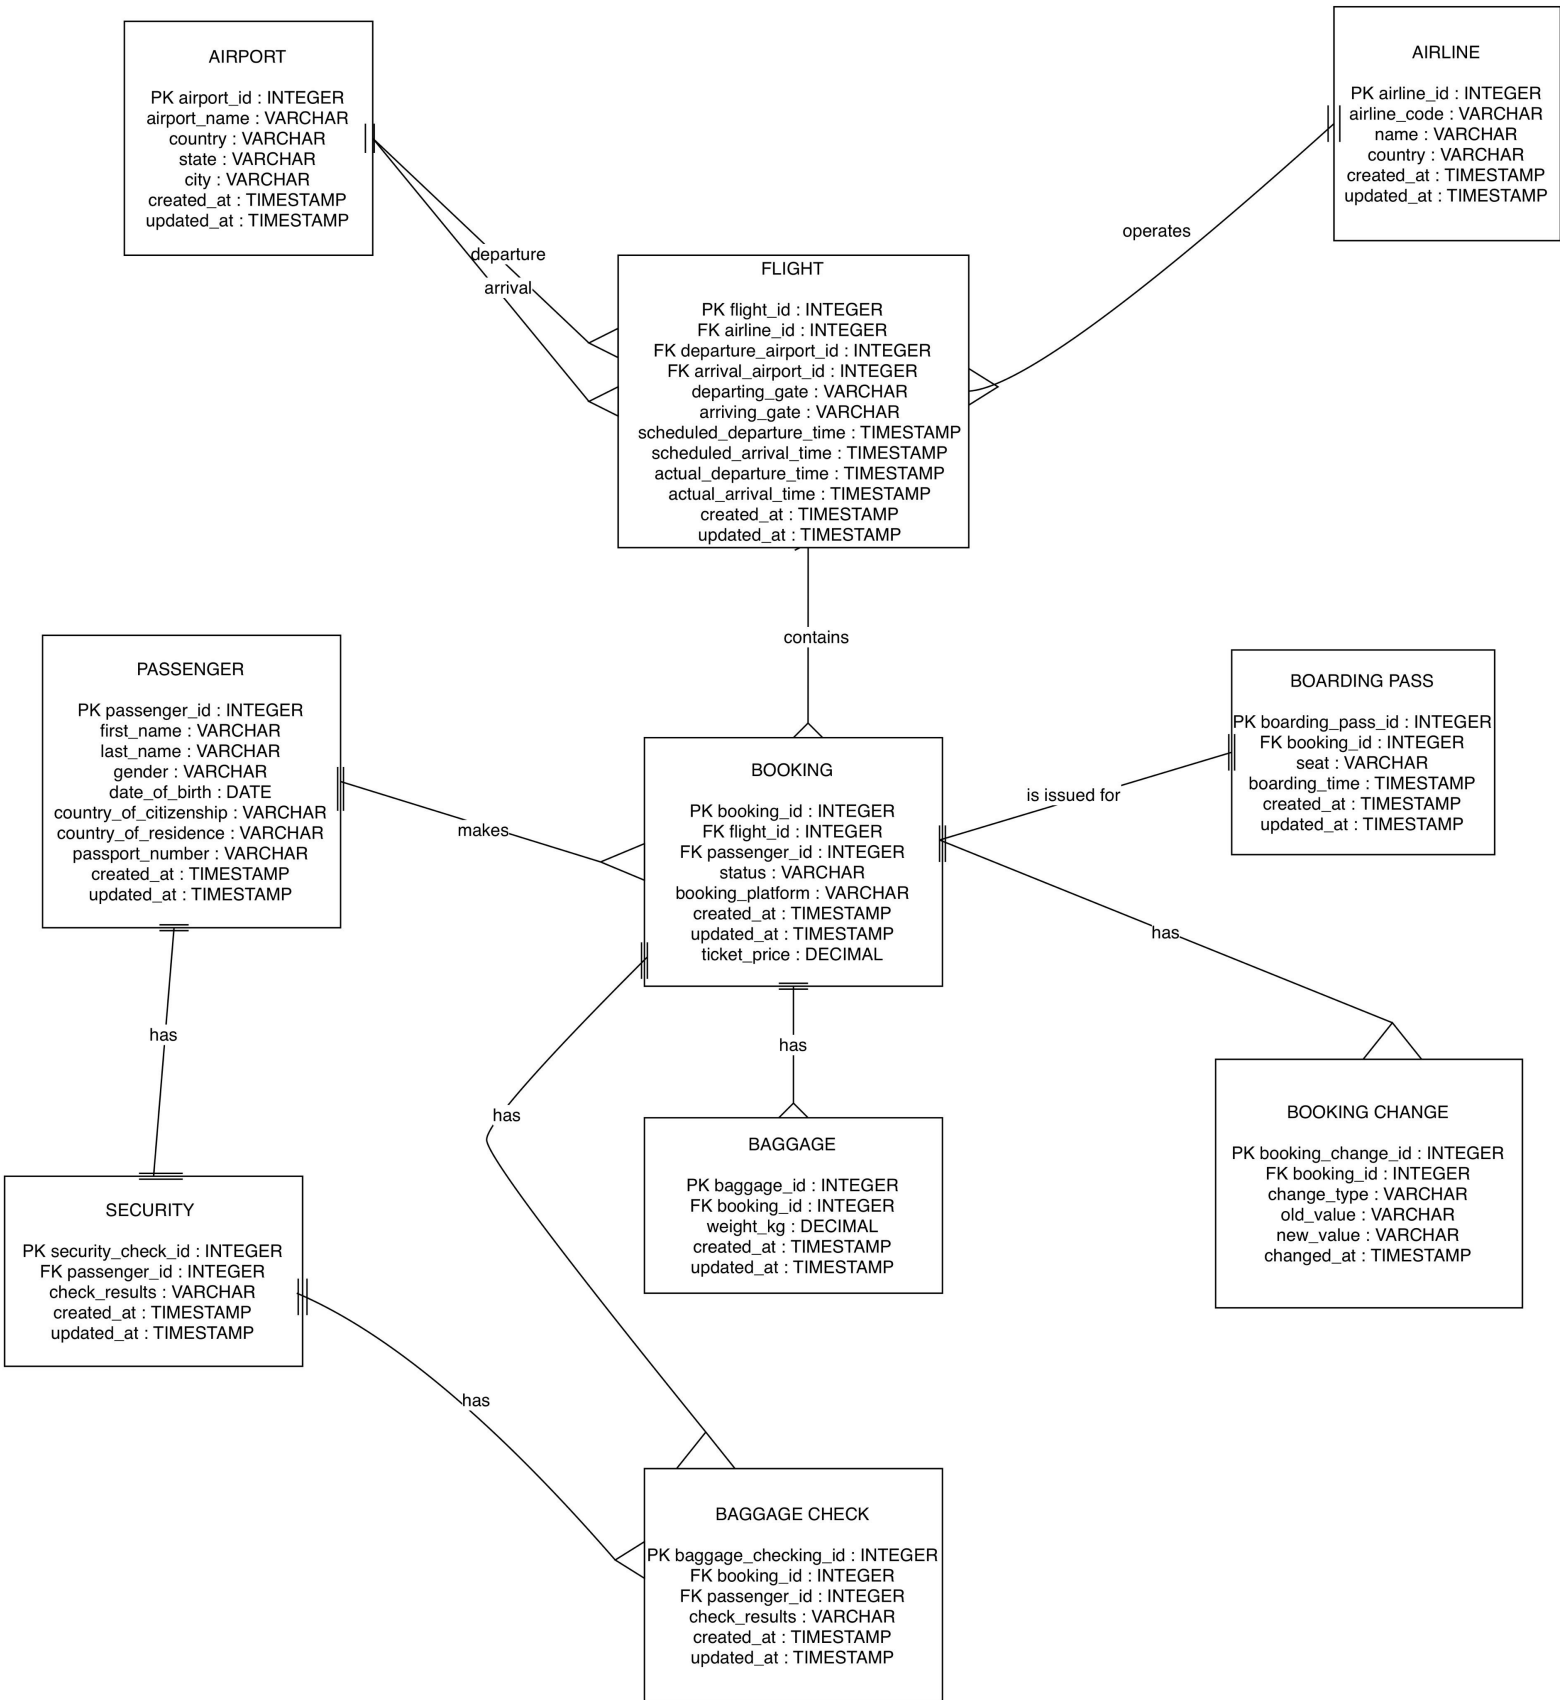

PK - Primary key - uniquely identifies each record.

FK - Foreign key - connects one entity to another.

I used Crow's Foot - represents "many"

|| - one record.

> - many record.

Varchar - Text/string data.

Integer - Whole number.

Date - Date value.

Timestamp - Date and Time.

Decimal - Number that can contain decimal values.

Entity descriptions.

AIRPORT - stores information about airports, including name, country, state, city, and creation/update times.

AIRLINE - stores information about airline companies, including airline code, name, country, and creation/update times.

FLIGHT - stores schedule and actual flight information, including, gates, times, airline, departure airport, and arrival airport.

PASSENGER - stores passenger personal and passport information.

BOOKING - stores information about a passenger's flight booking, including, status, platform, ticket price, and related flight and passengers.

BAGGAGE - store baggage information, including weight the booking it belongs to.

BOARDING PASS - stores boarding-pass information such as seat and boarding time.

BAGGAGE CHECK - stores baggage-check information and its result.

SECURITY CHECK - stores information about passenger security checks and their result.

BOOKING CHANGE - store information about changes made to a booking. The provided system description doesn't specify its individual attributes.

Relationship description.

The relationships show how entities are collected. For example:

- 1) One AIRLINE can operate many FLIGHTS.
- 2) One AIRPORT can be the departure airport for many FLIGHTS.
- 3) One AIRPORT can be the arrival airport for many FLIGHTS.
- 4) One FLIGHT can have many BOOKINGS.
- 5) One PASSENGER can make many BOOKINGS.
- 6) One BOOKING can have baggage and baggage-check information.
- 7) A PASSENGER can have security-check information.