

FRONT END ASSESSMENT – 4

NAME – Satyam

ROLL NO – 2501301126

1. Props (Properties) :

Props are used to pass data from a parent component → child component.

They are read-only inside the child.


2. Use State :

State is data that belongs to a component and can change over time. UseState lets functional components store and update state.

3. useEffect (Hook)


Used for side effects, like:

- **API calls**
- **timers**
- **logging**
- **DOM updates**

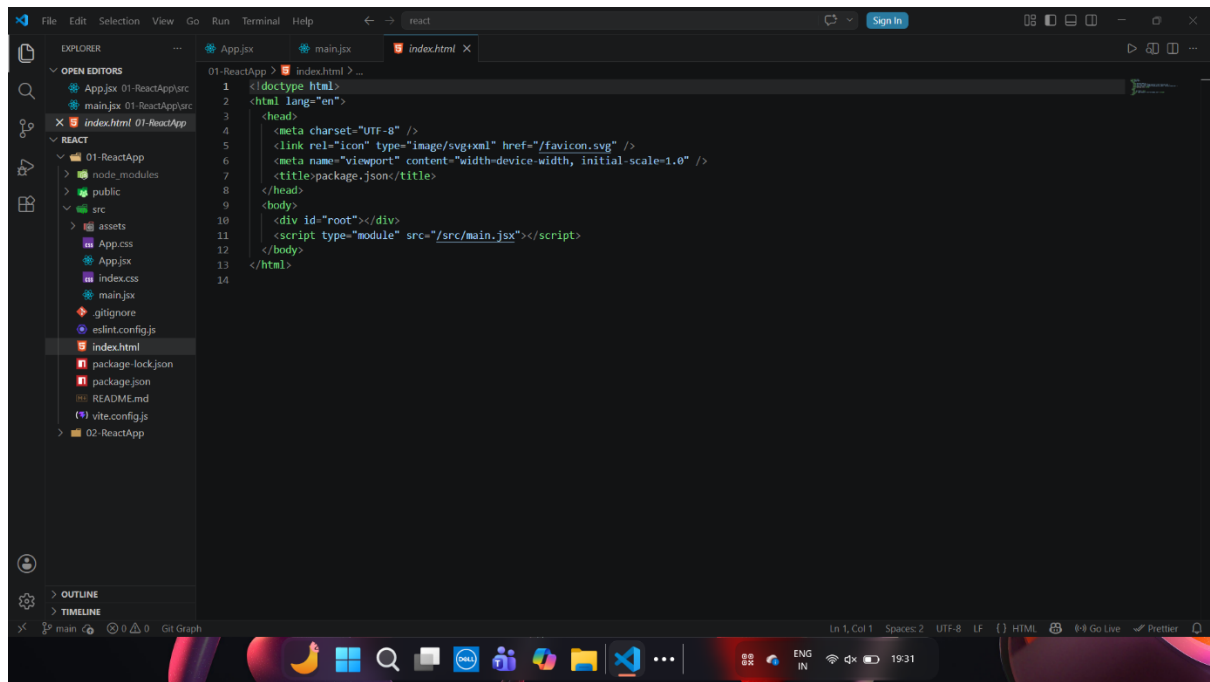

This screenshot shows the Visual Studio Code editor with a React project open. The Explorer sidebar on the left displays the file structure, including the 'src' directory with files like 'App.jsx', 'index.css', 'main.jsx', and 'index.html'. The 'index.html' file is currently selected and open in the main editor. The code in 'index.html' is a standard HTML boilerplate for a web application, featuring a doctype, language attribute, charset, a favicon link, a viewport meta tag, a title, and a script tag that loads 'main.js' from the 'src' directory. The status bar at the bottom indicates the current position is Line 1, Column 1, with 2 spaces, in UTF-8 encoding, LF line endings, and HTML format.

```
1 <!doctype html>
2 <html lang="en">
3   <head>
4     <meta charset="UTF-8" />
5     <link rel="icon" type="image/svg+xml" href="/favicon.svg" />
6     <meta name="viewport" content="width=device-width, initial-scale=1.0" />
7     <title>package.json</title>
8   </head>
9   <body>
10    <div id="root"></div>
11    <script type="module" src="/src/main.js"></script>
12  </body>
13 </html>
14
```

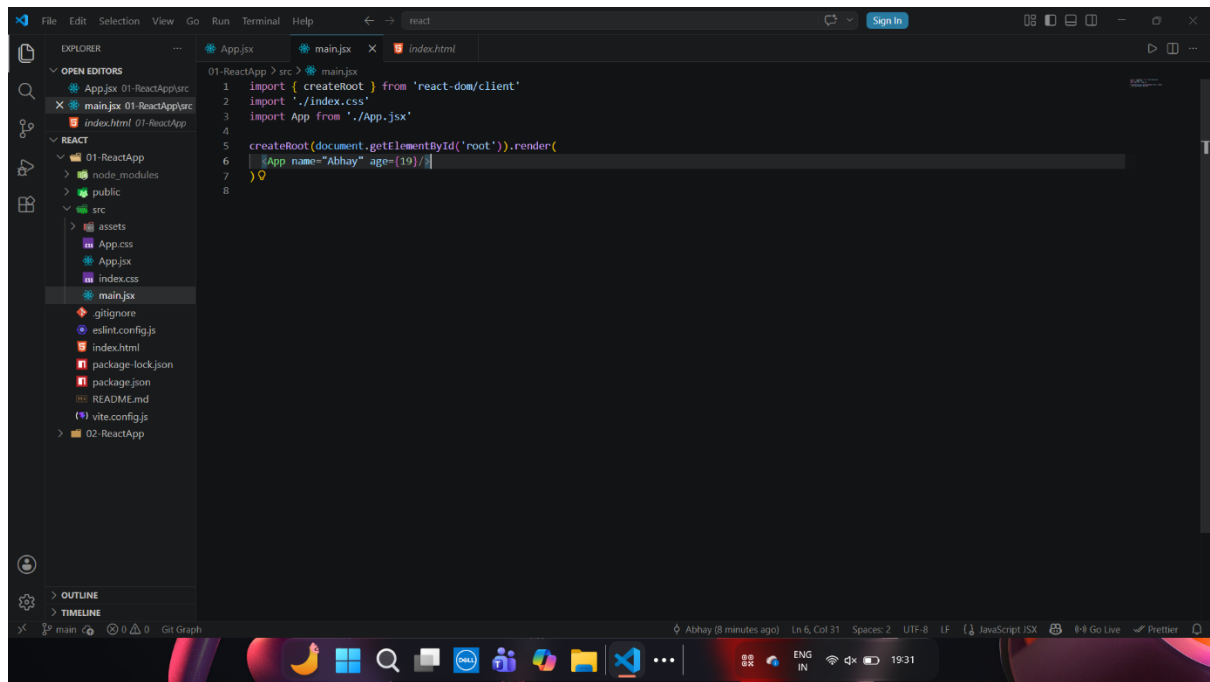

This screenshot shows the Visual Studio Code editor with the same React project, but now the 'main.jsx' file is open in the main editor. The Explorer sidebar shows 'main.jsx' selected. The code in 'main.jsx' imports 'createRoot' from 'react-dom/client', imports 'index.css' and 'App' from the local project, and then uses 'createRoot' to render the 'App' component into the root element of the document. The status bar at the bottom shows the current position is Line 6, Column 31, with 2 spaces, in UTF-8 encoding, LF line endings, and JavaScript JSX format.

```
1 import { createRoot } from 'react-dom/client'
2 import './index.css'
3 import App from './App.jsx'
4
5 createRoot(document.getElementById('root')).render(
6   <App name="Abhay" age={19}/>
7 )
8
```

