


POSTMAN STUDENT RECORDS CRUD API PROJECT

VS CODE:

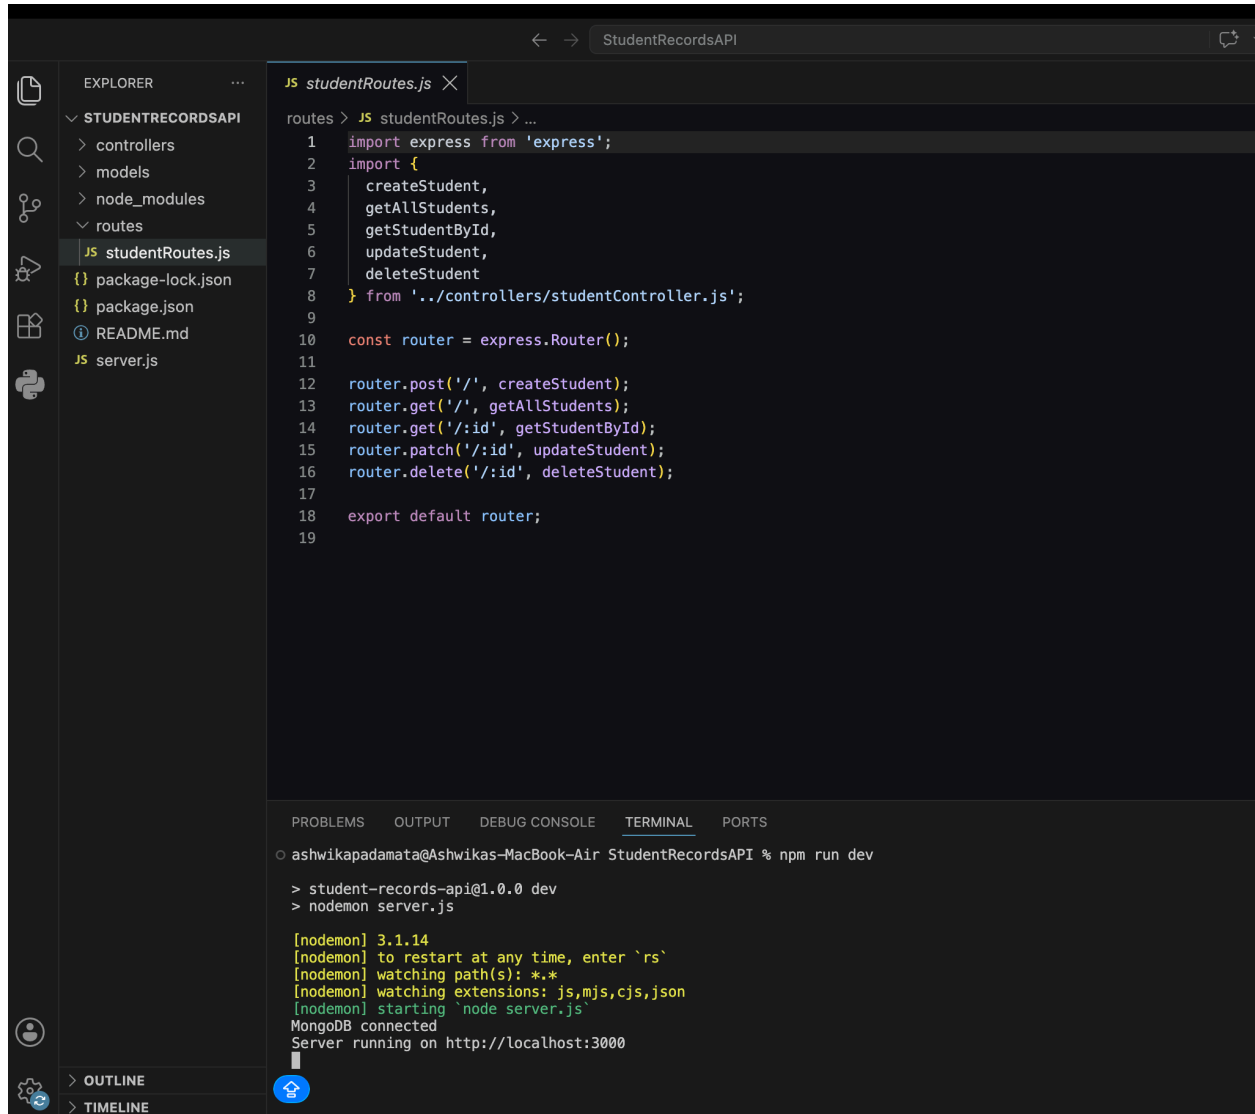

The screenshot shows the Visual Studio Code interface for a project named 'StudentRecordsAPI'. The Explorer sidebar on the left displays the project structure, including folders for 'controllers', 'models', 'node_modules', and 'routes'. The 'routes' folder is expanded, showing 'studentRoutes.js'. The main editor area displays the content of 'studentRoutes.js', which defines an Express.js router with routes for creating, getting, updating, and deleting students. The bottom panel shows the Terminal with the command 'npm run dev' and the output of the 'nodemon' process, indicating the server is running on http://localhost:3000.


```
routes > JS studentRoutes.js > ...
1  import express from 'express';
2  import {
3    createStudent,
4    getAllStudents,
5    getStudentById,
6    updateStudent,
7    deleteStudent
8  } from '../controllers/studentController.js';
9
10 const router = express.Router();
11
12 router.post('/', createStudent);
13 router.get('/', getAllStudents);
14 router.get('/:id', getStudentById);
15 router.patch('/:id', updateStudent);
16 router.delete('/:id', deleteStudent);
17
18 export default router;
19
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS


```
○ ashwikapadamata@Ashvikas-MacBook-Air StudentRecordsAPI % npm run dev
> student-records-api@1.0.0 dev
> nodemon server.js

[nodemon] 3.1.14
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,cjs,json
[nodemon] starting `node server.js`
MongoDB connected
Server running on http://localhost:3000
```

GET:

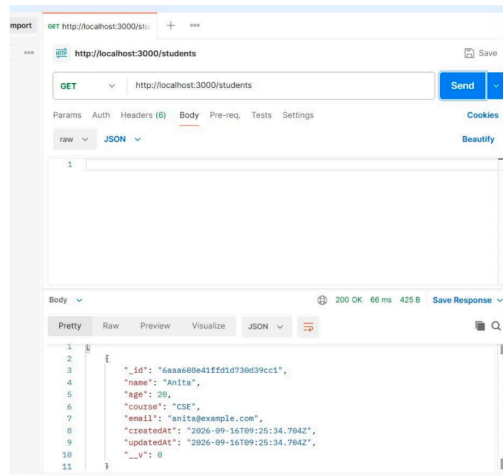

POST:

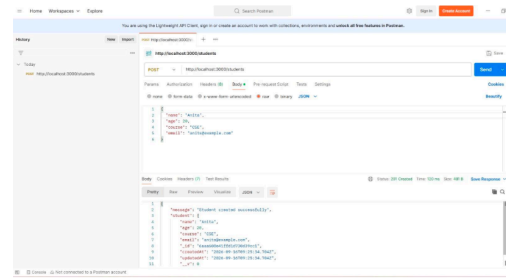

PATCH:

