


Creating a repo in github with README.md and .ignore file

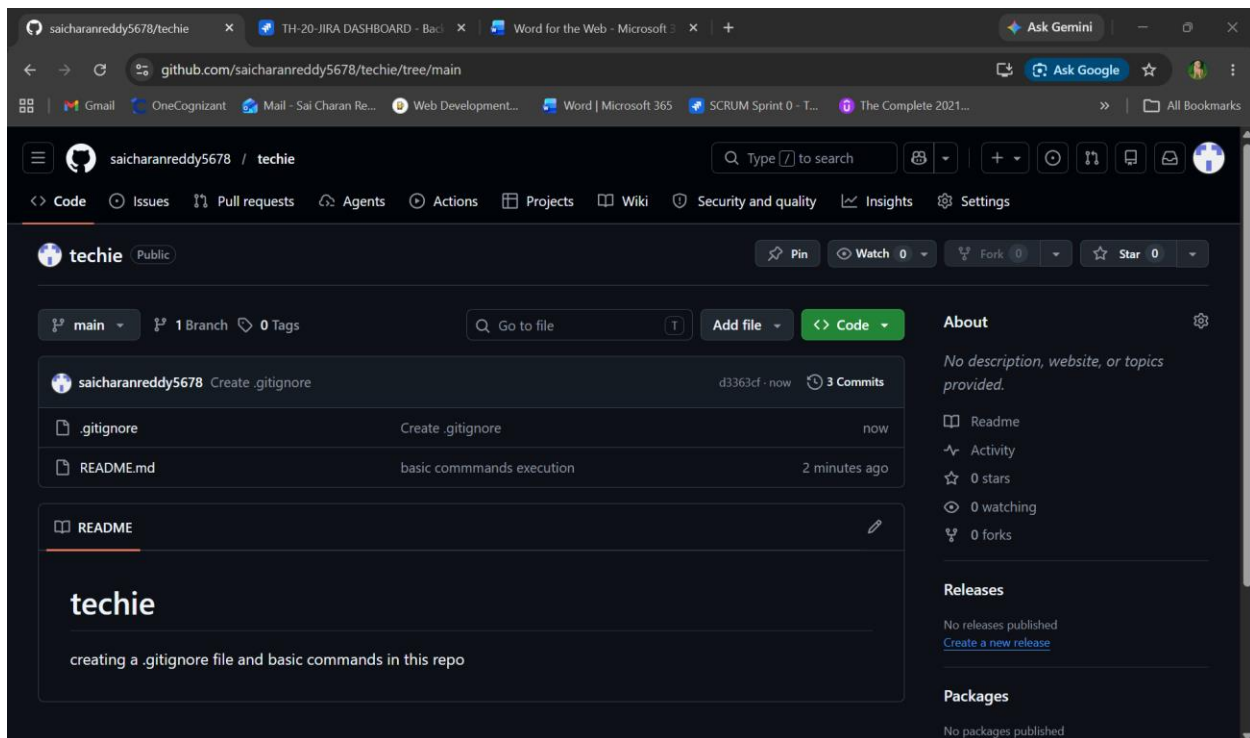

Clone the created repo to local

```
MINGW64~/Users/Rajes/Desktop/xbox/techie
Rajes@charanreddy MINGW64 ~/Desktop/xbox (master)
$ git clone git@github.com:saicharanreddy5678/techie.git
Cloning into 'techie'...
remote: Enumerating objects: 9, done.
remote: Counting objects: 100% (9/9), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 9 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (9/9), done.

Rajes@charanreddy MINGW64 ~/Desktop/xbox (master)
$ ls
techie/

Rajes@charanreddy MINGW64 ~/Desktop/xbox (master)
$ cd techie

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ ls
README.md

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$
```

Create two files in local repo

```
MINGW64/c/Users/Rajes/Desktop/xbox/techie
Rajes@charanreddy MINGW64 ~/Desktop/xbox (master)
$ git clone git@github.com:saicharanreddy5678/techie.git
Cloning into 'techie'...
remote: Enumerating objects: 9, done.
remote: Counting objects: 100% (9/9), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 9 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (9/9), done.

Rajes@charanreddy MINGW64 ~/Desktop/xbox (master)
$ ls
techie/

Rajes@charanreddy MINGW64 ~/Desktop/xbox (master)
$ cd techie

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ ls
README.md


Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ ls
README.md

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ touch file1 file2

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ ls
README.md file1 file2

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$
```

Commit two files and push to central Repository

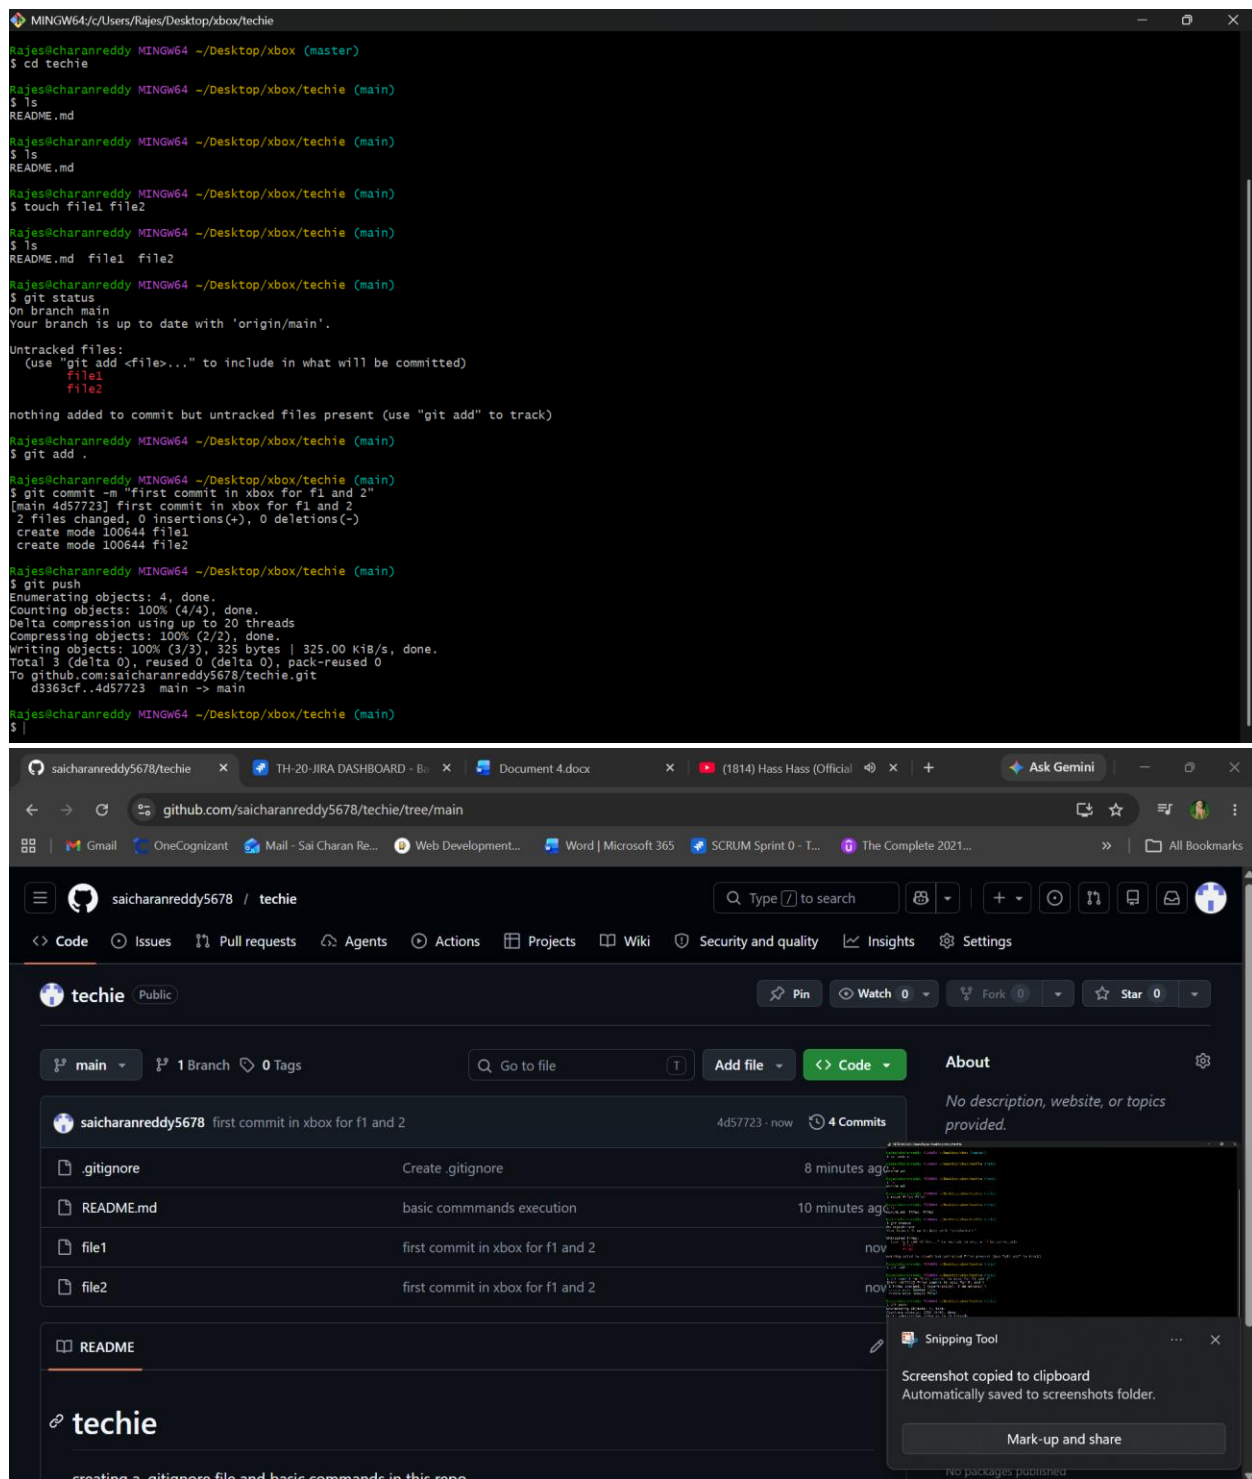

Create a branch in local and create a sample file and push to central

Created a new branch named release in local repo and pushed to github

Git push -u origin release

```
MINGW64/c/Users/Rajes/Desktop/xbox/techie
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ git add .
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ git commit -m "new branch has been created"
[On branch main
Your branch is up to date with 'origin/main'.


nothing to commit, working tree clean
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ git checkout release
Switched to branch 'release'
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ ls
README.md file1 file2
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ touch sample1
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ ls
README.md file1 file2 sample1
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git push
fatal: The current branch release has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin release

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetUpRemote' in 'git help config'.

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git push -u origin main
Everything up-to-date
branch 'main' set up to track 'origin/main'.

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git push -u origin release
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'release' on GitHub by visiting:
remote:   https://github.com/saicharanreddy5678/techie/pull/new/release
remotes:
To github.com:saicharanreddy5678/techie.git
 * [new branch]      release -> release
branch 'release' set up to track 'origin/release'.
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$
```

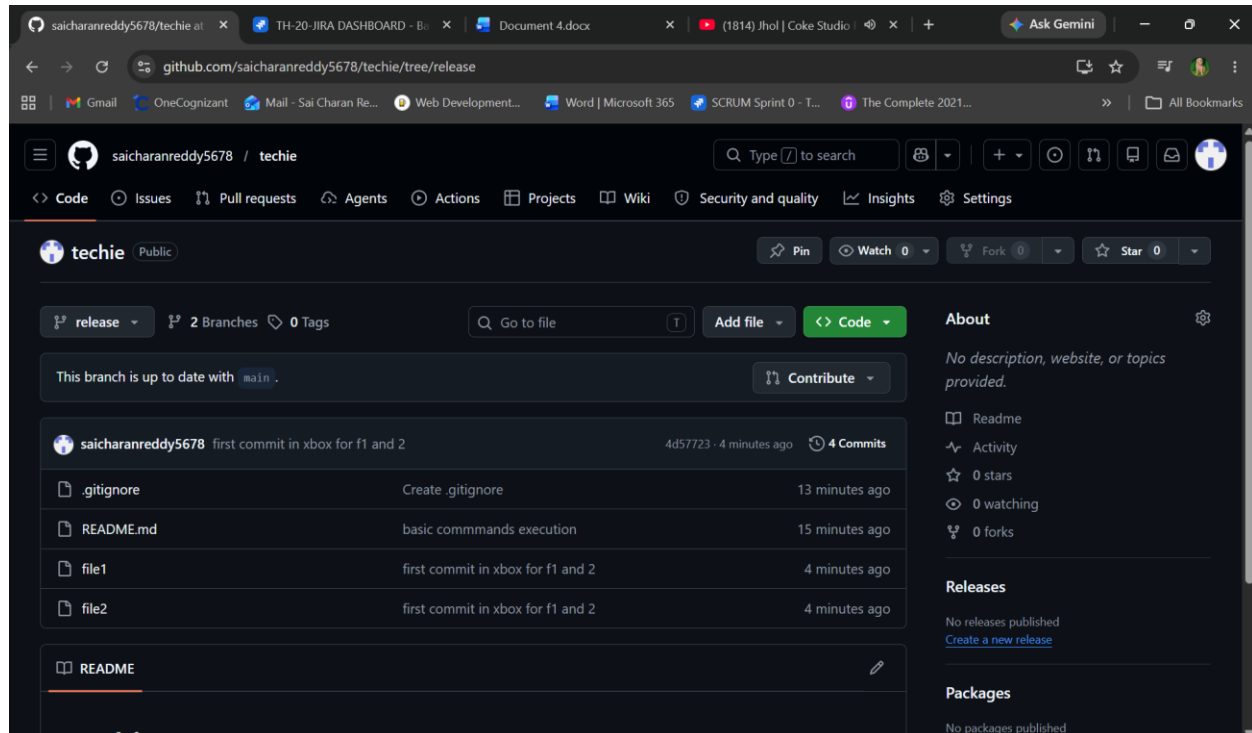

Create a branch in github and clone that to local

Created new branch in git hub named slave and cloned all files from github to local repo using syntax

Git fetch origin or git clone -b branchname url

```
MINGW64/c/Users/Rajes/Desktop/xbox/techie
Receiving objects: 100% (16/16), 4.69 KiB | 1.56 MiB/s, done.
remote: Compressing objects: 100% (10/10), done.
remote: Total 16 (delta 2), reused 2 (delta 0), pack-reused 0 (from 0)
Resolving deltas: 100% (2/2), done.

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release2)
$ ls
README.md  file1  file2  sample1  techie/

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release2)
$ git checkout slave
error: pathspec 'slave' did not match any file(s) known to git

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release2)
$ git checkout -b slave
Switched to a new branch 'slave'

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ ls
README.md  file1  file2  sample1  techie/

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ cd ..

Rajes@charanreddy MINGW64 ~/Desktop/xbox (master)
$ ls
techie/

Rajes@charanreddy MINGW64 ~/Desktop/xbox (master)
$ git checkout slave
git: 'checkout' is not a git command. See 'git --help'.

The most similar command is
  checkout

Rajes@charanreddy MINGW64 ~/Desktop/xbox (master)
$ git checkout slave
error: pathspec 'slave' did not match any file(s) known to git

Rajes@charanreddy MINGW64 ~/Desktop/xbox (master)
$ git checkout -b slave
Switched to a new branch 'slave'

Rajes@charanreddy MINGW64 ~/Desktop/xbox (slave)
$ ls
techie/

Rajes@charanreddy MINGW64 ~/Desktop/xbox (slave)
$ cd techie

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ ls
README.md  file1  file2  sample1  techie/
```

Merge the created branch with master in git local

```
MINGW64/c/Users/Rajes/Desktop/xbox/techie
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ ls
README.md file1 file2 sample1
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ touch filez
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git add .
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git status
On branch release
Your branch is up to date with 'origin/release'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   filez
        new file:   sample1

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git commit -m "new file created in release"
[release f1429a3] new file created in release
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 filez
 create mode 100644 sample1

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ ls
README.md file1 file2
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ git merge release
Updating 4d57723..f1429a3
Fast-forward
 filez | 0
 sample1 | 0
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 filez
 create mode 100644 sample1

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ ls
README.md file1 file2 filez sample1
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$
```

```
MINGW64/c/Users/Rajes/Desktop/xbox/techie
first commit in xbox for f1 and 2

commit d3363cfff37b202a4826fdb2d36bd7346de25ea
Author: saicharanreddy5678 <saicharanreddy5678@outlook.com>
Date: Tue May 19 14:20:33 2026 +0530

    Create .gitignore

commit 785bd54475e5408385de19eadbd9148021dea732
Author: saicharanreddy5678 <saicharanreddy5678@outlook.com>
Date: Tue May 19 14:18:27 2026 +0530

    basic commands execution

    Add description for the techie project in README

commit 67f8e8f16e2d9185be0e9bd190c753e0f012a0da
Author: saicharanreddy5678 <saicharanreddy5678@outlook.com>
Date: Tue May 19 14:17:41 2026 +0530



    Initial commit

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ ls
README.md file1 file2 filez sample1 textfile.txt
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ git checkout release
Switched to branch 'release'
Your branch is ahead of 'origin/release' by 1 commit.
(Use "git push" to publish your local commits)

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ ls
README.md file1 file2 filez sample1
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ ls
README.md file1 file2 filez sample1
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git merge main
Updating f1429a3..c0ea463
Fast-forward
 textfile.txt | 0
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 textfile.txt

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ ls
README.md file1 file2 filez sample1 textfile.txt
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$
```

Merge the created branch with master in github by sending a pull request\

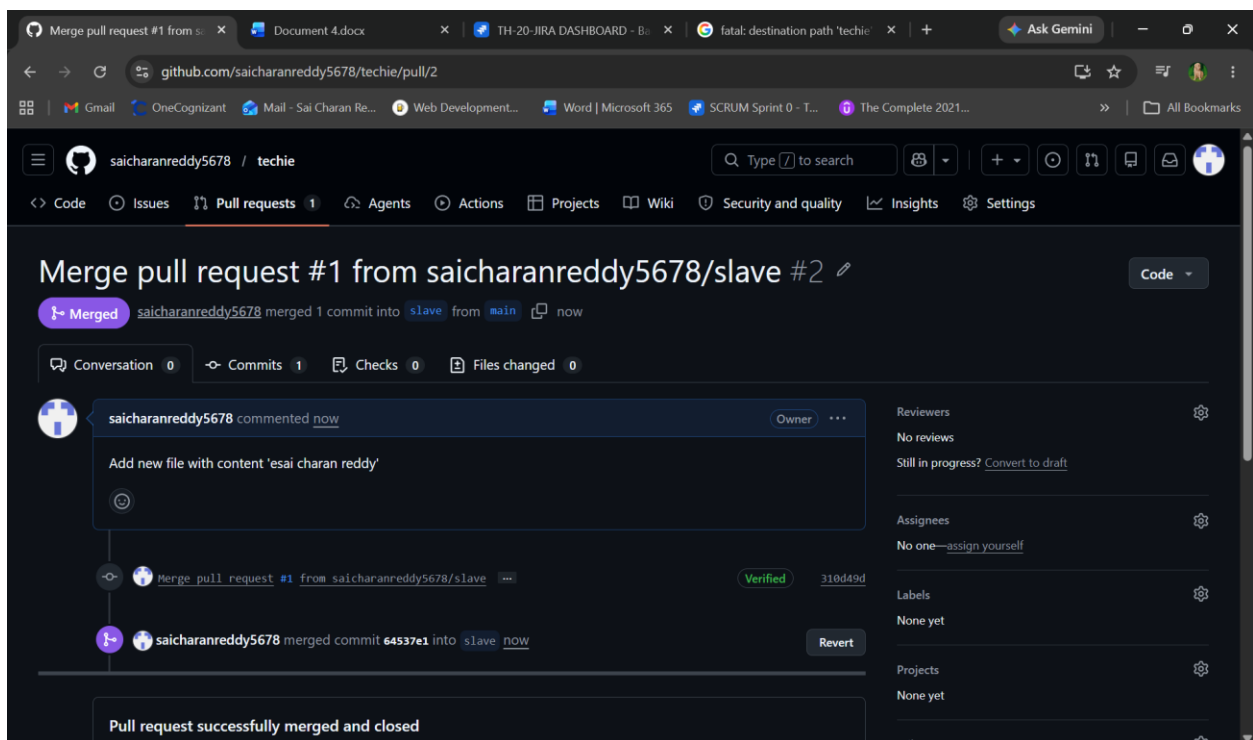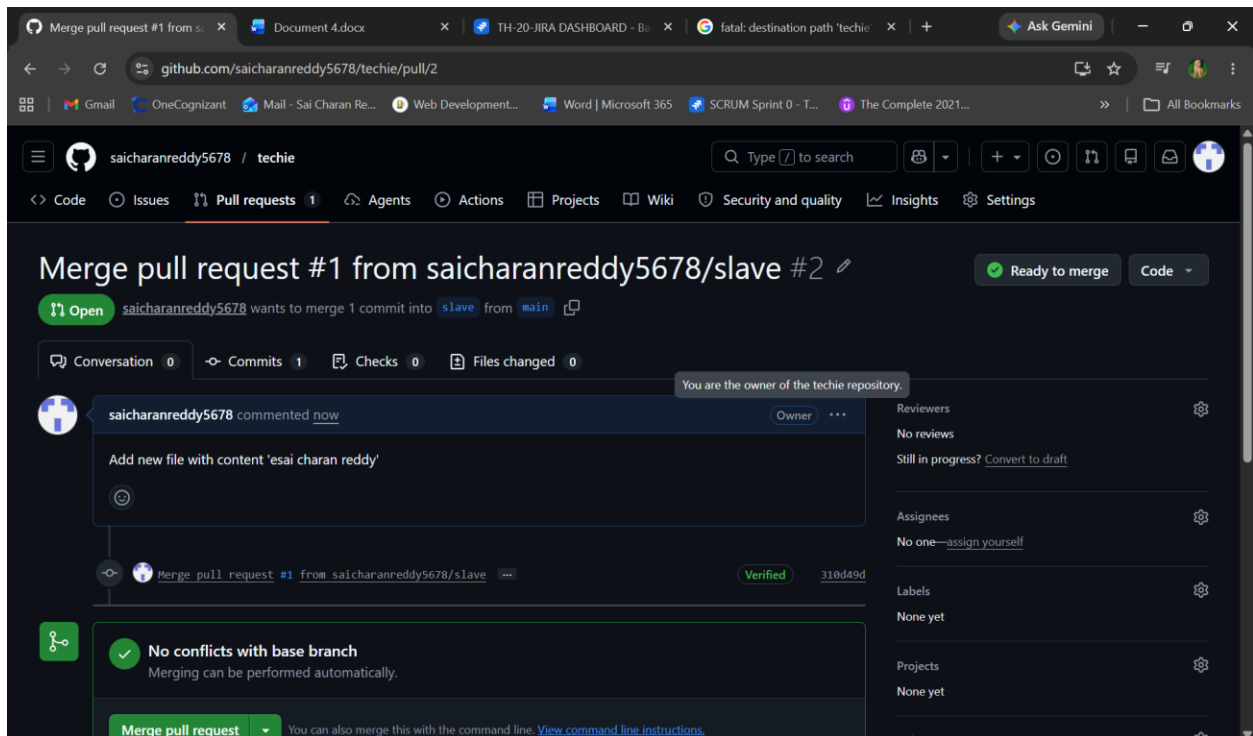

Create a file in local and send that to branch in github

```
MINGW64/C:/Users/Rajes/Desktop/xbox/techie
4d57723 (origin/release2, 1st) HEAD@{21}: checkout: moving from release2 to slave
4d57723 (origin/release2, 1st) HEAD@{22}: checkout: moving from main to release2
4d57723 (origin/release2, 1st) HEAD@{23}: checkout: moving from release to main
4d57723 (origin/release2, 1st) HEAD@{24}: checkout: moving from main to release
4d57723 (origin/release2, 1st) HEAD@{25}: commit: first commit in xbox for f1 and 2
d3363cf HEAD@{26}: clone: from github.com:saicharanreddy5678/techie.git

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git branch
* release
  main
  slave

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ touch file21.txt

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git add .

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git commit -m "new file file23 has been added in release branch and pushing to slave"
[release e715158] new file file23 has been added in release branch and pushing to slave
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 file21.txt

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git push -u origin slave
Everything up-to-date
branch 'slave' set up to track 'origin/slave'.

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ git push -u origin release
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 20 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 275 bytes | 275.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To github.com:saicharanreddy5678/techie.git
 c0e4d63..e715158 release -> release
branch 'release' set up to track 'origin/release'.

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ ls
README.md  file1  file2  file21.txt  filez  'new file in slave'  sample1  textfile.txt

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$ ls
README.md  file1  file2  file21.txt  filez  'new file in slave'  sample1  textfile.txt

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (release)
$
```

saicharanreddy5678/techie at · Document 4.docx · TH-20 JIRA DASHBOARD - B... · fatal: destination path 'techie' x... · Ask Gemini

github.com/saicharanreddy5678/techie/tree/release

release 4 Branches 0 tags

This branch is 1 commit behind main.

saicharanreddy5678 new file file23 has been added in release branch and pushing to slave e715158 · 6 minutes ago 10 Commits

.gitignore	Create .gitignore	1 hour ago
README.md	basic commmands execution	1 hour ago
file1	first commit in xbox for f1 and 2	53 minutes ago
file2	first commit in xbox for f1 and 2	53 minutes ago
file21.txt	new file file23 has been added in release branch and pushin...	6 minutes ago
filez	new file created in release	25 minutes ago
new file in slave	Add new file with content 'esai charan reddy'	35 minutes ago
sample1	new file created in release	25 minutes ago
textfile.txt	new commit for textfile added in main branch	20 minutes ago

README

About

No description, website, or topics provided.

Readme

Activity

0 stars

0 watching

0 forks

Releases

No releases published

Create a new release

Packages

No packages published

Publish your first package

Contributors 1

saicharanreddy5678

Clone only a branch from github to local


```
MINGW64/c/Users/Rajes/Desktop/xbox/techie
--negotiation-tip <revision>
    report that we have only objects reachable from this object
--show-forced-updates
    check for forced-updates on all updated branches
--set-upstream
    set upstream for git pull/fetch

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git pull origin slave

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie
$ git pull origin slave
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 961 bytes | 106.00 KiB/s, done.
From github.com:saicharanreddy5678/techie
* branch      slave      -> FETCH_HEAD
64537e1..c4bb7c4 slave    -> origin/slave
Updating 64537e1..c4bb7c4
Fast-forward
 filecreatedinhub | 1 +
 1 file changed, 1 insertion(+)
 create mode 100644 filecreatedinhub

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ ls
README.md  file1  file2  filecreatedinhub  'new file in slave'


Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ ls
README.md  file1  file2  filez  'new file in slave'  sample1  textfile.txt

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ git pull origin slave
From github.com:saicharanreddy5678/techie
* branch      slave      -> FETCH_HEAD
Merge made by the 'ort' strategy.
 filecreatedinhub | 1 +
 1 file changed, 1 insertion(+)
 create mode 100644 filecreatedinhub


Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
$ ls
README.md  file1  file2  filecreatedinhub  filez  'new file in slave'  sample1  textfile.txt

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (main)
```

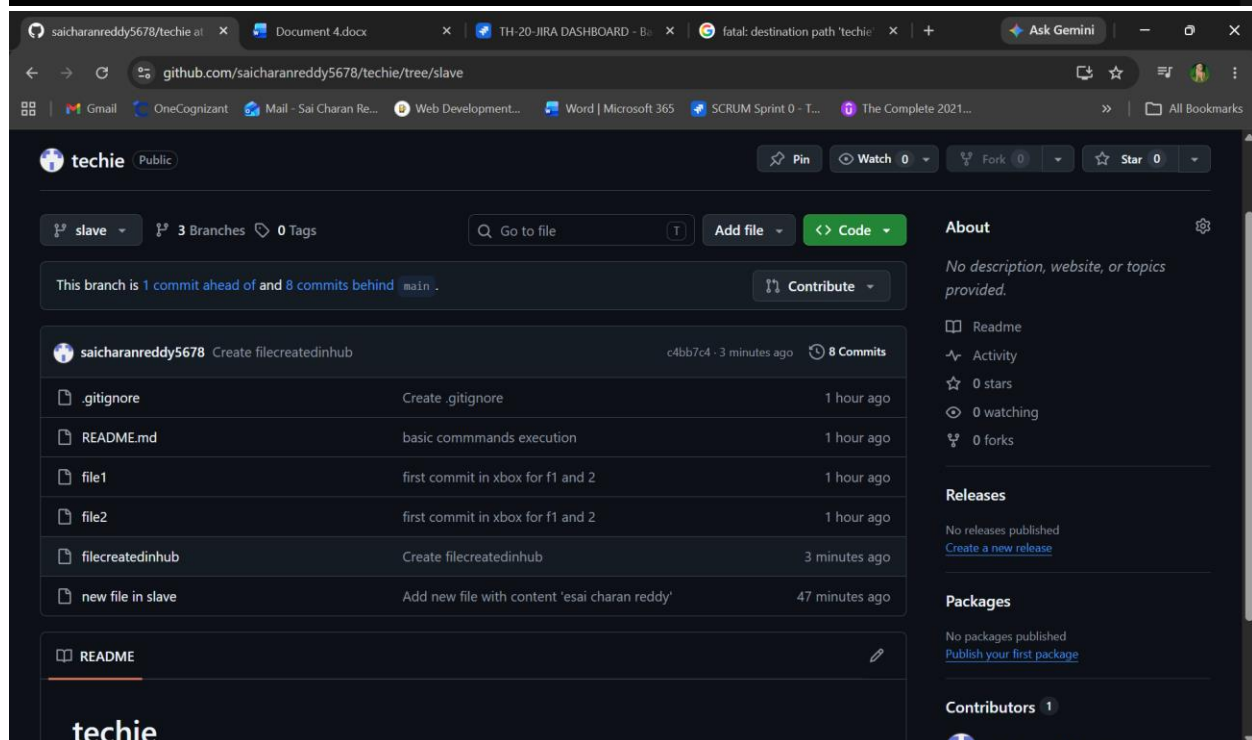

Create a file with all passwords and make that untrackable with git

I have created a new file named passwords which contains all my passwords and without being tracked i added the filename in .gitignore file subject and committed by this my passwords wont be committed and pushed to remote repo

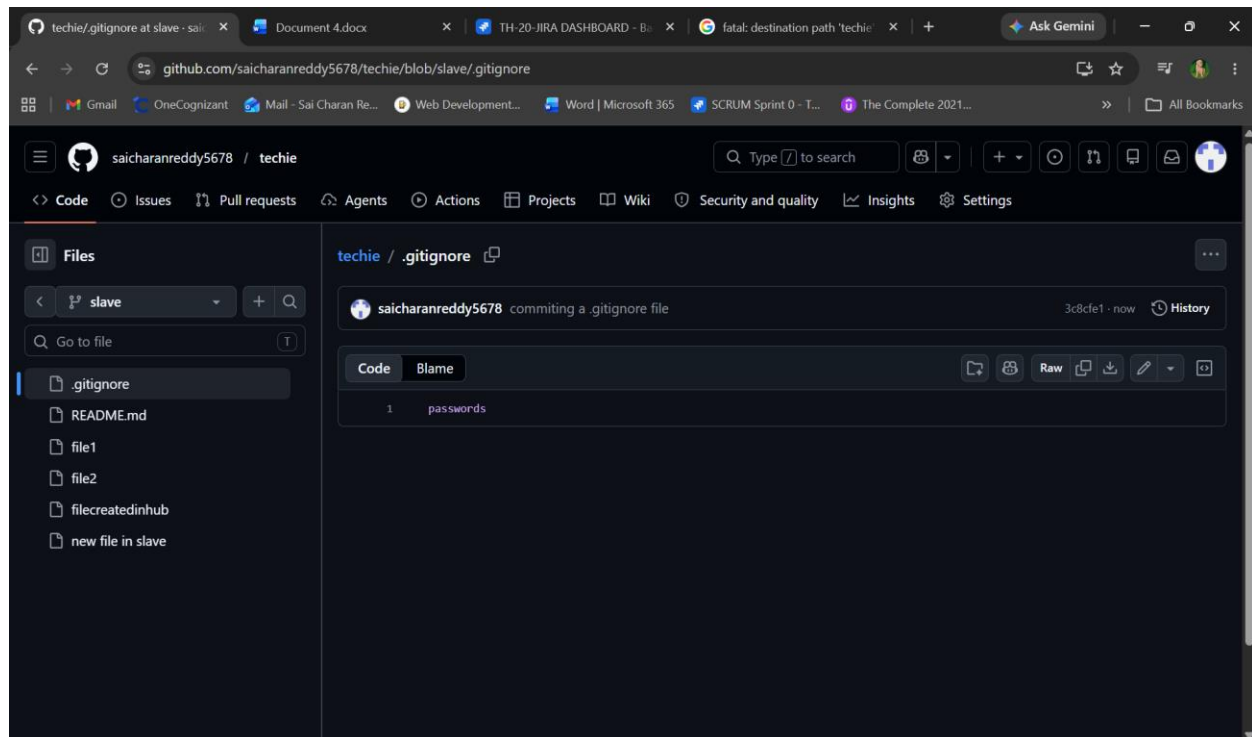

```
MINGW64/c:/Users/Rajes/Desktop/xbox/techie
new file: passwords

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git reset
$ git status
On branch slave
Your branch is up to date with 'origin/slave'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  passwords

nothing added to commit but untracked files present (use "git add" to track)
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ vi .gitignore
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git status
On branch slave
Your branch is up to date with 'origin/slave'.

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   .gitignore

no changes added to commit (use "git add" and/or "git commit -a")
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git add .
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git commit -m "committing a .gitignore file"
[slave 3c8cfe1] committing a .gitignore file
1 file changed, 1 insertion(+)
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git push
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 20 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 294 bytes | 294.00 KiB/s, done.
Total 3 (delta 2), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To github.com:saicharanreddy5678/techie.git
 c4bb7c4..3c8cfe1 slave -> slave
Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$
```

Make a commit and make that commit reset without savings changes.

```
MINGW64/c/Users/Rajes/Desktop/xbox/techie
Your branch is ahead of 'origin/slave' by 3 commits.
(use "git push" to publish your local commits)

nothing to commit, working tree clean

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ ls
README.md  file1  file2  filecreatedinhub 'new file in slave'  passwords  textfile1.txt

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git reset

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git status
On branch slave
Your branch is ahead of 'origin/slave' by 3 commits.
(use "git push" to publish your local commits)

nothing to commit, working tree clean

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git reset 66ea2b
Unstaged changes after reset:
M   file2

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git status
On branch slave
Your branch is behind 'origin/slave' by 1 commit, and can be fast-forwarded.
(use "git pull" to update your local branch)

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file2

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        textfile1.txt

no changes added to commit (use "git add" and/or "git commit -a")

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ ls
README.md  file1  file2  filecreatedinhub 'new file in slave'  passwords  textfile1.txt

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ cat file2

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ cat textfile1.txt

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$
```

Push a file to stash without saving the changes and work on another file

First storing the untracked files to stash using

“Git stash”

And with “git stash list “ we can see stash list

“Git stash pop stash{id}” we can recover files from stash list after the commits has been done for remaining files and this files in stash will be untracked

```
MINGW64/c/Users/Rajes/Desktop/xbox/techie
on branch slave
Your branch is up to date with 'origin/slave'.

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file1
        modified:   file2

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        1

no changes added to commit (use "git add" and/or "git commit -a")

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git stash file1
fatal: unknown subcommand: file1

usage: git stash list [<options>]
      or: git stash show [<options>] [<stash>]
      or: git stash drop [-q|--quiet] [<stash>]
      or: git stash ( pop | apply ) [--index] [--quiet] [<stash>]
      or: git stash branch <branchname> [<stash>]
      or: git stash clear
      or: git stash [push [-p|--patch] [-S|--staged] [-k|--[no-]keep-index] [-q|--quiet]
        [-u|--include-untracked] [-a|--all] [-m|--message <message>]
        [--pathspec-from-file=<file> [--pathspec-file-null]
        [--] [<pathspec>...]]
      or: git stash save [-p|--patch] [-S|--staged] [-k|--[no-]keep-index] [-q|--quiet]
        [-u|--include-untracked] [-a|--all] [<message>]

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git stash
warning: in the working copy of 'file1', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'file2', LF will be replaced by CRLF the next time Git touches it
Saved working directory and index state WIP on slave: b79a129 Merge branch 'slave' of github.com:saicharanreddy5678/techie into slave

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git status
On branch slave
Your branch is up to date with 'origin/slave'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        1

nothing added to commit but untracked files present (use "git add" to track)

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ ls
1  README.md  file1  file2  filecreatedinhub  'new file in slave'  passwords  textfile1.txt
```

Undo the stash file and start working on that again

```
MINGW64/c/Users/Rajes/Desktop/xbox/techie

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git add .
warning: in the working copy of '1', LF will be replaced by CRLF the next time Git touches it

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git commit -m "commit"
[slave 2bdf413] commit
1 file changed, 2 insertions(+)
create mode 100644 1

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git status
On branch slave
Your branch is ahead of 'origin/slave' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git stash list
stash@{0}: WIP on slave: b79a129 Merge branch 'slave' of github.com:saicharanreddy5678/techie into slave

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git stash pop stash@{0}
On branch slave
Your branch is ahead of 'origin/slave' by 1 commit.
  (use "git push" to publish your local commits)

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file1
        modified:   file2

no changes added to commit (use "git add" and/or "git commit -a")
Dropped stash@{0} (c699f497dad968a2364f2ccd68b1440106850f11)

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git status
On branch slave
Your branch is ahead of 'origin/slave' by 1 commit.
  (use "git push" to publish your local commits)

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file1
        modified:   file2

no changes added to commit (use "git add" and/or "git commit -a")

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ |
```

Revert a committed commit to the older version

```
MINGW64/c/Users/Rajes/Desktop/xbox/techie
Your branch is up to date with 'origin/slave'.

nothing to commit, working tree clean

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ ls
README.md  file1  file2  filecreatedinhub  'new file in slave'  passwords

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ vi file2

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git status
On branch slave
Your branch is up to date with 'origin/slave'.

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file2

no changes added to commit (use "git add" and/or "git commit -a")

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git add .
warning: in the working copy of 'file2', LF will be replaced by CRLF the next time Git touches it

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git commit -m "edited the file2 in slave"
[slave 66ea2b1] edited the file2 in slave
1 file changed, 6 insertions(+)

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git status
On branch slave
Your branch is ahead of 'origin/slave' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git log
commit 66ea2b1e6c5cb2cf973d5dda76394a6581106751 (HEAD -> slave)
Author: xbox <saicharanreddy5678@outlook.com>
Date:   Tue May 19 15:43:33 2026 +0530

    edited the file2 in slave

commit 3c8cfe13427a5ec2c4b999186189b9d721647b23 (origin/slave)
Author: xbox <saicharanreddy5678@outlook.com>
Date:   Tue May 19 15:39:35 2026 +0530

    committing a .gitignore file
```

```
MINGW64/c/Users/Rajes/Desktop/xbox/techie

[slave 9e885ed] Revert "edited the file2 in slave"
1 file changed, 6 deletions(-)

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ ls
README.md  file1  file2  filecreatedinhub  'new file in slave'  passwords

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git status
On branch slave
Your branch is ahead of 'origin/slave' by 2 commits.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git touch file2
git: 'touch' is not a git command. See 'git --help'.

The most similar command is
    notes

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git touch file2
git: 'touch' is not a git command. See 'git --help'.

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ cat file2

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ vi file2

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git log -2
commit 9e885ed836030ee0d2bb9374fa3b84604dffff5ca (HEAD -> slave)
Author: xbox <saicharanreddy5678@outlook.com>
Date:   Tue May 19 15:44:27 2026 +0530

    Revert "edited the file2 in slave"

    This reverts commit 66ea2b1e6c5cb2cf973d5dda76394a6581106751.

commit 66ea2b1e6c5cb2cf973d5dda76394a6581106751
Author: xbox <saicharanreddy5678@outlook.com>
Date:   Tue May 19 15:43:33 2026 +0530

    edited the file2 in slave

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$
```

Check all the logs of git

```
mingw64 ~/Desktop/xbox/techie
modified: file2

no changes added to commit (use "git add" and/or "git commit -a")

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git log
commit 2bdf41393339acf3e16632cb72e6cb9ef620c653 (HEAD -> slave)
Author: xbox <saicharanreddy5678@outlook.com>
Date: Tue May 19 16:02:31 2026 +0530

    commit

commit b79a129b3b511de19015e0382ddd986e6f031b28 (origin/slave)
Merge: 086b76e 9e885ed
Author: xbox <saicharanreddy5678@outlook.com>
Date: Tue May 19 15:57:26 2026 +0530

    Merge branch 'slave' of github.com:saicharanreddy5678/techie into slave

commit 086b76e5cddf6f8122c20a3fddc302369fe21be7
Author: xbox <saicharanreddy5678@outlook.com>
Date: Tue May 19 15:55:23 2026 +0530

    new

commit 9e885ed836030ee0d2bb9374fa3b84604dfff5ca
Author: xbox <saicharanreddy5678@outlook.com>
Date: Tue May 19 15:44:27 2026 +0530

    Revert "edited the file2 in slave"

    This reverts commit 66ea2b1e6c5cb2cf973d5dda76394a6581106751.

commit 66ea2b1e6c5cb2cf973d5dda76394a6581106751
Author: xbox <saicharanreddy5678@outlook.com>
Date: Tue May 19 15:43:33 2026 +0530

    edited the file2 in slave

commit 3c8cfe13427a5ec2c4b999186189b9d721647b23
Author: xbox <saicharanreddy5678@outlook.com>
Date: Tue May 19 15:39:35 2026 +0530

    committing a .gitignore file

commit c4bb7c464e817f5a4b55a4addc952232ddc44717
Author: saicharanreddy5678 <saicharanreddy5678@outlook.com>
Date: Tue May 19 15:31:54 2026 +0530

    Create filecreatedinhub

commit 64537e18a0350e4cdee7ae2fc7ed39333b2a1eb1
Merge: 0ded426 310d49d
Author: saicharanreddy5678 <saicharanreddy5678@outlook.com>
```

Rename the commit message

I have changed the commit message using command

“Git commit - - amend”

it will change the last commit message

```
mingw64 ~/Desktop/xbox/techie

[slave 674b4ee] commit message has been updated using
Date: Tue May 19 16:02:31 2026 +0530
1 file changed, 2 insertions(+)
create mode 100644 1

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git log -2
commit 674b4ee726675c20c2e9637199c389dd89a027 (HEAD -> slave)
Author: xbox <saicharanreddy5678@outlook.com>
Date: Tue May 19 16:02:31 2026 +0530

    commit message has been updated using

commit b79a129b3b511de19015e0382ddd986e6f031b28 (origin/slave)
Merge: 086b76e 9e885ed
Author: xbox <saicharanreddy5678@outlook.com>
Date: Tue May 19 15:57:26 2026 +0530

    Merge branch 'slave' of github.com:saicharanreddy5678/techie into slave

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$
```


Generate a ssh-keygen and configure into github

i have added ssh key in local destination using 'ssh-keygen'

And pasting the key in ssh authentication in github just copying the code

And using command

Git remote add origin ssh url

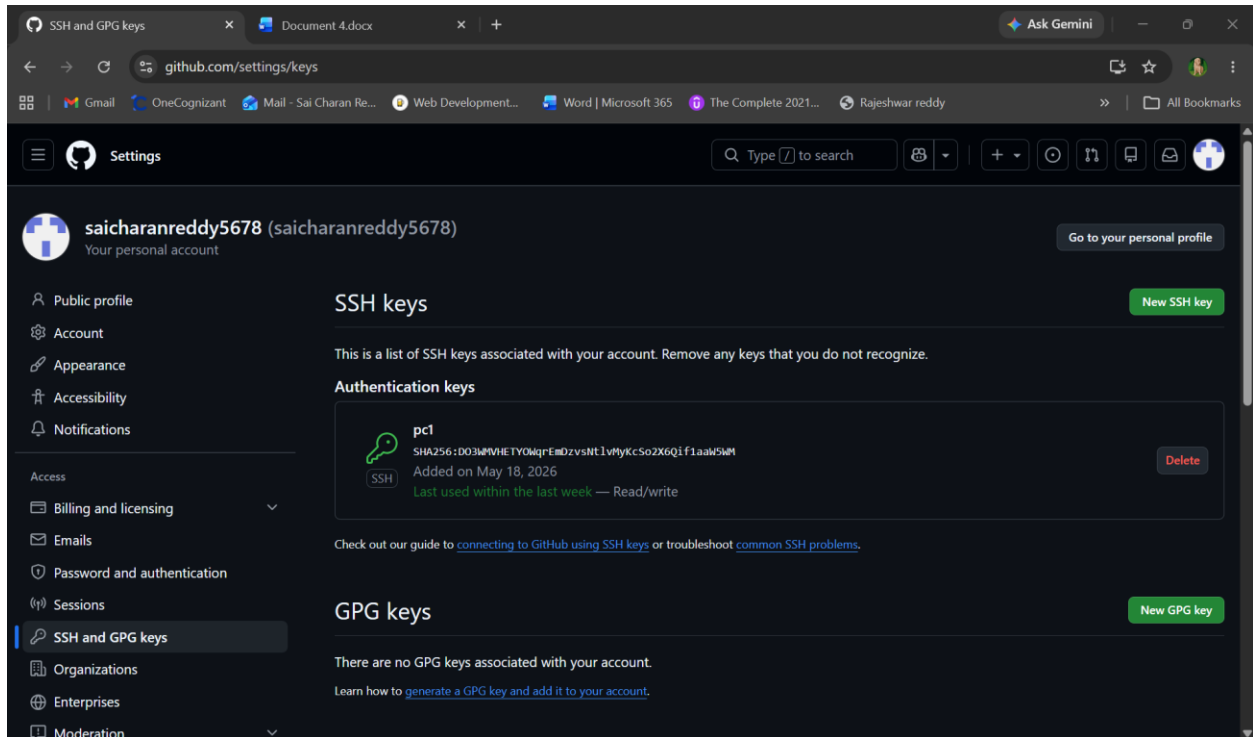

Merge multiple commits into single commit

```
MINGW64/c:/Users/Rajes/Desktop/xbox/techie
[detached HEAD 1528843] committing a .gitignore file
Date: Tue May 19 15:39:35 2026 +0530
3 files changed, 3 insertions(+)
create mode 100644 1
create mode 100644 textfile1.txt
Successfully rebased and updated refs/heads/slave.

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$ git log -4
commit 1528843bab2a243b2a7c85e571b778f0f2b19f44 (HEAD -> slave)
Author: xbox <saicharanreddy5678@outlook.com>
Date: Tue May 19 15:39:35 2026 +0530

    committing a .gitignore file

    edited the file2 in slave

    new

    Revert "edited the file2 in slave"

    This reverts commit 66ea2b1e6c5cb2cf973d5dda76394a6581106751.

    commit message has been updated using

commit c4bb7c464e817f5a4b55a4addc95232ddc44717
Author: saicharanreddy5678 <saicharanreddy5678@outlook.com>
Date: Tue May 19 15:31:54 2026 +0530

    Create filecreatedinhub

commit 64537e18a0350e4cdee7ae2fc7ed39333b2a1eb1
Merge: 0ded426 310d49d
Author: saicharanreddy5678 <saicharanreddy5678@outlook.com>
Date: Tue May 19 15:04:28 2026 +0530

    Merge pull request #2 from saicharanreddy5678/main

    Merge pull request #1 from saicharanreddy5678/slave

commit 310d49da4e4677aa3f8d123c195ab2dead0c3588
Merge: 4d57723 0ded426
Author: saicharanreddy5678 <saicharanreddy5678@outlook.com>
Date: Tue May 19 14:47:52 2026 +0530

    Merge pull request #1 from saicharanreddy5678/slave

    Add new file with content 'esai charan reddy'

Rajes@charanreddy MINGW64 ~/Desktop/xbox/techie (slave)
$
```

Basic understanding of .git file

It is a hidden directory created when you run git init

Head and default config files will be in .git folder it wont be visible unless you do ls -a

Whenever you use fetch command

Git fetch

The head and all files can be seen in .git folder

If you delete this .git then your repo will be a normal windows folder

Configure webhooks to github

Webhooks allow GitHub to send real-time notifications to your external server (like a CI/CD tool, a Discord bot, or a custom API) whenever an event happens in your repository