

Basic shell scripts And executions

Output to screen

```
#!/bin/bash
```

Simple output script

```
echo "Hello World"
```

Here the output should be hello world when i execute the file

[illegible]

Defining Tasks

#!/bin/bash

Define small tasks

Whoami

Echo

Pwd

Echo

Hostname

Echo

ls -ltr

Echo

Here it should execute all the commands

```
root@ip-172-31-25-213/charan/scripts
[root@ip-172-31-25-213 scripts]# vi hello
[root@ip-172-31-25-213 scripts]# chsh -s /bin/zsh
-bash: chsh: command not found
[root@ip-172-31-25-213 scripts]# cd
[root@ip-172-31-25-213 ~]# chsh -s /bin/zsh
-bash: chsh: command not found
[root@ip-172-31-25-213 ~]# vi smalltasks
[root@ip-172-31-25-213 ~]# chmod 755 smalltasks
[root@ip-172-31-25-213 ~]# ll
total 4
-rwxr-xr-x. 1 root root 84 May 14 09:06 smalltasks
[root@ip-172-31-25-213 ~]# bash smalltasks
root
/root
ip-172-31-25-213.ec2.internal
total 4
-rwxr-xr-x. 1 root root 84 May 14 09:06 smalltasks
smalltasks: line 12: unexpected EOF while looking for matching `''
[root@ip-172-31-25-213 ~]# cat smalltasks
#!/bin/bash
# Define small tasks

whoami
echo
pwd
echo
hostname
echo
ls -ltr
echo
'
[root@ip-172-31-25-213 ~]# vi smalltasks
[root@ip-172-31-25-213 ~]# bash smalltasks
root
/root
ip-172-31-25-213.ec2.internal
total 4
-rwxr-xr-x. 1 root root 82 May 14 09:08 smalltasks
[root@ip-172-31-25-213 ~]# ls
smalltasks
[root@ip-172-31-25-213 ~]# mv smalltasks /charan/scripts
[root@ip-172-31-25-213 ~]# ls
[root@ip-172-31-25-213 ~]# cd /charan/scripts
[root@ip-172-31-25-213 scripts]# ls
hello smalltasks
[root@ip-172-31-25-213 scripts]#
```

Defining variables

```
#!/bin/bash
```

```
# Example of defining variables
```

```
a=xbox
```

```
b=vbox
```

```
c='new users'
```

```
echo "My first name is $a"
```

```
echo "My surname is $b"
```

```
echo 'My surname is $c'
```

here we are using 'a' as variable

```
root@ip-172-31-25-213/charan/scripts
[root@ip-172-31-25-213 ~]# ls
smalltasks
[root@ip-172-31-25-213 ~]# mv smalltasks /charan/scripts
[root@ip-172-31-25-213 ~]# ls
[root@ip-172-31-25-213 ~]# cd /charan/scripts
[root@ip-172-31-25-213 scripts]# ls
hello smalltasks
[root@ip-172-31-25-213 scripts]# vi basicvariables
[root@ip-172-31-25-213 scripts]# cat basicvariables
#!/bin/bash
# Example of defining variables

a=xbox
b=vbox
c='Linux class'
echo
# here i have used ' ' for taking it as in single sentence
echo
echo "My first name is $a"
echo "My surname is $b"
echo 'My surname is $c'

[root@ip-172-31-25-213 scripts]# chmod 755 basicvariables
[root@ip-172-31-25-213 scripts]# bash basicvariables
basicvariables: line 6: class': command not found

My first name is xbox
My surname is vbox
'My surname is '
[root@ip-172-31-25-213 scripts]# vi basicvariables
[root@ip-172-31-25-213 scripts]# bash basicvariables

My first name is xbox
My surname is vbox
basicvariables: line 12: unexpected EOF while looking for matching `''
[root@ip-172-31-25-213 scripts]# vi basicvariables
[root@ip-172-31-25-213 scripts]# bash basicvariables

My first name is xbox
My surname is vbox
My surname is Linux class
[root@ip-172-31-25-213 scripts]# |
```

Read Input

```
#!/bin/bash
```

```
# Read user input
```

```
echo "What is your first name?"
```

```
read a
```

```
echo
```

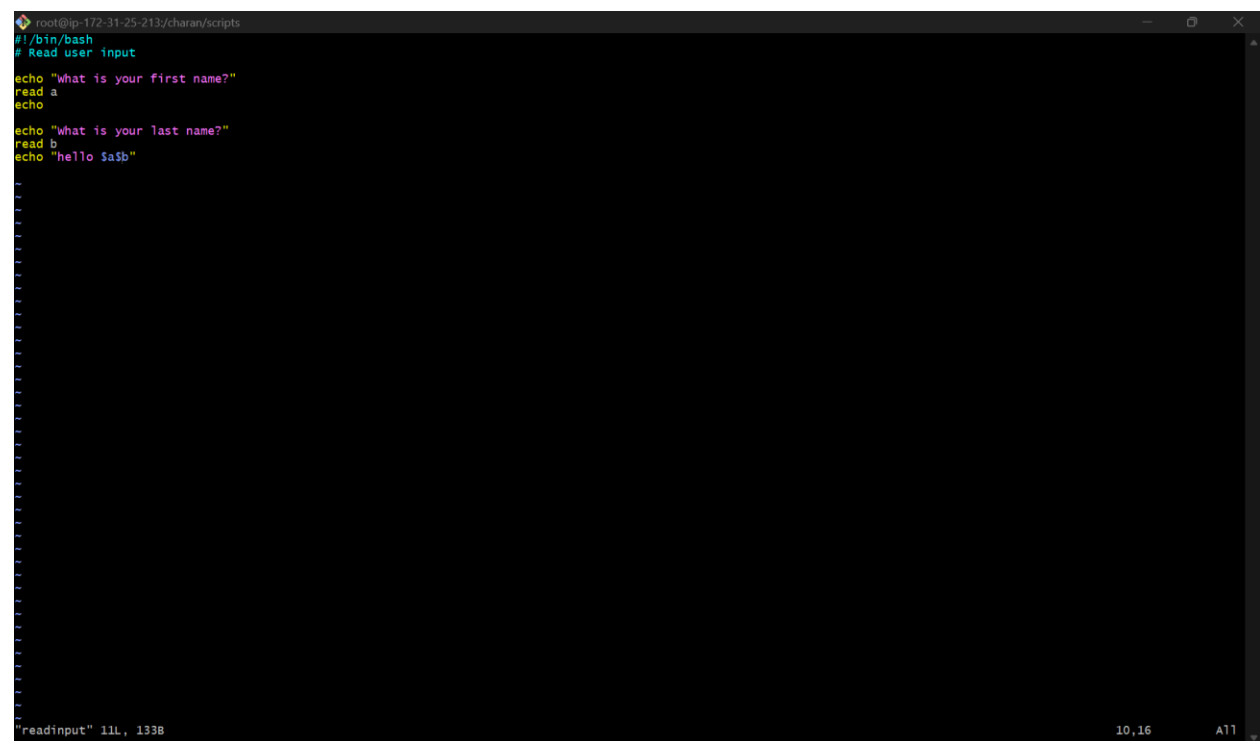
```
echo "What is your last name?"
```

```
read b
```

```
echo
```

```
echo
```

```
Hello $a $b
```



A terminal window titled "root@ip-172-31-25-213:/charan/scripts" displays the execution of a bash script. The script's content is shown in the top left corner:

```
#!/bin/bash
# Read user input
echo "What is your first name?"
read a
echo
echo "What is your last name?"
read b
echo "hello $a$b"
```

 Below the script content, a series of tilde (~) characters represent the output of the script, indicating that the user input was successfully read and processed. The terminal window includes standard window controls (minimize, maximize, close) in the top right corner and a status bar at the bottom showing the command "readinput" with its PID (111), memory usage (1338), and other system information (10, 16, A11).

```
root@ip-172-31-25-213/charan/scripts
My surname is Linux class
[root@ip-172-31-25-213 scripts]# vi readinput
[root@ip-172-31-25-213 scripts]# chmod 755 readinput
[root@ip-172-31-25-213 scripts]# bash readinput
What is your first name?
sai

What is your last name?
reddy
a b
[root@ip-172-31-25-213 scripts]# vi readinput
[root@ip-172-31-25-213 scripts]# bash readinput
What is your first name?
sai

What is your last name?
nana
nani
nani
echo
[root@ip-172-31-25-213 scripts]# vi readinput
[root@ip-172-31-25-213 scripts]#
[root@ip-172-31-25-213 scripts]# bash readinput
What is your first name?
sai

What is your last name?
c
d
f
echo
[root@ip-172-31-25-213 scripts]# vi readinput
[root@ip-172-31-25-213 scripts]# bash readinput
What is your first name?
s

What is your last name?
d
a echo b
[root@ip-172-31-25-213 scripts]# vi readinput
[root@ip-172-31-25-213 scripts]# bash readinput
What is your first name?
sai

What is your last name?
redd
hello sairedd
[root@ip-172-31-25-213 scripts]# |
```

Scripts to run commands within

```
#!/bin/bash
```

```
# Script to run commands within
```

```
clear
```

```
echo "Hello `whoami` "
```

```
echo
```

```
echo "Today is `date` "
```

```
echo
```

```
echo "Number of user login: `who | wc -l` "
```

```
echo
```

```
clear
echo "Hello `whoami`"
echo
echo "Today is `date`"
echo
echo "Number of user login: `who | wc -l`"
```

```
[root@ip-172-31-25-213 scripts]# who
ec2-user pts/0      2026-05-14 08:53 (103.160.27.197)
ec2-user pts/1      2026-05-14 08:54 (103.160.27.197)
[root@ip-172-31-25-213 scripts]# who
ec2-user pts/0      2026-05-14 08:53 (103.160.27.197)
ec2-user pts/1      2026-05-14 08:54 (103.160.27.197)
[root@ip-172-31-25-213 scripts]# who $3
ec2-user pts/0      2026-05-14 08:53 (103.160.27.197)
ec2-user pts/1      2026-05-14 08:54 (103.160.27.197)
[root@ip-172-31-25-213 scripts]# time
```

```
Thu May 14 09:31:10 UTC 2026
[root@ip-172-31-25-213 scripts]# vi runcommandswithin
[root@ip-172-31-25-213 scripts]# |
```

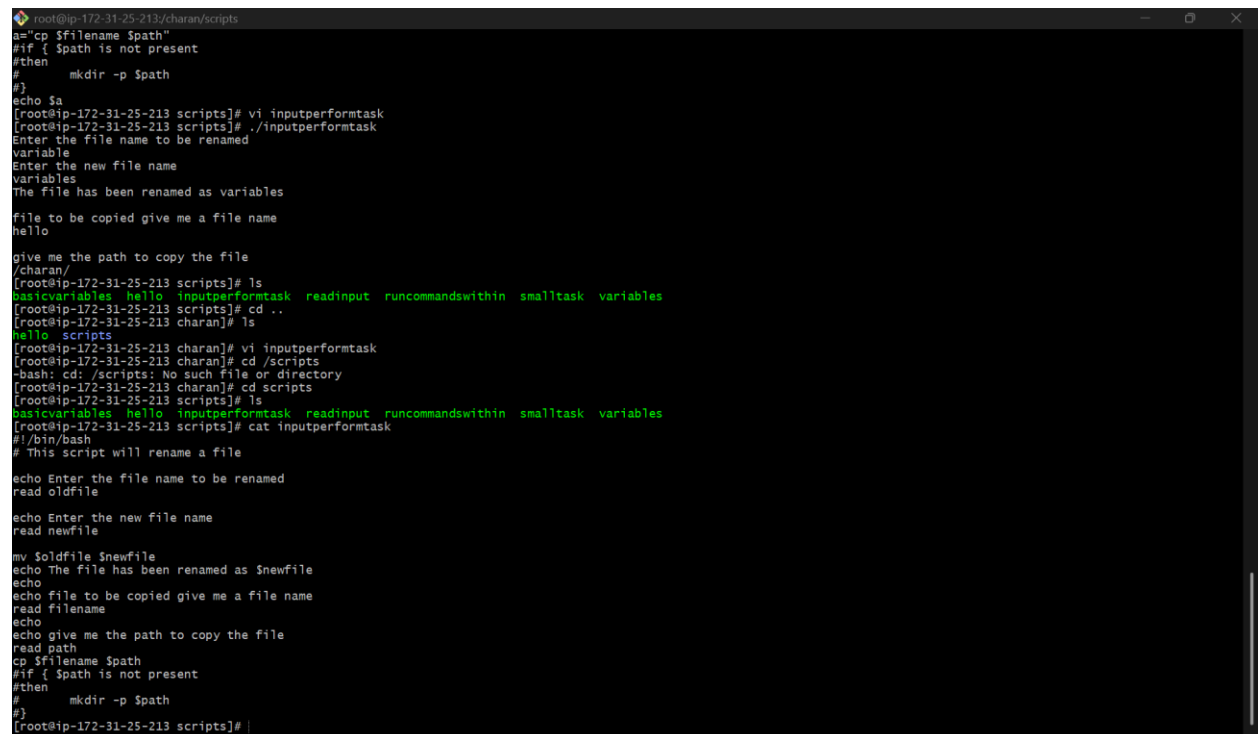
Read input and perform a task

```
#!/bin/bash
# This script will rename a file

echo Enter the file name to be renamed
read oldfilename

echo Enter the new file name
read newfilename

mv $oldfilename $newfilename
echo The file has been renamed as $newfilename
```

A terminal window titled 'root@ip-172-31-25-213:charan/scripts' showing the execution of a script. The script prompts for a file name to be renamed, a new file name, and a path to copy the file. The user enters 'variables', 'variables', and '/charan/' respectively. The script then renames 'variables' to 'variables' and prints the new file name. The user then enters 'hello' for the file to be copied. The script then copies 'hello' to the specified path. The terminal output is as follows:

```
root@ip-172-31-25-213:charan/scripts
a="cp $filename $path"
# if { $path is not present
# then
#     mkdir -p $path
# }
echo $a
[root@ip-172-31-25-213 scripts]# vi inputperformtask
[root@ip-172-31-25-213 scripts]# ./inputperformtask
Enter the file name to be renamed
variable
Enter the new file name
variables
The file has been renamed as variables
file to be copied give me a file name
hello

give me the path to copy the file
/charan/
[root@ip-172-31-25-213 scripts]# ls
basicvariables hello inputperformtask readinput runcommandswithin smalltask variables
[root@ip-172-31-25-213 scripts]# cd ..
[root@ip-172-31-25-213 charan]# ls
hello scripts
[root@ip-172-31-25-213 charan]# vi inputperformtask
[root@ip-172-31-25-213 charan]# cd /scripts
-bash: cd: /scripts: No such file or directory
[root@ip-172-31-25-213 charan]# cd scripts
[root@ip-172-31-25-213 scripts]# ls
basicvariables hello inputperformtask readinput runcommandswithin smalltask variables
[root@ip-172-31-25-213 scripts]# cat inputperformtask
#!/bin/bash
# This script will rename a file

echo Enter the file name to be renamed
read oldfile

echo Enter the new file name
read newfile

mv $oldfile $newfile
echo The file has been renamed as $newfile
echo
echo file to be copied give me a file name
read filename
echo
echo give me the path to copy the file
read path
cp $filename $path
# if { $path is not present
# then
#     mkdir -p $path
# }
[root@ip-172-31-25-213 scripts]# |
```


I want to copy a file but the given path does not exist now i want to create the path and copy

```
#!/bin/bash
```

```
# creating path that does not exist and shold create path and copy file
```

```
echo new path creation
```

```
echo
```

```
echo file copy name
```

```
read filename
```

```
echo
```

```
echo new path destination
```

```
echo
```

```
read path
```

```
echo
```

```
echo
```

```
if [ -d "$path" ]
```

```
then
```

```
    cp $filename $path
```

```
elif [ ! -d "$path" ]
```

```
then
```

```
    mkdir -p $path
```

```
fi
```

```
`cp "$filename" "$path"`
```

```
root@ip-172-31-25-213/charan/scripts
[root@ip-172-31-25-213 scripts]# vi copy
[root@ip-172-31-25-213 scripts]# ./copy
new path creation

file copy name
hello

new path destination
/charan/in

./copy: line 13: [: missing `]'
./copy: line 16: [!: command not found

cp: missing destination file operand after 'hello /charan/in'
Try 'cp --help' for more information.
[root@ip-172-31-25-213 scripts]# vi copy
[root@ip-172-31-25-213 scripts]# ./copy
new path creation

file copy name
hello

new path destination
/charan/in

./copy: line 16: [: missing `]'

[root@ip-172-31-25-213 scripts]# vi copy
[root@ip-172-31-25-213 scripts]# ./copy
new path creation

file copy name
hello

new path destination
/charan/in

mkdir: cannot create directory '/charan/in': File exists

[root@ip-172-31-25-213 scripts]# cd ..
[root@ip-172-31-25-213 charan]# ls
in  scripts
[root@ip-172-31-25-213 charan]# cd in
-bash: cd: in: Not a directory
[root@ip-172-31-25-213 charan]# ll
total 4
-rwxr-xr-x. 1 root root 57 May 14 11:19 in
drwxr-xr-x. 2 root root 167 May 14 11:19 scripts
```

case Scripts:

```
#!/bin/bash
```

```
echo
```

```
echo Please chose one of the options below
```

```
echo
```

```
echo 'a = Display Date and Time'
```

```
echo 'b = List file and directories'
```

```
echo 'c = List users logged in'
```

```
echo 'd = Check System uptime'
```

```
echo
```

```
    read choices
```

```
    case $choices in
```

```
a) date;;
```

```
b) ls;;
```

```
c) who;;
```

```
d) uptime;;
```

```
*) echo Invalid choice - Bye.
```

```
    esac
```

```

root@ip-172-31-25-213:/charan/scripts
-rwxr-xr-x. 1 root root 156 May 14 09:29 runcommandswithin
-rwxr-xr-x. 1 root root 82 May 14 09:08 smalltask
-rwxr-xr-x. 1 root root 119 May 14 09:36 variables
[root@ip-172-31-25-213 scripts]# vi case.bash
[root@ip-172-31-25-213 scripts]# chmod 755 case.bash
[root@ip-172-31-25-213 scripts]# ll
total 40
-rwxr-xr-x. 1 root root 219 May 14 09:15 basicvariables
-rwxr-xr-x. 1 root root 345 May 15 07:29 case.bash
-rwxr-xr-x. 1 root root 323 May 14 11:23 copy
-rwxr-xr-x. 1 root root 57 May 14 08:57 hello
-rwxr-xr-x. 1 root root 309 May 14 10:31 ifthen
-rwxr-xr-x. 1 root root 396 May 14 09:53 inputperformtask
-rwxr-xr-x. 1 root root 133 May 14 09:26 readinput
-rwxr-xr-x. 1 root root 156 May 14 09:29 runcommandswithin
-rwxr-xr-x. 1 root root 82 May 14 09:08 smalltask
-rwxr-xr-x. 1 root root 119 May 14 09:36 variables
[root@ip-172-31-25-213 scripts]# ./case.bash

Please chose one of the options below

a = Display Date and Time
b = List file and directories
c = List users logged in
d = Check System uptime

c
ec2-user pts/0      2026-05-15 07:26 (103.160.27.197)
ec2-user pts/1      2026-05-15 07:26 (103.160.27.197)
[root@ip-172-31-25-213 scripts]# cat case.bash
#!/bin/bash

echo
echo Please chose one of the options below
echo
echo 'a = Display Date and Time'
echo 'b = List file and directories'
echo 'c = List users logged in'
echo 'd = Check System uptime'
echo

    read choices

    case $choices in

a) date;;
b) ls;;
c) who;;
d) uptime;;
*) echo Invalid choice - Bye.

        esac

[root@ip-172-31-25-213 scripts]# |

```

This script will look at your current day and tell you the state of the backup

```
#!/bin/bash

NOW=$(date +"%a")

case $NOW in
    Mon)
        echo "Full backup";;
    Tue|Wed|Thu|Fri)
        echo "Partial backup";;
    Sat|Sun)
        echo "No backup";;
    *) ;;
esac
```

```
root@ip-172-31-25-213:~/scripts
echo
echo Please chose one of the options below
echo
echo 'a = Display Date and Time'
echo 'b = List file and directories'
echo 'c = List users logged in'
echo 'd = Check System uptime'
echo
    read choices
    case $choices in
a) date;;
b) ls;;
c) who;;
d) uptime;;
*) echo Invalid choice - Bye.
    esac

[root@ip-172-31-25-213 scripts]# vi stateofbackup.bash
[root@ip-172-31-25-213 scripts]# chmod 755 stateofbackup.bash
[root@ip-172-31-25-213 scripts]# ll
total 44
-rwxr-xr-x. 1 root root 219 May 14 09:15 basicvariables
-rwxr-xr-x. 1 root root 345 May 15 07:29 case.bash
-rwxr-xr-x. 1 root root 323 May 14 11:28 copy
-rwxr-xr-x. 1 root root 57 May 14 08:57 hello
-rwxr-xr-x. 1 root root 309 May 14 10:31 ifthen
-rwxr-xr-x. 1 root root 396 May 14 09:53 inputperformtask
-rwxr-xr-x. 1 root root 133 May 14 09:26 readinput
-rwxr-xr-x. 1 root root 156 May 14 09:29 runcommandswithin
-rwxr-xr-x. 1 root root 82 May 14 09:08 smalltask
-rwxr-xr-x. 1 root root 163 May 15 07:31 stateofbackup.bash
-rwxr-xr-x. 1 root root 119 May 14 09:36 variables
[root@ip-172-31-25-213 scripts]# ./stateofbackup.bash
Partial backup
[root@ip-172-31-25-213 scripts]# cat stateofbackup.bash
#!/bin/bash

NOW=$(date +"%a")
case $NOW in
    Mon)
        echo "Full backup";;
    Tue|Wed|Thu|Fri)
        echo "Partial backup";;
    Sat|Sun)
        echo "No backup";;
    *) ;;
esac

[root@ip-172-31-25-213 scripts]# |
```

do-while Script

Script to run for a number of times

```
#!/bin/bash
```

```
c=1
```

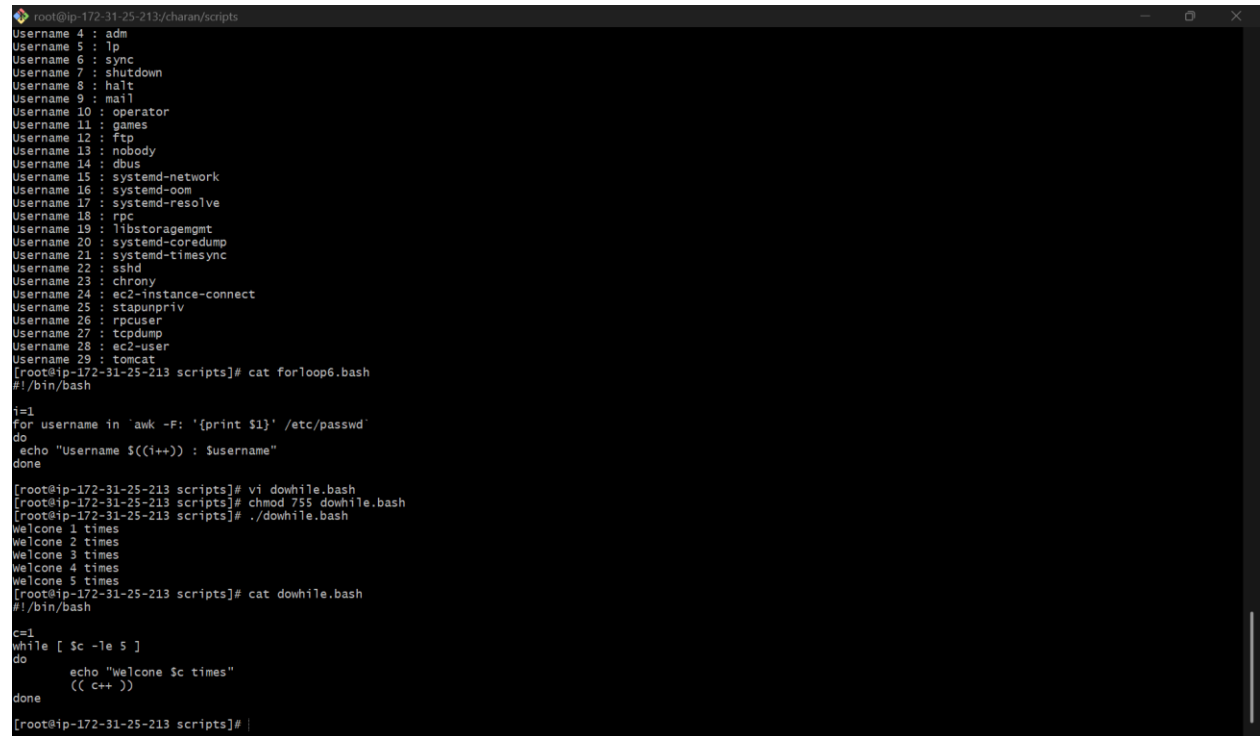
```
while [ $c -le 5 ]
```

```
do
```

```
    echo "Welcone $c times"
```

```
    (( c++ ))
```

```
done
```

A terminal window screenshot showing the execution of a script. The prompt is root@ip-172-31-25-213/charan/scripts. The terminal displays a list of system users from /etc/passwd. Then, it shows the execution of a script named forloop6.bash, which prints usernames. Next, it shows the creation and execution of a script named dowhile.bash, which prints 'welcone' followed by the number of times (1 to 5). Finally, it shows the execution of the do-while script, which prints 'Welcone' followed by the number of times (1 to 5).

```
root@ip-172-31-25-213/charan/scripts
Username 4 : adm
Username 5 : lp
Username 6 : sync
Username 7 : shutdown
Username 8 : halt
Username 9 : mail
Username 10 : operator
Username 11 : games
Username 12 : ftp
Username 13 : nobody
Username 14 : dbus
Username 15 : systemd-network
Username 16 : systemd-oom
Username 17 : systemd-resolve
Username 18 : rpc
Username 19 : libstoragemgmt
Username 20 : systemd-coredump
Username 21 : systemd-timesync
Username 22 : sshd
Username 23 : chrony
Username 24 : ec2-instance-connect
Username 25 : stapunpriv
Username 26 : rpcuser
Username 27 : tcpdump
Username 28 : ec2-user
Username 29 : tomcat
[root@ip-172-31-25-213 scripts]# cat forloop6.bash
#!/bin/bash

i=1
for username in `awk -F: '{print $1}' /etc/passwd`
do
    echo "Username ${i++} : $username"
done

[root@ip-172-31-25-213 scripts]# vi dowhile.bash
[root@ip-172-31-25-213 scripts]# chmod 755 dowhile.bash
[root@ip-172-31-25-213 scripts]# ./dowhile.bash
welcone 1 times
welcone 2 times
welcone 3 times
welcone 4 times
welcone 5 times
[root@ip-172-31-25-213 scripts]# cat dowhile.bash
#!/bin/bash

c=1
while [ $c -le 5 ]
do
    echo "Welcone $c times"
    (( c++ ))
done

[root@ip-172-31-25-213 scripts]#
```

Script to run for a number of seconds

```
#!/bin/bash
```

```
count=0
```

```
num=10
```

```
while [ $count -lt 10 ]
```

```
do
```

```
    echo
```

```
    echo $num seconds left to stop this process $1
```

```
    echo
```

```
    sleep 1
```

```
num=`expr $num - 1`
```

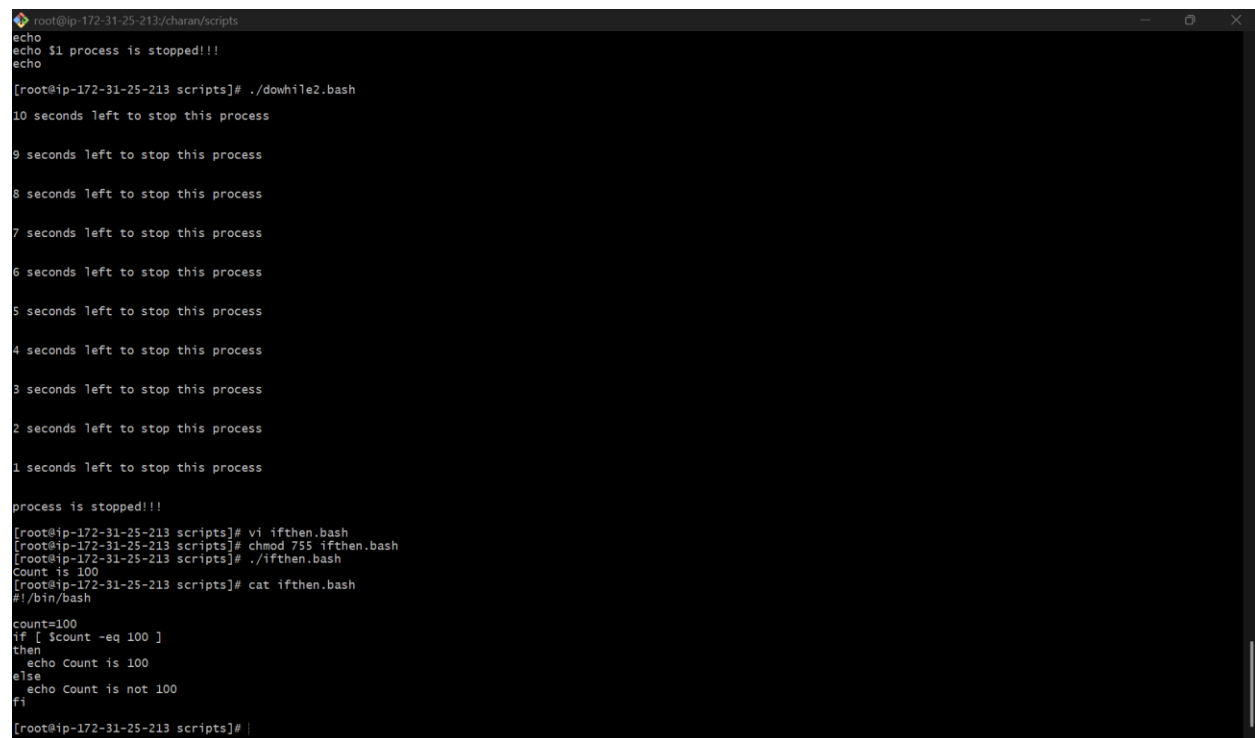
```
count=`expr $count + 1`
```

```
done
```

```
echo
```

```
echo $1 process is stopped!!!
```

```
Echo
```

A terminal window with a dark background and light gray text. The window title is 'root@ip-172-31-25-213:/charan/scripts'. The terminal shows the execution of a script named 'dowhile2.bash'. The script prints '10 seconds left to stop this process' through '1 seconds left to stop this process', followed by 'process is stopped!!!'. After this, the user runs 'vi ifthen.bash', 'chmod 755 ifthen.bash', and './ifthen.bash'. The output of './ifthen.bash' shows 'Count is 100' and then a loop that prints 'echo Count is 100' if the count is 100, and 'echo Count is not 100' otherwise. The terminal ends with the prompt '[root@ip-172-31-25-213 scripts]# |'.

If-then Scripts:

Check the variable

```
#!/bin/bash
```

```
count=100
```

```
if [ $count -eq 100 ]
```

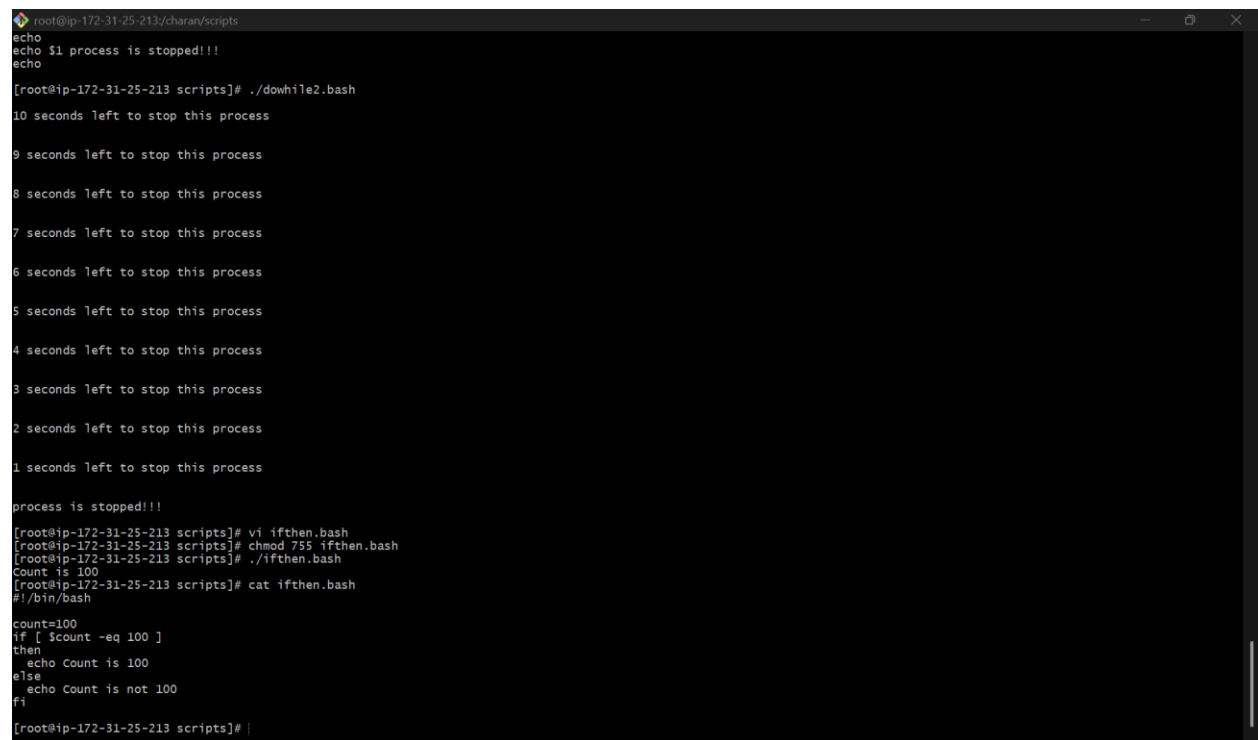
```
then
```

```
    echo Count is 100
```

```
else
```

```
    echo Count is not 100
```

```
fi
```

A terminal window with a dark background and light gray text. The window title is 'root@ip-172-31-25-213:/charan/scripts'. The terminal shows the execution of a script. It starts with 'echo \$1 process is stopped!!!' and 'echo'. Then it runs './dowhile2.bash', which outputs '10 seconds left to stop this process' through '1 seconds left to stop this process'. After that, it prints 'process is stopped!!!'. The user then runs 'vi ifthen.bash', 'chmod 755 ifthen.bash', and './ifthen.bash'. The script outputs 'Count is 100'. Finally, the user runs 'cat ifthen.bash', which displays the script's content: '#!/bin/bash', 'count=100', 'if [\$count -eq 100]', 'then', ' echo Count is 100', 'else', ' echo Count is not 100', 'fi'. The prompt returns to '[root@ip-172-31-25-213 scripts]# |'.

Check if a file error.txt exist

```
#!/bin/bash
```

```
clear
```

```
if [ -e /home/iafzal/error.txt ]
```

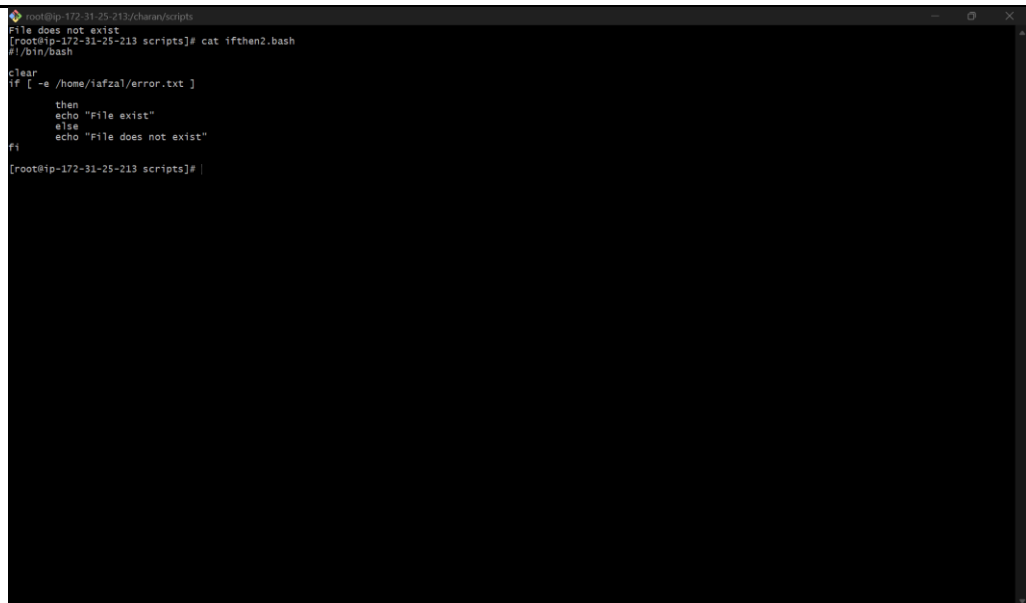
```
then
```

```
echo "File exist"
```

```
else
```

```
echo "File does not exist"
```

```
fi
```



```
root@ip-172-31-25-213:/charan/scripts
File does not exist
[root@ip-172-31-25-213 scripts]# cat ifthen2.bash
#!/bin/bash

clear
if [ -e /home/iafzal/error.txt ]
then
    echo "File exist"
else
    echo "File does not exist"
fi

[root@ip-172-31-25-213 scripts]#
```

A terminal window with a dark background. The title bar shows 'root@ip-172-31-25-213:/charan/scripts'. The terminal output shows the script being executed, which first prints 'File does not exist'. Then, the user runs 'cat ifthen2.bash', displaying the script's content: a shebang, a clear command, an if-then-else-fi conditional block checking for the existence of /home/iafzal/error.txt, and a final prompt. The prompt changes to '[root@ip-172-31-25-213 scripts]#'. A small black dot is visible on the left side of the terminal window.

Check the response and then output

```
#!/bin/bash
```

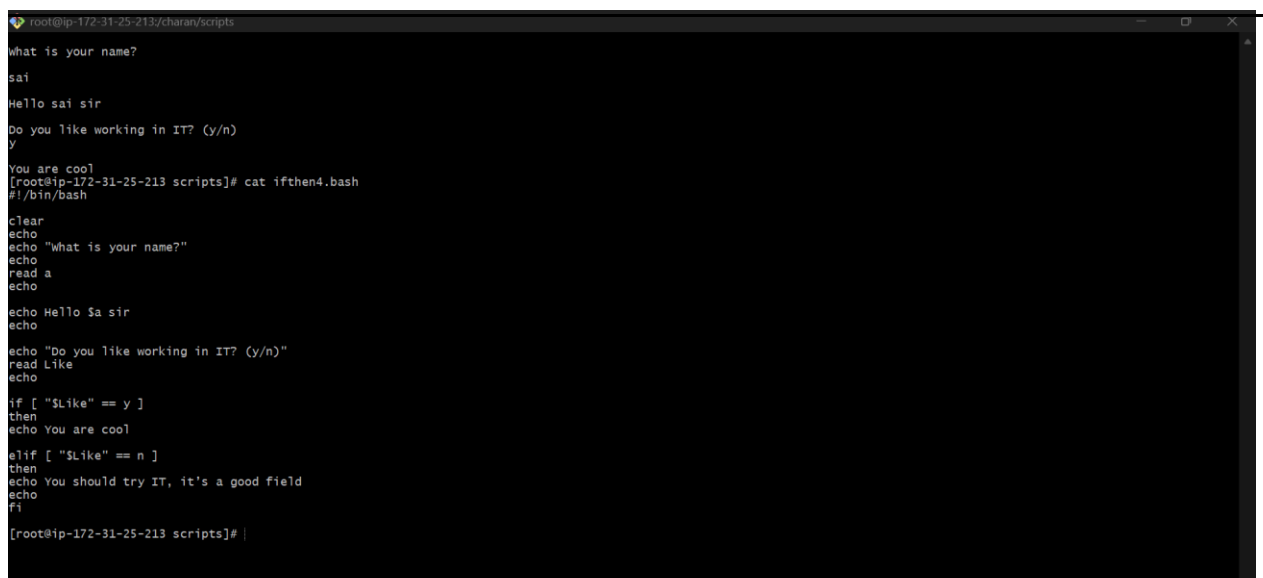
```
clear
echo
echo "What is your name?"
echo
read a
echo
```

```
echo Hello $a sir
echo
```

```
echo "Do you like working in IT? (y/n)"
read Like
echo
```

```
if [ "$Like" == y ]
then
echo You are cool
```

```
elif [ "$Like" == n ]
then
echo You should try IT, it's a good field
echo
Fi
```

A terminal window with a dark background and light text. The window title is 'root@ip-172-31-25-213/charan/scripts'. The terminal shows the execution of a script. It starts with 'what is your name?' and 'sai' as input. Then 'Hello sai sir'. Then 'Do you like working in IT? (y/n)' and 'y' as input. Then 'You are cool'. Then '[root@ip-172-31-25-213 scripts]# cat ifthen4.bash'. Then '#!/bin/bash'. Then 'clear'. Then 'echo'. Then 'echo "What is your name?"'. Then 'echo'. Then 'read a'. Then 'echo'. Then 'echo Hello \$a sir'. Then 'echo'. Then 'echo "Do you like working in IT? (y/n)"'. Then 'read Like'. Then 'echo'. Then 'if ["\$Like" == y]'. Then 'then'. Then 'echo You are cool'. Then 'elif ["\$Like" == n]'. Then 'then'. Then 'echo You should try IT, it's a good field'. Then 'echo'. Then 'Fi'. Then '[root@ip-172-31-25-213 scripts]# |'.

```
root@ip-172-31-25-213/charan/scripts
what is your name?
sai
Hello sai sir
Do you like working in IT? (y/n)
y
You are cool
[root@ip-172-31-25-213 scripts]# cat ifthen4.bash
#!/bin/bash

clear
echo
echo "What is your name?"
echo
read a
echo

echo Hello $a sir
echo

echo "Do you like working in IT? (y/n)"
read Like
echo

if [ "$Like" == y ]
then
echo You are cool

elif [ "$Like" == n ]
then
echo You should try IT, it's a good field
echo
Fi

[root@ip-172-31-25-213 scripts]# |
```

Check if a variable value is met

```
#!/bin/bash
```

```
a=`date | awk '{print $1}'`
```

```
if [ "$a" == Mon ]
```

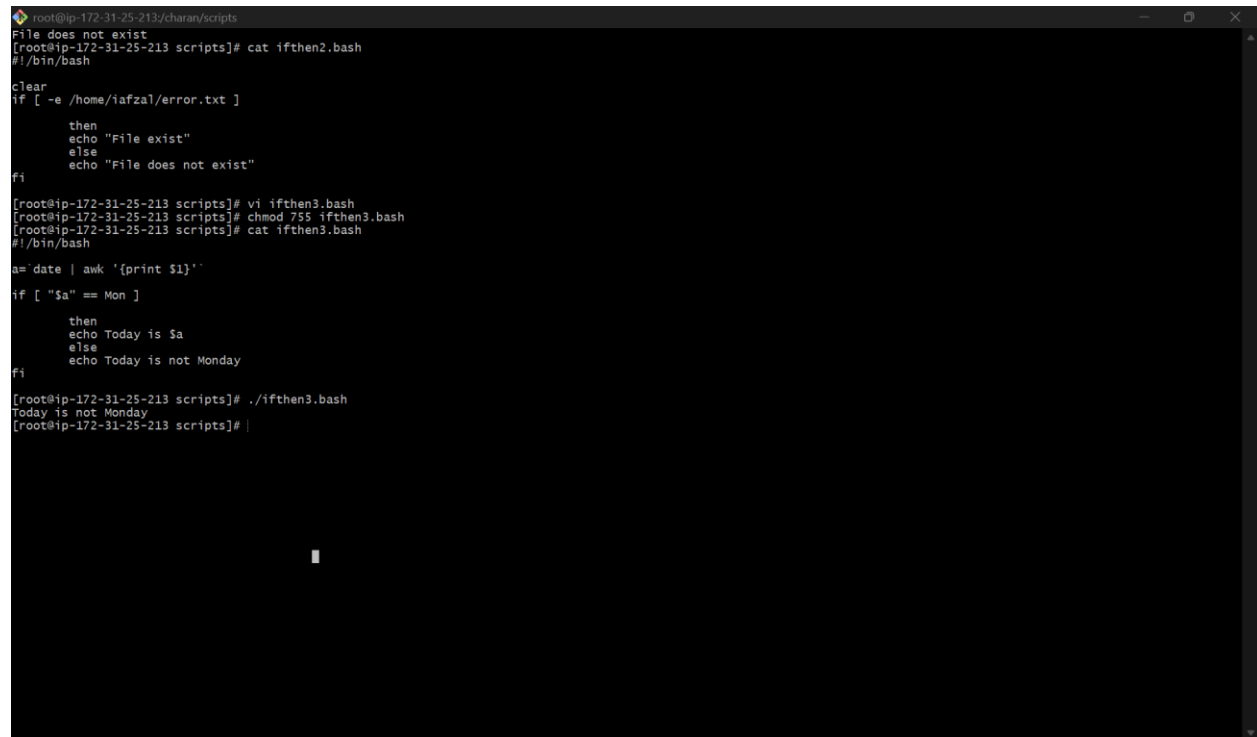
```
then
```

```
echo Today is $a
```

```
else
```

```
echo Today is not Monday
```

```
fi
```

A terminal window with a dark background and light text. The window title is 'root@ip-172-31-25-213:~/charan/scripts'. The terminal shows the execution of a script. It starts with an error message 'File does not exist' because 'ifthen2.bash' does not exist. Then, it shows the creation and execution of 'ifthen3.bash'. The script sets a variable 'a' to the current date's first part using 'date | awk '{print \$1}'' and checks if it is 'Mon'. Since it is not Monday, it outputs 'Today is not Monday'.

```
root@ip-172-31-25-213:~/charan/scripts
File does not exist
[root@ip-172-31-25-213 scripts]# cat ifthen2.bash
#!/bin/bash

clear
if [ -e /home/iafzal/error.txt ]
then
    echo "File exist"
else
    echo "File does not exist"
fi

[root@ip-172-31-25-213 scripts]# vi ifthen3.bash
[root@ip-172-31-25-213 scripts]# chmod 755 ifthen3.bash
[root@ip-172-31-25-213 scripts]# cat ifthen3.bash
#!/bin/bash

a=`date | awk '{print $1}'`

if [ "$a" == Mon ]
then
    echo Today is $a
else
    echo Today is not Monday
fi

[root@ip-172-31-25-213 scripts]# ./ifthen3.bash
Today is not Monday
[root@ip-172-31-25-213 scripts]#
```
