

Basic shell scripts And executions


Output to screen

```
#!/bin/bash
```

```
# Simple output script
```

```
echo "Hello World"
```

Here the output should be hello world when i execute the file

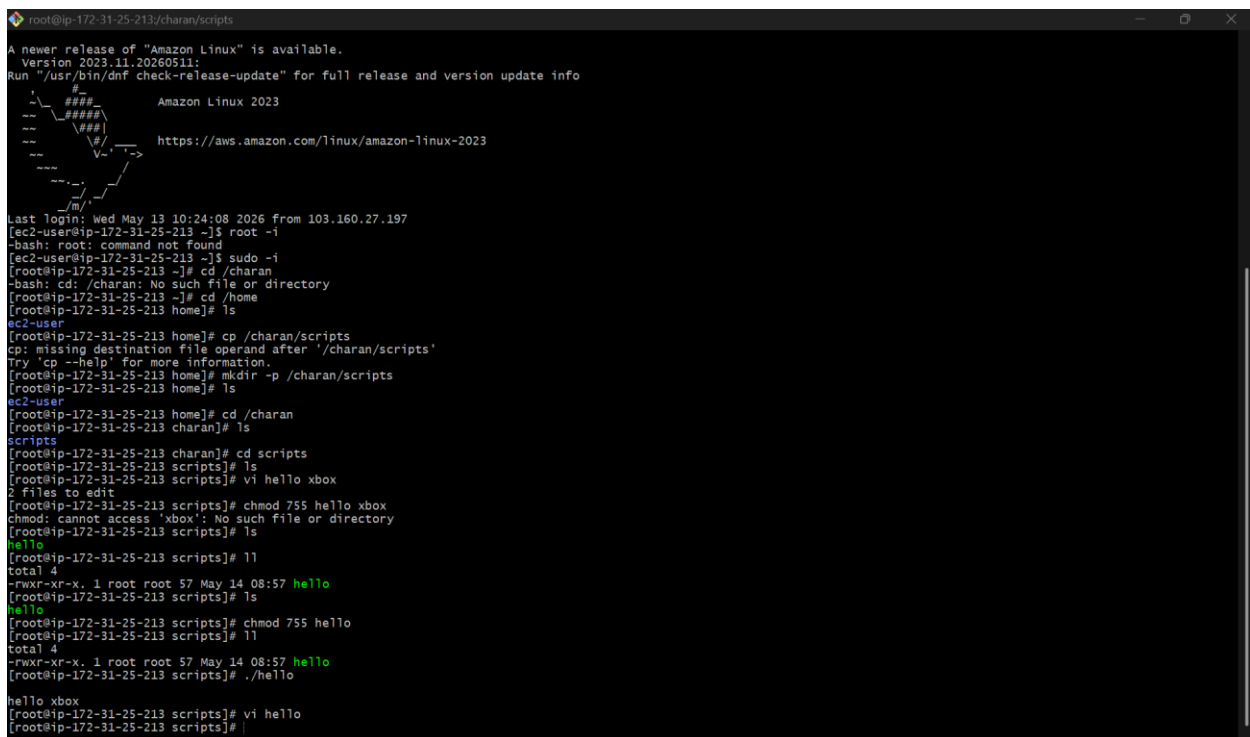

```
root@ip-172-31-25-213/charan/scripts
A newer release of "Amazon Linux" is available.
Version 2023.11.20260511:
Run "/usr/bin/dnf check-release-update" for full release and version update info

#####
Amazon Linux 2023
#####
https://aws.amazon.com/linux/amazon-linux-2023

Last login: Wed May 13 10:24:08 2026 from 103.160.27.197
[ec2-user@ip-172-31-25-213 ~]$ root -i
-bash: root: command not found
[ec2-user@ip-172-31-25-213 ~]$ sudo -i
[root@ip-172-31-25-213 ~]# cd /charan
-bash: cd: /charan: No such file or directory
[root@ip-172-31-25-213 ~]# cd /home
[root@ip-172-31-25-213 home]# ls
ec2-user
[root@ip-172-31-25-213 home]# cp /charan/scripts
cp: missing destination file operand after '/charan/scripts'
Try 'cp --help' for more information.
[root@ip-172-31-25-213 home]# mkdir -p /charan/scripts
[root@ip-172-31-25-213 home]# ls
ec2-user
[root@ip-172-31-25-213 home]# cd /charan
[root@ip-172-31-25-213 charan]# ls
scripts
[root@ip-172-31-25-213 charan]# cd scripts
[root@ip-172-31-25-213 scripts]# ls
[root@ip-172-31-25-213 scripts]# vi hello xbox
2 files to edit
[root@ip-172-31-25-213 scripts]# chmod 755 hello xbox
chmod: cannot access 'xbox': No such file or directory
[root@ip-172-31-25-213 scripts]# ls
hello
[root@ip-172-31-25-213 scripts]# ll
total 4
-rwxr-xr-x. 1 root root 57 May 14 08:57 hello
[root@ip-172-31-25-213 scripts]# ls
hello
[root@ip-172-31-25-213 scripts]# chmod 755 hello
[root@ip-172-31-25-213 scripts]# ll
total 4
-rwxr-xr-x. 1 root root 57 May 14 08:57 hello
[root@ip-172-31-25-213 scripts]# ./hello
hello xbox
[root@ip-172-31-25-213 scripts]# vi hello
[root@ip-172-31-25-213 scripts]# |
```

Defining Tasks

#!/bin/bash

Define small tasks

Whoami

Echo

Pwd

Echo

Hostname

Echo

ls -ltr

Echo

Here it should execute all the commands

```
root@ip-172-31-25-213/charan/scripts
[root@ip-172-31-25-213 scripts]# vi hello
[root@ip-172-31-25-213 scripts]# chsh -s /bin/zsh
-bash: chsh: command not found
[root@ip-172-31-25-213 scripts]# cd
[root@ip-172-31-25-213 ~]# chsh -s /bin/zsh
-bash: chsh: command not found
[root@ip-172-31-25-213 ~]# vi smalltasks
[root@ip-172-31-25-213 ~]# chmod 755 smalltasks
[root@ip-172-31-25-213 ~]# ll
total 4
-rwxr-xr-x. 1 root root 84 May 14 09:06 smalltasks
[root@ip-172-31-25-213 ~]# bash smalltasks
root
/root
ip-172-31-25-213.ec2.internal
total 4
-rwxr-xr-x. 1 root root 84 May 14 09:06 smalltasks
smalltasks: line 12: unexpected EOF while looking for matching `''
[root@ip-172-31-25-213 ~]# cat smalltasks
#!/bin/bash
# Define small tasks

whoami
echo
pwd
echo
hostname
echo
ls -ltr
echo
'
[root@ip-172-31-25-213 ~]# vi smalltasks
[root@ip-172-31-25-213 ~]# bash smalltasks
root
/root
ip-172-31-25-213.ec2.internal
total 4
-rwxr-xr-x. 1 root root 82 May 14 09:08 smalltasks
[root@ip-172-31-25-213 ~]# ls
smalltasks
[root@ip-172-31-25-213 ~]# mv smalltasks /charan/scripts
[root@ip-172-31-25-213 ~]# ls
[root@ip-172-31-25-213 ~]# cd /charan/scripts
[root@ip-172-31-25-213 scripts]# ls
hello smalltasks
[root@ip-172-31-25-213 scripts]#
```

Defining variables

```
#!/bin/bash
```

```
# Example of defining variables
```

```
a=xbox
```

```
b=vbox
```

```
c='new users'
```

```
echo "My first name is $a"
```

```
echo "My surname is $b"
```

```
echo 'My surname is $c'
```

here we are using 'a' as variable

```
root@ip-172-31-25-213/charan/scripts
[root@ip-172-31-25-213 ~]# ls
smalltasks
[root@ip-172-31-25-213 ~]# mv smalltasks /charan/scripts
[root@ip-172-31-25-213 ~]# ls
[root@ip-172-31-25-213 ~]# cd /charan/scripts
[root@ip-172-31-25-213 scripts]# ls
hello smalltasks
[root@ip-172-31-25-213 scripts]# vi basicvariables
[root@ip-172-31-25-213 scripts]# cat basicvariables
#!/bin/bash
# Example of defining variables

a=xbox
b=vbox
c='Linux class'
echo
# here i have used ' ' for taking it as in single sentence
echo
echo "My first name is $a"
echo "My surname is $b"
echo 'My surname is $c'

[root@ip-172-31-25-213 scripts]# chmod 755 basicvariables
[root@ip-172-31-25-213 scripts]# bash basicvariables
basicvariables: line 6: class': command not found

My first name is xbox
My surname is vbox
'My surname is '
[root@ip-172-31-25-213 scripts]# vi basicvariables
[root@ip-172-31-25-213 scripts]# bash basicvariables

My first name is xbox
My surname is vbox
basicvariables: line 12: unexpected EOF while looking for matching `''
[root@ip-172-31-25-213 scripts]# vi basicvariables
[root@ip-172-31-25-213 scripts]# bash basicvariables

My first name is xbox
My surname is vbox
My surname is Linux class
[root@ip-172-31-25-213 scripts]# |
```

Read Input

```
#!/bin/bash
```

```
# Read user input
```

```
echo "What is your first name?"
```

read a

echo

```
echo "What is your last name?"
```

```
read b
```

echo

echo

Hello \$a \$b

A screenshot of a terminal window titled "root@ip-172-31-25-213:/charan/scripts". The terminal displays the following commands and output:

```
#!/bin/bash  
# Read user input  
  
echo "What is your first name?"  
read a  
echo  
  
echo "What is your last name?"  
read b  
echo "hello $a$b"
```

The prompt character is "~". At the bottom left, it says "readinput" 11L, 133B. At the bottom right, there are two status indicators: "10,16" and "ATTN".

```
root@ip-172-31-25-213/charan/scripts
My surname is Linux class
[root@ip-172-31-25-213 scripts]# vi readinput
[root@ip-172-31-25-213 scripts]# chmod 755 readinput
[root@ip-172-31-25-213 scripts]# bash readinput
What is your first name?
sai

What is your last name?
reddy
a b
[root@ip-172-31-25-213 scripts]# vi readinput
[root@ip-172-31-25-213 scripts]# bash readinput
What is your first name?
sai

What is your last name?
nana
nani
nani
echo
[root@ip-172-31-25-213 scripts]# vi readinput
[root@ip-172-31-25-213 scripts]#
[root@ip-172-31-25-213 scripts]# bash readinput
What is your first name?
sai

What is your last name?
c
d
f
echo
[root@ip-172-31-25-213 scripts]# vi readinput
[root@ip-172-31-25-213 scripts]# bash readinput
What is your first name?
s

What is your last name?
d
a echo b
[root@ip-172-31-25-213 scripts]# vi readinput
[root@ip-172-31-25-213 scripts]# bash readinput
What is your first name?
sai

What is your last name?
redd
hello sairedd
[root@ip-172-31-25-213 scripts]# |
```

Scripts to run commands within

```
#!/bin/bash
```

```
# Script to run commands within
```

```
clear
```

```
echo "Hello `whoami` "
```

```
echo
```

```
echo "Today is `date` "
```

```
echo
```

```
echo "Number of user login: `who | wc -l` "
```

```
echo
```

```
root@ip-172-31-25-213:/charan/scripts
#!/bin/bash
# Script to run commands within
```

```
clear
echo "Hello `whoami`"
echo
echo "Today is `date`"
echo
echo "Number of user login: `who | wc -l`"
echo
```

```
"runcommandswithin" 11L, 156B
```

```
root@ip-172-31-25-213:/charan/scripts
Hello root
```

Today is Thu May 14 09:30:01 UTC 2026

Number of user login: 2

```
[root@ip-172-31-25-213 scripts]# who
ec2-user pts/0 2026-05-14 08:53 (103.160.27.197)
ec2-user pts/1 2026-05-14 08:54 (103.160.27.197)
[root@ip-172-31-25-213 scripts]# who $2
ec2-user pts/0 2026-05-14 08:53 (103.160.27.197)
ec2-user pts/1 2026-05-14 08:54 (103.160.27.197)
[root@ip-172-31-25-213 scripts]# who $3
ec2-user pts/0 2026-05-14 08:53 (103.160.27.197)
ec2-user pts/1 2026-05-14 08:54 (103.160.27.197)
[root@ip-172-31-25-213 scripts]# time
```

```
real    0m0.000s
user    0m0.000s
sys     0m0.000s
```

```
[root@ip-172-31-25-213 scripts]# date
Thu May 14 09:31:10 UTC 2026
```

Thu May 14 09:31:10 UTC 2026
Front@in-172-31-25-212.covrin

```
[root@ip-172-31-25-213 scripts]# vi runcommandswithin
[root@ip-172-31-25-213 scripts]# |
```


Read input and perform a task

```
#!/bin/bash
# This script will rename a file

echo Enter the file name to be renamed
read oldfilename

echo Enter the new file name
read newfilename

mv $oldfilename $newfilename
echo The file has been renamed as $newfilename
```

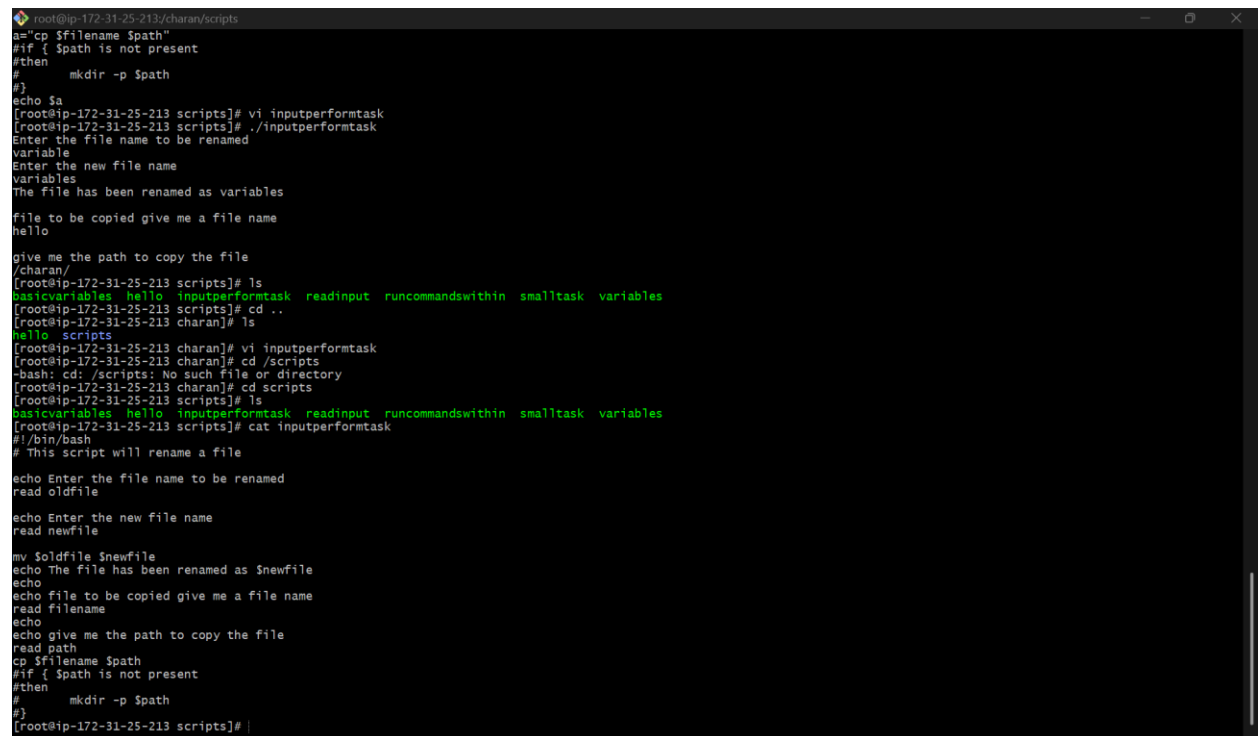

A terminal window titled 'root@ip-172-31-25-213:charan/scripts' displays the execution of a script. The script prompts for a file name to be renamed, a new file name, and a path to copy the file. The user enters 'variables' as the file to be renamed, 'variables' as the new name, and '/charan/' as the path. The script then copies the file and renames it. The terminal output shows the script's execution steps and the user's input.

```
root@ip-172-31-25-213:charan/scripts
a="cp $filename $path"
# if { $path is not present
# then
#     mkdir -p $path
# }
echo $a
[root@ip-172-31-25-213 scripts]# vi inputperformtask
[root@ip-172-31-25-213 scripts]# ./inputperformtask
Enter the file name to be renamed
variable
Enter the new file name
variables
The file has been renamed as variables
file to be copied give me a file name
hello

give me the path to copy the file
/charan/
[root@ip-172-31-25-213 scripts]# ls
basicvariables hello inputperformtask readinput runcommandswithin smalltask variables
[root@ip-172-31-25-213 scripts]# cd ..
[root@ip-172-31-25-213 charan]# ls
hello scripts
[root@ip-172-31-25-213 charan]# vi inputperformtask
[root@ip-172-31-25-213 charan]# cd /scripts
-bash: cd: /scripts: No such file or directory
[root@ip-172-31-25-213 charan]# cd scripts
[root@ip-172-31-25-213 scripts]# ls
basicvariables hello inputperformtask readinput runcommandswithin smalltask variables
[root@ip-172-31-25-213 scripts]# cat inputperformtask
#!/bin/bash
# This script will rename a file

echo Enter the file name to be renamed
read oldfile

echo Enter the new file name
read newfile

mv $oldfile $newfile
echo The file has been renamed as $newfile
echo
echo file to be copied give me a file name
read filename
echo
echo give me the path to copy the file
read path
cp $filename $path
# if { $path is not present
# then
#     mkdir -p $path
# }
[root@ip-172-31-25-213 scripts]#
```

I want to copy a file but the given path does not exist now i want to create the path and copy

```
#!/bin/bash
```

```
# creating path that does not exist and shold create path and copy file
```

```
echo new path creation
```

```
echo
```

```
echo file copy name
```

```
read filename
```

```
echo
```

```
echo new path destination
```

```
echo
```

```
read path
```

```
echo
```

```
echo
```

```
if [ -d "$path" ]
```

```
then
```

```
    cp $filename $path
```

```
elif [ ! -d "$path" ]
```

```
then
```

```
    mkdir -p $path
```

```
fi
```

```
`cp "$filename" "$path"`
```

```
root@ip-172-31-25-213/charan/scripts
[root@ip-172-31-25-213 scripts]# vi copy
[root@ip-172-31-25-213 scripts]# ./copy
new path creation

file copy name
hello

new path destination
/charan/in

./copy: line 13: [: missing `]'
./copy: line 16: [!: command not found

cp: missing destination file operand after 'hello /charan/in'
Try 'cp --help' for more information.
[root@ip-172-31-25-213 scripts]# vi copy
[root@ip-172-31-25-213 scripts]# ./copy
new path creation

file copy name
hello

new path destination
/charan/in

./copy: line 16: [: missing `]'

[root@ip-172-31-25-213 scripts]# vi copy
[root@ip-172-31-25-213 scripts]# ./copy
new path creation

file copy name
hello

new path destination
/charan/in

mkdir: cannot create directory '/charan/in': File exists

[root@ip-172-31-25-213 scripts]# cd ..
[root@ip-172-31-25-213 charan]# ls
in  scripts
[root@ip-172-31-25-213 charan]# cd in
-bash: cd: in: Not a directory
[root@ip-172-31-25-213 charan]# ll
total 4
-rwxr-xr-x. 1 root root 57 May 14 11:19 in
drwxr-xr-x. 2 root root 167 May 14 11:19 scripts
```

