HoopMind: A Real-Time Neural Game-Tree System for Opponent-Aware Possession Planning

Yibo Gong
Beijing National Day School
(High School Student)
Beijing, China
briangongyibo@outlook.com

Cong Guo
University of Memphis
Memphis, TN, USA
cguo@memphis.edu

Jiacheng Ding
University of Memphis
Memphis, TN, USA
jding2@memphis.edu

arXiv:2608.29563v1 [cs.LG] 30 Aug 2026

***Abstract*—School coaches prepare for opponents with game film and intuition. The analytics tools of professional teams stay out of reach. We ask how far *public* data can close this gap. Professional basketball is our case study, chosen for its data rather than the league. We fuse five public sources into one per-shot dataset of 4.23M shots over 21 seasons. The sources are shot locations, two play-by-play feeds, official matchup tracking, and player biometrics. Alignment across them is 99.5% to 100%. We also report two data pitfalls that are easy to miss. We then model a half-court possession as a sequential game. Shot values come from *ShotNet*, an embedding multilayer perceptron (MLP). On a held-out season it beats a zone-rate baseline and a logistic baseline, and its probabilities are well calibrated. A depth-limited expectimax search then solves the offensive decision tree, with branch-and-bound pruning to keep it real time. All training runs offline, so the online system stays light. A scouting planner and a playable simulator both run in a single browser page.**

***Index Terms*—sports analytics, multi-source data fusion, spatiotemporal data mining, interactive visualization, serious games**

I. Introduction

This project began with something we noticed as student players. A school coach preparing for an opponent has only game film, a whiteboard, and intuition. Telling players to open a video game is not instruction, and purely verbal scouting is hard to absorb. A coach could use something in between: a fast, visual tool, grounded in data, that shows *where, against whom, and when* an opponent is weak, and lets players feel the answer by playing against it.

Such a tool needs historical data at scale, and school basketball has none. Professional basketball does. Three kinds of data are public there: shot locations, event-level play-by-play, and, since the 2017-18 season, matchup-level tracking of who guarded whom [1]–[3]. Two gaps remain. First, nobody has fused these sources per shot in the open. Second, the resulting models must run in real time on a school laptop.[1]

This project differs from earlier course and club work. There the first author trained standard classifiers on tabular sports data and drew static shot charts. That work made the gap clear. A model that only scores shots after the fact cannot tell a player what to do next. That is why we added the planning layer.

The work has three parts.

The first part is the data (§IV). Every shot carries its pre-shot score margin, its assist source, a clutch flag, the identity of any blocker, and the shooter's height and weight. Alignment is 99.5% to 100%, and the sources agree on 99.9% of matched outcomes. We also report two pitfalls that quietly corrupt a naive merge (§IV-B).

The second part is the models (§V). We build opponent profiles at four levels: team by zone, individual defender, quarter of the game, and the single shot. The shot level is ShotNet, an embedding MLP fit to 3.8M training shots. It beats a zone-rate baseline and a logistic baseline on a held-out season under a strict time split. Every rate estimate uses empirical-Bayes shrinkage, and we state where the matchup data is biased.

The third part is planning and the system (§III, §VI). We treat a half-court possession as a sequential game and solve it by depth-limited expectimax with branch-and-bound pruning. Two browser tools ship the result: a scouting planner that answers where, against whom, and when to attack, and a playable simulator whose defense follows the learned profiles. Every shot in the simulator is one in-browser forward pass of ShotNet, and a coach mode shows the live solution (Fig. 5).

II. Related Work

Spatial and tracking models. These works build the two quantities we need: where shots come from, and what a defense does to them. Reich et al. [4] model shot charts spatially, and later work splits shot intensity into spatial bases [5]. We use the same zone view of the court. Franks et al. [6] estimate defensive skill, Cervone et al. [7] expected possession value, and Le et al. [8] learn "ghost" defenders by imitation. Those three are the closest in goal to our planner, but all three need private optical tracking. We ask how far the same goals go on public data alone.

Shot outcome prediction. This line sets the bar ShotNet must clear. Models built from public features report an area under the ROC curve (AUC) of about 0.60 to 0.68 [9]. Adding the closest-defender distance raises accuracy, but that feature is private. ShotNet sits inside the public band, so our focus is the

[1]Code: github.com/sujo666/hoopmind; demo: sujo666.github.io/hoopmind. Review is single-blind, so the links are open. Y. Gong, a high school student, is the primary contributor.

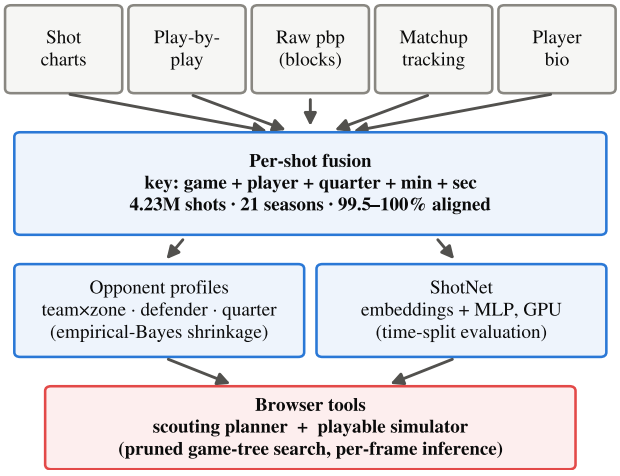


Fig. 1. System overview: five public sources fused per shot, profiles and the shot model learned offline, both feeding two browser front-ends.

fused features, the time-based evaluation, and the interactive deployment, not a higher AUC.

Shot selection and decision value. This line asks our exact question: not where players shoot, but *whether they should*. Skinner [10] derives optimal shot thresholds analytically. We use the same expected-points idea, but put it inside a searchable action tree tied to one named opponent. Seidl et al. [11] let a user sketch plays against a learned defense, the same interactive goal as our coach mode, again from private tracking.

Sports video games. Our simulator borrows its runtime design from here. Commercial titles drive non-player characters with finite-state machines, influence maps, and steering behaviors [12], and we keep that architecture: perception delay, then steering, then simplified execution. Their player ratings, however, are set by editors and never checked against outcomes. We replace them with estimates from data, checked on a held-out season.

III. Possession as a Pruned Sequential Game

A. Formulation

A five-on-five half-court possession is a two-team zero-sum stochastic (Markov) game [13] $\mathcal{G} = (\mathcal{S}, \mathcal{A}_O, \mathcal{A}_D, T, r)$. A state $s \in \mathcal{S}$ holds the ball location, the positions of all ten players, the distance from each attacker to the nearest defender, both clocks, and the score margin. The offense picks an action from its playbook $\mathcal{A}_O$: shoot, drive, pass, screen, cut, and so on. The defense picks a coverage from $\mathcal{A}_D$. The reward r is the points scored on the possession. Solving $\mathcal{G}$ exactly in real time is out of reach, so we make three assumptions:

A1 (empirical opponent). The defense plays a behavioral policy π_D estimated from data rather than a worst-case adversary. We write $\pi_D = (\rho, \delta, \iota)$ for its three estimated tables, all learned in §V. Here $\rho[t, z]$ is what team t concedes in zone z, $\delta[i]$ is how attackable defender i is, and $\iota[t, q]$ is how hard team t defends in quarter q. Fixing one side's policy in a Markov game leaves a Markov decision process (MDP) for the other side [13]. Planning is therefore well defined.

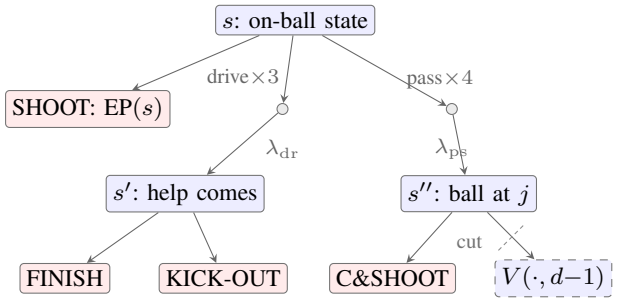


Fig. 2. The decision (sub)tree the planner expands for one on-ball state. Red nodes are terminals priced by the learned estimators, circles are turnover chance nodes (λ), and the dashed mark is a branch-and-bound cut, taken when $U(a, s) \le V_{\text{best}} - \varepsilon$. Screens and off-ball cuts enter through the defender-reaction model rather than as explicit branches.

A2 (where the randomness sits). Contest and block uncertainty go into the terminal payoff. That payoff is linear in the outcome probabilities, so taking their expectation at the leaf loses nothing. The only explicit chance nodes are turnovers. A drive or a pass succeeds with probability $1 - \lambda_a$. We set λ_{dr}=0.06 for a drive and λ_{ps}=0.035 for a pass, from the turnover rates in the development seasons. Otherwise the possession ends with zero points.

A3 (finite horizon). Search depth is limited to d. The search expands the subset $A(s) \subset \mathcal{A}_O$ shown in Fig. 2. SHOOT is available in every state. Every leaf of the cut-off tree is therefore a real terminal, and we never have to guess the value of an unfinished branch.

Write $\mathrm{EP}(s)$ for the expected points (EP) of shooting from state s. Under A1 to A3 the value of an on-ball state is the depth-limited expectimax

$$V(s, d) = \max\Big\{ \underbrace{\mathrm{EP}(s)}_{\text{shoot now}}, \max_{a \in A(s)} (1 - \lambda_a)\, V\big(f(s, a, \pi_D),\, d{-}1\big) \Big\}, \tag{1}$$

The terminal payoff is $\mathrm{EP}(s) = (1 - \beta_{\text{blk}}(s)) \cdot p_{\text{make}}(s) \cdot \mathrm{pts}(s)$. Here p_{make} is the ShotNet forward pass of §V, adjusted by the openness and contest layer. The block probability β_{blk} is read from ρ and δ. The transition $f(s, a, \pi_D)$ is where the defense responds. A drive moves the ball 8 to 10 feet toward the rim, tightens the on-ball defender, and pulls in the weak-side helper. That *frees* every weak-side teammate and re-prices their shots. A pass moves the ball in 0.9 seconds, and every defender recovers toward its mark (Fig. 2).

B. Pruning and complexity

The action set has $|A(s)| = 8$ entries: one shoot, three drives, and four passes. At depth d=2 the exhaustive tree evaluates 57.0 leaf shots on average. We stop there because deeper search cost more browser time without changing the action it picked. We prune with branch-and-bound, in the spirit

Algorithm 1 Pruned depth-limited possession search

Require: state s, depth d, beam k, margin ε, defense π_D

$V_{\text{best}} \leftarrow \text{EP}(s)$ ▷ shoot now: ShotNet + contest layer
best $\leftarrow$ (SHOOT, V_{best})
if $d = 0$ **then return** *best*
$C \leftarrow \{(a,\, U(a,s)) : a \in \text{DRIVE}_{\{L,M,R\}} \cup \text{PASS}_{1..4}\}$
sort C by the optimistic bound U, descending
for (a, U_a) in the first k entries of C **do**
  if $U_a \le V_{\text{best}} - \varepsilon$ **then break** ▷ branch-and-bound cut
  $s' \leftarrow f(s, a, \pi_D)$ ▷ defensive response to a
  $(\textit{tail}, v') \leftarrow \text{SEARCH}(s', d-1, k, \varepsilon)$
  $v_a \leftarrow (1 - \lambda_a)\, v'$ ▷ turnover risk on a
  if $v_a > V_{\text{best}}$ **then** $V_{\text{best}} \leftarrow v_a$; *best* $\leftarrow (a \| \textit{tail},\, v_a)$
return *best*

TABLE I
PRUNING TRADE-OFF VS. EXHAUSTIVE DEPTH-2 EXPECTIMAX (300 RANDOM STATES; "AGREE" = SAME TOP-LEVEL ACTION AS EXHAUSTIVE SEARCH).

Config	nodes saved	agree	mean EP gap
k=4, ε=0.05	65.8%	85.0%	0.022
k=5, ε=0.02	55.0%	91.3%	0.008
k=6, ε=0.02 (used)	**43.4%**	**97.0%**	**0.001**

of alpha-beta search [14]. Algorithm 1 gives the procedure. Children are ordered by a fast optimistic bound $U(a, s)$. For a drive that bound is an uncontested rim finish. For a pass it is a near-open catch-and-shoot at the receiver's spot. A branch is cut when $U(a, s) \le V_{\text{best}} - \varepsilon$, where V_{best} is the best value found so far. At most k children expand per node. Note that U is a heuristic, not a provably admissible bound, so the pruning is *approximate*. We therefore measure what it costs instead of claiming it is exact.

Table I reports that cost over 300 random states. The shipped setting is k=6 and ε=0.02. It evaluates 43% fewer nodes. It still picks the same top action as exhaustive search in 97% of states. That was the best trade-off we found between computation and agreement. All training happens offline on a GPU. The browser therefore re-solves the tree every 0.25 seconds in well under a millisecond.

IV. Data and Fusion

A. Sources and alignment

Algorithm 2(a) gives the whole offline path, from the raw public files to the payload the browser loads. The five sources of Fig. 1 differ in coverage. Shot charts run from 2003-04 through 2023-24, while both play-by-play feeds and the biometrics [15] run from 1996-97. Matchup tracking starts in 2017-18, when the league began publishing who guarded whom. We join shots to play-by-play on the key `(game, player, quarter, min-left, sec-left)`. Across 21 seasons the match rate is 99.5% to 100%. The two sources also agree on 99.9% of matched outcomes, since both come from the same official scorer feed. Blocks come from the third-player slot of the raw play-by-play. Court zones are the 14 combinations of range and side labels in the league's application programming interface (API): the restricted area, three paint sectors, five mid-range sectors, and five three-point sectors. Backcourt heaves fall outside this scheme. They are 0.2% of attempts, and we drop them everywhere below.

B. Two pitfalls worth recording

Zero versus missing. In play-by-play files up to 2016-17, a non-scoring event carries `0-0` rather than an empty score. Filling scores forward then gives margin 0 for most shots. That inflates the rate of "clutch" shots, meaning the last 5 minutes with $|\text{margin}| \le 5$, from about 4% to about 7.5%. The give-away is a jump at the 2017/2018 file boundary.

Post-shot score leakage. A score is recorded *after* the shot it accompanies. Used as-is, it produces a strong and steady trend. Teams ahead by 16 or more appear to shoot 55.4%, against 40.3% when behind by 16 or more (Fig. 3(b), red). We then subtract the points of the shot itself. The curve flattens to a range of 46.9% to 48.6% across all margin bins (blue). The effect was almost entirely an artifact of the encoding. Every margin in this paper is a pre-shot margin.

C. What fusion unlocks

Here are three findings from 2023-24. First, field goal percentage (FG%) falls under pressure. In the clutch, meaning the last five minutes with $|\text{margin}| \le 5$, it drops from 47.7% to 43.9%. Three-point (3PT) shots fall hardest, from 36.9% to 31.7%. We can measure this only because the pre-shot margin was fused in. Second, corner threes are assisted on 96% to 97% of makes, against only 46% for mid-range makes, so court position decides how a shot is created. Third, 9.0% of two-point attempts are blocked, against 0.9% of threes. Fig. 4 shows the structural shift across the 21 seasons. The mid-range emptied out, from 35.6% of attempts to 11.2%. The three-point share more than doubled, from 18.7% to 39.5%.

V. Learned Opponent Profiles

A. Team, defender, and time profiles

For every defending team and every one of the 14 zones we estimate two numbers: the FG% it allows and the rate at which it blocks. Both use empirical-Bayes shrinkage toward the league rate, with a prior strength of 100 attempts. A sanity check supports them. In 2023-24 the best rim defense belongs to Oklahoma City, Cleveland, and Minnesota, the teams of the rim protectors Holmgren, Mobley, and Gobert. The weakest belong to Washington, Portland, and Toronto. From matchup tracking we then rank each roster's defenders. The measure is points allowed per 100 partial possessions when a defender is targeted, again shrunk, over at least 400 possessions. Boston is a good example of the spread. Its backup centers concede 34.5 points per 100 targeted possessions. Its reserve guards concede 15.5. The planner attacks that gap directly. Per-quarter FG% allowed gives each team an intensity curve. Boston, for instance, defends hardest in the first quarter, at 3.1 percentage points (pp) below its own average, and eases off late.

Algorithm 2 From public files to an on-court recommendation: (a) the offline build, (b) one online frame. Symbols follow §III.

(a) Offline: public event streams → browser payload

Require: seasons Y and the five public sources of Fig. 1

$\mathcal{D} \leftarrow \emptyset$
for $y \in Y$ **do**
  $B \leftarrow$ play-by-play(y); recode `0-0` as missing; fill forward
  $J \leftarrow$ shots$(y) \bowtie B$ on (game, player, quarter, min, sec)
  margin $\leftarrow$ score margin $-$ points of this shot
  attach blocker and biometrics; $\mathcal{D} \leftarrow \mathcal{D} \cup J$
$\rho[t, z] \leftarrow$ EBShrink(field goal % allowed, block rate), per team-zone
$\delta[i] \leftarrow$ EBShrink(pts per 100 targeted poss.), per defender
$\iota[t, q] \leftarrow$ EBShrink(field goal % allowed), per team-quarter
$\theta \leftarrow$ TrainShotNet$(\mathcal{D})$, split by season (train $\leq$ 2021-22)
return payload $(\rho, \delta, \iota, \theta)$, exported as JSON

(b) Online: one frame of coupled five-on-five play

Require: state s, payload $(\rho, \delta, \iota, \theta)$, step Δt

$h \leftarrow$ off-ball defender nearest the rim ▷ designated helper
for each defender i, marking attacker $m(i)$ **do**
  $\hat{x}_i \leftarrow \hat{x}_i + (1 - \mathrm{e}^{-\Delta t/\tau_i})(x_{m(i)} - \hat{x}_i)$ ▷ lag τ_i from $\delta[i]$
  $g \leftarrow$ point on the $\hat{x}_i$-to-rim line, tighter if i guards the ball
  if ball in the paint **and** $i{=}h$ **then** $g \leftarrow$ midpoint(ball, rim)
  steer i to g: speed $\propto \iota$ for this quarter, bounded acceleration
push apart defenders closer than 2.4 ft; each off-ball attacker cuts backdoor if its defender left, else re-spaces
$o_j \leftarrow$ openness of attacker j from defender distance and momentum
$\mathrm{EP}_j \leftarrow$ Price$(\theta, \rho, x_j, o_j,$ clock, margin$)$
return Search$(s, 2, k, \varepsilon)$ ▷ Alg. 1, every 0.25 s

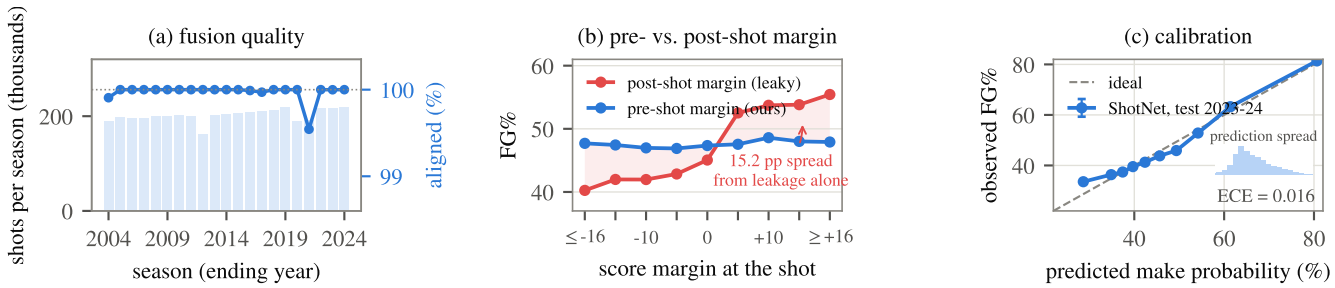


Fig. 3. (a) Alignment over 21 seasons: 4.23M shots, never below 99.54% matched (bars: volume; line: rate). (b) The post-shot margin (red) creates a 15.2 percentage point effect that the pre-shot margin (blue) shows to be an artifact. (c) Reliability on the held-out season, with the prediction spread inset.

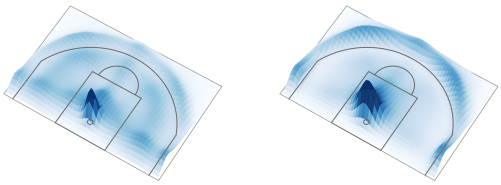


Fig. 4. Shot-density landscapes, first versus last season (square-root scale, shared normalization). The mid-range plateau drains into a ridge along the arc.

TABLE II
SHOT-OUTCOME PREDICTION ON THE HELD-OUT 2023-24 SEASON.

Model	AUC	log-loss
League zone rate	0.631	0.663
Logistic regression (numeric features)	0.639	0.666
ShotNet (ours)	**0.646**	**0.648**

Assignment bias. Matchup possessions are not assigned at random. Coaches hide weak defenders on weak scorers. A defender ranking therefore measures output when targeted, not pure ability. The tools label it that way. Conditioning on the offensive strength of each defender's assignments would sharpen the ranking further.

B. ShotNet

ShotNet learns four embeddings: shooter (16-d), defending team (8-d), zone (6-d), and action group (6-d). It concatenates them with nine numeric features: x, y, distance, a 3PT flag, the quarter, seconds left, the pre-shot margin, and the shooter's height and weight. A 96-64-1 MLP sits on top, about 46k parameters in all. It trains in minutes on one workstation GPU, using AdamW with batch size 16384 for four epochs. Training uses 3.79M shots from seasons up to 2021-22, and validation uses 217k shots from 2022-23. The 2023-24 test season, 218k shots, is never touched during development. Table II reports the results. Fig. 3(c) shows that the model is well calibrated. Its 10-bin expected calibration error is 0.016, and its mean prediction is 47.4% against a 47.5% base rate. Calibration matters more here than raw AUC, because Eq. (1) consumes probabilities, not rankings. The margin over the logistic baseline is also not only a metric gap. The planner needs a prediction conditioned on the shooter and the defending team at the same time. The embeddings give that, and a numeric-feature model cannot. The size of the improvement matches prior work on public shooting features [9], since shot outcomes stay noisy without defender-distance tracking. The trained network exports to 362 KB of JSON. It runs in about 10^4 multiply-adds, one forward pass per frame in the browser.

VI. The Interactive Layer

A. Scouting planner

The planner takes one opponent as input. It colors the court by how much better than league average each zone is to attack. It ranks that roster's defenders by how attackable they are, and beside each one it shows the selected player's own history

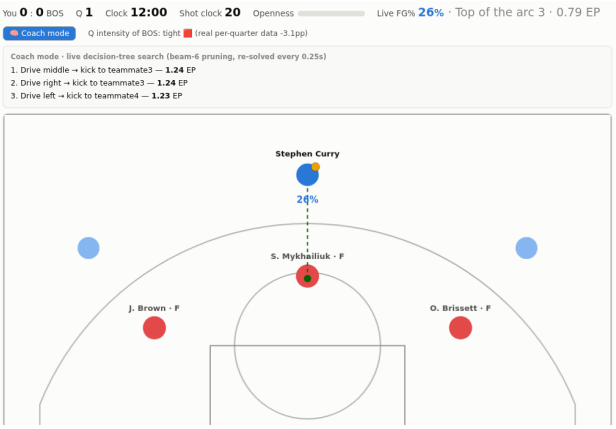


Fig. 5. The simulator versus Boston's real rotation: live FG%, coach-mode top-3 branches with expected points, and the best branch drawn on court.

against him. It also shows the per-quarter intensity strip. For a named attacker, the prediction combines his zone profile with the opponent's in log-odds space.

B. Playable simulator with a live-solved game tree

Algorithm 2(b) gives one simulation frame. This is where one action changes the other nine players. When the helper leaves its assignment, a teammate's shot is re-priced. The search in Algorithm 1 then exploits that new price. The simulator keeps the usual sports-game AI stack: perception delay, steering with bounded acceleration, and man or help assignment [12]. Every parameter, however, comes from the data. Reaction time comes from the defender's matchup difficulty and ranges from 0.10 to 0.34 seconds. Speed comes from position group, block attempts from personal and team-zone block rates, and per-quarter intensity from the team's own curve. Substitutions at quarter boundaries follow the real rotation. A shot resolves as one ShotNet forward pass plus a game layer for openness and contest distance, whose coefficients we show to the player. *Coach mode* (Fig. 5) runs the pruned search of §III every 0.25 seconds. It lists the top three branches with their expected points and draws the best one on the court. This is what a scouting analyst would sketch, recomputed as the play develops. In the state shown, a contested pull-up three against Boston is worth 0.79 expected points, while driving middle and kicking to the weak-side shooter is worth 1.24. The difference between a habitual shot and a better branch becomes a number the player can question. A post-game report lists every shot with its openness, closest defender, model probability, and outcome, against expected points. One real-time minute compresses to about one quarter. Each tool is one self-contained HTML file, and a FastAPI backend serves the same models programmatically.

The interface is explicit about what each number is. Every probability traces back to a documented estimator in the open pipeline, and defender *paths* are behavior AI driven by those same estimates, because movement tracking is not published.

The whole system is reproducible from our public repository. A reader can clone it and run `make`. That rebuilds the dataset, the three profile tables, and ShotNet from the raw public files, and regenerates every number and figure here. Both browser tools are also hosted live, so a reader can try them without installing anything.

C. Beyond basketball

The same framework should carry to other sports with enough public event data. The recipe has four steps: fuse the public event streams, estimate how the opponent defends, learn a calibrated pricing model for terminal actions, then solve the offensive decision tree with pruned search. Any invasion sport with open event data qualifies. Soccer through StatsBomb's open data and ice hockey through public shot logs are the two we port to next.

VII. Conclusion

We combined public shot, play-by-play, matchup, and biometric data into one per-shot dataset, and used it to estimate opponent profiles and shot probabilities. Those estimates price the leaves of a depth-limited search, which runs inside a browser-based simulator. Two results follow. The fusion holds high alignment across sources. The pruned search cuts computation a lot and still picks the same action as exhaustive search most of the time. Basketball is only the case study; the pipeline is what we expect to carry over.

References

[1] mexwell, "NBA Shots dataset: regular-season shot locations, 2003–2024," Kaggle: `mexwell/nba-shots` (NBA Stats API mirror), 2024.

[2] S. Jwiak, "NBA play-by-play data (1997–2025)," Kaggle: `szymonjwiak/nba-play-by-play-data`, 2025.

[3] V. Shufinskiy, "nba_data: NBA play-by-play and matchup datasets," GitHub: `shufinskiy/nba_data`, 2025.

[4] B. J. Reich, J. S. Hodges, B. P. Carlin, and A. M. Reich, "A spatial analysis of basketball shot chart data," *The American Statistician*, vol. 60, no. 1, pp. 3–12, 2006.

[5] A. Miller, L. Bornn, R. Adams, and K. Goldsberry, "Factorized point process intensities: A spatial analysis of professional basketball," in *Proc. ICML*, 2014, pp. 235–243.

[6] A. Franks, A. Miller, L. Bornn, and K. Goldsberry, "Characterizing the spatial structure of defensive skill in professional basketball," *Ann. Appl. Statist.*, vol. 9, no. 1, pp. 94–121, 2015.

[7] D. Cervone, A. D'Amour, L. Bornn, and K. Goldsberry, "A multiresolution stochastic process model for predicting basketball possession outcomes," *J. Amer. Statist. Assoc.*, vol. 111, no. 514, pp. 585–599, 2016.

[8] H. M. Le, P. Carr, Y. Yue, and P. Lucey, "Data-driven ghosting using deep imitation learning," in *Proc. MIT Sloan Sports Analytics Conf.*, 2017.

[9] P. Zuccolotto, M. Manisera, and M. Sandri, "Big data analytics for modeling scoring probability in basketball: The effect of shooting under high-pressure conditions," *Int. J. Sports Sci. Coaching*, vol. 13, no. 4, pp. 569–589, 2018.

[10] B. Skinner, "The problem of shot selection and the optimal strategy in basketball," *J. Quant. Anal. Sports*, vol. 8, no. 1, 2012.

[11] T. Seidl, A. Cherukumudi, A. Hartnett, P. Carr, and P. Lucey, "Bhostgusters: Realtime interactive play sketching with synthesized NBA defenses," in *Proc. MIT Sloan Sports Analytics Conf.*, 2018.

[12] M. Buckland, *Programming Game AI by Example*. Jones & Bartlett Learning, 2005.

[13] M. L. Littman, "Markov games as a framework for multi-agent reinforcement learning," in *Proc. ICML*, 1994, pp. 157–163.

[14] D. E. Knuth and R. W. Moore, "An analysis of alpha-beta pruning," *Artificial Intelligence*, vol. 6, no. 4, pp. 293–326, 1975.

[15] J. Cirtautas, "NBA player biometrics, per season," Kaggle: `justinas/nba-players-data`, 2023.