Context-adjusted Player Evaluation for Twenty20 Cricket

Rhitankar Bandyopadhyay

University of Florida, Gainesville, FL 32611, USA. Email: r.bandyopadhyay@ufl.edu

arXiv:2608.18020v2 [stat.AP] 27 Aug 2026

Abstract

I develop a reproducible framework for evaluating individual batting and bowling performances in Twenty20 (T20) cricket on one interpretable scale of runs above expectation, built from two ball-level primitives. The first, *Runs Above Expected* (RAE), is the residual between the runs scored on a delivery and a contextual expectation of what an average performer would produce in the same situation. That expectation is a multiplicative log-linear model of the cohort scoring rate, whose per-cell estimator is shown to be a conditional Poisson maximum likelihood multiplier. It is fitted by iterated backfitting and stabilised by empirical Bayes shrinkage, so that thinly sampled contexts are pooled towards the population. A single opposition symmetry places run-scoring and run-prevention on the same footing. The second primitive, *Dismissal Adjusted Runs* (DAR), prices a dismissal in that currency as the runs it forgoes, read off a batting side value function solved by dynamic programming through a Bellman expectation recursion, under observed play. Because dismissal is the expected end of every innings, the realised wicket cost (realDAR) is centered against its expectation (xDAR) under a league dismissal hazard rate. The centered quantity is a run-weighted mean zero martingale residual of the dismissal process, so a player is charged only for departing from average behaviour. The two primitives sum to a symmetric Impact, which makes batting and bowling comparable in centre as well as in unit. Estimated on over 2.7 million legal deliveries of men's T20 cricket, the framework recovers known contextual structure, agrees with the conventional rates it refines while correcting their context-blindness, and yields face-valid player, innings and season leaderboards for the Indian Premier League.

Keywords: Bellman expectation, Dynamic programming, Impact metrics, Player evaluation, Run expectancy, Sports analytics.

1 Introduction

Twenty20 (T20) is the shortest and most widely watched form of professional cricket. Each side bats for a single innings of twenty overs, i.e. at most 120 legal deliveries, so scoring is compressed and unforgiving. A handful of balls can decide a match, and every delivery carries a visible trade-off between runs and the risk of dismissal. Since its introduction, the format has grown into a global professional circuit of franchise leagues, the Indian Premier League (IPL) foremost among them, alongside the Big Bash League (BBL), the Caribbean Premier League (CPL), the SA20 to name a few, in which recruitment, selection and in-game tactics turn on large sums of money and on increasingly fine grained data. Every ball of professional T20 matches is now recorded, which makes the quantitative evaluation of individual batting and bowling both possible and consequential, and it is that evaluation this paper develops.

The rest of this section sets the context: Section 1.1 discusses performance analysis in T20 and why raw statistics are inadequate for it, Section 1.2 reviews the relevant literature across cricket and other sports, and Section 1.3 states our contribution. The data are described in Section 2; Section 3 formulates the first primitive, Runs Above Expected; Section 4 constructs the second of them, Dismissal Adjusted Runs, through a batting-side value function; Section 5 combines them into a single Impact rating; Section 6 reports the empirical properties and validation; and Section 7 concludes.

This work is part of the development of an app Regulus. The Regulus platform and its constituent metrics are proprietary at this point; all methodology described herein is for documentation and scholarly communication only.

1.1 Performance analysis in T20 cricket

A T20 innings unfolds in three broadly recognised phases. Unless rain or some other interruption shortens the match, the 'powerplay' of the first six overs restricts the fielding side and rewards aggression; the 'middle overs' usually see consolidation, often against spin, and the 'death overs' at the end of the innings are played at maximum risk. Batting and bowling therefore mean very different things at different points of an innings, and against different opponents and conditions, and this is what makes individual evaluation difficult. The conventional measures, namely a batter's average (runs per dismissal) and strike rate (runs per hundred balls), a bowler's average (runs per dismissal), economy rate (runs per 6 balls), and strike rate (balls per dismissal), aggregate over this heterogeneity and are systematically confounded by it. A strike rate of 150 is unremarkable at the death and exceptional in the middle overs, an economy around 8 is expensive in the middle overs and cheap at the death, a boundary off a good bowler is worth more than the same boundary off a part-timer, and a dismissal early in an innings costs a side far more than the same dismissal towards its end. None of these situational factors are visible in the raw numbers. Two further problems compound it. Batting and bowling are reported on incommensurable scales, i.e. runs per ball (or 100 balls) against runs per over, so the two roles cannot be placed on a common footing, which matters acutely for all-rounders and for squad-level decisions, and a raw average credits occupation of the crease without asking what the runs were worth in context. Yet these are the distinctions performance analysis exists to draw, since selection, auction valuation, match-ups and in-game strategy all turn on what a player actually contributes, net of the situation he found himself in. A metric fit to inform such decisions must adjust for context at the level of the individual ball, must reward run-scoring and run-prevention on the same scale as the wickets that punctuate them, and must stay interpretable enough to be trusted and reproducible enough to be checked.

1.2 Review of literature

Quantitative cricket analysis has long rested on the idea of a run expectancy, a function that assigns to each state of an innings the runs a side can expect from it. Its best known instance is the Duckworth-Lewis method for resetting targets in interrupted matches (Duckworth and Lewis, 1998), whose resource table is exactly such a function of the overs and wickets a side has in hand. A parallel line used dynamic programming to derive optimal play: Clarke (1988) computed optimal scoring rates in one-day cricket, and Preston and Thomas (2000) formulated optimal batting strategy against a target. The same machinery underlies the modern win-and-score predictor WASP, built by Brooker and Hogan (2011) on a dynamic programming run expectancy estimated from historical limited-overs data, while later statistical models describe how scoring and dismissal risk evolve within an innings rather than optimise them (Stevenson and Brewer, 2021). The value function of the present paper belongs to this tradition, but is put to a different use. I solve it under observed play, to price the runs a wicket forgoes, not to prescribe how a side should bat.

Turning from game states to players, early evaluation measures refined the batting average and strike rate into single indices (Lemmer, 2004), but these inherit the context-blindness of their ingredients. The closest antecedent of our work is the simulation approach of Davis et al. (2015a) and Davis et al. (2015b), who built a ball-by-ball T20 simulator and, from it, an *expected run differential*: the runs a player adds relative to a standard player in the same role, obtained by re-simulating innings with and without him. This captures context and reports contributions in runs, but it depends on a full generative simulator and a role-defined replacement, and it does not yield a transparent per-ball decomposition. Other work rates players through Bayesian or machine-learning models and data-envelopment indices, or models player valuation specifically for the IPL auction. These gain flexibility at the cost of interpretability, and typically treat batting and bowling on separate scales.

Alongside the academic literature, several proprietary systems target the same quantity we do: a context-adjusted, unified measure of impact, but behind closed models. Cricinfo's Smart Stats[1] report *Smart Runs* (runs re-weighted by match context) and *Smart Wickets* (a dismissal valued by the batter removed, its timing, and the state of the game) and combine the two into a single 'Player Impact' on a runs scale, the same design goal as ours. CricViz derives expected runs, expected wickets and expected

[1] Read articles and illustrations on Cricinfo's Smart Stats here: https://www.cricinfo.com/genre/superstats-706

dismissals from ball-tracking data, and independent analysts have proposed replacement-level measures such as Runs Above Average Replacement[2], a cricketing analogue of baseball's value over replacement. These efforts are influential, but their mechanisms are largely unpublished, they often rely on proprietary or tracking data unavailable for most matches, and they are validated only informally, so they can be neither reproduced nor audited by others.

The underlying idea of valuing an event by its expected contribution to a scoring currency, above what an average or replacement performer would have produced, is mature in several other sports. Baseball's run expectancy and win probability accounting descends from Lindsey (1963) and now underpins reproducible wins-above-replacement systems (Baumer et al., 2015). In association football, expected goals grade a chance by its scoring probability, and action value frameworks such as VAEP value every on-the-ball action by the change it induces in the probabilities of scoring and conceding (Decroos et al., 2019). In basketball, the expected possession value model prices the state of a possession by the points it is expected to yield (Cervone et al., 2016). All of these share one logic: price events in the currency of the game, relative to expectation, which the present framework brings to T20 cricket.

The cricketing literature either optimises play rather than evaluating it, evaluates players through simulators or opaque models that are hard to reproduce, or reports the two roles on scales that do not meet, and the systems that come closest to a unified impact measure are proprietary. What is missing is a transparent, likelihood based framework that adjusts for context at the level of the individual ball, prices wickets in the same runs currency as the runs themselves, and places batting and bowling on one comparable scale, reproducible in full from public data. This paper provides it.

1.3 Contribution of the work

I build the framework from two ball-level primitives, both expressed in runs above expectation and shared symmetrically between the two roles. The first, *Runs Above Expected* (RAE), is the residual between the runs scored on a delivery and a contextual expectation of what an average performer would have produced in the same situation, specified through phase, innings, era, fall of wickets, bowler type, venue and the specific opponent. That expectation is a multiplicative, log-linear model of the cohort scoring rate whose per-cell estimator I show to be a conditional Poisson maximum likelihood multiplier, fitted by iterated backfitting and stabilised by empirical Bayes shrinkage, so that thinly sampled contexts and players are pooled towards the population rather than trusted blindly. A single opposition symmetry credits a batter against the bowler he faced and a bowler against the batter he contained, which places run-scoring and run-prevention on one scale. The second primitive, *Dismissal Adjusted Runs* (DAR), prices a dismissal in that same currency. A batting-side value function, solved by dynamic programming under observed play, gives the runs a wicket forgoes in a given state. But charging a batter the full cost of every dismissal would penalise even an average player, since being dismissed is the expected end of an innings. I therefore centre the realised wicket cost against its expectation under a corresponding league dismissal hazard rate, which yields a quantity that is exactly a run-weighted martingale residual of the dismissal process, mean zero under average behaviour, so a player is charged only for departing from it. Summed over a career, the two primitives give a symmetric Impact, batting and bowling differing only in sign, on a single interpretable runs scale.

Three parts of this are new. The first is reproducibility. Every multiplier, hazard and shrinkage strength is estimated from public ball-by-ball data, and there is no tuning constant left to set, whereas the proprietary impact systems do not disclose their models at all. The second is the pricing of a wicket as a centered martingale residual, which is to our knowledge new to cricket. It is what puts a batter's and a bowler's Impact on a common centre and not only a common unit: an average performer of either role sits near zero, and the long-standing difficulty of placing the two roles on one footing goes away with it. The third is that both primitives are additive at the ball level, so the same construction reads coherently from a single delivery to a long career without re-fitting anything. I fit the framework on more than 2.7 million legal T20 deliveries and report the contextual structure it recovers, the agreement of each primitive with the conventional rate it refines, and leaderboards and case studies for the IPL.

[2]Read here: https://www.cricinfo.com/story/using-the-runs-above-average-replacement-metric-1226970

2 Data

The analysis uses a ball-by-ball dataset across men's T20 cricket spanning from February 2005 to June 2026 (data last updated as of June 05, 2026), drawn from 19 competitions including T20 Internationals and several major domestic franchise and national leagues. Table 1 summarises the dataset. The unit of analysis is the legal delivery (`is_legal_ball` = True, wides and no-balls excluded).

Table 1: Data summary and coverage. The dataset has two tiers: a *baseline* record present for every delivery and a *ball-tracking* record available only for a section of matches. Qualification thresholds count players by legal balls, n_i.

Quantity	Value
Entire dataset	
Total deliveries	2,819,700
Legal deliveries	2,727,420
Matches	12,492
Distinct competitions	19
Date range	Feb 2005 - May 2026
IPL deliveries / matches	295,629 / 1,243
Coverage of the detailed (ball-tracking) tier	
Matches with any stroke annotation	2,128 (17.0% of matches)
Deliveries with stroke annotation	448,751 (16.5% of legal)
Deliveries with line/length	924,134 (33.9% of legal)
Baseline-only (Cricsheet) matches	10,364 (83.0% of matches)
Qualifying players	
Qualifying batters, $n_i \geq 30/100/500$	6,234 / 3,800 / 1,220
Qualifying bowlers, $n_i \geq 60/200$	4,607 / 2,516

Two tiers of detail. The dataset is deliberately heterogeneous in granularity, so I state exactly what is available where. Each of the 12,492 matches (2,727,420 legal deliveries) carries a baseline record derived from public Cricsheet repositories: the batter and bowler identities, the key components of model (1) (`phase`, `innings`, `date`, `wickets_fallen`, `bowler_type_grp`, `ground`), the outcome fields `runs_off_bat`, `is_boundary`, `is_dot`, bowler-credited dismissal flag and the chase-state components (runs, balls, wickets remaining, target at any point during 2nd innings) used by the second-innings value function of Section 4. A smaller *ball-tracking* tier adds the delivery's line and length, stroke type, stroke magnitude, stroke direction, elevation etc. This richer information is present for only a minority of the data: stroke annotation covers 448,751 legal deliveries (16.5%) across 2,128 matches (17.0%) and line and length data covers 924,134 deliveries (33.9%), so the majority of matches (10,364 or 83%) carry the baseline record alone. Coverage is also uneven within the tier: some matches are annotated ball for ball while others are only partially tracked, which is why I report ball counts rather than treating any match as wholly tracked.

This heterogeneity forces a design choice. Both primitives, RAE (Section 3) and Dismissal Adjusted Runs (Section 4), use only baseline fields, so they are computed identically on every match irrespective of ball-tracking availability. Restricting the covariates to those recorded for every delivery keeps the sample pool as large as possible, lets a player be compared across eras, venues and match situations on one consistent baseline, and keeps the framework reproducible from public data. The richer ball-tracking covariates (line, length, stroke geometry etc.) are therefore not used by the metrics defined here. A fairer batting evaluation would, however, credit run-scoring relative to the exact delivery faced. I accordingly extend the expected runs model to incorporate the delivery's line and length on the annotated subset, and formulate a modified RAE in Section S2 of the supplementary materials. No metric silently degrades on a baseline-only match; each is fully defined from fields recorded everywhere.

3 The 'Runs Above Expected' (RAE) model

RAE is the foundation of the framework, and every other metric is a functional of the ball-level RAE series. The construction has three parts: a contextual expectation model (Section 3.1), its estimation by iter-

ated, shrunk backfitting (Section 3.2-3.3) and the role-specific opposition overlay followed by aggregation (Section 3.4).

3.1 The contextual expectation model

Let $r_b \in \{0, 1, 2, 3, 4, 6\}$ be the runs off the bat on legal delivery b and let $\boldsymbol{x}_b$ denote its context. I model the cohort expected runs, defined as what an average batter would score (for batting), and an average bowler would concede (for bowling), in that situation, as a product of a global base rate and contextual multipliers:

$$\mu(\boldsymbol{x}_b) = \mu_0 \, \gamma^{\text{scen}}_{c_1(b)} \, \gamma^{\text{era}}_{c_2(b)} \, \gamma^{\text{wkt}}_{c_3(b)} \, \gamma^{\text{type}}_{c_4(b)} \, \gamma^{\text{ven}}_{c_5(b)} \, \gamma^{\text{opp}}_{c_6(b)}, \tag{1}$$

where μ_0 is the grand mean over all legal deliveries, each of $\gamma^{\text{scen}}_{c_1(b)}$, $\gamma^{\text{era}}_{c_2(b)}$, $\gamma^{\text{wkt}}_{c_3(b)}$, $\gamma^{\text{type}}_{c_4(b)}$, $\gamma^{\text{ven}}_{c_5(b)}$ is a non-negative multiplier attached to a categorical cell of the corresponding factor, and $\gamma^{\text{opp}}_{c_6(b)}$ is the opposition factor, defined as the opposition bowler's multiplier for batter evaluation and the opposition batter's multiplier for bowler evaluation (Section 3.4). The five shared factors stated in (1) are:

Factor	Cell key $c_f(b)$	Captures
Scenario	(phase, innings)	situational scoring level
Era	(year, phase)	temporal scoring inflation
Wicket	(phase, wickets fallen)	fall-of-wickets pressure
Bowler type	(phase, pace/spin sub-type)	match-up difficulty by phase
Venue	(ground, 3-year bucket)	pitch, via temporal locality

The wicket factor is conditioned on the exact number of wickets fallen (0 to 10), so the fall-of-wickets gradient is estimated at full resolution and the empirical Bayes shrinkage of Section 3.3 pools the sparse deep-collapse cells automatically; the venue bucket groups consecutive 3-year windows at each ground. Taking logs on both sides, (1) is a main-effects log-linear model,

$$\log \mu(\boldsymbol{x}_b) = \log \mu_0 + \sum_f \log \gamma^{(f)}_{c_f(b)}, \tag{2}$$

on crossed categorical keys; the crosses (e.g. phase×innings, year×phase etc.) admit a controlled set of two-way interactions while keeping the parameter count tractable.

Remark 1 (Difficulty parameter lives in the expectation)**.** *Phase difficulty is captured* inside $\mu(\boldsymbol{x}_b)$*, principally by the scenario factor* $\gamma^{\text{scen}}_{(phase,innings)}$ *(and refined by era, wicket and bowler-type factors, each phase-conditioned). A run in a higher-scoring phase is therefore measured against a higher bar automatically. No separate phase weight is applied to either role,* RAE *therefore acts as a pure residual on the run scale.*

The factors of (1) are not chosen by convention alone; each of them carries strong, independent signal. Table 2 reports an analysis of deviance for the fitted expected runs model: dropping any single factor from the converged fit raises the Poisson deviance of Proposition 1 by the stated amount, on its degrees of freedom. At this sample size, every factor is significant far beyond any conventional threshold ($p < 10^{-300}$), so the deviance each explains is read not as a test but as a measure of relative importance. The venue and the fall of wickets state carry the most, the phase-innings scenario and opposition bowler identity follow, and even the smallest, the pace or spin sub-type of a bowler, remains decisive. The symmetric opposition batter factor of the bowler evaluation fit is significant to the same degree.

Beyond the covariates in (1), the delivery's line and length are the most informative additions the data offer. On the annotated subset, length alone explains a deviance rivalling that of the venue factor and line a smaller but still overwhelming amount (lower block of Table 2). I keep them out of the headline model for the comparability reasons of Section 2, but develop the resulting extension, a modified RAE, and quantify its effect in Section S2 of the Supplementary Materials.

The case for line and length is cricketing as much as statistical. Two deliveries identical in every recorded respect, i.e. the same phase, innings, bowler type, venue and match state, are still not equivalent if one is a good length ball outside off and the other a half volley on the pads. A boundary off the former is a finer stroke than off the latter and, for a fair evaluation, should be rewarded as such. Symmetrically,

Table 2: Analysis of deviance for the expected runs model. Each row gives the rise in Poisson deviance (χ^2) when the factor is dropped from the converged fit, on its degrees of freedom; all factors are significant beyond any usual threshold.

Factor	d.f.	ΔDeviance (χ^2)	p
Always-available model (1)	*(n = 2,727,420 legal deliveries)*		
Scenario (phase × innings)	7	21,686	$< 10^{-300}$
Era (year × phase)	68	8,611	$< 10^{-300}$
Wicket (phase × wickets fallen)	32	27,972	$< 10^{-300}$
Bowler type (phase × sub-type)	20	2,812	$< 10^{-300}$
Venue (ground × 3-yr bucket)	1,267	41,767	$< 10^{-300}$
Opposition bowler (identity)	7,281	27,545	$< 10^{-300}$
Additional ball-tracking covariates	*(annotated subset, n = 804,308)*		
Length (phase × length)	20	41,924	$< 10^{-300}$
Line (phase × line)	20	3,409	$< 10^{-300}$

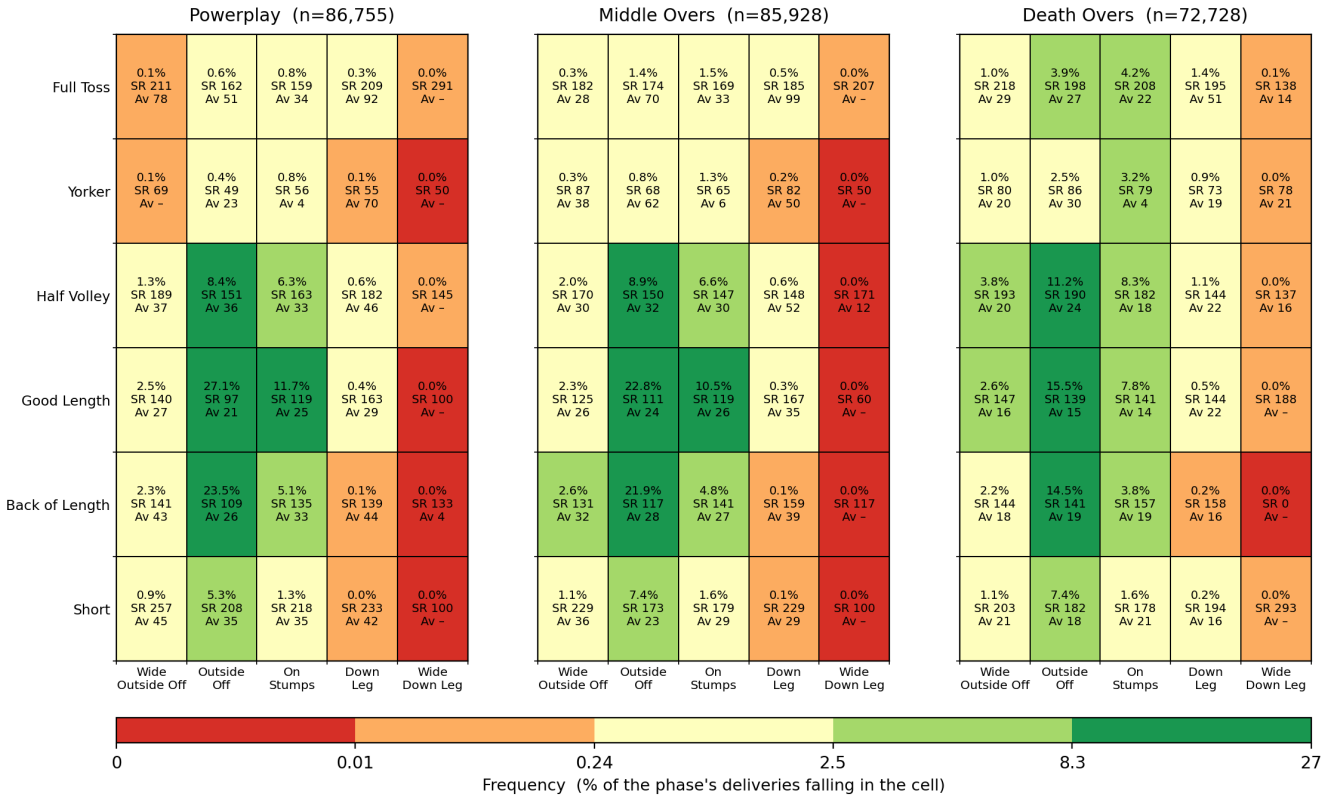


Figure 1: Line×length structure for right-hand batters against right-arm pace, by phase. Each cell reports the frequency (percentage of the phase's deliveries pitching there), strike rate and batting average in that cell.

being dismissed by a sharp yorker is not the lapse that missing a straight full toss is, and ideally the two should be debited differently. These 'line-and-length' effects are large, and they shift with the phase and the bowler. Figure 1 shows, for right-hand batters against right-arm pace, how sharply scoring depends on where the ball lands. Against a good-length ball outside off, which is the single most common delivery (27% of powerplay balls), the strike rate is only 97, less than half the 208 that a short ball on the same line concedes, and the mix itself moves through the innings, fuller lengths growing far more frequent at the death overs. Figure 2 tells the same story from the striker's end, plotting where each delivery reaches the batter. The cloud of impact points[3], and the wickets, fours and sixes within it, climbs and spreads as the innings progresses. A model blind to line and length scores all of these deliveries against one bar;

[3]Impact points, along with the detailed ball-tracking data for IPL 2026, have been obtained from the official IPL website run by BCCI: https://www.iplt20.com/matches/results.

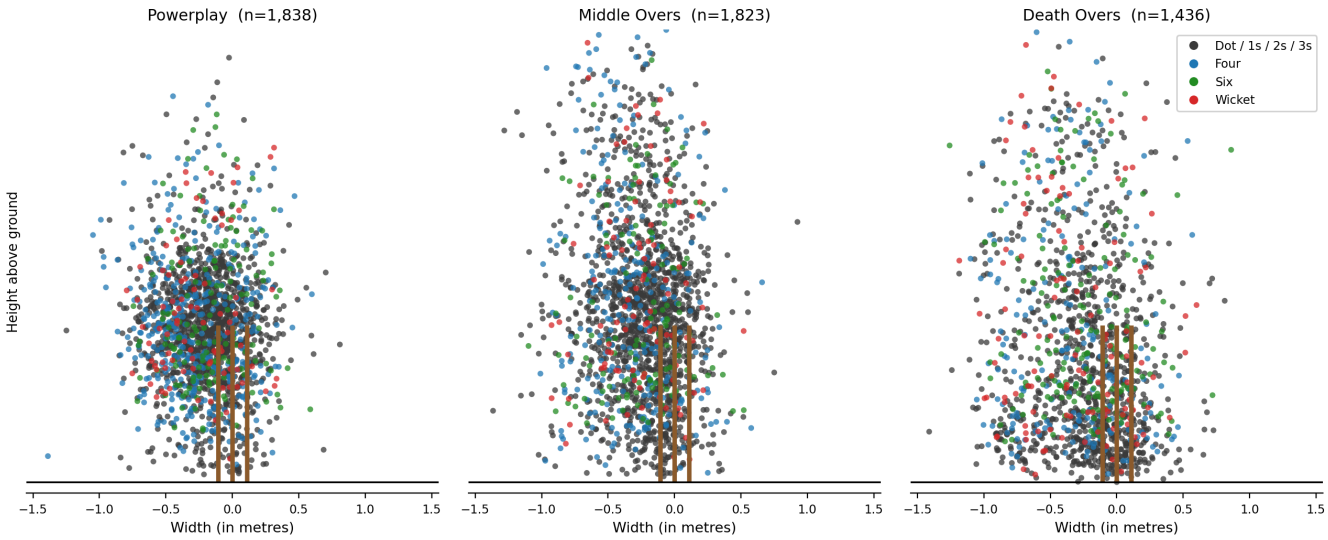


Figure 2: Ball impact point (the 'beehive' stump view) for right-hand batters against right-arm pace in IPL 2026, by phase. Each dot is a delivery, placed by its width and height as it reaches the batter; wickets, fours and sixes are highlighted. The cloud rises and widens from the powerplay to the death overs.

conditioning on them, where the data allow, is the refinement Section S2 takes up.

3.2 Estimation by iterated backfitting

The factors in (1) are correlated: deliveries early (and late) in an innings are simultaneously in the Powerplay (and Death) phase, at low (and high) wicket counts, and often against pace, so fitting each against the raw base rate would over-count shared variation. I therefore estimate them by sequential residualisation (backfitting) in the fixed order: scenario → era → wicket → bowler type → venue → opposition. Carry a running fitted value e_b, initialised at $e_b = \mu_0$. At any stage, for the current factor f with cells c, set

$$\hat{\gamma}_c^{(f)} \;=\; \frac{\sum_{b\in c} r_b}{\sum_{b\in c} e_b}, \tag{3}$$

then update $e_b \leftarrow e_b \cdot \hat{\gamma}^{(f)}_{c_f(b)}$ before moving to the next factor. Note that (3) is exactly the multiplicative adjustment that equates each cell's fitted total to its observed total and it has a precise likelihood interpretation.

Proposition 1 (Cell ratio as a conditional Poisson MLE)**.** *Suppose* $r_b \mid \boldsymbol{x}_b \sim \text{Poisson}(\mu_b)$ *independently, with* $\log \mu_b = \log e_b + \log \gamma_{c(b)}$*, i.e.* $\log e_b$ *enters as a known offset. Then the maximum-likelihood estimator of the multiplier* γ_c *for cell* c *is* $\hat{\gamma}_c = (\sum_{b\in c} r_b)/(\sum_{b\in c} e_b)$*, which is* (3)*.*

Proof. The cell-c log-likelihood contribution is $\sum_{b\in c}\{r_b(\log e_b + \log \gamma_c) - e_b\gamma_c\} + \text{const}$. Differentiating with respect to γ_c and equating it to zero gives $\sum_{b\in c} r_b/\gamma_c - \sum_{b\in c} e_b = 0$, hence the stated estimator. The second derivative $-\sum r_b/\gamma_c^2 < 0$ confirms a maximum. □

Thus each update step given by (3) is one coordinate (block) step of Gauss-Seidel ascent on the Poisson log-likelihood of (2), holding the other factors as offset. Since the log-likelihood is concave in the log-multipliers, repeating the sweep drives the estimates to that peak, i.e. the one best-fitting set of multipliers. On the first pass, each factor is fitted against the factors placed before it, and on every later pass, a factor is re-fitted against all the others (I divide its current multiplier back out of e_b before re-estimating, so no factor counts itself twice). I iterate the sweep till convergence, stopping once the fitted values e_b have effectively stopped changing. The empirical Bayes shrinkage of Section 3.3 is re-applied each time a factor is fitted.

Remark 2 (Order independence at convergence)**.** *The maximised log-likelihood is unique, so the fitted expectation and hence the ball-level* RAE *does not depend on the order in which the factors are cycled. The ordering (most to least populous) affects only the number of cycles to convergence. Up to the mild*

empirical-Bayes shrinkage, the fit satisfies the Poisson score identities $\sum_{b\in c} r_b = \sum_{b\in c} \hat{\mu}_b$ *for every cell of every factor, so the residual* RAE *is centered within each context cell and not merely in aggregate.*

3.3 Empirical Bayes shrinkage of the multipliers

Thin cells with very few deliveries (a rare ground in a particular three-year window; a bowler or batter with a short record) yield unstable ratios. Each raw multiplier is therefore shrunk towards the neutral value 1 by a pseudo-count κ_f:

$$\gamma_c^{(f)} \;=\; \frac{n_c\,\hat{\gamma}_c^{(f)} + \kappa_f}{n_c + \kappa_f} \;=\; \omega_c\,\hat{\gamma}_c^{(f)} + (1-\omega_c)\cdot 1, \qquad \omega_c = \frac{n_c}{n_c+\kappa_f}, \tag{4}$$

where n_c is the cell's delivery count. The shrinkage is a convex combination of the data ratio and unity, with data weight ω_c increasing in sample size; κ_f is the number of prior deliveries pulling a thin cell back to neutral.

Here 1 is the neutral no-adjustment value: a multiplier of 1 leaves the expectation unchanged. Shrinking towards it simply treats a thin, poorly-estimated cell as average until it has enough data to prove otherwise. I estimate one κ_f per factor from the data by empirical Bayes, so the degree of shrinkage is itself learned. Model the raw ratios $\hat{\gamma}_c^{(f)}$ as noisy estimates of true multipliers θ_c that scatter across cells around a cross-sectional mean of 1 with variance τ_f^2. Two variances must be separated here. The between-cell variance τ_f^2 is the real spread of the true effects from one cell to the next; this is the signal I want to keep. The within-cell variance is the sampling error in a single cell's estimate, coming only from its finite number of deliveries; this is the noise I want to discount. Because $\hat{\gamma}_c^{(f)} = (\sum_{b\in c} r_b)/(\sum_{b\in c} e_b)$ has a fixed offset in its denominator, this sampling variance is

$$v_c = \frac{\mathrm{Var}(r)\;n_c}{\left(\sum_{b\in c} e_b\right)^2}. \tag{5}$$

I calibrate it to the empirical run variance $\mathrm{Var}(r)$ rather than to a Poisson assumption: runs off the bat are lumpy (point masses concentrated mostly at $0, 1, 2, 4, 6$ and few at $3, 5$) and markedly over-dispersed, with $\mathrm{Var}(r)/\mu_0 \approx 2.08$ in the dataset, so a Poisson variance would understate the noise and leave thin cells over-trusted.

I do not observe τ_f^2 directly, since the observed spread of $\hat{\gamma}_c^{(f)}$ mixes signal and noise. I recover it by the DerSimonian-Laird method of moments (DerSimonian and Laird, 1986), the standard method-of-moments empirical Bayes estimator, which simply subtracts the average sampling variance from the total observed spread, leaving the between-cell signal τ_f^2. The Bayes posterior mean for θ_c is then the precision-weighted average of the cell's own ratio and the neutral value 1, with weight

$$w_c = \frac{\tau_f^2}{\tau_f^2 + v_c} = \frac{\text{signal}}{\text{signal} + \text{noise}}. \tag{6}$$

So a cell is trusted in proportion to how much of its apparent effect is real rather than sampling noise. Finally, because each delivery's expectation is close to the base rate, $\sum_{b\in c} e_b \approx n_c\mu_0$ and hence $v_c \approx (\mathrm{Var}(r)/\mu_0^2)/n_c$; substituting this into (6) collapses the variance weight exactly onto the pseudo-count form $\omega_c = n_c/(n_c+\kappa_f)$ of (4), with

$$\kappa_f = \frac{\mathrm{Var}(r)}{\mu_0^2\;\tau_f^2} = \frac{\text{within-cell sampling noise}}{\text{between-cell signal}}. \tag{7}$$

Thus a single number κ_f (the noise-to-signal ratio for factor f), read as an equivalent count of prior deliveries, sets the shrinkage. A factor whose cells differ only weakly beyond noise (small τ_f^2) gives a large κ_f and is pulled hard towards 1, while a factor carrying strong, repeatable variation (large τ_f^2) gives a small κ_f and is left close to its raw ratios. A cell holding exactly κ_f deliveries sits halfway ($\omega_c = 0.5$) between its own estimate and the neutral value. The fitted values (Table 3) recover the expected ordering without it being imposed: the small pace/spin effect (bowler-type) is shrunk most heavily ($\kappa_f \approx 10^3$), while venue, opposition batter and scenario, which carry large heterogeneity, are shrunk the least ($\kappa_f \approx 1.5\text{-}1.9 \times 10^2$).

Remark 3 (Relation to the conjugate Gamma-Poisson posterior)**.** *Under a* Gamma(κ, κ) *prior on* γ_c *(prior mean* 1*, prior strength* κ*) with the Poisson likelihood of Proposition 1, the posterior mean is* $(\sum_{b\in c} r_b + \kappa)/(\sum_{b\in c} e_b + \kappa)$*. Estimator* (4) *replaces the exposure* $\sum_{b\in c} e_b$ *by the count* n_c*; since* $e_b \approx \mu_0 \approx 1.24$ *runs per ball,* $\sum_{b\in c} e_b \approx 1.24\, n_c$*, so* (4) *is a close, slightly more conservative proxy for the exact conjugate posterior mean. I therefore describe it as an empirical Bayes shrinkage estimator rather than an exact Bayes rule.*

3.4 The opposition overlay and aggregation

The single adjustment that specialises the cohort expectation to either role is the opposition factor γ^{opp}, estimated symmetrically. For batters' evaluation, a bowler multiplier $\gamma^{\text{bowl}}_{(\text{bowler id})}$ is co-fit with the context factors in the joint backfitting of Section 3.2 and for bowlers' evaluation, a batter multiplier $\gamma^{\text{bat}}_{(\text{batter id})}$ is co-fit with the same context factors. The two role-specific fits share an identical context specification, differing only in which opposition identity they carry, and each is applied one at a time.

- Batter's RAE multiplies the expectation by the opposition-bowler multiplier γ^{bowl}, so out-scoring a strong bowler yields a larger residual.
- Bowler's RAE multiplies the expectation by the opposition-batter multiplier γ^{bat}, so containing a strong batter yields a larger (more negative) residual.

A player's own factor is never applied to his own residual since multiplying a bowler's expectation by his own multiplier would cancel the skill being measured, and likewise for a batter.

The ball-level Runs Above Expected and its player aggregates are finally recorded as

$$\text{RAE}_b = r_b - \hat{\mu}(\boldsymbol{x}_b), \qquad \overline{\text{RAE}}_i = \frac{1}{n_i}\sum_{b:\, i} \text{RAE}_b, \qquad \text{RAE}_i^{\text{total}} = \sum_{b:\, i} \text{RAE}_b, \tag{8}$$

with standard error $\text{se}_i = \text{sd}_b(\text{RAE}_b)/\sqrt{n_i}$, where the expectation $\hat{\mu}$ carries the role-appropriate opposition factor. For a batter, $\overline{\text{RAE}}_i$ (denoting RAE/Ball) is the headline rate, centered so that a cohort-average batter scores ≈ 0, with positive values denoting run production above contextual expectation. For a bowler, $\overline{\text{RAE}}_i$ is the excess runs conceded per ball, so lower (negative) is better: a negative RAE/Ball means the bowler concedes fewer runs than an average bowler would concede in the same situation. The per-ball value used by all downstream signals is $v_b = \text{RAE}_b$ for batters and $v_b = -\text{RAE}_b$ for bowlers.

Reading RAE at different scales. Because RAE is defined and additive at the ball level, the same primitive reads coherently at every level of aggregation, with no re-fitting. The expectation is fixed, so a delivery, a knock and a career are all just sums of the identical residual, and each scale answers a distinct question.

- *Single ball-level event* (RAE_b): the value of a single delivery, i.e. the unit for ball-by-ball diagnostics (determines which deliveries a batter punished, where a bowler was beaten etc.).
- *Per innings or spell* ($\sum_{b\in\text{knock/spell}} \text{RAE}_b$): the value of one performance. This is a context-adjusted innings/spell measure. For example, a fighting 40-run innings against quality pace during a collapse can outscore a 60-run innings on a flat deck, because the expectation bar it cleared was higher.
- *Per-ball average* ($\overline{\text{RAE}}_i$ or RAE/Ball): a player's quality rate, the headline per-ball figure, comparable across players irrespective of sample size.
- *Cumulative* ($\text{RAE}_i^{\text{total}}$): the total value contributed by a player over a series, tournament, career or any span of time.

The rate and the total RAE outputs distinctly answer "how good per ball (or on average)" versus "how much value in total" a player produces. A short-sample specialist can top the former while a durable accumulator tops the latter (Tables 9 and 10). Run prevention, however, is only one of a bowler's two sources of value, and only one side of a dismissal's ledger; the next section prices the second, Dismissal Adjusted Runs.

4 Dismissal Adjusted Runs (DAR)

RAE prices the runs on a delivery, but a delivery that takes a wicket carries value that a per-ball run residual cannot capture: a wicket removes a batter from the remainder of the innings, and the runs he would have gone on to score go with him. From the batting side's view, the side loses whatever those forgone runs exceed what the batters who followed him actually managed; from the bowling side's, the same runs are saved. I call this quantity *Dismissal Adjusted Runs*: the number of runs a dismissal costs the batting side, and equivalently the number it saves the bowling side. It is the framework's second primitive and, like RAE, a currency shared by the two roles. I build it in two steps. Section 4.1 constructs a batting-side value function and reads off, for every delivery, the wicket cost $c(s)$ it would forgo were a dismissal to occur there, a single non-negative number attached to the match state. Section 4.2 then aggregates this cost twice: once over a player's realised dismissals and once, as a hazard-weighted expectation, over all the balls the batter is party to. The primitive that enters Impact is the difference of the two, which centers the wicket ledger at zero in the same way RAE centers the run ledger.

A wicket's value is inherently counterfactual, in the sense of "how would the innings have continued had the batter survived?". It cannot be read directly off the scorecard, or off any record of events that actually took place, and must instead be estimated against a model of the innings' continuation. The natural model for this estimation is a run-expectancy function or 'value' function. To every state of an innings it assigns the runs the batting side can expect to add from that point onward. Given such a function, a wicket needs no separate apparatus to price, rather it is simply the drop in expected remaining runs when a set batter is replaced by the next one in. Valuing game states this way has a long lineage in sport, from the run-expectancy tables of baseball (Lindsey, 1963) to the resource tables of Duckworth and Lewis (1998), which are themselves a value function of the overs and wickets (together termed as 'resources' in DL and DLS methods) a side has in hand.

Such value functions are naturally recursive. The runs expected from a state equal what happens on the next delivery plus the expected value of the state that delivery leads to, averaged over its possible outcomes. This decomposition is a Bellman equation, the identity that organises dynamic programming by tying the value of a state to the values of its successors, and it comes in two forms that must not be confused. The Bellman optimality equation maximises over the actions available at each state and so describes how a side should bat to score the most. It is the object of the dynamic programming studies of optimal scoring rates and batting strategy in limited-overs cricket (Clarke, 1988; Preston and Thomas, 2000). The Bellman expectation equation instead holds the policy fixed: it takes the way batters actually score and are dismissed, estimated directly from the data, and returns the expected runs under that behaviour, in the descriptive spirit of models of how scoring evolves through an innings (Stevenson and Brewer, 2021). Pricing a wicket calls for the runs an innings would in fact have yielded, not the runs an optimal side could have extracted, so I adopt the expectation form in this paper. Carrying no maximisation, it is a linear recursion, and since the state advances one ball at a time, it is acyclic in terms of balls remaining. So a single backward sweep from the end of the innings solves it exactly, with no optimiser and no fixed point to iterate towards.

4.1 The batting team value function

Describe an innings by the state $s = (m, w, i, j)$: m legal balls remain in the innings, the batting side has w remaining wickets in hand, the striker is of quality tier i and the non-striker of tier j (tiers are defined in Section 4.2), with $e \in \{1, 2\}$ denoting the innings. Let

$$V_e(m, w, i, j) = \text{expected runs the batting side scores over the remaining } m \text{ balls from state } s,$$

under observed play. The phase of a delivery is a deterministic function of the balls already bowled, given by $\varphi = \varphi(M_0 - m)$ with $M_0 = 120$, so contextual scoring enters through the transition model without enlarging the state.

On the next delivery, the striker (tier i) is dismissed with hazard rate $h_{i,\varphi,e}$, otherwise he scores $r \in \mathcal{R} = \{0, 1, 2, 3, 4, 5, 6\}$ runs with probability $\pi_{r|i,\varphi,e}$, where $\sum_{r\in\mathcal{R}} \pi_{r|i,\varphi,e} = 1$ (probabilities are conditional on survival of the batter). Odd runs and the end of an over rotate the strike; a dismissal brings in a fresh batter of tier $\iota(w)$ (see details in Section 4.2). Writing $\sigma(r, m) \in \{0, 1\}$ for whether the strike changes ends

after the ball (i.e. r is odd or the over ends), the value function satisfies the Bellman expectation recursion

$$V_e(m, w, i, j) = h_{i,\varphi,e}\, V_e(m-1,\, w-1,\, \iota(w),\, j) \;+\; (1 - h_{i,\varphi,e}) \sum_{r \in \mathcal{R}} \pi_{r|i,\varphi,e} \Big[r + V_e(m-1,\, w,\, i', j') \Big], \tag{9}$$

where $(i', j') = (j, i)$ when $\sigma(r, m) = 1$ and (i, j) otherwise, and on a dismissal the incoming batter takes strike (its position rotates under σ likewise). The recursion closes at the absorbing boundaries

$$V_e(0, w, i, j) = 0 \quad \text{(balls exhausted)}, \qquad V_e(m, 0, i, j) = 0 \quad \text{(batting team gets all out)}. \tag{10}$$

Equation (9) is the expectation form introduced above: it evaluates the runs a team scores under its observed scoring and dismissal behaviour, with no maximisation over batting actions. The state space is finite and acyclic when ordered by m, so (9) has a unique solution, obtained by a single backward sweep from $m = 0$ to $m = M_0$.

4.2 The transition model

The recursion needs, per (tier, phase, innings), a dismissal hazard rate h and a scoring distribution π, all estimated from the same dataset with the empirical Bayes shrinkage of Section 3.3.

Player rates and quality tiers. For each batter, I form empirical Bayes shrunk estimates of their scoring rate μ_i and per-ball dismissal hazard η_i,

$$\mu_i = \frac{\sum_{b:\, i} r_b + \kappa_\mu\, \mu_0}{n_i + \kappa_\mu}, \qquad \eta_i = \frac{d_i + \kappa_\eta\, \eta_0}{n_i + \kappa_\eta}, \tag{11}$$

with d_i denoting the batter's dismissals, μ_0 and η_0 the corresponding means based on the dataset, and κ_μ and κ_η the corresponding pseudo-counts in the sense of the empirical Bayes shrinkage theory described in Section 3.3. Batters are grouped into $Q = 6$ quality tiers by ball-weighted quantiles of μ_i, so a tier is a homogeneous quality band and thin players are pulled to the population before being tiered.

Scoring and hazard by state. Pooling deliveries by (tier, phase, innings), the scoring distribution $\pi_{\cdot|i,\varphi,e}$ and hazard rate $h_{i,\varphi,e}$ are the corresponding empirical frequencies, each shrunk toward its (phase, innings) pooled distribution by a conjugate (Dirichlet, respectively Beta) pseudo-count so that sparse cells borrow strength. Estimating π and h separately by innings lets the second-innings value function reflect chase-state scoring; a finer conditioning on the required run rate is a natural refinement (see Section 7).

Strike rotation and the incoming batter. Odd runs and end of an over rotate the strike through σ. When a wicket falls, the incoming batter's tier $\iota(w)$ is the empirical average tier of batters entering at that position, so the value function unrolls the actual remaining batting order: every subsequent batter is accounted for through the recursion, weighted by how much of the innings remains and how likely each of them is to bat in it.

Because the state is ordered by balls remaining in the innings, one backward pass fills the entire table exactly (Algorithm 1).

Algorithm 1 Backward solve of the batting-side value function V_e (Bellman expectation)

$V_e(0, \cdot, \cdot, \cdot) \leftarrow 0$; $\quad V_e(\cdot, 0, \cdot, \cdot) \leftarrow 0$
for $m = 1, \ldots, M_0$ **do**
  $\varphi \leftarrow \varphi(M_0 - m)$; $\quad$ overEnd $\leftarrow \mathbb{1}[(M_0 - m + 1) \bmod 6 = 0]$
  for $w = 1, \ldots, 10$ **and** tiers $i, j \in \{1, \ldots, Q\}$ **do**
    $A \leftarrow \sum_{r \in \mathcal{R}} \pi_{r|i,\varphi,e} \big[r + V_e(m-1,\, w,\, i', j') \big]$ ▷ (i', j') per strike rotation $\sigma(r, m)$
    $B \leftarrow V_e(m-1,\, w-1,\, \iota(w),\, j)$ ▷ 0 if $w = 1$ (all out)
    $V_e(m, w, i, j) \leftarrow h_{i,\varphi,e}\, B + (1 - h_{i,\varphi,e})\, A$
  end for
end for
return V_e

Per-ball wicket cost. Consider a delivery in state $s = (m, w, i, j, e)$: a tier-i striker with a tier-j partner, m balls and w wickets remaining in innings e. Had the striker been dismissed here, the batting side would trade its current continuation for the one that follows a wicket, the ball is consumed and a fresh batter of tier $\iota(w)$ resumes, so the runs forgone are the drop in the value function,

$$c(s) = \Big[\underbrace{V_e(m, w, i, j)}_{\text{runs if batter survived}} - \underbrace{V_e(m-1, w-1, \iota(w), j)}_{\text{runs after the dismissal}} + \delta_{\text{fresh}} \Big]_+, \tag{12}$$

where $[\,\cdot\,]_+ = \max\{\cdot, 0\}$. The quantity in brackets is non-negative by construction, since a set batter is worth at least as much as the fresh one who replaces him, and the positive part only guards against rare estimation noise. The correction $\delta_{\text{fresh}} \geq 0$ accounts for the incoming batter entering unset: a new batter scores below his settled rate over his first few deliveries. Writing the empirical 'set curve' as $f(\cdot)$, with $f(k) \in (0, 1]$ the fraction of the settled rate realised over the first k balls, and $E = \{1 - (1 - \eta_i)^{s_i m}\}/\eta_i$ for the geometric survival expectation of balls the dismissed batter would have faced (from his hazard η_i and strike share s_i),

$$\delta_{\text{fresh}} = (1 - f(E))\, \mu\, \min(E, E_{\max}). \tag{13}$$

Note that $c(s)$ is a function of the match state, defined on every delivery and not only on those that happen to take a wicket. Every state is priced on its own terms: the quality of the striker and his partner, the balls and wickets remaining, the phase and the innings, so no global 'runs per wicket' constant enters anywhere. Dismissing a top-order batter in the powerplay forgoes many runs; removing a tail-ender in the final over forgoes almost none, and the same expression returns both.

Realised and expected Dismissal Adjusted Runs. Let $W_b \in \{0, 1\}$ mark whether the striker was dismissed on delivery b, and let s_b be its state. The realised Dismissal Adjusted Runs (realDAR) sums the cost over a player's actual dismissals, grouped by $\mathcal{D}_i$, the deliveries on which batter i was out and $\mathcal{W}_i$, the deliveries on which bowler i took the wicket,

$$\text{realDAR}_i^{\text{bat}} = \sum_{b \in \mathcal{D}_i} c(s_b), \qquad \text{realDAR}_i^{\text{bowl}} = \sum_{b \in \mathcal{W}_i} c(s_b). \tag{14}$$

Taken alone, this is a strictly non-negative accumulation, one term per wicket, and it is the naive quantity one would debit the batter and credit the bowler. It is also what makes the two roles incomparable if used directly: a mean-zero run ledger (RAE) combined with a one-signed wicket ledger (realDAR) drives every batter's total down and every bowler's up, an artefact of mixing a centered and an uncentered quantity rather than a fact about the players (Section 6.3 quantifies the resulting scale gap). The correct comparison is not against zero but against what the same deliveries would have cost an average player. Let $\bar{h}_{\varphi,e}$ be the global dismissal rate per legal ball in phase φ, innings e (for evaluations confined to a large enough league, tournament or era, the corresponding dismissal rate can be used instead for finer accuracy). This is defined as a context-level baseline, conditioned on the situation and not on the player being evaluated, exactly as the cohort expectation $\mu(\boldsymbol{x}_b)$ is in RAE. Summing the cost over every delivery a player takes part in, weighted by that hazard, gives the expected Dismissal Adjusted Runs (xDAR). For $\mathcal{F}_i$ denoting the deliveries batter i faced and $\mathcal{B}_i$ those bowler i bowled,

$$\text{xDAR}_i^{\text{bat}} = \sum_{b \in \mathcal{F}_i} \bar{h}_{\varphi_b, e_b}\, c(s_b), \qquad \text{xDAR}_i^{\text{bowl}} = \sum_{b \in \mathcal{B}_i} \bar{h}_{\varphi_b, e_b}\, c(s_b). \tag{15}$$

$\text{xDAR}_i^{\text{bat}}$ reads as the wicket value an average batter would be expected to concede over the situations i actually batted in, and $\text{xDAR}_i^{\text{bowl}}$ the value an average bowler would be expected to take over the balls i actually bowled.

The centered Dismissal Adjusted Runs. The primitive that enters the final Impact of a player, *Dismissal Adjusted Runs* (DAR), is the difference of the two aggregates, realised minus expected. Because $\sum_{b \in \mathcal{F}_i} W_b\, c(s_b) = \sum_{b \in \mathcal{D}_i} c(s_b) = \text{realDAR}_i^{\text{bat}}$, it collapses to a single sum over the balls faced,

$$\text{DAR}_i^{\text{bat}} \;:=\; \text{realDAR}_i^{\text{bat}} - \text{xDAR}_i^{\text{bat}} \;=\; \sum_{b \in \mathcal{F}_i} (W_b - \bar{h}_{\varphi_b, e_b})\, c(s_b), \tag{16}$$

and symmetrically for the bowler over $\mathcal{B}_i$. The factor $\sum_b (W_b - \bar{h}_{\varphi_b,e_b})$ is the martingale residual of the dismissal counting process, i.e. observed events minus their compensator, the accumulated hazard (following Barlow and Prentice (1988) and Therneau et al. (1990)), so (16) is that residual weighted by the run value of each potential wicket. The following makes the centering precise.

Proposition 2 (The centered Dismissal Adjusted Runs is a mean-zero martingale residual)**.** *If, conditional on the state s_b, a batter is dismissed at the league hazard, $\mathbb{E}[W_b \mid s_b] = \bar{h}_{\varphi_b,e_b}$, then $\mathbb{E}\big[\mathrm{DAR}_i^{bat}\big] = \mathbb{E}\big[\mathrm{realDAR}_i^{bat} - \mathrm{xDAR}_i^{bat}\big] = 0$. Consequently a batter is charged only for departing from the global (or league) dismissal rate: negative values (survival beyond expectation) raise Bat Impact, positive values (being dismissed more often, or in costlier states, than his situations warranted) lower it, and dismissal at exactly the expected rate is free.*

Proof. Taking expectations in (16), $\mathbb{E}[(W_b - \bar{h}_{\varphi_b,e_b})c(s_b) \mid s_b] = c(s_b)\,\mathbb{E}[W_b - \bar{h}_{\varphi_b,e_b} \mid s_b] = 0$ under the stated null; summing over $\mathcal{F}_i$ and applying the tower property gives the result. The same argument holds for the bowler over $\mathcal{B}_i$. □

Remark 4 (A transfer of expected runs, conserved system-wide)**.** *The wicket cost $c(s_b)$ enters the dismissed batter's ledger with a negative sign and the bowler's with a positive one, so a wicket remains a transfer of expected runs between the sides. The centering is conserved in aggregate as well: the expected total is the same whether summed over all batters or all bowlers, $\sum_i \mathrm{xDAR}_i^{bat} = \sum_b \bar{h}_{\varphi_b,e_b}\, c(s_b) = \sum_i \mathrm{xDAR}_i^{bowl}$, while $\sum_i \mathrm{realDAR}_i^{bat} = \sum_i \mathrm{realDAR}_i^{bowl}$ is the realised total. The framework therefore stays balanced globally while judging each player against the situations they personally faced, the same property* RAE *possesses.*

5 Impact: batting and bowling on the same runs scale

With two primitives in hand, i.e. RAE for excess runs on every ball and the centered Dismissal Adjusted Runs (DAR = realDAR − xDAR) for excess wicket value, a player's Impact is his total contribution across both channels. The construction is symmetric between the roles and differs only in sign: a batter and a bowler each add value by scoring or saving runs, and transfer value at dismissals relative to what those dismissals were expected to be worth.

Batting Impact. A batter adds runs above expectation ball by ball (+RAE) and carries the centered wicket ledger:

$$\Omega_i^{(\mathrm{Bat})} = \sum_{b \in \mathcal{F}_i} \mathrm{RAE}_b \;-\; \mathrm{DAR}_i^{\mathrm{bat}}. \tag{17}$$

The first term rewards how he scored, a per-ball residual against a contextual par, so a below-par passage accrues little or negative RAE however long it lasts. The second term, expanded as $\mathrm{realDAR}_i^{\mathrm{bat}} - \mathrm{xDAR}_i^{\mathrm{bat}}$, credits the wicket value an average batter would have surrendered over his situations and debits what he actually surrendered. A batter who outlasts the global (or league) dismissal rate is rewarded for it; one who is dismissed early or cheaply, relative to the states he batted in, is charged the excess. This differs from a raw wicket penalty in an important way. Getting out is the expected end of every innings, so the metric does not tax a batter simply for being dismissed, rather it taxes only dismissals beyond expectation, and pays a survival dividend below it. Occupation of the crease is close to neutral rather than free, since the survival credit it earns is offset by the weak RAE that slow scoring produces, while sustained batting at or above par is rewarded through both channels at once.

Bowling Impact. Symmetrically, a bowler saves runs ball by ball (−RAE) and carries the centered wicket credit:

$$\Omega_i^{(\mathrm{Bowl})} = -\sum_{b \in \mathcal{B}_i} \mathrm{RAE}_b \;+\; \mathrm{DAR}_i^{\mathrm{bowl}}. \tag{18}$$

Here the wicket term credits a bowler for taking wickets beyond what his overs would ordinarily yield and neither rewards nor penalises one who takes exactly the expected number. This is the correction that a raw wicket count misses: a high-volume containment bowler accumulates wickets simply by bowling many deliveries, and pricing those against the expected haul strips out the inflation while leaving the strike

bowlers who beat expectation ahead. Run prevention and this net wicket credit are the two separate sources of bowling value, and both are measured in runs, so they add directly. Their relative weight is not a tuning parameter but a consequence of the value function and the hazard baseline.

Remark 5 (One centered scale, comparable across roles)**.** *Both* (17) *and* (18) *are sums of two mean-zero residuals in runs above expectation. A batter's Impact and a bowler's Impact are therefore readily comparable: a value of* +300 *denotes the same* 300 *runs of net contribution whichever role produced it, and an average performer of either role sits near the common origin. Under the naive aggregate* $\sum \mathrm{RAE} \mp \mathrm{realDAR}$*, a one-signed wicket total added to a centered run total pushes the roles onto disjoint ranges; subtracting the expectation* xDAR *restores a shared scale, as Section 6.3 documents. Impact may be read as a career or tournament total, which is longevity-aware because both the run value and the survival credit accumulate with volume, or as a per-ball* rate $\Omega_i^{(\mathrm{Bat})}/n_i$*; the two answer peak-quality and total-contribution questions respectively.*

Given the value table of Algorithm 1 and the hazard baseline $\bar{h}_{\varphi,e}$, both aggregates assemble in a single linear pass over the deliveries (Algorithm 2): each ball adds its RAE to the striker and its negative to the bowler, adds the hazard-weighted wicket cost $\bar{h}_{\varphi_b,e_b} c(s_b)$ to both players' expected ledgers, and, on a dismissal, adds the realised cost $c(s_b)$ as well.

Algorithm 2 Assembly of batting and bowling Impact in one pass over deliveries

$R^{\mathrm{bat}}, R^{\mathrm{bowl}}, \mathrm{realDAR}^{\mathrm{bat}}, \mathrm{realDAR}^{\mathrm{bowl}}, \mathrm{xDAR}^{\mathrm{bat}}, \mathrm{xDAR}^{\mathrm{bowl}} \leftarrow 0$ for all players
for each legal delivery b with striker p, bowler q, state s_b **do**
  $R_p^{\mathrm{bat}} \mathrel{+}= \mathrm{RAE}_b$; $R_q^{\mathrm{bowl}} \mathrel{-}= \mathrm{RAE}_b$
  $\mathrm{xDAR}_p^{\mathrm{bat}} \mathrel{+}= \bar{h}_{\varphi_b,e_b}\, c(s_b)$; $\mathrm{xDAR}_q^{\mathrm{bowl}} \mathrel{+}= \bar{h}_{\varphi_b,e_b}\, c(s_b)$
  if a wicket falls ($W_b = 1$): $\mathrm{realDAR}_{d(b)}^{\mathrm{bat}} \mathrel{+}= c(s_b)$, $\mathrm{realDAR}_q^{\mathrm{bowl}} \mathrel{+}= c(s_b)$
end for
$\Omega_p^{(\mathrm{Bat})} \leftarrow R_p^{\mathrm{bat}} - (\mathrm{realDAR}_p^{\mathrm{bat}} - \mathrm{xDAR}_p^{\mathrm{bat}})$; $\Omega_q^{(\mathrm{Bowl})} \leftarrow R_q^{\mathrm{bowl}} + (\mathrm{realDAR}_q^{\mathrm{bowl}} - \mathrm{xDAR}_q^{\mathrm{bowl}})$
return $\{\Omega_p^{(\mathrm{Bat})}\}, \{\Omega_q^{(\mathrm{Bowl})}\}$

6 Results and discussions

This section documents the fitted framework on the entire dataset: the structure of the expected runs model (Section 6.1), the distribution of RAE (Section 6.2), the state dependence of Dismissal Adjusted Runs (Section 6.3), the correlation structure and convergent validity (Section 6.4), and the face-validity leaderboards from an IPL case study (Section 6.5). All quantities are computed by the production estimators of Sections 3-5.

6.1 Structure of the expected runs model

The grand mean is $\mu_0 = 1.2425$ runs per legal delivery. Table 3 summarises the seven fitted factors and their shrinkage pseudo-counts; Table 4 reports the interpretable scenario, wicket and bowler-type multipliers, and Figure 3 plots the era trend.

Finding 1 (Death overs premium, Powerplay discount)**.** *Conditional on all other factors, expected runs in the Death overs run* +18.8% *(innings 1) and* +13.2% *(innings 2) above base, while the Powerplay sits* 0-4% *below base. The strike rate premium of the Powerplay visible in raw data is therefore largely a phase artefact: because the scenario factor raises the Death overs bar, a run scored (or saved) there earns proportionately less (or more)* RAE *than the same run in the lower-scoring Powerplay.*

Finding 2 (Wicket pressure is phase-dependent)**.** *The wicket factor (Table 5) is sharp where deliveries are plentiful and shrunk toward neutral where they are not. In the middle overs it declines almost monotonically from* 1.136 *(0 down) to* 0.657 *(9 down), so each further wicket lowers cohort expected runs. The powerplay shows the same early decline (*1.047 → 0.716 *across the first five wickets), while its deep-collapse cells (6 or more down inside the first six overs, a rare event) carry little information and are pulled back towards* 1*. The death overs invert the top of the gradient: one wicket down* (1.164) *scores above none* (0.986),

Table 3: The fitted RAE factor model. Multiplier ranges for the low-cardinality factors are over interpretable cell aggregates; for the high-cardinality venue and opposition factors, they are raw shrunk-cell extrema. τ_f^2 is the empirical Bayes between-cell variance and $\kappa_f = \mathrm{Var}(r)/(\mu_0^2\tau_f^2)$ the resulting data estimated shrinkage pseudo-count (7). The batter and bowler factors are the symmetric opposition multipliers of Section 3.4, applied one at a time.

Factor (cell key)	No. of cells	Multiplier range	τ_f^2	κ_f
Scenario (phase × innings)	8	0.96 - 1.27	0.0093	180
Era (year × phase)	69	0.96 - 1.14	0.0016	1,043
Wicket (phase × wickets fallen)	33	0.66 - 1.16	0.0034	485
Bowler type (phase × sub-type)	21	0.97 - 1.03	0.0013	1,249
Venue (ground × 3-yr bucket)	1,268	0.17 - 1.36	0.0054	311
Opposition bowler (identity)	7,282	0.77 - 1.18	0.0061	273
Opposition batter (identity)	9,740	0.50 - 1.87	0.0249	67

Base rate $\mu_0 = 1.2425$ runs / legal ball; $\mathrm{Var}(r) = 2.578$.

Table 4: Interpretable context multipliers. Values above 1 raise, and below 1 lower, the cohort expected runs relative to base.

Scenario γ^{scen}			Bowler type γ^{type}	
Phase	Inns 1	Inns 2	Sub-type	Multiplier
Powerplay	0.959	0.999	Right-arm pace	1.028
Middle overs	0.968	0.975	Left-arm pace	0.998
Death overs	1.188	1.132	Leg-spin	1.005
			Off-spin	0.989
			Left-arm spin	0.968

Table 5: Wicket multiplier γ^{wkt} by phase and number of wickets fallen. Values above 1 raise, and below 1 lower, the cohort expected runs relative to base.

Wickets fallen	0	1	2	3	4	5	6	7	8	9	10
Powerplay	1.047	1.025	0.920	0.825	0.746	0.716	0.851	0.911	1.008	0.984	–
Middle overs	1.136	1.081	1.036	0.988	0.938	0.889	0.840	0.770	0.735	0.657	0.977
Death overs	0.986	1.164	1.150	1.117	1.083	1.028	0.975	0.895	0.824	0.692	0.751

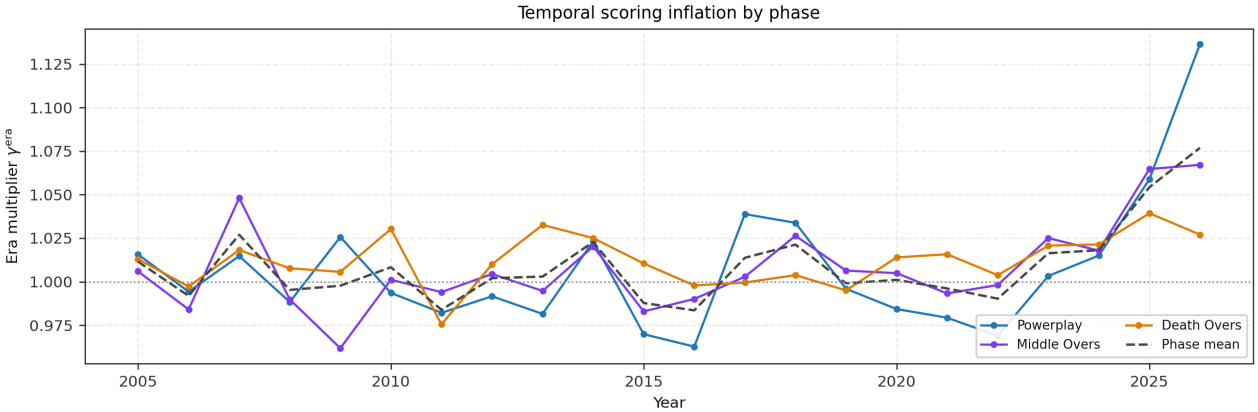


Figure 3: The era multiplier γ^{era} by year, shown separately for each match phase together with the phase mean (dashed). Scoring conditions are broadly stationary across the sample with a mild inflation in the most recent seasons. The phase × innings scenario multipliers are listed exactly in Table 4.

consistent with a side that accelerates once a set batter falls, before the decline resumes. Banding the counts averages this phase-dependent structure away, while conditioning on the exact count retains it, with

the empirical Bayes shrinkage absorbing the sparse cells automatically.

Finding 3 (Pace is more expensive than spin)**.** *Averaged over phases, right-arm pacers concede the most* (1.028) *and finger spinners the least (off-spin* 0.989*, left-arm spin* 0.968*), with left-arm pace* (0.998) *and leg-spin* (1.005) *sitting near base:* $\approx 6\%$ *expected runs gap between right-arm pace and left-arm finger spin, absorbed by the bowler-type factor so that* RAE *neither rewards batters for merely facing more pace nor penalises bowlers for bowling it.*

6.2 Distribution of RAE

Figure 4 shows the ball-level and batter-level RAE distributions.

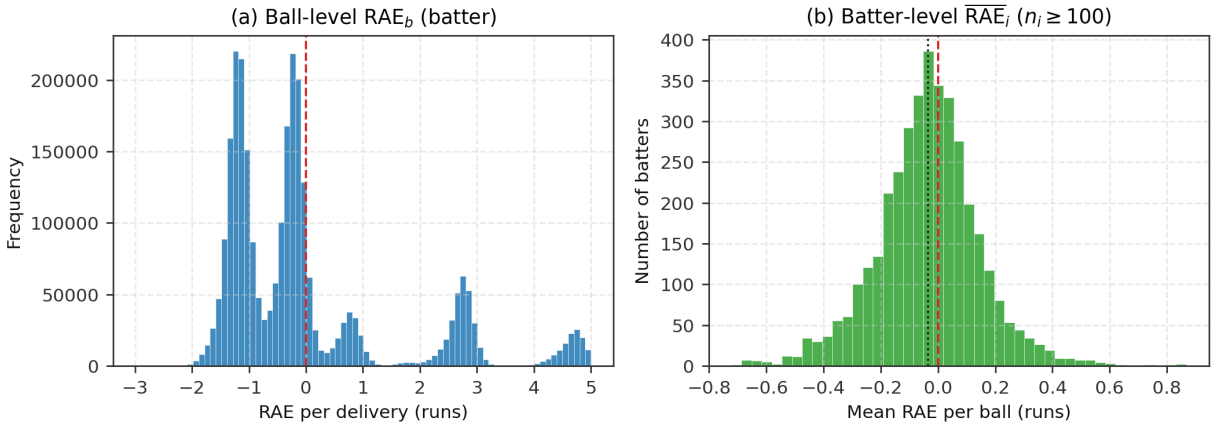


Figure 4: (a) Ball-level batter RAE_b (truncated to $[-3, 5]$ for display): a right-skewed point-mass mixture centered at zero, the long right tail corresponding to boundaries. (b) Batter-level $\overline{\text{RAE}}_i$ for batters with $n_i \geq 100$; the dotted line marks the cohort mean.

Remark 6 (The residual is centered)**.** *Across all* 2,727,420 *legal deliveries, the mean ball-level batter residual is* $\overline{\text{RAE}}_b = -0.0001$ *runs, i.e. four orders of magnitude below the base rate* $\mu_0 = 1.2425$*, with standard deviation* 1.588 *and right-skew* 1.58*; the bowler residual is likewise centered* (-0.0005*, s.d.* 1.582)*. This centering is a property of the converged fit, whose Poisson score identities (Remark 2) equate fitted and observed totals within every context cell; the skew and excess mass at* $\{-\mu_0, 4, 6\}$ *reflect the discrete run distribution rather than model misfit.*

6.3 The wicket cost and restoration due to centering

Across all 147,797 bowler-credited dismissals in the dataset, the per-ball wicket cost $c(s)$ evaluated at the dismissal state averages 2.65 runs (median 2.56, 90th percentile 5.34). A dismissal, therefore, costs a batting side, on average, only a couple of runs beyond the ball on which it falls, because most wickets remove middling batters in the middle or late overs where the marginal cost of one more is small; the tail of high-value dismissals (a set top-order batter removed early) reaches 15 runs. This spread is produced entirely by the state: the value function assigns every wicket its own worth from the balls and wickets remaining, the phase, the innings, and the quality of the batter dismissed and their partner.

The cost is highest in the powerplay and roughly flat thereafter (Table 6). A powerplay dismissal costs $\approx 23\%$ more than a death-overs dismissal does, because removing a batter early exposes the rest of the order to more of the innings. The gradient is not monotone through the innings, however the middle overs are the cheapest, and the death overs recover slightly because the few balls a late wicket forgoes are the highest-scoring of the innings, an effect that partly offsets their small number.

Finding 4 (Wicket value is situational, not constant)**.** *No single 'runs per wicket' number describes the data: the wicket cost ranges from near zero (a tail-ender removed on the last ball of a settled match) to approximately* 15.5 *runs (a set top-order batter dismissed early), with a powerplay-to-death phase profile of* $3.10 \to 2.52$ *runs (Table 6) and a further, orthogonal dependence on the quality of the batter dismissed. This is the behaviour a run value of a wicket should have, and it is why the value function, rather than a flat exchange rate, is required.*

Table 6: Mean wicket cost $c(s)$ (runs) by over band, over all bowler-credited dismissals. The cost is largest in the powerplay, dips through the middle overs, and recovers marginally at the death, so it is not monotone in the balls remaining.

Over band	1-6 (Powerplay)	7-10 (Middle 1)	11-15 (Middle 2)	16-20 (Death)
Mean $c(s)$ (runs)	3.10	2.49	2.42	2.52

The realised total of these costs is what a naive symmetric aggregate would debit each batter and credit each bowler. Doing so is what breaks role comparability. Figure 5(a) shows the two Impact distributions under the absolute construction $\sum \text{RAE} \mp \text{realDAR}$ across qualifying IPL players (137 batters at ≥ 500 balls, 207 bowlers at ≥ 300 balls). On this subset of players, Batting Impact averages -193 runs (median -159, maximum 210) while Bowling Impact averages $+225$ (median $+123$, maximum 1799). The distributions barely overlap, and the ratio of the leading bowler to the leading batter is roughly 8.6 to 1.

Subtracting the expected Dismissal Adjusted Runs (xDAR) removes the artefact. Panel (b) shows the same players under the centered aggregate of (17)-(18): batting Impact now averages $+144$ (median $+87$, maximum 1022) and bowling Impact -15 (median -34, maximum 924), so the two roles occupy a common range around the origin and their leaders differ by less than 10%. The shift is not a rescaling but a re-centering: an average bowler who takes the wickets his volume ordinarily yields, previously flattered by a large positive wicket total, now sits near zero, while the strike bowlers who beat expectation stay high.

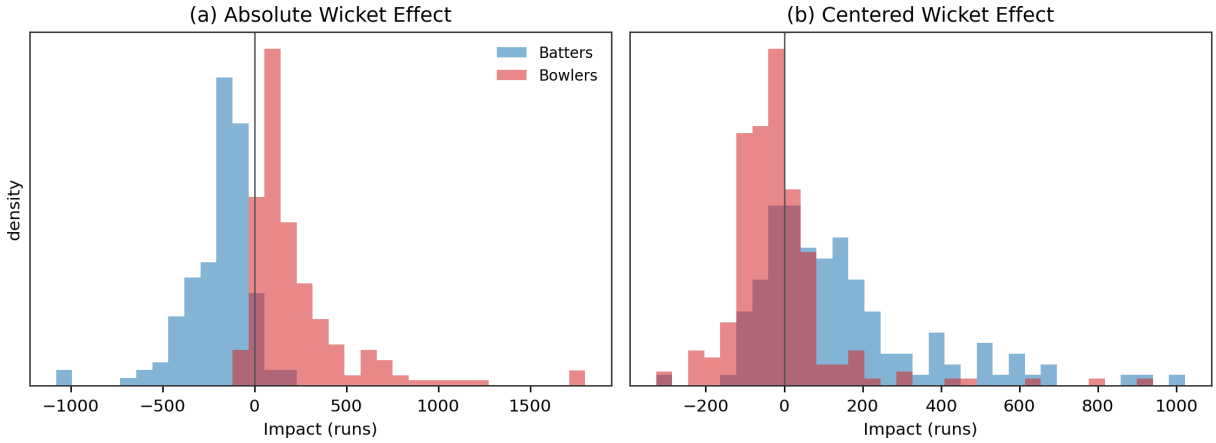


Figure 5: Batting (blue) and bowling (red) Impact distributions over qualifying IPL players. **(a)** The absolute construction $\sum \text{RAE} \mp \text{realDAR}$ places the roles on disjoint ranges: a mean-zero run ledger combined with a one-signed wicket ledger. **(b)** The centered construction $\sum \text{RAE} \mp \text{DAR}$ returns both roles to a shared, comparable scale about the origin. Densities; the vertical line marks zero.

Finding 5 (Centering the wicket ledger restores role comparability)**.** *Pricing wickets in runs is necessary but not sufficient for a comparable batting and bowling scale:* realDAR *is a one-signed accumulation, and adding it to the mean-zero* RAE *leaves batters and bowlers on ranges that differ by nearly an order of magnitude (Figure 5a). Subtracting each player's* xDAR*, i.e. the martingale compensator of Proposition 2, returns both roles to mean-zero residuals on one runs scale (Figure 5b), so that a batter's and a bowler's Impact share a common centre as well as a common unit.*

6.4 Correlation structure and convergent validity

Since the framework rests on two primitives, the natural validity checks are that (i) each primitive agrees with the conventional statistic it is meant to context-adjust (convergent validity), and (ii) the two sources of bowling value are distinct from each other (discriminant validity). Tables 7-8 report Pearson correlations across qualifying IPL players ($n = 137$ batters at ≥ 500 balls, $n = 207$ bowlers at ≥ 300 balls).

Table 7: Batting Impact correlations

	Impact	RAE/Ball	Strike Rate
Impact	1.00		
RAE/Ball	0.65	1.00	
Strike Rate	0.54	0.82	1.00

Table 8: Bowling Impact correlations

	Impact	−RAE/Ball	DAR/Ball	Economy
Impact	1.00			
−RAE/Ball	0.73	1.00		
DAR/Ball	0.13	0.09	1.00	
Economy	−0.46	−0.68	−0.07	1.00

Finding 6 (RAE is essentially a context-adjusted run rate)**.** RAE/*Ball correlates* 0.82 *with the batter's raw strike rate and the bowler's runs saved correlate* −0.68 *with economy. Each primitive tracks the conventional rate it refines, confirming that* RAE *measures scoring rate or run-prevention rate. The correlations are strong but far from one, and the gap is exactly the contextual adjustment (era, phase, wicket pressure, venue, opposition) that any raw performance metric ignores. Batting Impact correlates only* 0.54 *with strike rate, because it also carries the centered wicket ledger, through survival credit and dismissal charge, which strike rate cannot see.*

Finding 7 (Wicket-taking and run prevention are nearly orthogonal)**.** *On the bowling side, the two value sources are almost uncorrelated. The net Dismissal Adjusted Runs per ball correlates only* 0.09 *with runs saved per ball. Wicket-taking is therefore a separate dimension of bowling value, not a by-product of containment: a miserly bowler need not be a strike bowler (e.g. Jasprit Bumrah), nor the reverse (e.g. Arshdeep Singh). This justifies Bowling Impact carrying both terms in* (18)*: economy alone (which correlates* −0.46 *with Bowling Impact) would misjudge the wicket-hunters, and neither term subsumes the other. The more modest correlation of net Dismissal Adjusted Runs with Bowling Impact itself (*0.13*) is a direct consequence of centering. Once the expected haul is removed, most bowlers contribute little through wickets, and the minority of strike bowlers does the separating.*

6.5 Leaderboards based on the Indian Premier League

The framework's rankings should recover cricketing consensus while remaining reproducible from the ball-by-ball record. Among the 18 domestic and franchise leagues across Australia, Bangladesh, England, India, Ireland, Nepal, New Zealand, Pakistan, South Africa, Sri Lanka and West Indies available in our dataset, the Indian Premier League (IPL) records the largest sample size, with 295,629 deliveries (285,761 of them legal) spanning 18 consecutive seasons (2008-2026), involving 769 batters and 603 bowlers.

I report IPL leaderboards (2008-present) as the primary case study, both as per-ball rate and as cumulative Impacts, and the two answer different questions (peak rate versus sustained contribution).

Table 9: Top batters in IPL sorted by (a) per-ball rate RAE/Ball; (b) cumulative Bat Impact $\Omega^{(\mathrm{Bat})} = \mathrm{RAE} - \mathrm{DAR}^{\mathrm{bat}}$ (min 500 balls).

(a) By RAE/Ball

Rank	Batter	RAE/Ball	Runs	SR
1	Andre Russell	0.368	2651	175.5
2	Virender Sehwag	0.341	2728	155.4
3	Sunil Narine	0.278	1820	165.2
4	Phil Salt	0.276	1258	175.7
5	Abhishek Sharma	0.271	2379	171.3
6	Glenn Maxwell	0.257	2819	155.1
7	Sanath Jayasuriya	0.238	768	144.4
8	Travis Head	0.221	1556	170.1
9	Nicholas Pooran	0.215	2527	164.0
10	Tim David	0.210	1151	176.5
11	AB de Villiers	0.209	5162	151.9
12	Chris Gayle	0.204	4965	149.2

(b) By cumulative Bat Impact $\Omega^{(\mathrm{Bat})}$

Rank	Batter	$\Omega^{(\mathrm{Bat})}$	RAE	realDAR	xDAR	Runs	SR
1	AB de Villiers	1022	713	514	824	5162	151.9
2	David Warner	911	540	762	1133	6565	139.6
3	Chris Gayle	891	684	568	775	4965	149.2
4	KL Rahul	672	204	550	1017	5815	139.1
5	Andre Russell	667	543	333	457	2651	175.5
6	Suryakumar Yadav	619	424	460	655	4581	149.1
7	MS Dhoni	601	68	535	1069	5439	137.5
8	Virat Kohli	601	11	1013	1604	9336	134.8
9	Suresh Raina	584	371	678	891	5528	136.7
10	Jos Buttler	545	312	508	741	4646	149.7
11	Virender Sehwag	523	598	509	434	2728	155.4
12	Shane Watson	511	390	538	659	3874	138.0

Reading Table 9(b) through its decomposition separates two distinct routes to a high Bat Impact. The first is contextual run production. Virender Sehwag reaches 523 almost entirely through RAE (598, the second largest in the table), and is the only batter in the table whose wicket ledger is a net charge: his realised effect (realDAR = 509) exceeds its expectation (xDAR = 434), so being an attacking opener, he was naturally dismissed more, and in higher-value states, than the league baseline predicts, a tax his

Table 10: Top bowlers in IPL sorted by (a) per-ball run prevention −RAE/Ball; (b) cumulative Bowl Impact $\Omega^{(\text{Bowl})} = -\sum \text{RAE}+\text{DAR}^{\text{bowl}}$ (min 300 balls).

(a) By −RAE/Ball

Rank	Bowler	−RAE/Ball	Wkts	Econ
1	Matheesha Pathirana	0.292	47	7.73
2	Jasprit Bumrah	0.286	187	7.07
3	Sunil Narine	0.227	207	6.66
4	Jofra Archer	0.217	84	7.78
5	Anil Kumble	0.200	45	6.38
6	Lasith Malinga	0.199	170	6.77
7	Glenn McGrath	0.192	12	6.52
8	Bhuvneshwar Kumar	0.186	226	7.44
9	Dale Steyn	0.180	97	6.61
10	M. Muralitharan	0.161	63	6.45
11	Lungi Ngidi	0.151	42	8.16
12	Rashid Khan	0.147	179	7.17

(b) By cumulative Bowl Impact $\Omega^{(\text{Bowl})}$

Rank	Bowler	$\Omega^{(\text{Bowl})}$	−RAE	realDAR	xDAR	Econ	Wkts
1	Jasprit Bumrah	924	1049	750	875	7.07	187
2	Sunil Narine	802	1059	728	985	6.66	207
3	Bhuvneshwar Kumar	621	858	878	1115	7.44	226
4	Lasith Malinga	476	566	467	556	6.77	170
5	Rashid Khan	430	520	701	790	7.17	179
6	Dale Steyn	307	395	296	384	6.61	97
7	Jofra Archer	296	345	371	419	7.78	84
8	R. Ashwin	242	521	647	925	6.95	187
9	M. Muralitharan	197	246	155	204	6.45	63
10	Varun Chakravarthy	176	180	454	458	7.39	111
11	Matheesha Pathirana	175	208	154	188	7.73	47
12	Anil Kumble	169	194	106	132	6.38	45

scoring more than repays. That a batter who last appeared in the IPL in 2015 still ranks this high follows directly from the era factor γ^{era}: his stroke-play is scored against the lower bar of his own pre-inflation seasons rather than the high-scoring modern game, so he is neither flattered by a friendly era nor penalised for having missed the recent run-glut. The second route is survival. Virat Kohli (RAE = 11) and MS Dhoni (RAE = 68) add almost nothing above par per delivery, yet rank equal-seventh at 601, because their wicket ledger is a large credit: the expected effect far exceeds the realised one (xDAR = 1604 against realDAR = 1013 for Kohli, 1069 against 535 for Dhoni). Both figures are large because they scale with deliveries faced, and Kohli has faced more than any batter in IPL history; their difference xDAR−realDAR is the run value of the dismissals each avoided relative to an average batter over that volume, which a raw wicket count cannot see. KL Rahul (672, credit 467) is the same anchor profile. AB de Villiers tops the board by drawing on both routes at once, a large RAE (713) alongside a survival credit of 310.

The bowling decomposition reads differently from a raw wicket count. Jasprit Bumrah and Sunil Narine lead on elite containment, the two largest run-saved totals in the league (−RAE around 1050). Their realised wicket hauls sit close to, but do not exceed, what their heavy volumes predict (realDAR = 750 against xDAR = 875 for Bumrah), so it is run prevention, not wicket-taking, that elevates them. One thing the tables do not show directly: Yuzvendra Chahal took the most wickets of any bowler in IPL (233, realDAR = 840), yet his expected haul over the same overs is almost identical (xDAR = 845), so he nets nothing significant through wickets and ranks on his modest containment alone. R Ashwin shows the sharper edge of the same mechanism: his realised wickets (647) fall well short of what his large volume would ordinarily yield (925), so his standing rests on containment rather than strike. The pattern holds across the table: once the expected haul is removed, the net wicket ledger is a modest, usually negative adjustment, and it is run prevention that separates the leading bowlers, with the wicket channel penalising those whose strike output lags their workload. Because Impact is a cumulative runs total, longevity still contributes, but only through value added above expectation, not through the sheer number of balls bowled.

As a sharper face-validity test, I rank single innings by their batting Impact. Table 11 lists the top knocks of IPL history sorted by their Batting Impacts. It recovers the canonical great innings, i.e. Chris Gayle's 175* (the highest score in T20 history till date) on top, followed by Brendon McCullum's 158* in the league opening match, and spans eras from 2008 to 2025 because RAE is measured against the scoring conditions of each era.

The innings ranking rewards contextual run value and survival rather than milestones, and this is clearest among the knocks Table 11 leaves out. The most impactful sub-hundred score in IPL history is Suresh Raina's 87 from 25 balls against Kings XI Punjab in 2014 (Impact 56), almost at a level with a few lower hundreds in and around the table, despite Raina facing barely a quarter of the deliveries. Hardik Pandya's 91 (34) and Rashid Khan's 79* (32) reach the same Impact of 56. A twenty-five-ball assault clears a far higher contextual bar than a measured hundred and the metric records it as such. The costliest dismissals tell a different story: they are not the failures of tail-enders but the early falls

Table 11: Most impactful individual IPL innings by batting Impact (innings $\mathrm{RAE} - \mathrm{DAR}^{\mathrm{bat}}$, in runs). Cost is the realised wicket value realDAR at the dismissal, 0 for an unbeaten innings; Credit is the expected wicket value xDAR accrued over the deliveries faced, the survival dividend.

Rank	Batter	Opposition	Date	Runs	Balls	RAE	Cost	Credit	Impact
1	Chris Gayle	PWI	2013-04-23	175	66	76	0	15	91
2	Brendon McCullum	RCB	2008-04-18	158	73	60	0	17	77
3	Virender Sehwag	DC	2011-05-05	119	56	55	4	15	66
4	AB de Villiers	GL	2016-05-14	129	52	53	0	11	64
5	David Miller	RCB	2013-05-06	101	38	54	0	9	63
6	Yusuf Pathan	MI	2010-03-13	100	37	53	2	11	62
7	David Warner	KKR	2017-04-30	126	59	52	3	13	62
8	Priyansh Arya	CSK	2025-04-08	103	42	52	6	14	60
9	AB de Villiers	MI	2015-05-10	133	59	46	0	13	59
10	Andrew Symonds	RR	2008-04-24	117	53	45	0	13	58

of set or top-order batters in the powerplay, where the wicket value peaks. Travis Head's 22 (12) cost 14 runs, the largest single-dismissal debit in the sample, and even the rare early failures of great players surface here, with Chris Gayle's 10 (10) and a sixteen-ball 16 from MS Dhoni each costing 12. The survival dividend, finally, is largest for long unbeaten innings: Shikhar Dhawan's 99* (66) earns a credit of 34 runs and Dhoni's 63* (45) earns a credit of 28, where the batters were repaid for carrying their wicket through deliveries an average batter would not have survived.

Aggregating Impact over an entire IPL season rather than a single innings gives a longer-run view of contribution. Tables 12 and 13 list the most impactful batting and bowling seasons in IPL history, each decomposed into its run and wicket components.

Table 12: Most impactful individual IPL batting seasons, by season Bat Impact $\Omega^{(\mathrm{Bat})} = \mathrm{RAE} - (\mathrm{realDAR} - \mathrm{xDAR})$ (minimum 150 balls faced).

#	Batter	Team	Season	Runs	SR	RAE	RAE/B	realDAR	xDAR	$\Omega^{(\mathrm{Bat})}$
1	Vaibhav Suryavanshi	RR	2026	776	237.3	254	0.78	73	79	260
2	Chris Gayle	RCB	2011	608	183.1	192	0.58	38	69	223
3	Andre Russell	KKR	2019	511	204.4	170	0.68	32	82	220
4	Chris Gayle	RCB	2012	733	160.7	158	0.35	49	109	218
5	David Warner	SRH	2016	848	151.4	147	0.26	70	130	208
6	Virat Kohli	RCB	2016	973	152.0	110	0.17	46	141	205
7	AB de Villiers	RCB	2016	687	168.8	155	0.38	46	95	204
8	Glenn Maxwell	KXIP	2014	552	187.8	194	0.66	63	65	196
9	Rishabh Pant	DC	2018	684	173.6	157	0.40	54	89	192
10	Chris Gayle	RCB	2013	720	156.9	112	0.24	57	107	163

Table 13: Most impactful individual IPL bowling seasons, by season Bowl Impact $\Omega^{(\mathrm{Bowl})} = -\mathrm{RAE} + (\mathrm{realDAR} - \mathrm{xDAR})$ (minimum 120 balls bowled).

#	Bowler	Team	Season	Wkts	Econ	−RAE	−RAE/B	realDAR	xDAR	$\Omega^{(\mathrm{Bowl})}$
1	Jasprit Bumrah	MI	2024	20	6.08	159	0.51	86	83	162
2	Sunil Narine	KKR	2013	25	5.42	152	0.40	61	66	148
3	Jasprit Bumrah	MI	2025	19	6.57	141	0.50	76	71	146
4	Sunil Narine	KKR	2012	26	5.37	130	0.37	67	53	144
5	Jasprit Bumrah	MI	2019	20	6.48	158	0.42	66	85	139
6	Bhuvneshwar Kumar	RCB	2026	29	7.73	106	0.28	151	119	138
7	Rashid Khan	SRH	2020	20	5.27	138	0.36	73	79	132
8	Mohammed Siraj	RCB	2023	19	6.81	114	0.38	88	80	123
9	Sunil Narine	KKR	2026	16	6.60	138	0.45	61	76	123
10	Lasith Malinga	MI	2011	29	5.61	107	0.28	83	71	119

Season Impact rewards contextual efficiency over raw volume. The most impactful batting season in IPL

history belongs not to the leading run-scorer but to Vaibhav Suryavanshi's 776 runs at a strike rate of 237 in 2026 (Impact 260), whose per-ball value of 0.78 is much higher than that of Virat Kohli's record 973-run season in 2016 (Impact 205, per-ball value 0.17), which ranks only sixth. Several of the most impactful seasons rest on modest aggregate returns, because what those runs were worth, ball for ball and situation for situation, far outstripped a longer but flatter accumulation, for example, Andre Russell's 511 runs in 2019 (Impact 220) and Glenn Maxwell's 552 in 2014 (Impact 196). A few names recur, a sign of sustained rather than one-off impact. Chris Gayle holds three of the 10 most impactful batting seasons (2011-2013) and Jasprit Bumrah holds three of the top 10 bowling seasons, with Sunil Narine close behind. The two routes to bowling value reappear at the season scale as well. Bumrah leads through elite containment at an economy near 6, whereas Bhuvneshwar Kumar's 2026 (29 wickets) is carried by a large wicket haul despite a higher economy. Finally, the same players surface on both leaderboards: Narine ranks among the most impactful bowling seasons and, as an opener, among the most valuable batting rates, and Pat Cummins appears on both sides too, the mark of season-long all-round contribution.

7 Concluding remarks

The framework reduces T20 player evaluation to two ball-level primitives, both measured as runs above expectation, and its strengths follow from that single design choice. RAE prices the runs on every delivery against a contextual, likelihood-grounded expectation whose per-cell update is an exact conditional Poisson maximum-likelihood multiplier (Proposition 1). The stratified, nonparametric baseline makes it robust to playing conditions, phase and opposition without assuming any distribution for the lumpy, over-dispersed run outcome, and a single opposition symmetry lets the same residual serve both batting and bowling. Dismissal Adjusted Runs prices the runs at every dismissal through a batting-side value function and then nets a player's realised total against its hazard compensator, so the quantity that enters evaluation is a run-weighted martingale residual, mean-zero by construction (Proposition 2). This centering is what turns a shared unit into a shared scale. Both primitives become above-expectation residuals, so Bat Impact $= \sum \mathrm{RAE} - \mathrm{DAR}^{\mathrm{bat}}$ and Bowl Impact $= -\sum \mathrm{RAE} + \mathrm{DAR}^{\mathrm{bowl}}$ are comparable in centre as well as in dimension (Finding 5), and a batter is charged for a dismissal only to the extent it exceeds what his match situations warranted.

Some further properties follow from the same construction. Empirical-Bayes shrinkage, applied both to the factor multipliers of (4) and to the player rates feeding the value function, corrects the small-sample bias that inflates naive averages, and the symmetric opposition factors remove any need for hand-set phase weights, since difficulty is carried inside the expectation itself (Remark 1). Because Dismissal Adjusted Runs is priced in the same unit as RAE, a bowler's two separate sources of value (run prevention and wicket-taking), near-orthogonal by Finding 7, combine additively with no weighting constant to defend, and every wicket is valued on its own match state rather than by a flat exchange rate (Finding 4). Nothing is tuned in the construction: the weight of a wicket relative to a run is a consequence of the value function and the hazard baseline, not a parameter I set.

The framework's limitations point directly to its extensions. The expectation model treats delivery context as exogenous to player identity, whereas in practice bowlers adjust line and length to specific batters; a batter who forces bowlers into uncomfortable areas may carry a slightly deflated $\hat{\mu}(\boldsymbol{x}_b)$, and a structural model of bowler strategy would address the resulting confounding. The second-innings value function conditions on the innings alone, capturing average chase behaviour through innings-specific transition models but not the live required run rate; a finer chase state, valuing runs and wickets against the current target in the spirit of the Pressure Index of Bandyopadhyay and Bhattacharjee (2026), is a natural refinement. The value function itself tracks batter quality by discrete tiers and treats every dismissal as the striker's, so run-outs of the non-striker, finer within-tier heterogeneity and a full ball-by-ball settling model are left aside, though these are secondary to the state variables that dominate a wicket's worth. On the input side, RAE uses only always-available fields so that every match is scored identically; the line, length and stroke-geometry data present for a minority of deliveries could sharpen the expected runs model on the annotated subset, at the cost of comparability across the dataset. This extended RAE model, together with the evidence for adopting line and length as the additional covariates and for confining the extension to batting, is developed in Section S2 in the supplementary materials.

Two choices shape how the numbers should be read. The expected DAR uses a league dismissal hazard $\bar{h}_{\varphi,e}$ conditioned on phase and innings only; the coarseness is deliberate, since a context-level baseline lets batting skill surface as survival above the league rate rather than being absorbed into a player-specific expectation, but it leaves the survival credit indifferent to finer state such as the wicket count or the tier of the batter at the crease. Conditioning $\bar{h}$ on the richer state the value function already tracks would sharpen the compensator, at the cost of moving the baseline closer to the player and diluting the skill signal it is meant to expose; where to set that resolution is a modelling choice I leave open. A related consequence is that cumulative Impact is longevity-aware by construction. Both the run value and the survival credit accumulate with volume, so a durable accumulator can top the cumulative board on sustained competence while the per-ball rate isolates peak quality, and the two are meant to be read together. Finally, because both primitives are defined relative to the average player in the chosen data slice, cross-competition comparisons inherit a system-wide competition-strength discrepancy, and a standard-adjusted baseline is planned.

Data availability statement

The data used in this research have been obtained from three sources: baseline ball-by-ball data from the Cricsheet website (link: https://cricsheet.org/matches/), granular ball-by-ball data from Dr. Himanish Ganjoo's collection of cricket data (link: https://himanishganjoo.com/cricket-data/) with his authorization and assistance, and hawk-eye ball-tracking data for IPL 2026 from the IPL website (link: https://www.iplt20.com/matches/results). The cleaned data, along with all relevant Python code and other files, will be made publicly available in the author's GitHub repository.

References

Bandyopadhyay, R. and Bhattacharjee, D. (2026). Applications of higher order markov models and pressure index to strategize controlled run chases in twenty20 cricket. *International Journal of Sports Science & Coaching*, page 17479541261430809.

Barlow, W. E. and Prentice, R. L. (1988). Residuals for relative risk regression. *Biometrika*, 75(1):65–74.

Baumer, B. S., Jensen, S. T., and Matthews, G. J. (2015). openWAR: An open source system for evaluating overall player performance in Major League Baseball. *Journal of Quantitative Analysis in Sports*, 11(2):69–84.

Brooker, S. and Hogan, S. (2011). A method for inferring batting conditions in ODI cricket from historical data. Technical report, Department of Economics and Finance, University of Canterbury. Working paper; statistical basis of the WASP win-and-score predictor.

Cervone, D., D'Amour, A., Bornn, L., and Goldsberry, K. (2016). A multiresolution stochastic process model for predicting basketball possession outcomes. *Journal of the American Statistical Association*, 111(514):585–599.

Clarke, S. R. (1988). Dynamic programming in one-day cricket—optimal scoring rates. *Journal of the Operational Research Society*, 39(4):331–337.

Davis, J., Perera, H., and Swartz, T. B. (2015a). Player evaluation in Twenty20 cricket. *Journal of Sports Analytics*, 1(1):19–31.

Davis, J., Perera, H., and Swartz, T. B. (2015b). A simulator for Twenty20 cricket. *Australian & New Zealand Journal of Statistics*, 57(1):55–71.

Decroos, T., Bransen, L., Van Haaren, J., and Davis, J. (2019). Actions speak louder than goals: Valuing player actions in soccer. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 1851–1861.

DerSimonian, R. and Laird, N. (1986). Meta-analysis in clinical trials. *Controlled Clinical Trials*, 7(3):177–188.

Duckworth, F. C. and Lewis, A. J. (1998). A fair method for resetting the target in interrupted one-day cricket matches. *Journal of the Operational Research Society*, 49(3):220–227.

Lemmer, H. H. (2004). A measure for the batting performance of cricket players. *South African Journal for Research in Sport, Physical Education and Recreation*, 26(1):55–64.

Lindsey, G. R. (1963). An investigation of strategies in baseball. *Operations Research*, 11(4):477–501.

Preston, I. and Thomas, J. (2000). Batting strategy in limited overs cricket. *Journal of the Royal Statistical Society, Series D*, 49(1):95–106.

Stevenson, O. G. and Brewer, B. J. (2021). Modelling the evolution of batting strategies in Twenty20 cricket. *Journal of the Royal Statistical Society, Series C*, 70(4):770–793.

Therneau, T. M., Grambsch, P. M., and Fleming, T. R. (1990). Martingale-based residuals for survival models. *Biometrika*, 77(1):147–160.

Supplementary materials

S1 Model specification for reproducibility

This section records the fitted values of every quantity the estimators of Sections 3–4 produce, so that the numbers reported in the paper can be reproduced exactly. Unless stated otherwise, each quantity is estimated on the full dataset of 2,727,420 legal deliveries of Section 2. The estimators themselves, i.e. the shrunk backfitting for RAE and the tiering, transition model, and backward recursion for Dismissal Adjusted Runs, are given in the main text and are not repeated. The three high-cardinality RAE factors (venue and the two opposition identities, with 1,268, 7,282, and 9,740 cells) are too numerous to list; each is estimated by the shrinkage rule (4) and its fitted extrema appear in Table 3.

S1.1 Global constants and fixed hyperparameters

Every tuning quantity in the framework is either estimated from the data or fixed at a value stated here; there are no hand-set weights. Table S1 collects the fixed constants. The per-factor RAE shrinkage strengths κ_f are themselves data-estimated by empirical Bayes and are reported with the factor model in Table 3.

Table S1: Global constants and fixed hyperparameters.

Symbol	Value	Meaning
μ_0	1.2425	grand mean runs per legal ball
$\mathrm{Var}(r)$	2.578	run variance (overdispersion scale)
Q	6	batter quality tiers
M_0	120	legal balls in a T20 innings
phases	3	powerplay ($\leq$ over 6), middle (7–15), death (16–20)
$E_{\max}$	6	cap on the freshness horizon in (13)
venue window	3 years	bucket width for the venue factor
κ_μ	60	EB pseudo-count for the batter scoring rate μ_i (11)
κ_η	40	EB pseudo-count for the hazard η_i and for $h_{i,\varphi,e}$
κ_π	200	Dirichlet pseudo-count pooling $\pi_{r\mid i,\varphi,e}$ toward its phase mean
strike-share clip	[0.25, 0.75]	bounds on the crease-window strike share s_i
κ_f	data-estimated	per-factor RAE shrinkage (Table 3)

S1.2 Expected-runs factor estimates

The scenario and bowler-type multipliers appear in Table 4 and the wicket factor in Table 5. Two further pieces complete the specification of the interpretable factors. The bowler-type factor is resolved by phase in Table S2 (Table 4 reports its phase average). The era factor, plotted in Figure 3, is listed in full by year and phase in Table S3.

Table S2: Bowler-type multiplier γ^{type} by phase and bowling sub-type.

Sub-type	Powerplay	Middle	Death
Right-arm pace	1.016	1.025	1.033
Left-arm pace	0.951	1.026	1.007
Leg-spin	1.056	0.998	0.950
Off-spin	1.005	0.988	0.961
Left-arm spin	0.988	0.951	0.953
Other	0.990	1.001	1.009
Unknown	0.958	0.985	1.011

Table S3: Era multiplier γ^{era} by year and phase, with the phase means.

Year	Powerplay	Middle	Death	Mean
2005	1.015	1.007	1.014	1.012
2006	0.994	0.985	0.995	0.991
2007	1.016	1.050	1.020	1.029
2008	0.988	0.991	1.005	0.995
2009	1.027	0.962	1.003	0.997
2010	0.995	1.002	1.030	1.009
2011	0.981	0.993	0.972	0.982
2012	0.992	1.005	1.007	1.001
2013	0.981	0.994	1.030	1.002
2014	1.023	1.020	1.022	1.022
2015	0.969	0.983	1.008	0.987
2016	0.963	0.991	0.995	0.983
2017	1.039	1.004	0.997	1.013
2018	1.034	1.027	1.003	1.021
2019	0.995	1.006	0.993	0.998
2020	0.984	1.005	1.012	1.000
2021	0.979	0.993	1.014	0.995
2022	0.969	0.998	1.004	0.990
2023	1.004	1.026	1.021	1.017
2024	1.016	1.019	1.023	1.019
2025	1.060	1.066	1.042	1.056
2026	1.137	1.068	1.028	1.078

S1.3 Value-function transition model

The batting-side value function V_e of Section 4.1 is fully determined by the quality tiers (Table S4), the per-state dismissal hazard $h_{i,\varphi,e}$ (Table S5) and scoring distribution $\pi_{r|i,\varphi,e}$ (Tables S6–S7), the incoming-batter tier $\iota(w)$ (the observed average batting order of Section 4.2), and the set curve $f(k)$ (Table S8). Given these inputs, a single backward sweep of the recursion (9) reproduces V_e exactly.

Table S4: Quality tiers. A batter is assigned to a tier by his empirical Bayes shrunk scoring rate μ_i falling in the stated range; the tier's ball-weighted mean rate $\bar{\mu}$ and mean hazard $\bar{\eta}$ index the transition tables below.

Tier	μ_i range (runs/ball)	$\bar{\mu}$	$\bar{\eta}$	#batters
0	$\mu_i < 1.016$	0.920	0.0268	1,373
1	$1.016 \le \mu_i < 1.103$	1.062	0.0273	1,669
2	$1.103 \le \mu_i < 1.171$	1.140	0.0250	2,011
3	$1.171 \le \mu_i < 1.241$	1.208	0.0230	2,402
4	$1.241 \le \mu_i < 1.333$	1.285	0.0218	1,342
5	$\mu_i \ge 1.333$	1.419	0.0244	943

Table S5: Per-state dismissal hazard rate $h_{i,\varphi,e}$ (probability of a dismissal on a legal ball) by tier i, phase φ and innings e.

	Innings 1			Innings 2		
Tier	PP	Mid	Death	PP	Mid	Death
0	0.0527	0.0590	0.1105	0.0539	0.0625	0.1030
1	0.0503	0.0535	0.1028	0.0523	0.0565	0.1011
2	0.0473	0.0485	0.0978	0.0507	0.0538	0.0922
3	0.0435	0.0448	0.0910	0.0458	0.0488	0.0875
4	0.0421	0.0446	0.0861	0.0435	0.0462	0.0796
5	0.0443	0.0461	0.0823	0.0481	0.0489	0.0812

Table S6: Scoring distribution $\pi_{r|i,\varphi,e}$ in first innings, by tier and phase.

Tier	Phase	0	1	2	3	4	6
0	PP	0.620	0.242	0.050	0.005	0.075	0.008
0	Mid	0.510	0.371	0.061	0.003	0.044	0.012
0	Death	0.448	0.383	0.085	0.005	0.057	0.021
1	PP	0.553	0.265	0.050	0.006	0.108	0.017
1	Mid	0.421	0.431	0.065	0.003	0.058	0.021
1	Death	0.384	0.404	0.091	0.005	0.078	0.037
2	PP	0.526	0.270	0.050	0.006	0.126	0.022
2	Mid	0.374	0.453	0.071	0.004	0.069	0.029
2	Death	0.348	0.403	0.098	0.004	0.095	0.051
3	PP	0.502	0.278	0.050	0.006	0.138	0.026
3	Mid	0.340	0.468	0.074	0.004	0.078	0.036
3	Death	0.304	0.410	0.105	0.004	0.109	0.067
4	PP	0.478	0.284	0.049	0.006	0.149	0.034
4	Mid	0.321	0.473	0.073	0.004	0.086	0.043
4	Death	0.283	0.401	0.108	0.004	0.120	0.083
5	PP	0.460	0.271	0.049	0.006	0.163	0.051
5	Mid	0.318	0.454	0.071	0.003	0.092	0.063
5	Death	0.282	0.374	0.105	0.003	0.126	0.110

Table S7: Scoring distribution $\pi_{r|i,\varphi,e}$ in second innings, by tier and phase.

Tier	Phase	0	1	2	3	4	6
0	PP	0.622	0.235	0.046	0.005	0.081	0.011
0	Mid	0.516	0.363	0.060	0.002	0.045	0.014
0	Death	0.501	0.354	0.066	0.003	0.055	0.020
1	PP	0.544	0.270	0.049	0.005	0.114	0.019
1	Mid	0.429	0.420	0.064	0.004	0.061	0.022
1	Death	0.419	0.392	0.075	0.004	0.076	0.034
2	PP	0.519	0.276	0.048	0.005	0.127	0.025
2	Mid	0.392	0.441	0.065	0.003	0.069	0.030
2	Death	0.380	0.391	0.084	0.005	0.094	0.045
3	PP	0.493	0.282	0.049	0.006	0.140	0.030
3	Mid	0.359	0.454	0.071	0.003	0.078	0.036
3	Death	0.338	0.405	0.092	0.003	0.104	0.058
4	PP	0.472	0.283	0.048	0.005	0.152	0.039
4	Mid	0.334	0.461	0.072	0.004	0.088	0.042
4	Death	0.312	0.395	0.098	0.003	0.119	0.072
5	PP	0.456	0.263	0.049	0.005	0.168	0.058
5	Mid	0.328	0.440	0.070	0.003	0.094	0.065
5	Death	0.309	0.373	0.092	0.003	0.122	0.101

Table S8: The set curve $f(k)$: the fraction of the settled scoring rate realised over a batter's first k deliveries, used in the freshness term (13).

k	1	2	3	4	5	6	8	10	15	20	30
$f(k)$	0.623	0.688	0.734	0.771	0.802	0.830	0.876	0.912	0.970	1.003	1.042

The centered Dismissal Adjusted Runs additionally uses the league dismissal hazard $\bar{h}_{\varphi,e}$. Table S9 gives it, and also reports how the hazard varies across the major T20 leagues. The assembly of Impact then follows Algorithm 2.

Table S9: Empirical dismissal hazard $\bar{h}_{\varphi,e}$ (probability of a dismissal on a legal ball) by phase and innings, within each of ten major T20 leagues and pooled over the full dataset. The pooled values (final block) are the baseline $\bar{h}_{\varphi,e}$ that centers Dismissal Adjusted Runs (Section 4).

League	Innings	Powerplay	Middle	Death
Indian Premier League	1	0.0386	0.0417	0.0844
	2	0.0415	0.0446	0.0820
Big Bash League	1	0.0414	0.0441	0.0904
	2	0.0451	0.0489	0.0871
Caribbean Premier League	1	0.0440	0.0444	0.0899
	2	0.0457	0.0497	0.0833
Pakistan Super League	1	0.0387	0.0465	0.0916
	2	0.0457	0.0487	0.0904
SA20	1	0.0474	0.0448	0.0837
	2	0.0466	0.0547	0.0927
Major League Cricket	1	0.0513	0.0429	0.0860
	2	0.0464	0.0562	0.0798
Syed Mushtaq Ali Trophy	1	0.0454	0.0446	0.0911
	2	0.0425	0.0450	0.0820
Super Smash	1	0.0446	0.0483	0.0884
	2	0.0519	0.0519	0.0868
Lanka Premier League	1	0.0478	0.0486	0.0941
	2	0.0528	0.0512	0.0845
T20 Blast	1	0.0445	0.0461	0.0886
	2	0.0470	0.0505	0.0886
Full dataset	1	0.0448	0.0471	0.0905
	2	0.0475	0.0502	0.0876

S2 Extending RAE with ball-tracking covariates

The RAE model of Section 3 conditions only on covariates recorded for every delivery in our dataset, so that it applies identically to every match and keeps players comparable across eras and conditions. That choice is deliberate, but it leaves information unused: a boundary struck off a yorker is a finer piece of batting than the same boundary off a half-volley, yet the baseline model, blind to the delivery's line and length, scores the two alike. Where ball-tracking data exist, we can refine the expectation to the exact delivery faced, and so isolate a batter's shot-production more sharply. This section develops that refinement, measures how much it moves the evaluation, and says why we keep it out of the headline metric and apply it to batting only.

To keep the two metrics separate we name them distinctly. We write pRAE (primary RAE) for the metric of the main paper and mRAE (modified RAE) for the extension. pRAE is the residual $r_b - \mu(\boldsymbol{x}_b)$ against the expectation built from fields recorded for every delivery (Equation (1)), while mRAE is the residual against an expectation that additionally conditions on the delivery's line and length. The availability of these two data tiers is described in Section 2. Because the two use different covariate sets and, since tracking is partial, are defined on different samples, the distinct notation guards against conflating a player's pRAE (over all his deliveries) with his mRAE (over his tracked deliveries only).

S2.1 Ball-tracking data: covariates and coverage

The ball-tracking tier records two kinds of variable. Delivery variables describe the ball the bowler sent down, before the batter played it: its length (Yorker, Full Toss, Half Volley, Good Length, Back of Length, Short, Bouncer), its line (On Stumps, Outside Off, Down Leg and their wide variants), and the bowler's variation. Response variables describe what the batter then did: whether the shot was controlled, the

stroke played, its elevation, and the area to which the ball went. Only the delivery variables are candidates for an expected-runs model, for the reason given in Section S2.2.

Coverage is partial and uneven across competitions (Table S10). Line and length are present for about one-third of all legal deliveries in men's T20 matches and only a quarter of men's T20 internationals, but for a majority of the well-resourced franchise leagues: 57% of the IPL, 66% of the Big Bash and around three quarters of the CPL and SA20 in our dataset carry ball-tracking data, while some competitions are barely tracked. Coverage is also patchy within a competition: the T20 Blast carries length for one-third of its deliveries but line for almost none. This heterogeneity is exactly why line and length cannot enter the headline metric, at least until ball-tracking data become publicly available across the board. A residual built on them would be defined on an unpredictable, competition-dependent subset and would not be comparable across matches, so the extension below is a refinement available wherever tracking exists, and it sits alongside pRAE rather than taking its place.

Table S10: Ball-tracking coverage: percentage of legal deliveries carrying each covariate, overall, for men's internationals, and for the major franchise leagues.

Competition	Legal balls	Length	Line	Control	Shot type
Overall (all data)	2,727,420	33.9	29.5	39.7	16.5
Men's internationals	1,213,059	25.2	24.2	25.4	12.4
Indian Premier League	285,761	57.1	57.0	57.1	32.3
Big Bash League	147,955	65.5	65.5	65.4	49.6
Caribbean Premier League	90,866	75.7	75.7	75.7	22.6
Pakistan Super League	81,037	60.8	60.8	60.9	0.0
SA20	28,048	75.5	75.5	75.4	0.0
T20 Blast	324,920	33.7	0.4	82.1	33.2
Syed Mushtaq Ali Trophy	154,361	6.4	6.4	6.4	0.0
Super Smash	59,327	15.1	15.1	15.0	0.0

S2.2 Choosing the covariates

An expected runs model may condition only on what is known before the outcome of a ball, which rules out the response variables at once. Conditioning expected runs on whether a shot was controlled, or on where the ball was hit, would fold the outcome into its own expectation and explain away the run-scoring the residual is meant to capture. The objection is not only a conceptual one. Table S11 fits each candidate as a single phase-conditioned factor on top of the baseline expectation and reports its between-cell signal τ^2, its data-estimated shrinkage κ, and the fraction of residual sum of squares it removes (ΔRSS). The response variables carry by far the largest apparent signal. Shot area alone removes 20% of the residual variance, with a multiplier range from 0.02 to 1.75, because they are proxies for the result: a ball hit to the boundary explains its four runs tautologically. Admitting them would be circular, so they are excluded despite, indeed because of, their apparent significance.

Table S11: Significance of candidate additional covariates, each fitted as a single phase-conditioned factor on top of the baseline expectation. ΔRSS is the percentage of residual sum of squares the factor removes on its own coverage subset. Response variables are post-outcome and are excluded from the model despite their large apparent signal (see text).

Covariate	Role	Coverage (%)	Cells	Multiplier range	τ^2	κ	ΔRSS (%)
Length	delivery	33.9	21	0.51–1.44	0.0455	37	2.61
Line	delivery	29.5	21	0.93–1.18	0.0038	437	0.20
Variation	delivery	16.5	39	0.53–1.08	0.0061	272	0.32
Control	response	39.7	15	0.01–1.17	0.1282	13	6.47
Shot type	response	16.5	71	0.06–1.58	0.1646	10	10.24
Shot area	response	16.1	48	0.02–1.75	0.3164	5	19.93

Among the admissible delivery variables, length is by far the most informative: it removes 2.6% of

the residual variance with a multiplier ranging from 0.49 on a yorker to 1.46 on a short ball. Line is comparatively weak (0.2%, almost all of it in the wide categories), and the bowler's variation weak too (0.3%) and poorly covered. Adding line to length lifts the removed variance from 2.63% to 2.74%, and adding variation to 2.86%. The marginal gains beyond length are small, and variation's low coverage would further shrink the tracked sample. We therefore adopt 'line and length' as the additional covariates to formulate mRAE.

S2.3 The modified expected runs model

The extension is a strict addition to the multiplicative model (1), not a new mechanism. On the tracked subset we append two factors,

$$\tilde{\mu}(\boldsymbol{x}_b) = \mu(\boldsymbol{x}_b)\, \gamma^{\text{len}}_{(\varphi,\, \ell(b))}\, \gamma^{\text{lin}}_{(\varphi,\, \lambda(b))}, \tag{S1}$$

where $\ell(b)$ and $\lambda(b)$ are the length and line of delivery b, each factor is phase-conditioned like the others, and γ^{len}, γ^{lin} are estimated by the same iterated, empirical Bayes shrunk backfitting of Sections 3.2-3.3, holding the baseline expectation $\mu(\boldsymbol{x}_b)$ as the offset. The modified and primary residuals are then

$$\text{mRAE}_b = r_b - \tilde{\mu}(\boldsymbol{x}_b), \qquad \text{pRAE}_b = r_b - \mu(\boldsymbol{x}_b). \tag{S2}$$

The fitted multipliers (Table S12) line up with cricketing intuition. A yorker is worth about half an average ball and a short ball about half again as much, while line matters only through width, down the leg side or wide outside off. Because length dominates, mRAE is in effect a length adjustment, raising the bar on deliveries that are easy to score off and lowering it on the hardest.

Table S12: Fitted length and line multipliers (phase-averaged).

Length	γ^{len}	Line	γ^{lin}
Yorker	0.490	Off Stump	0.973
Bouncer	0.607	Leg Stump	0.982
Good Length	0.880	Outside Off	0.986
Back of Length	0.970	On Stumps	0.988
Half Volley	1.188	Down Leg	1.013
Full Toss	1.320	Wide Down Leg	1.042
Short	1.460	Wide Outside Off	1.118

Line and length occupy opposite roles for the two sides of a delivery. For the batter, they provide context: the ball he had to deal with and did not choose, so conditioning on them isolates his shot-making given the delivery. For the bowler, they measure skill: bowling a yorker or hitting a hard length is the act by which he suppresses scoring, so conditioning a bowler's residual on his own line and length subtracts out his main contribution, just as conditioning a batter's residual on his own shot selection would. The distinction mirrors the opposition factor asymmetry already in the model (Section 3.4), where a batter is credited against the bowler he faced and a bowler against the batter he faced, never against his own quality.

Applied to batters, the extension leaves the ranking essentially intact: across the 107 qualifying IPL batters (≥ 400 tracked balls) the pRAE and mRAE per-ball rates correlate 0.984, with Spearman rank correlation 0.97. Applied to bowlers, conditioning on their own line and length degrades the ranking markedly (Spearman 0.83) and moves it in the wrong direction. The bowlers who lose most are the ones whose value is their length and line control: Rashid Khan ($+0.170 \to +0.118$ runs saved per ball), Bhuvneshwar Kumar ($+0.178 \to +0.117$), Sunil Narine ($+0.168 \to +0.099$) and Mitchell Santner ($+0.139 \to +0.078$), since the model now treats the 'hard to score' deliveries they bowl as the expected state of affairs rather than their achievement. We therefore define mRAE for batters only.

S2.4 Primary RAE versus modified RAE

Ball tracking is available in the IPL only from the 2015 season onward, so every leaderboard in this subsection is computed on the tracked deliveries of the 2015–2025 seasons, and each player's runs, balls, strike rate, wickets and economy are likewise measured over those tracked deliveries alone, so that pRAE

and mRAE are compared on exactly the same balls. Each table is ordered by the modified metric, and we report two ranks: the 'mRank' is the player's position under mRAE and the 'pRank' is the position he would have held under pRAE on the same balls. The gap between the two is the clearest single summary of what the tracking refinement changes.

Table S13: Top IPL batters by mRAE per ball on the tracked subset (2015–2025, $\geq$ 400 tracked balls), with pRAE per ball on the same balls, the two ranks, the change $\Delta = \text{mRAE} - \text{pRAE}$, and runs, balls and strike rate over the tracked deliveries.

mRank	Batter	mRAE/Ball	pRAE/Ball	pRank	Δ	Runs	Balls	SR
1	Andre Russell	0.321	0.375	1	−0.054	2,588	1,475	175.5
2	AB de Villiers	0.249	0.270	5	−0.021	3,102	1,919	161.6
3	Nicholas Pooran	0.220	0.272	4	−0.052	2,293	1,357	169.0
4	Phil Salt	0.215	0.272	3	−0.057	1,056	600	176.0
5	Heinrich Klaasen	0.204	0.235	7	−0.031	1,480	872	169.7
6	Pat Cummins	0.192	0.205	10	−0.013	612	402	152.2
7	Travis Head	0.186	0.245	6	−0.059	1,146	674	170.0
8	Sunil Narine	0.179	0.310	2	−0.131	1,733	1,028	168.6
9	Abhishek Sharma	0.176	0.218	8	−0.042	1,816	1,114	163.0
10	Liam Livingstone	0.165	0.209	9	−0.044	1,051	662	158.8
11	Glenn Maxwell	0.161	0.185	12	−0.024	2,223	1,482	150.0
12	Prithvi Shaw	0.146	0.161	14	−0.015	1,884	1,280	147.2
13	Suryakumar Yadav	0.132	0.152	16	−0.020	4,140	2,776	149.1
14	Shashank Singh	0.128	0.157	15	−0.029	773	490	157.8
15	Rajat Patidar	0.128	0.129	21	−0.001	1,111	720	154.3

Table S14: Top IPL bowlers by −mRAE per ball (runs saved) on the tracked subset (2015–2025, $\geq$ 300 tracked balls), shown only to demonstrate the failure of the extension on bowling (Section S2.3).

mRank	Bowler	−mRAE/Ball	−pRAE/Ball	pRank	Δ	Wkts	Econ	Balls
1	Matheesha Pathirana	0.311	0.301	1	+0.010	49	7.66	682
2	Jasprit Bumrah	0.293	0.298	2	−0.005	190	6.93	3,086
3	Jofra Archer	0.291	0.257	3	+0.034	60	7.49	1,228
4	Chris Morris	0.160	0.117	11	+0.043	86	7.69	1,420
5	Harshal Patel	0.150	0.080	19	+0.070	155	8.37	2,129
6	Andrew Tye	0.137	0.113	12	+0.024	48	8.25	684
7	Nathan Ellis	0.136	0.142	8	−0.006	20	8.44	381
8	Prasidh Krishna	0.135	0.102	14	+0.033	79	8.32	1,516
9	Mitchell Marsh	0.135	0.079	20	+0.056	21	8.10	300
10	Nathan Coulter-Nile	0.131	0.079	21	+0.052	49	7.49	815
11	Lasith Malinga	0.130	0.098	15	+0.032	53	8.08	904
12	Morne Morkel	0.121	0.058	28	+0.063	22	7.70	384
13	Mohammed Siraj	0.120	0.105	13	+0.015	112	8.25	2,307
14	Rashid Khan	0.119	0.171	6	−0.052	166	6.96	3,156
15	Bhuvneshwar Kumar	0.117	0.178	4	−0.061	165	7.71	3,260

Per-ball rates. Among batters (Table S13), the ordering holds broadly but reshuffles underneath. AB de Villiers rises from pRank 5 to second under mRAE, while Sunil Narine falls from pRank 2 to mRank 8, the sharpest mover, because much of his scoring comes off short and wide balls the refined model now expects runs from. The bowler table (Table S14) is the evidence, as mentioned in Section S2.3, that the same refinement must not be applied to bowling. Conditioning a bowler's residual on his own line and length lifts almost every bowler's apparent run prevention. Harshal Patel jumps from pRank 19 to mRank 5, and Chris Morris and Morne Morkel climb similarly, while the elite suppressors fall. Rashid Khan slides from pRank 6 to mRank 14 and Bhuvneshwar Kumar from pRank 4 to mRank 15, because the hard lengths that are their skill now count as par. The resulting order does not describe bowling quality.

Cumulative and season totals. The cumulative and per-season orderings tell the same story on the batting side, where they are meaningful. Over careers, (Table S15) de Villiers and Russell trade the top two places and Narine slides from pRank 8 to mRank 12. By season, (Table S17) Russell's 2019 and de Villiers's 2016 remain the most valuable tracked campaigns under either metric. The bowling cumulative and season tables (Tables S16 and S18) are included for completeness and show the same distortion as the rates: Bumrah, whose value is as much containment as length, is the one elite name to hold the top; Bhuvneshwar and Rashid each shed about 200 runs of apparent value, and Bumrah alone accounts for four of the ten most valuable bowling seasons.

Table S15: Top IPL batters by cumulative mRAE (tracked deliveries, 2015–2025, ≥ 400 balls), with cumulative pRAE on the same balls.

mRank	Batter	mRAE	pRAE	pRank	Δ	Runs	Balls	SR
1	AB de Villiers	479	517	2	−38	3,102	1,919	161.6
2	Andre Russell	474	554	1	−80	2,588	1,475	175.5
3	Suryakumar Yadav	367	422	3	−55	4,140	2,776	149.1
4	Jos Buttler	311	331	7	−20	4,119	2,756	149.5
5	Rishabh Pant	299	357	5	−58	3,546	2,401	147.7
6	Nicholas Pooran	298	369	4	−71	2,293	1,357	169.0
7	Sanju Samson	260	257	10	+3	4,156	2,929	141.9
8	Glenn Maxwell	238	274	9	−36	2,223	1,482	150.0
9	David Warner	238	332	6	−94	4,597	3,243	141.8
10	Abhishek Sharma	196	243	11	−47	1,816	1,114	163.0
11	Prithvi Shaw	187	207	12	−19	1,884	1,280	147.2
12	Sunil Narine	185	318	8	−134	1,733	1,028	168.6

Table S16: Top IPL bowlers by cumulative −mRAE (runs saved; tracked deliveries, 2015–2025, ≥ 300 balls), with −pRAE on the same balls. Included for completeness only (Section S2.3). $\Delta = (-\text{mRAE}) - (-\text{pRAE})$.

mRank	Bowler	−mRAE	−pRAE	pRank	Δ	Wkts	Econ	Balls
1	Jasprit Bumrah	903	920	1	−17	190	6.93	3,086
2	Bhuvneshwar Kumar	381	581	2	−200	165	7.71	3,260
3	Rashid Khan	374	539	4	−165	166	6.96	3,156
4	Jofra Archer	357	315	6	+42	60	7.49	1,228
5	Harshal Patel	319	169	11	+150	155	8.37	2,129
6	Sunil Narine	319	541	3	−222	135	6.98	3,224
7	Sandeep Sharma	315	346	5	−31	135	7.74	2,713
8	Mohammed Siraj	277	242	7	+35	112	8.25	2,307
9	Chris Morris	227	166	12	+62	86	7.69	1,420
10	Matheesha Pathirana	212	206	9	+6	49	7.66	682
11	Prasidh Krishna	205	154	13	+50	79	8.32	1,516
12	Pat Cummins	147	77	23	+70	80	8.51	1,595

Not every player falls under mRAE and the direction of the change is itself informative. Among batters, only eleven of the 107 qualifiers gain, and they are the orthodox accumulators who score against good balls rather than by waiting for loose ones: Faf du Plessis (pRank 26 → mRank 15 on the cumulative list, +39 runs), Ruturaj Gaikwad, Shane Watson and Ajinkya Rahane, so the refinement redistributes credit from those who feast on hittable deliveries towards those who milk good ones. On the bowling side, the pattern reverses and is far larger. A majority of qualifying bowlers (73 of 132) *rise*, because conditioning away line and length compresses the field, flattering the expensive bowler who at least bowled testing areas and docking the miser who earned his economy through control. That the adjustment moves most bowlers in the wrong direction is the quantitative case for confining mRAE to batting.

Table S17: Most valuable IPL batter-seasons by mRAE (tracked deliveries, 2015–2025, $\geq$ 150 balls in the season), with pRAE on the same balls, the two ranks, the per-ball change Δ/Ball, and tracked runs, balls and strike rate.

mRank	Batter	Season	mRAE	pRAE	pRank	Δ/B	Runs	Balls	SR
1	Andre Russell	2019	154	170	1	−0.064	511	250	204.4
2	AB de Villiers	2016	151	156	3	−0.011	686	406	169.0
3	Rishabh Pant	2018	145	158	2	−0.032	679	390	174.1
4	David Warner	2016	130	149	4	−0.033	848	559	151.7
5	Abhishek Sharma	2024	128	140	6	−0.053	484	237	204.2
6	Travis Head	2024	127	141	5	−0.045	567	296	191.6
7	Suryakumar Yadav	2023	125	137	7	−0.034	605	334	181.1
8	AB de Villiers	2018	103	108	9	−0.017	478	273	175.1
9	Prithvi Shaw	2021	103	98	16	+0.016	479	301	159.1
10	Priyansh Arya	2025	103	108	10	−0.017	545	299	182.3

Table S18: Most valuable IPL bowler-seasons by −mRAE (runs saved; tracked deliveries, 2015–2025, $\geq$ 120 balls in the season), with −pRAE on the same balls. Included for completeness only (Section S2.3).

mRank	Bowler	Season	−mRAE	−pRAE	pRank	Δ/B	Balls	Wkts	Econ
1	Jasprit Bumrah	2019	149	158	2	−0.023	374	21	6.48
2	Jasprit Bumrah	2024	142	159	1	−0.056	315	21	6.08
3	Jasprit Bumrah	2025	139	141	4	−0.007	284	21	6.57
4	Lasith Malinga	2015	138	108	10	+0.081	362	24	7.08
5	Jofra Archer	2020	133	115	7	+0.053	336	20	6.29
6	Prasidh Krishna	2025	124	102	11	+0.061	354	26	8.08
7	Rashid Khan	2020	118	138	5	−0.053	384	20	5.27
8	Mohammed Siraj	2023	116	114	8	+0.005	302	20	6.81
9	Jasprit Bumrah	2018	115	117	6	−0.007	325	17	6.55
10	Sunil Narine	2022	110	142	3	−0.095	336	10	5.45

Two caveats temper even the batting refinement, and together they are why the main paper headlines pRAE. First, it is available only on the tracked subset, large for some leagues and negligible for others (Table S10), so mRAE cannot serve as a universal, reproducible cross-competition scale. Second, treating the delivery as exogenous ignores the batter's own hand in it: a fine player forces bowlers into the loose lengths he then punishes, and mRAE, by adjusting them away, declines to credit him for it (the confounding noted in Section 7). mRAE is thus best read as a sharper, tracking-aware companion to pRAE on the matches that support it, not as its direct replacement.