Detecting Common Golfing Faults Using AI and Video-Derived Biomechanical Features

Oliver Martin

Jeff Clark

Nawid Keshtmand
nawid.keshtmand@bristol.ac.uk

School of Engineering Mathematics and Technology
University of Bristol
Bristol, UK

arXiv:2611.11515v1 [cs.LG] 8 Nov 2026

Abstract

Understanding how an athlete moves can improve both technique and safety, yet outside the laboratory technique is still assessed by eye. We present a pipeline that detects named golf swing faults from ordinary video, without markers or calibration. Instead of learning end to end, it tracks body pose and the clubhead in a body-centred frame, and classifies the biomechanical quantities a coach would measure, such as the height of the clubhead above the swing plane, with shallow boosted trees. We demonstrate the approach on two common faults, coming over-the-top (OTT) and early-extension (EE). On 160 swings and 143 swings from public sources it detects OTT and EE with a cross-validated ROC-AUC of 0.975 and 0.911 respectively. Because every feature is a biomechanical quantity a coach already uses, measured at a known phase of the downswing, each decision can be traced to the signals and the moments of the swing that drove it. The signals the model relies on most are the same ones a coach checks when diagnosing these faults. The pipeline processes phone video on a consumer laptop in seconds, so it could feasibly be developed into an app for golfers of all abilities and extended to other sports in which technique is judged against a biomechanical reference.

1 Introduction

How an athlete moves determines how well they perform, how likely they are to be injured, and in some sports whether their technique is legal at all. In golf, swing kinematics can differ between professionals and amateurs [53], and the mechanics of the swing are implicated in low back pain, among the most common injuries in the sport [4, 15, 16]. Most of what is known about the technique comes from marker-based motion capture in the laboratory [2], which is precise but requires a capture volume, markers, and an operator, and may not be representative of typical outdoor golfing conditions. Outside the laboratory, coaches assess technique by eye against a small set of key swing parameters [22], and golfers without a coach are left to assess their own technique by filming themselves on a phone. A tool that serves professionals and amateurs alike must therefore work from a single ordinary video, with no markers, calibration, or special equipment.

© 2026. The copyright of this document resides with its authors.
It may be distributed unchanged freely in print or electronic forms.

Computer vision and machine learning are increasingly used in sports analytics, from player and ball tracking to motion analysis [24, 27], and markerless pose estimators [1] now return body landmarks from phone video in real time. In golf, video has already been used for swing sequencing, self-training, and skill assessment [10, 14, 17], yet academic studies and consumer apps typically do not explicitly detect faults. In this paper we develop a pipeline to detect two named faults in golf technique:

1. **Coming "over-the-top" (OTT)**: the club is thrown outward at the start of the downswing, so the clubhead travels above the swing plane. Perhaps the most common fault among high-handicap golfers, it typically produces a pull or a slice [26]. Coaches diagnose it from the down-the-line view; so do we, from body pose and a tracked clubhead (Figure 1). It is a demanding test case: the decisive evidence is the club path, invisible to a pose estimator, judged over time against a biomechanical construct, the swing plane [5, 13].

2. **Early-extension (EE)**: the hips thrust toward the ball during the downswing, so the torso stands up out of its address posture (Figure 2). It typically produces a two-way miss, a block or a hook [25]. Coaches diagnose it from the same view, by whether the hips keep their distance from the ball; so do we.

Our contributions are:

- A golf fault detection pipeline for ordinary monocular video, combining MediaPipe pose estimation with a YOLO11 clubhead detector fine-tuned on 700 hand-labelled frames and a gated Kalman/RTS tracker that bridges detection dropouts, utilising directly interpretable biomechanical features (Sec. 3).
- A biomechanics-guided, phase-normalised *trajectory* representation of the downswing, demonstrated on 160 and 143 swing videos, on which it detects OTT with a cross-validated ROC-AUC of 0.975 (Table 1) and EE with 0.911 (Table 3).
- Error and feature importance analyses for both faults; for OTT the single most informative signal is clubhead height above the swing plane (Table 2).

2 Related work

Technique assessment from pose estimation. Action quality assessment regresses judges' scores from whole-clip features, first from pose [20] and later from spatio-temporal RGB networks [19]; it yields a global score rather than a decision about a named fault, and its benchmarks are broadcast footage of judged sports such as diving. Pose-based coaching systems compare a user's keypoints with exemplars and return corrective feedback [29]. Closer to our task, named execution faults have been detected from monocular video with keypoint time series and compact classifiers: squat form classes from distance matrices [18], aberrant executions of the military press from time-series classifiers [21], and race-walking faults using pose estimation and machine learning models trained based on the judgements of multiple qualified judges [23]. These studies share our regime of small, expert-labelled datasets and interpretable features, but in each of them the fault is visible in the body alone, whereas OTT is a fault of the club path. Skeleton-based recognisers [32] learn from keypoint sequences end to end but need far more than 160 clips, and pose inputs have the further advantage of transferring to out-of-context actions where RGB models fail [30].

Golf swing analysis from video. Monocular golf analysis has a long history in computer vision research. In 2003 Gehrig et al. [7] recovered the clubhead trajectory from ordinary swing video by fitting curves to club detections, and in 2005 Urtasun et al. [28] tracked the golfer's 3D pose through a swing with a learned motion model. Modern pipelines start from a learned body-pose estimator. GolfDB [17] provides 1,400 professional swings annotated with eight event frames and the SwingNet event detector; we draw our negative class cases from it, and our top and impact detection plays the same role as its event detection, but from pose and clubhead tracks rather than RGB frames. Pose-based coaching tools synchronise a learner's swing with an expert's and visualise where the two diverge [14], estimate a golfer's handicap from video [10], or separate proficiency-related differences from individual style using 2D pose and club detection in a single camera view [31]. 3D pose estimation from monocular video has been found too inaccurate for golf kinematics [9]. Closest in task to ours, Feng et al. [6] classify common swing errors from MediaPipe landmarks with an attention-augmented LSTM, on 160 swings recorded under controlled conditions, and Kim et al. [12] derive posture and tempo metrics and a projected club path from down-the-line footage, without a labelled fault to detect. Because body-pose estimators do not see the club, recent work fuses club and body keypoints to predict ball flight [11]; we also treat the club as a first-class signal, with a dedicated detector and tracker, but use it to measure a named fault against a swing-plane line. To our knowledge no prior work detects OTT and EE automatically from monocular video.

3 Method

Our representation is guided by interpretable biomechanical signals rather than learned end to end: we track the quantities a coach would measure and let a shallow classifier use them. The downswing lasts a fraction of a second, and both faults are defined by sequential movements, so features that summarise the whole swing discard most of the evidence. The pipeline therefore runs per-frame body pose and clubhead detection (Sec. 3.1), maps the coordinates into a body-centred, aspect-corrected frame (Sec. 3.2), detects the top of the backswing and impact (Sec. 3.3), and resamples the downswing between them to a fixed number of phase steps, as gait cycles are time-normalised in biomechanics [8]. Within that window it tracks a small set of signals a coach would look at, including the height of the clubhead above a swing-plane line (Sec. 3.4.1), and classifies their trajectories with boosted trees whose feature importance can be read off by signal and by phase (Sec. 3.4). EE detection reuses every stage except the clubhead detector.

3.1 Body pose and clubhead detection

Body landmarks are generated with MediaPipe Pose (33 landmarks per frame, video mode, model complexity 1) and are used by both fault models. The clubhead comes from a YOLO11-L detector (25.3M parameters) fine-tuned for three classes (ball, handle, clubhead) on 700 hand-labelled frames (560 train, 140 validation) for 80 epochs at 1280 px. Inference runs at 640 px with a confidence threshold of 0.10, followed by a recovery pass that re-detects missed clubheads in a zoomed crop around the predicted position; this raises the median fraction of frames with a detected clubhead from $\sim$62% to $\sim$86%. The raw clubhead track is then cleaned and smoothed. Detections more than 6.0 robust deviations (MAD) from the local median path, or more than 1.2 body heights from the lead wrist, are



Figure 1: Progression of an over-the-top (OTT) swing (top) and a non-OTT swing (bottom), shown at the top of the backswing, one-third and two-thirds of the way through the downswing, and impact. Orange: tracked clubhead path so far (red dot: current position). Cyan: the swing-plane line from the clubhead at address to the trail elbow. The OTT clubhead loops outward and stays above the line, while the non-OTT clubhead drops onto the line before impact.



Figure 2: Progression of an early-extension (EE) swing (top) and a non-EE swing (bottom), shown at the top of the backswing, one-third and two-thirds of the way through the downswing, and impact. Orange: tracked hip path (red dot: start position). Cyan: the start line from the back of the foot. The hips of the amateur (top) start slightly right and extend far further than those of the experienced player (bottom).

rejected. A constant-acceleration Kalman filter with confidence-scaled measurement noise (measurement and process noise variances 4×10^{-4} and 5×10^{-3}) and a 3.5σ innovation gate is followed by a Rauch–Tung–Striebel (RTS) smoother, which bridges gaps of up to 15 frames. These settings are fixed across all OTT experiments. Figure 1 shows an OTT and a non-OTT swing with the tracked clubhead path and the swing-plane line. The clubhead detector and tracker serve the OTT model only: EE is a fault of the body rather than the club, so its model works from the body landmarks alone.

3.2 Body-frame normalisation

Pose and detector coordinates arrive as fractions of frame width and height, which are different units on any non-square frame. Let (x, y) be a keypoint's horizontal and vertical image position. We first multiply x by the frame aspect ratio W/H so that both axes are in frame heights, which removes the angle distortion of portrait frames. Each keypoint is then mapped to

$$\tilde{x} = \frac{s\,(x - x_{\text{hip}})}{B}, \qquad \tilde{y} = \frac{y_{\text{hip}} - y}{B}, \tag{1}$$

where $(x_{\text{hip}}, y_{\text{hip}})$ is the mid-hip, B is body height (the median shoulder-to-ankle distance over the clip), and $s = \pm 1$ orients the horizontal axis by the backswing direction. This decouples frame resolution, camera distance and the golfer's size, and makes the signals invariant to handedness and camera side.

3.3 Swing phases

Both faults are faults of the downswing, so both models work on the window from the top of the backswing to impact, and both events must be located in every clip. Impact is the frame at which the clubhead returns to its address height (the ball) and turns upward; anchoring impact to the ball prevents a high finish, which comes after impact, from being mistaken for the top. The top is defined as the lead wrist's last up-to-down reversal before impact. It is anchored to the wrist rather than the clubhead because the clubhead's highest point is itself shifted by the OTT move: with a clubhead-defined top, the top fell at a different phase in each class. When the clubhead is tracked on fewer than half the frames, both events default to the wrist trajectory, and the EE model, which does not track the clubhead, locates both events from the wrist throughout.

3.4 Classifier and features

Biomechanical signals are extracted from each clip, as positions and as their frame-to-frame differences, and classified with XGBoost.

3.4.1 Absolute position and change in position

The downswing is resampled to N=30 phase steps, and at each step we record a set of signals a coach would look at, in the body frame (Sec. 3.2); their frame-to-frame differences $\Delta s_t = s_t - s_{t-1}$ double the feature count. For OTT the eleven signals are lead wrist x, y; trail elbow x, y; horizontal shoulder and hip separation; shoulder tilt; clubhead x, y; shaft angle; and the signed height of the clubhead above the swing-plane line (Sec. 3.4.2), giving 330 position and 330 delta features. The last of these measures the defining sign of OTT directly,

a clubhead that stays above the swing plane through the downswing [26], but not decisively. The other signals describe the hands, arms, club and torso around it and separate the classes at different moments.

For EE, a fault of the body rather than the club, the fifteen signals are the horizontal and vertical displacement of the hips and of the shoulders from address, measured relative to the mid-ankle; the head's rise from address; horizontal hip separation; the x, y of both knees and both ankles; and the spine angle, the forward tilt of the mid-hip to mid-shoulder line, giving 450 position and 450 delta features. The hips' horizontal displacement measures the defining sign of EE directly, a pelvis that moves toward the ball during the downswing [25]. The other signals describe what the hip thrust does to the torso, head and legs, and where the hips sit over the feet.

3.4.2 Swing plane

The plane line runs from the ball to the trail elbow, both taken at address in the first 0.5 s of the clip, and is held fixed through the downswing (Figure 1). At address the clubhead rests on the ball, so its tracked position there gives the ball point, avoiding the ball detector, which on a driving range can jump between stray balls. Every swing begins the downswing well above this line, so its early frames carry little information.

3.4.3 Trajectories rather than summaries

To assess the importance of temporal trajectories, we compare a model trained on the 30 separate phase steps with a baseline trained on scalar summaries of the whole downswing, taken from the coaching definition of each fault (Sec. 4). The same eleven signals (fifteen for EE) enter the trajectory model as positions alone, as frame-to-frame deltas alone, and as both together (Sec. 5.1.1 and Sec. 5.2.1).

4 Experimental setup

Data. A dataset of 169 video clips was assembled for OTT detection. *Positives*, which display the OTT fault, total 68 clips: 62 are amateur clips sourced from Reddit, 4 from YouTube and 2 from other sources. *Negatives* (non-OTT, 101 clips) are 83 professional clips from GolfDB (160×160 px, cropped to the annotated swing plus 15 frames either side), 13 amateur clips from TikTok, 4 from Reddit and 1 from YouTube. All clips share the down-the-line camera angle and were checked for a consistent view and adequate lighting. Nine clips (5 OTT, 4 non-OTT) whose detected downswing window (Sec. 3.3) does not actually descend (cut off or flat) are discarded, since their phase-normalised features would describe no real downswing, leaving 160 clips for all OTT experiments.

For EE detection, 143 video clips were used, consisting of 60 amateur clips from the OTT dataset graded independently for EE, 28 extra Reddit clips posted about EE, and 55 GolfDB professional clips, assumed free of it. In total 46 clips were positive for EE. These 143 clips remain after excluding 56 clips whose hip movement is not tracked effectively.

Classifier. Both fault models use the position and delta trajectory features of Sec. 3.4.1 (660 for OTT, 900 for EE), classified with XGBoost: depth-2 trees, 400 estimators, learning rate 0.05, L2 regularisation $\lambda=3$, and column subsampling of $\min(1, 8/\sqrt{d})$ for d features.

Shallow trees keep the feature importance readable by signal and by phase. The same settings are used for OTT and EE.

Scalar baseline. For comparison, baseline models for both faults were trained on a small number of scalar features from the coaching definition of each fault. For OTT the baseline scalar model utilises four features: the horizontal gap between the lead hand's downswing and backswing paths; how far the hand moves outward relative to how far it drops early in the downswing; the early change in shaft angle; and the clubhead's height above the swing plane, weighted toward mid-downswing (Sec. 3.4.2). The EE scalar baseline uses three features: how far the hips move toward the ball from top to impact; how far they sit past the ankles at impact compared with address; and the loss of forward spine tilt from address to impact. For both, an XGBoost classifier was trained with 200 trees of depth 3 and learning rate 0.1.

Evaluation protocol. Repeated stratified 5-fold cross-validation (3 repeats, seed 42), reporting mean $\pm$ s.d. of ROC-AUC over the 15 folds, and F1, precision and recall at a fixed 0.5 threshold. All results in Sec. 5 use this protocol unless stated otherwise; the 'full model' for OTT or EE is the one using both the positions and the deltas of the trajectory.

5 Results and discussion

5.1 Over-the-top (OTT)

5.1.1 Classification of "over-the-top" (OTT)

Table 1 summarises detection performance on the 160 swings. The full trajectory model (positions and deltas, 660 features) achieves the best performance and reaches a cross-validated ROC-AUC of 0.975 ± 0.019. In practical terms, at the default 0.5 decision threshold, when the model flags a swing as OTT it is correct in $\sim$93% of cases, and it detects $\sim$89% of the OTT swings in the dataset. The four scalar features that summarise the whole downswing reach only 0.874 ± 0.046, so resolving the downswing in time accounts for most of the improvement. Positions and deltas each perform well alone (AUC of 0.962 and 0.969) and are complementary when combined.

Features	Dim.	AUC	F1	Prec.	Rec.
Scalar baseline	4	0.874 ± 0.046	0.760	0.813	0.740
Trajectory: positions	330	0.962 ± 0.031	0.884	0.931	0.847
Trajectory: deltas	330	0.969 ± 0.020	0.840	0.881	0.821
Trajectory: pos+delta	660	$\mathbf{0.975 \pm 0.019}$	0.908	0.931	0.894

Table 1: OTT fault detection across 160 swings, 63 of them positive for OTT; ROC-AUC is mean $\pm$ s.d. over 15 folds. F1, precision ("Prec.") and recall ("Rec.") are at the 0.5 decision threshold; "Dim." is the number of features.

Figure 5 (Appendix A) shows the class-mean trajectory of each signal over the downswing. Clubhead height above the plane separates the classes most clearly, and the other club signals separate over most of the downswing. The body signals separate at their own moments: the lead wrist's horizontal position differs from the start, and shoulder tilt and hip separation differ slightly in the first half. The evidence is thus confined to particular phases,

which the phase-resolved representation preserves and a whole-swing summary would average away.

5.1.2 Feature importance by signal and phase


We examine which signals and which moments of the downswing the OTT model relies on in two ways. The first trains the classifier on a single signal, its 30 positions and 30 deltas, and reports the AUC that signal reaches alone (Table 2), a measure of how informative each signal is regardless of the others. The second lays out a trained model's feature importance, the share of XGBoost's gain attributed to each feature, as a map of signal against downswing phase, for the full model and for a model trained on the body signals alone (Figure 3).

Single-signal models. The ranking in Table 2 follows the definition of the fault. Clubhead height above the swing plane, the quantity a coach judges OTT by, is the strongest single signal with an AUC of 0.940, within 0.035 of the full model (Table 1), and the other three club signals follow: the clubhead's horizontal and vertical position (0.875 and 0.867) and the shaft angle (0.833). The body signals are weaker but far from uninformative. The lead wrist's horizontal position (0.820) outranks its height (0.689): in the down-the-line view the horizontal axis runs across the target line, the direction in which an OTT move throws the hands and club outward. Hip separation reaches 0.789 although it barely differs between the classes in any third of the downswing; the trail elbow (0.693 and 0.687) and shoulder tilt (0.650) add little alone, and the horizontal shoulder separation (0.571) is close to chance. The body alone thus carries a usable signal of a fault defined by the club, and the full model's 0.975 exceeds the strongest club and body signals, so the two are partly complementary.


Signal	AUC	Signal	AUC
Head above plane	0.940 ± 0.026	Trail elbow x	0.693 ± 0.067
Clubhead x	0.875 ± 0.057	Lead wrist y	0.689 ± 0.107
Clubhead y	0.867 ± 0.043	Trail elbow y	0.687 ± 0.088
Shaft angle	0.833 ± 0.073	Shoulder tilt	0.650 ± 0.083
Lead wrist x	0.820 ± 0.071	Shoulder sep. x	0.571 ± 0.063
Hip sep. x	0.789 ± 0.077		

Table 2: Per-signal cross-validated ROC-AUC (mean $\pm$ s.d. over 15 folds, 160 swings) of the OTT classifier trained on each signal individually, i.e. its 30 phase-step positions and 30 deltas (60 features), under the protocol of Sec. 4. "Head above plane" is the signed height of the clubhead above the swing-plane line (Sec. 3.4.2); x and y are horizontal and vertical body-frame coordinates (Sec. 3.2) and "sep." the horizontal separation of the shoulders or hips. Signals are sorted by AUC; the full model using all eleven signals reaches 0.975 (Table 1).

Importance maps. For the full model the importance map is sparse (Figure 3a): almost all of the importance sits in clubhead height above the swing plane between about 65% and 80% of the downswing, with smaller contributions from the same signal in the last 20% and from the clubhead's and lead wrist's horizontal position near impact. Contributions in the first half are minimal: every swing starts the downswing well above the plane line, and the classes diverge in the middle third and are furthest apart in the last. The body rows, by contrast, are nearly empty, which appears to contradict Table 2, where the same body signals

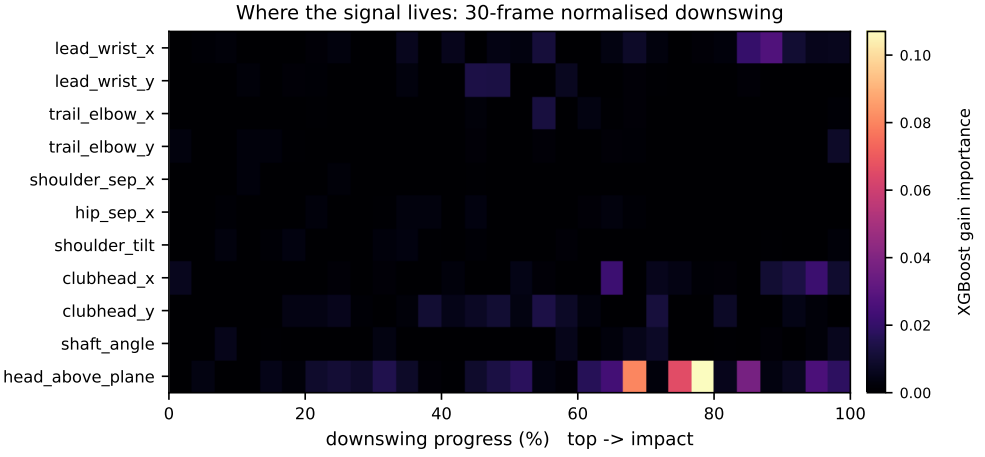

(a) Full model

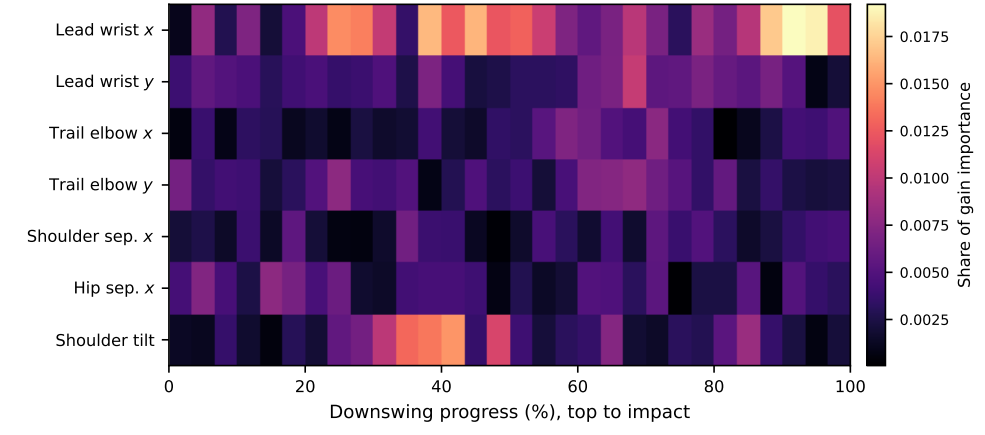

(b) Body pose only

Figure 3: Feature importance of the OTT classifier by signal (rows) and downswing phase (columns; 0% is the top of the backswing, 100% impact), with each signal's position and delta features at a phase step combined into one cell. (a) Full model. (b) Body-pose-only model (AUC 0.883). Colour scales differ between the panels.

reach AUCs between 0.57 and 0.82 on their own. The two views measure different things. A single-signal AUC measures how much a signal carries by itself, whereas importance measures how much the training loss fell when the trees split on a feature, and boosting chooses at each split the feature that reduces the loss most. Clubhead height above the plane separates the classes better than any body signal, so the trees split on it almost every time, and the body signals, which see the same outward move from the body's side and are correlated with it, are rarely needed once it has been used. Their low importance means the club signal carries their information more directly, not that they carry none: the table shows what each signal knows, and the map what the model uses.

Removing the club signals makes this visible. A body-only model trained on the seven

body signals (AUC 0.883) spreads its importance across signals and across the downswing (Figure 3b): the lead wrist's horizontal position from about 20% to 55% of the downswing and again near impact, shoulder tilt between about 30% and 50%, hip separation at the very start, and the wrist and trail-elbow heights in the second half. In both maps the evidence is confined to particular phases rather than spread evenly, which is what a whole-swing summary discards, and in both the signals and moments the model relies on are those a coach looks for.

5.2 Early-extension (EE)

5.2.1 Classification of early-extension (EE)

The EE experiments test whether the same recipe transfers to a fault of the body rather than the club. Table 3 presents detection of EE on the 143 clips. With position and delta features the model reaches a cross-validated ROC-AUC of 0.911 ± 0.065 and, at the 0.5 threshold, an F1 of 0.706 with precision 0.852 and recall 0.619: a swing flagged as EE is correct in $\sim$85% of cases, but only $\sim$62% of EE swings are detected. As with OTT, precision exceeds recall, but the gap is wider. The classes are more imbalanced (46 of 143 clips, against 63 of 160 for OTT), which leaves the fixed 0.5 threshold on the conservative side; the AUC shows that the ranking of swings is better than the thresholded figures suggest, and a lower threshold would trade precision for recall. The fold-to-fold spread of AUC is also more than three times that of OTT ($\pm$0.065 against $\pm$0.019), as expected with $\sim$nine positives per test fold. As for OTT, a trajectory beats scalar summaries of the same movement.

Features	Dim.	AUC	F1	Prec.	Rec.
Scalar baseline	3	0.726 ± 0.079	0.536	0.619	0.491
Trajectory: positions	450	0.824 ± 0.061	0.539	0.672	0.465
Trajectory: deltas	450	0.883 ± 0.080	0.727	0.853	0.649
Trajectory: pos+delta	900	$\mathbf{0.911 \pm 0.065}$	0.706	0.852	0.619

Table 3: EE fault detection across 143 swings, 46 of them positive for EE; ROC-AUC is mean $\pm$ s.d. over 15 folds. Trajectory rows use 15 hip, leg and torso signals. The 143 swings exclude 56 clips whose hip movement was not tracked effectively (Sec. 4), so these results are an upper bound. F1, precision ("Prec.") and recall ("Rec.") are at the 0.5 decision threshold; "Dim." is the number of features.

5.2.2 Feature importance by signal and phase

We examine which signals and moments of the downswing the EE model relies on in the same two ways as for OTT (Sec. 5.1.2): the AUC each signal reaches alone (Table 4), and the trained model's share of gain by signal and downswing phase (Figure 4). As the EE model works from body landmarks alone, there is one map rather than two.

Single-signal models. The ranking in Table 4 again follows the definition of the fault. The hips' horizontal displacement from address, the quantity a coach judges EE by (Sec. 1), is the strongest signal at 0.910, as high as the full model's 0.911 (Table 3), so the other fourteen signals add nothing measurable to the ranking of swings. Those that follow are consequences of the same movement: the spine angle (0.834) is the torso standing up out of its address tilt, and since the body frame is centred on the mid-hip (Sec. 3.2), the trail and lead ankle x

(0.826 and 0.727) are the horizontal offset between hips and feet, that is, how far the hips have moved out over the ankles. The head's rise (0.687) and three knee coordinates (0.605 to 0.641) carry less, and the remaining seven signals are close to chance (0.516 to 0.584), among them the vertical displacement of the hips and shoulders, the shoulders' horizontal displacement and hip separation, which reached 0.789 for OTT. EE is therefore visible as the hips moving toward the ball under the shoulders and over the feet, and as the posture change that follows.

Signal	AUC	Signal	AUC
Hip Δx from address	0.910 ± 0.057	Hip Δy from address	0.584 ± 0.098
Spine angle	0.834 ± 0.090	Shoulder Δx from address	0.563 ± 0.113
Trail ankle x	0.826 ± 0.045	Lead ankle y	0.559 ± 0.083
Lead ankle x	0.727 ± 0.113	Hip sep. x	0.552 ± 0.105
Head Δy from address	0.687 ± 0.102	Shoulder Δy from address	0.531 ± 0.073
Trail knee x	0.641 ± 0.079	Lead knee x	0.530 ± 0.109
Trail knee y	0.611 ± 0.103	Trail ankle y	0.516 ± 0.091
Lead knee y	0.605 ± 0.064		

Table 4: Per-signal cross-validated ROC-AUC (mean $\pm$ s.d. over 15 folds, 143 swings) of the EE classifier trained on each signal individually, i.e. its 30 phase-step positions and 30 deltas (60 features), under the protocol of Sec. 4. "Δx" and "Δy" are horizontal and vertical displacement from the address position, relative to the mid-ankle; "Spine angle" is the forward tilt of the mid-hip to mid-shoulder line; the other x and y are horizontal and vertical body-frame coordinates (Sec. 3.2) and "sep." the horizontal separation of the hips. Signals are sorted by AUC; the full model using all fifteen signals reaches 0.911 (Table 3).

Importance maps. Figure 4 shows what the EE model relies on. Through the first three quarters of the downswing importance is low and scattered, with only hip separation and the knees carrying weak, isolated importance in its middle. Importance concentrates at 80–100% of the downswing in the hips' horizontal displacement from address, the spine angle and the rise of the head, with the horizontal position of the trail ankle alongside. This is the fault as a coach defines it (Sec. 1) [25]: the hips move toward the ball and the torso stands up out of its address posture, and the evidence appears in the approach to impact rather than at the top. As for OTT, the decisive signals are confined to one part of the downswing, here its last fifth, which the phase-resolved representation keeps separate and a whole-swing summary would average away. The two views agree: the signals that carry the importance in the last fifth are four of the five strongest single signals in Table 4, and the rows that stay dark throughout are the signals near chance. That the gain is spread over the spine, ankle and head rows while the full model is no better than the hips' displacement alone follows the reading of gain in Sec. 5.1.2: correlated views of one movement share it.

5.3 Why OTT is detected better than EE

EE is harder to detect than OTT for three reasons. First, its defining movement is small and overlaps between classes: at impact, the median EE swing has moved its hips 0.033 body heights toward the ball against 0.003 for non-EE amateurs, but a quarter of EE swings move less than a quarter of non-EE swings, whereas clubhead height above the plane differs by 0.32 body heights in the last third of the downswing. Second, the clubhead is tracked

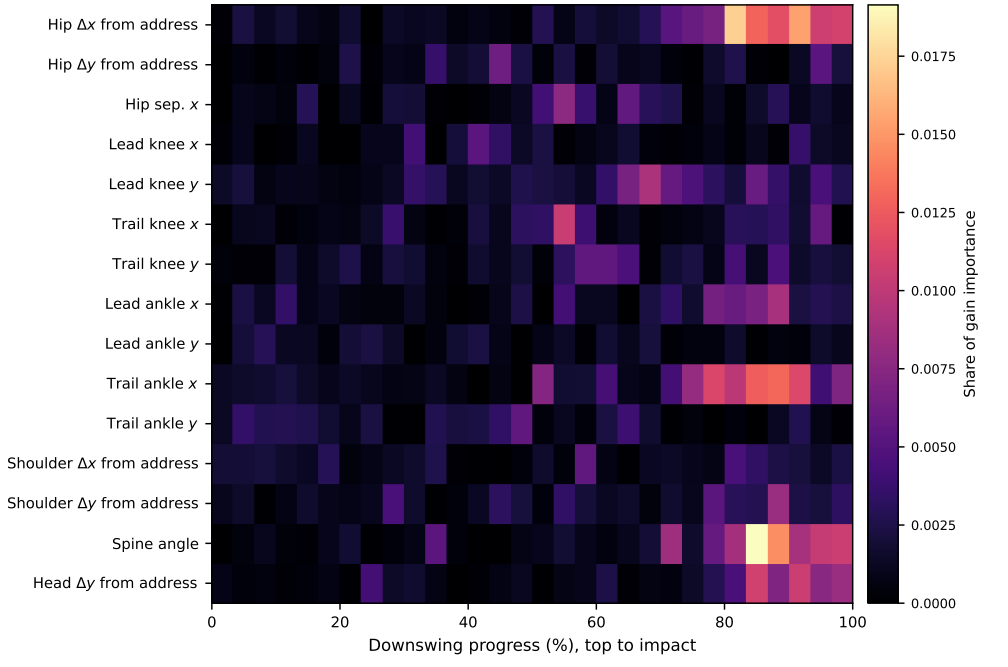


Figure 4: Feature importance of the EE classifier of Table 3 (143 clips, AUC 0.911) by signal (rows) and downswing phase (columns; 0% is the top of the backswing, 100% impact), with each signal's position and delta features at a phase step combined into one cell. The model sees body landmarks only; the fifteen signals are defined in Table 4. Importance concentrates at 80–100% of the downswing in the hips' horizontal displacement from address, the spine angle and the rise of the head.

directly, while the hip is a joint centre inferred by the pose estimator. Third, EE is graded on a continuum and has fewer positives.

5.4 Runtime

Run time was assessed on an Apple M2 laptop (Table 5). With the YOLO11-L detector used throughout, the forward pass takes 281 ms/frame, and full clubhead tracking of a 104-frame clip, including video decoding and the recovery pass, takes 12.7 s (42.3 s on the CPU). A phone clip can therefore be scored locally on consumer hardware within seconds of the swing, while it is still fresh; because OTT and EE are properties of the whole downswing, feedback is per swing rather than per frame. The smaller YOLO11-S and YOLO11-N variants run at 38 and 56 frames per second, which would allow near-instantaneous feedback once their detection accuracy has been validated.

Detector	Device	ms/frame	fps	3 s clip (s)
YOLO11-L†	CPU	1374	0.7	123.7
YOLO11-L†	GPU (MPS)	281	3.6	25.3
YOLO11-S	GPU (MPS)	26	38	2.3
YOLO11-N	GPU (MPS)	18	56	1.6

Table 5: Detector forward-pass time per frame on an Apple M2 laptop for a synthetic 640×640 input. "fps" is frames processed per second (1000/ms); typical video is 30 fps. "3 s clip" is the processing time for 90 frames. †The detector used in all experiments; the smaller S ("small") and N ("nano") variants were timed only and their detection accuracy is untested.

6 Conclusion

We have presented a pipeline that detects named golf swing faults from a single ordinary video, with no markers, calibration or special equipment, and applied it to OTT and EE. Rather than learning end to end, it tracks the biomechanical quantities a coach would measure, including the height of the clubhead above a swing-plane line, in a body-centred frame, and shallow boosted trees on these trajectories detect OTT and EE with a cross-validated ROC-AUC of 0.975 and 0.911 respectively. What the models rely on agrees with coaching practice: for OTT the most informative signals are the clubhead's height above the swing plane and its position, and the classes separate at distinct moments of the downswing that a whole-swing summary averages away, while for EE the movement of the hips is the driving factor. Because the signals are the ones a coach uses, a detection can be explained to the golfer in the same terms, which is what a coaching or injury-prevention tool needs. The study has several limitations. The dataset is small, only two faults are covered, and the clips come from a single down-the-line view in which hip rotation is foreshortened. Fault labels are partly confounded with skill level: most non-faulty clips are professional swings from GolfDB, while nearly all positives are amateurs, so the model may partly learn differences between professional and amateur swings rather than the fault itself. The static-frame probe (Appendix B) suggests it does not rely heavily on pre-fault cues, but does not rule the confound out. No qualified coach selected or graded the clips, so some labels are likely to be noisy, particularly for EE, which is graded on a continuum. Future work will expand the dataset from public sources, with more non-faulty amateur swings so the skill-level confound can be tested directly, have multiple qualified coaches grade the clips and report their inter-rater agreement, and assess further faults. Single-image 3D body reconstruction such as SAM 3D [3] may recover the rotations that a 2D view hides. Clubhead tracking already runs in about 13 s per clip on an Apple M2, so an app that returns fault feedback from a phone recording is within reach, and the same recipe of coach-defined signals, phase-normalised over a detected movement window, applies to other sports in which technique is judged against a biomechanical reference.

Acknowledgments OM was funded by the University of Bristol Faculty of Science and Engineering Summer Internship Scheme 2026.

References

[1] Valentin Bazarevsky, Ivan Grishchenko, Karthik Raveendran, Tyler Zhu, Fan Zhang, and Matthias Grundmann. BlazePose: On-device real-time body pose tracking. *arXiv preprint arXiv:2006.10204*, 2020.

[2] Maxime Bourgain, Philippe Rouch, Olivier Rouillon, Patricia Thoreux, and Christophe Sauret. Golf swing biomechanics: A systematic review and methodological recommendations for kinematics. *Sports*, 10(6):91, 2022.

[3] Xingyu Chen, Fu-Jen Chu, Pierre Gleize, Kevin J Liang, Alexander Sax, Hao Tang, Weiyao Wang, Michelle Guo, Thibaut Hardin, Xiang Li, et al. SAM 3D: 3Dfy anything in images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7220–7232, 2026.

[4] Michael H Cole and Paul N Grimshaw. The biomechanics of the modern golf swing: implications for lower back injuries. *Sports Medicine*, 46(3):339–351, 2016.

[5] Simon GS Coleman and Andrew J Rankin. A three-dimensional examination of the planar nature of the golf swing. *Journal of Sports Sciences*, 23(3):227–234, 2005.

[6] Chengwei Feng, Boris Bačić, and Weihua Li. SCA-LSTM: A deep learning approach to golf swing analysis and performance enhancement. In *International Conference on Neural Information Processing*, pages 72–86. Springer, 2024.

[7] Nicolas Gehrig, Vincent Lepetit, and Pascal Fua. Visual golf club tracking for enhanced swing analysis. In *Proceedings of the British Machine Vision Conference 2003*, 2003.

[8] Nathaniel E Helwig, Sungjin Hong, Elizabeth T Hsiao-Wecksler, and John D Polk. Methods to temporally align gait cycle data. *Journal of Biomechanics*, 44(3):561–566, 2011.

[9] Christian Keilstrup Ingwersen, Janus Nørtoft Jensen, Morten Rieger Hannemose, and Anders Bjorholm Dahl. Evaluating current state of monocular 3D pose models for golf. In *Northern Lights Deep Learning Workshop 2023*. Septentrio Academic Publishing, 2023.

[10] Christian Keilstrup Ingwersen, Artur Xarles, Albert Clapés, Meysam Madadi, Janus Nørtoft Jensen, Morten Rieger Hannemose, Anders Bjorholm Dahl, and Sergio Escalera. Video-based skill assessment for golf: Estimating golf handicap. In *Proceedings of the 6th International Workshop on Multimedia Content Analysis in Sports*, pages 31–39, 2023.

[11] Seunghyeon Jung, Minseok Kim, Hyeonjin Kim, Seungwon Jeong, Yunseok Lee, Yunji Kim, Hyunse Lee, Seoyoung Hong, Gyumin Choi, Jaerim Choi, et al. Explainable graph-based golf swing analysis integrating club and body keypoints for ball flight outcome prediction. *Applied Sciences*, 16(8):3813, 2026.

[12] Theodore T Kim, Mohamed A Zohdy, and Michael P Barker. Applying pose estimation to predict amateur golf swing performance using edge processing. *IEEE Access*, 8: 143769–143776, 2020.

[13] Young-Hoo Kwon, Christopher S Como, Kunal Singhal, Sangwoo Lee, and Ki Hoon Han. Assessment of planarity of the golf swing based on the functional swing plane of the clubhead and motion planes of the body points. *Sports Biomechanics*, 11(2): 127–148, 2012.

[14] Chen-Chieh Liao, Dong-Hyun Hwang, and Hideki Koike. AI Golf: Golf swing analysis tool for self-training. *IEEE Access*, 10:106286–106295, 2022.

[15] David M Lindsay and Anthony A Vandervoort. Golf-related low back pain: a review of causative factors and prevention strategies. *Asian Journal of Sports Medicine*, 5(4): e24289, 2014.

[16] Andrew McHardy, Henry Pollard, and Kehui Luo. Golf injuries: a review of the literature. *Sports Medicine*, 36(2):171–187, 2006.

[17] William McNally, Kanav Vats, Tyler Pinto, Chris Dulhanty, John McPhee, and Alexander Wong. GolfDB: A video database for golf swing sequencing. In *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 2553–2562. IEEE, 2019.

[18] Ryoji Ogata, Edgar Simo-Serra, Satoshi Iizuka, and Hiroshi Ishikawa. Temporal distance matrices for squat classification. In *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 2533–2542. IEEE, 2019.

[19] Paritosh Parmar and Brendan Tran Morris. What and how well you performed? a multitask learning approach to action quality assessment. In *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 304–313. IEEE, 2019.

[20] Hamed Pirsiavash, Carl Vondrick, and Antonio Torralba. Assessing the quality of actions. In *European Conference on Computer Vision*, pages 556–571. Springer, 2014.

[21] Ashish Singh, Antonio Bevilacqua, Thach Le Nguyen, Feiyan Hu, Kevin McGuinness, Martin O'Reilly, Darragh Whelan, Brian Caulfield, and Georgiana Ifrim. Fast and robust video-based exercise classification via body pose tracking and scalable multivariate time series classifiers. *Data Mining and Knowledge Discovery*, 37(2):873–912, 2023.

[22] Aimée Smith, Jonathan Roberts, Eric Wallace, Pui Wah Kong, and Steph Forrester. Golf coaches' perceptions of key technical swing parameters compared to biomechanical literature. *International Journal of Sports Science & Coaching*, 10(4):739–755, 2015.

[23] Tomohiro Suzuki, Kazuya Takeda, and Keisuke Fujii. Automatic detection of faults in simulated race walking from a fixed smartphone camera. *International Journal of Computer Science in Sport*, 23(1):22–36, 2024.

[24] Graham Thomas, Rikke Gade, Thomas B Moeslund, Peter Carr, and Adrian Hilton. Computer vision for sports: Current applications and research topics. *Computer Vision and Image Understanding*, 159:3–18, 2017.

[25] Titleist Performance Institute. Early extension. https://www.mytpi.com/improve-my-game/swing-characteristics/early-extension, 2026. Accessed 21 October 2026.

[26] Titleist Performance Institute. Over the top. https://www.mytpi.com/improve-my-game/swing-characteristics/over-the-top, 2026. Accessed 21 October 2026.

[27] Joseph Turner, Jeff Clark, and Nawid Keshtmand. Markerless pose estimation for resistance training technique assessment. *arXiv preprint arXiv:2608.24384*, 2026.

[28] Raquel Urtasun, David J Fleet, and Pascal Fua. Monocular 3D tracking of the golf swing. In *2005 IEEE Computer Society Conference on Computer Vision and Pattern Recognition (CVPR'05)*, volume 2, pages 932–938. IEEE, 2005.

[29] Jianbo Wang, Kai Qiu, Houwen Peng, Jianlong Fu, and Jianke Zhu. AI Coach: Deep human pose estimation and analysis for personalized athletic training assistance. In *Proceedings of the 27th ACM International Conference on Multimedia*, pages 374–382, 2019.

[30] Philippe Weinzaepfel and Grégory Rogez. Mimetics: Towards understanding human actions out of context. *International Journal of Computer Vision*, 129(5):1675–1690, 2021.

[31] Kota Yamamoto, Yumiko Hasegawa, Tomohiro Suzuki, Hiroo Suzuki, Hiroko Tanabe, and Keisuke Fujii. Extracting proficiency differences and individual characteristics in golfers' swing using single-video markerless motion analysis. *Frontiers in Sports and Active Living*, 5:1272038, 2023.

[32] Sijie Yan, Yuanjun Xiong, and Dahua Lin. Spatial temporal graph convolutional networks for skeleton-based action recognition. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 32, 2018.

[33] N Zheng, SW Barrentine, GS Fleisig, and JR Andrews. Kinematic analysis of swing in pro and amateur golfers. *International Journal of Sports Medicine*, 29(6):487–493, 2008.

A Class-mean trajectories for OTT

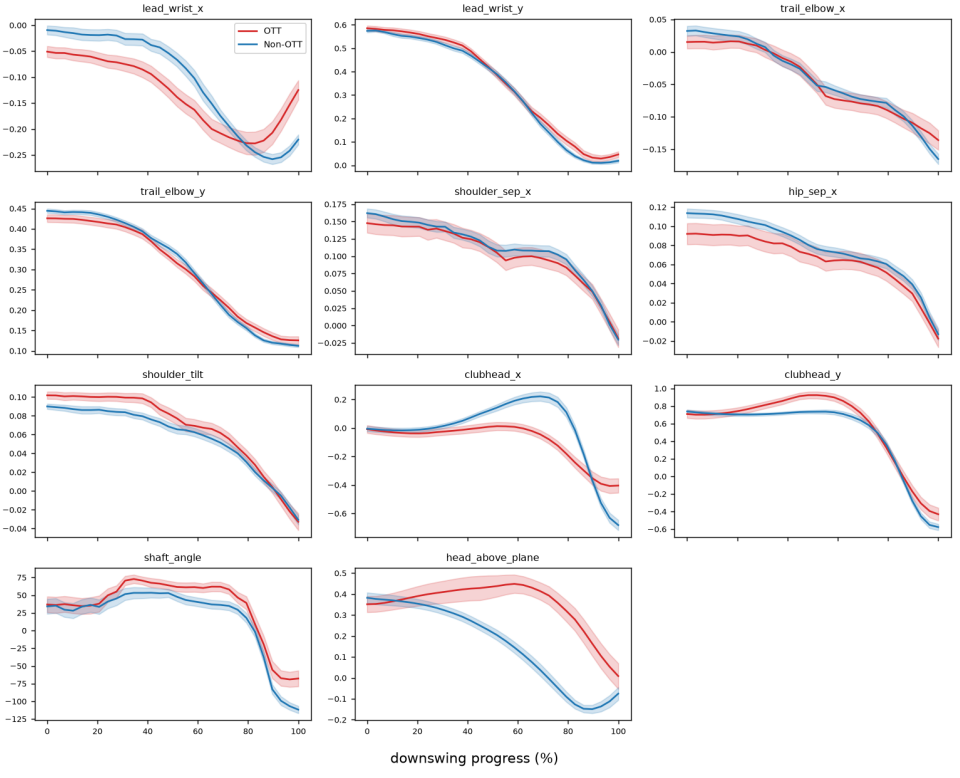


Figure 5: Class-mean trajectories of the eleven OTT signals over the downswing (0% is the top of the backswing, 100% impact), OTT (red) against non-OTT (blue), with shaded bands around each mean showing the standard deviation. Positions are body-frame coordinates in body heights (Sec. 3.2), the shaft angle is in degrees, and "head_above_plane" is the signed height of the clubhead above the swing-plane line (Sec. 3.4.2).

B Comparison of our model to a learned video model

Another alternative to tracking is a learned video model. We tested a Kinetics-pretrained R3D-18 as a frozen feature extractor on each downswing. It reaches AUC 0.967, close to the XGBoost model. To test what each model relies on, we freeze every test swing at the top of the backswing, before the fault occurs, and re-score with each model. The R3D-18 still scores 0.946, separating the classes from appearance. Our model falls to 0.547, close to chance. Frame differences of the RGB video do not remove the shortcut either (0.951). On an earlier version of the data, Grad-CAM on the same backbone fed rendered skeleton frames placed its attention on the torso rather than the club or arms.

Model	Normal	Frozen at top of backswing	
		re-scored	single-frame model
R3D-18 (frozen) + log. reg., RGB	0.967 ± 0.028	0.946 ± 0.040	0.960 ± 0.034
Ours (XGBoost, pos+delta)	0.975 ± 0.019	0.547 ± 0.077	0.752 ± 0.055

Table 6: Static-frame probe (CV ROC-AUC, 160 swings, 15 folds). "Re-scored": trained on real swings, tested on swings frozen at the top of the backswing. "Single-frame model": trained and tested on that frame alone.