



Laravel - Middleware

Middleware acts as a bridge between a request and a response. It is a type of filtering mechanism. This chapter explains you the middleware mechanism in Laravel.

Laravel includes a middleware that verifies whether the user of the application is authenticated or not. If the user is authenticated, it redirects to the home page otherwise, if not, it redirects to the login page.

Middleware can be created by executing the following command –

```
php artisan make:middleware <middleware-name>
```

Replace the **<middleware-name>** with the name of your middleware. The middleware that you create can be seen at **app/Http/Middleware** directory.

Example

Observe the following example to understand the middleware mechanism –

Step 1 – Let us now create AgeMiddleware. To create that, we need to execute the following command –

```
php artisan make:middleware AgeMiddleware
```

Step 2 – After successful execution of the command, you will receive the following output –

```
Administrator: C:\Windows\System32\cmd.exe
C:\laravel-master\laravel>php artisan make:middleware AgeMiddleware
Middleware created successfully.
C:\laravel-master\laravel>
```

Step 3 – **AgeMiddleware** will be created at **app/Http/Middleware**. The newly created file will have the following code already created for you.

```
<?php
```

```
namespace App\Http\Middleware;
use Closure;

class AgeMiddleware {
    public function handle($request, Closure $next) {
        return $next($request);
    }
}
```

Registering Middleware

We need to register each and every middleware before using it. There are two types of Middleware in Laravel.

- Global Middleware
- Route Middleware

The **Global Middleware** will run on every HTTP request of the application, whereas the **Route Middleware** will be assigned to a specific route. The middleware can be registered at **app/Http/Kernel.php**. This file contains two properties **\$middleware** and **\$routeMiddleware**. **\$middleware** property is used to register Global Middleware and **\$routeMiddleware** property is used to register route specific middleware.

To register the global middleware, list the class at the end of **\$middleware** property.

```
protected $middleware = [
    \Illuminate\Foundation\Http\Middleware\CheckForMaintenanceMode::class,
    \App\Http\Middleware\EncryptCookies::class,
    \Illuminate\Cookie\Middleware\AddQueuedCookiesToResponse::class,
    \Illuminate\Session\Middleware\StartSession::class,
    \Illuminate\View\Middleware\ShareErrorsFromSession::class,
    \App\Http\Middleware\VerifyCsrfToken::class,
];
```

To register the route specific middleware, add the key and value to **\$routeMiddleware** property.

```
protected $routeMiddleware = [
    'auth' => \App\Http\Middleware\Authenticate::class,
    'auth.basic' => \Illuminate\Auth\Middleware\AuthenticateWithBasicAuth::class,
    'guest' => \App\Http\Middleware\RedirectIfAuthenticated::class,
];
```

Example

We have created **AgeMiddleware** in the previous example. We can now register it in route specific middleware property. The code for that registration is shown below.


The following is the code for **app/Http/Kernel.php** –

```
<?php

namespace App\Http;
use Illuminate\Foundation\Http\Kernel as HttpKernel;

class Kernel extends HttpKernel {
    protected $middleware = [
        \Illuminate\Foundation\Http\Middleware\CheckForMaintenanceMode::class,
        \App\Http\Middleware\EncryptCookies::class,
        \Illuminate\Cookie\Middleware\AddQueuedCookiesToResponse::class,
        \Illuminate\Session\Middleware\StartSession::class,
        \Illuminate\View\Middleware\ShareErrorsFromSession::class,
        \App\Http\Middleware\VerifyCsrfToken::class,
    ];

    protected $routeMiddleware = [
        'auth' => \App\Http\Middleware\Authenticate::class,
        'auth.basic' => \Illuminate\Auth\Middleware\AuthenticateWithBasicAuth::class,
        'guest' => \App\Http\Middleware\RedirectIfAuthenticated::class,
        'Age' => \App\Http\Middleware\AgeMiddleware::class,
    ];
}
```

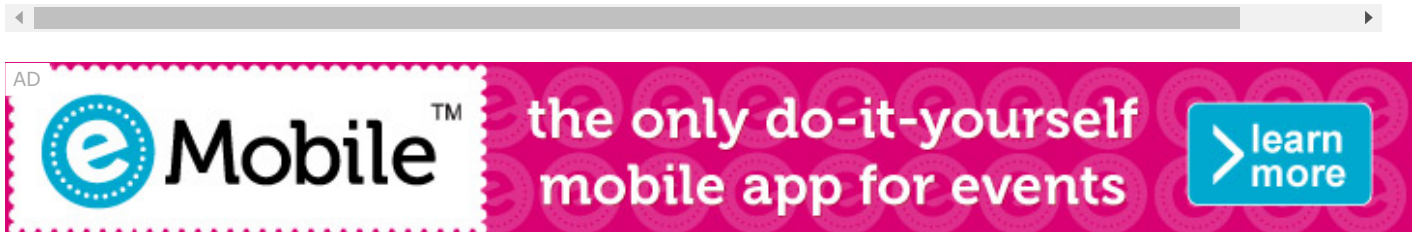

Middleware Parameters

We can also pass parameters with the Middleware. For example, if your application has different roles like user, admin, super admin etc. and you want to authenticate the action based on role, this can be achieved by passing parameters with middleware. The middleware that we create contains the following function and we can pass our custom argument after the **\$next** argument.


```
public function handle($request, Closure $next) {
    return $next($request);
}
```

Example

Step 1 – Create RoleMiddleware by executing the following command –

```
php artisan make:middleware RoleMiddleware
```

Step 2 – After successful execution, you will receive the following output –

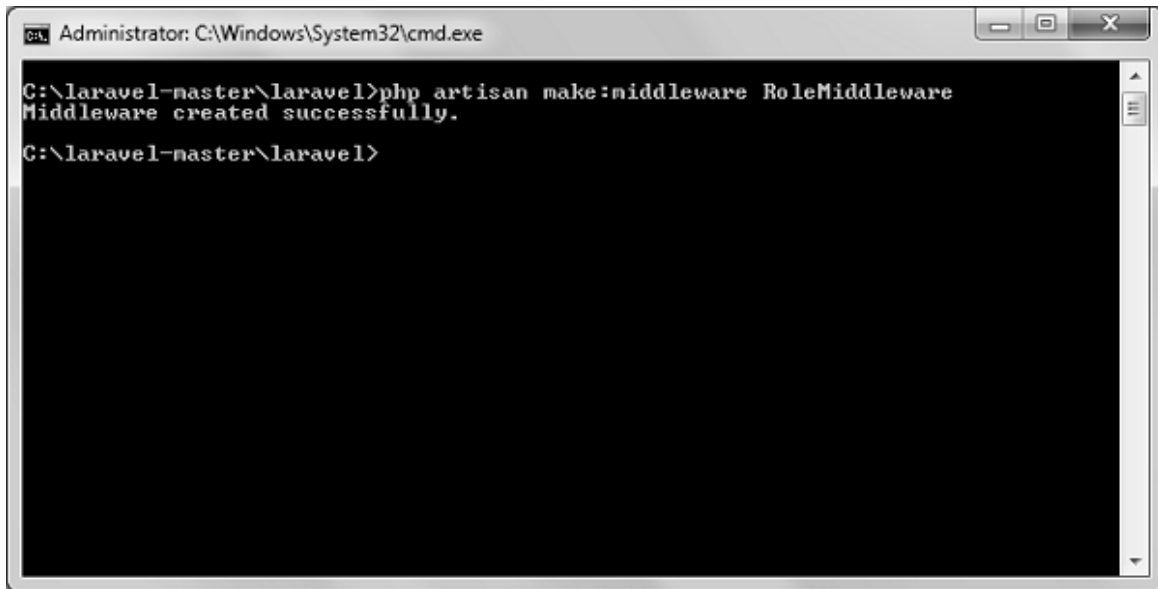

```
Administrator: C:\Windows\System32\cmd.exe
C:\laravel-master\laravel>php artisan make:middleware RoleMiddleware
Middleware created successfully.
C:\laravel-master\laravel>
```

Step 3 – Add the following code in the handle method of the newly created RoleMiddleware at `app/Http/Middleware/RoleMiddleware.php`.

```
<?php

namespace App\Http\Middleware;
use Closure;

class RoleMiddleware {
    public function handle($request, Closure $next, $role) {
        echo "Role: ".$role;
        return $next($request);
    }
}
```


Step 4 – Register the RoleMiddleware in `app/Http/Kernel.php` file. Add the line highlighted in gray color in that file to register RoleMiddleware.

 RoleMiddleware

Step 5 – Execute the following command to create **TestController** –

```
php artisan make:controller TestController --plain
```

Step 6 – After successful execution of the above step, you will receive the following output –

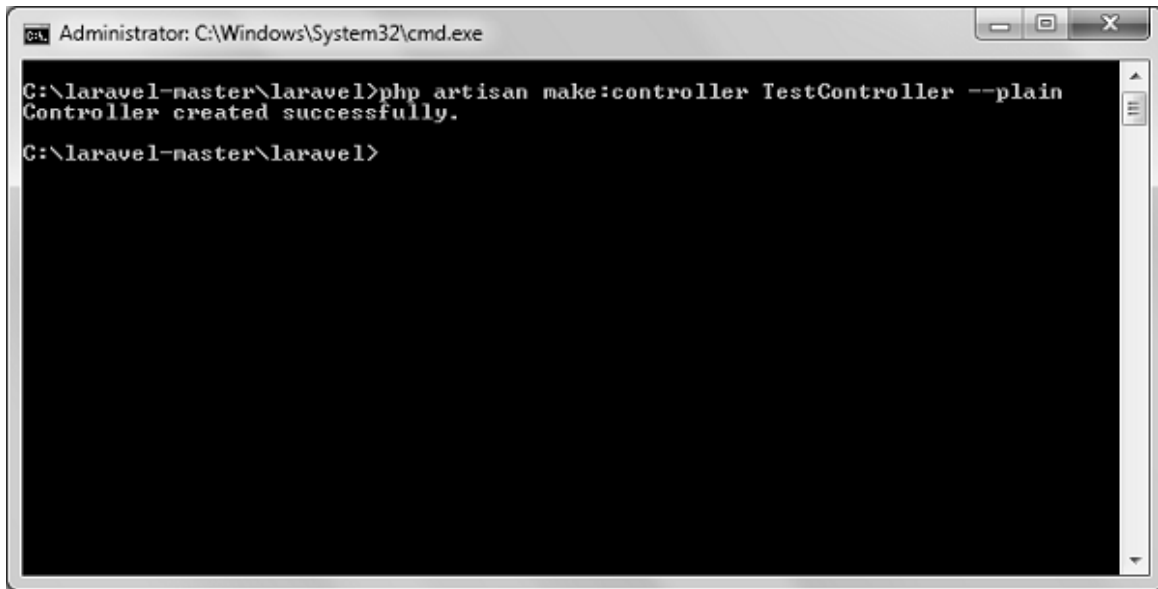

Step 7 – Copy the following lines of code to **app/Http/TestController.php** file.

app/Http/TestController.php

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;
use App\Http\Requests;
use App\Http\Controllers\Controller;

class TestController extends Controller {
    public function index() {
        echo "<br>Test Controller.";
    }
}
```

Step 8 – Add the following line of code in **app/Http/routes.php** file.

app/Http/routes.php

```
Route::get('role',[
    'middleware' => 'Role:editor',
    'uses' => 'TestController@index',
]);
```

Step 9 – Visit the following URL to test the Middleware with parameters

<http://localhost:8000/role>

Step 10 – The output will appear as shown in the following image.

Role: editor
Test Controller.

Terminable Middleware


Terminable middleware performs some task after the response has been sent to the browser. This can be accomplished by creating a middleware with **terminate** method in the middleware. Terminable middleware should be registered with global middleware. The terminate method will receive two arguments **\$request** and **\$response**. Terminate method can be created as shown in the following code.

Example

Step 1 – Create **TerminateMiddleware** by executing the below command.

```
php artisan make:middleware TerminateMiddleware
```

Step 2 – The above step will produce the following output –

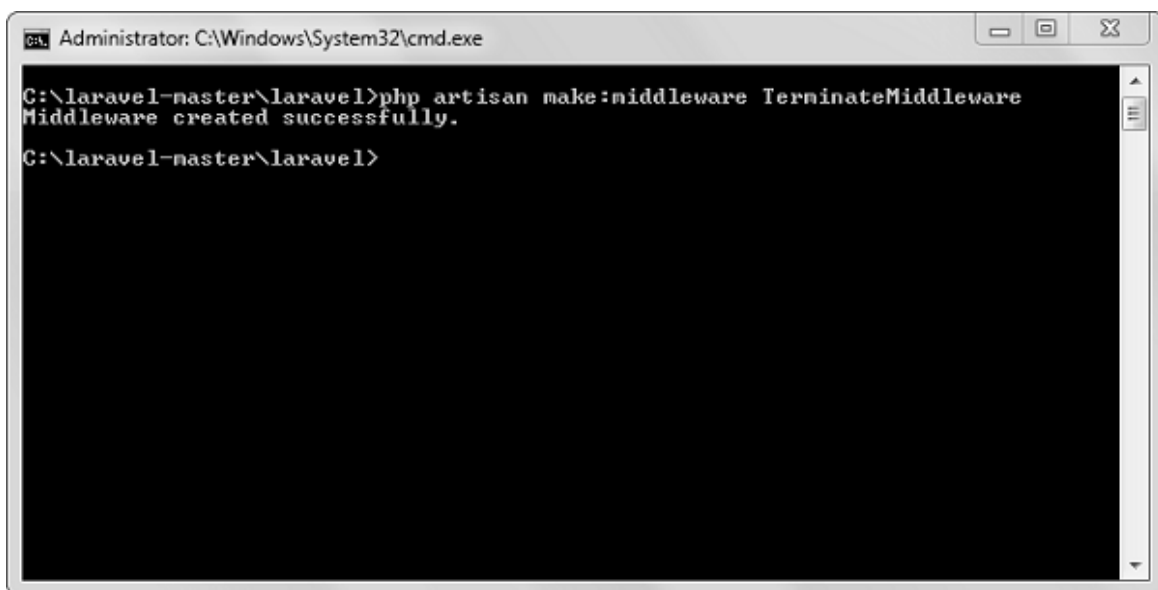

```
Administrator: C:\Windows\System32\cmd.exe
C:\laravel-master\laravel>php artisan make:middleware TerminateMiddleware
Middleware created successfully.
C:\laravel-master\laravel>
```

Step 3 – Copy the following code in the newly created **TerminateMiddleware** at **app/Http/Middleware/TerminateMiddleware.php**.

```
<?php
```

```
namespace App\Http\Middleware;
use Closure;
```

```
class TerminateMiddleware {
    public function handle($request, Closure $next) {
        echo "Executing statements of handle method of TerminateMiddleware.";
        return $next($request);
    }
}
```

```

public function terminate($request, $response) {
    echo "<br>Executing statements of terminate method of TerminateMiddleware";
}
}

```

Step 4 – Register the **TerminateMiddleware** in **app\Http\Kernel.php** file. Add the line highlighted in gray color in that file to register TerminateMiddleware.

```


/**
 * The application's route middleware.
 *
 * @var array
 */
protected $routeMiddleware = [
    'auth' => \App\Http\Middleware\Authenticate::class,
    'auth.basic' => \Illuminate\Auth\Middleware\AuthenticateWithBasicAuth::class,
    'guest' => \App\Http\Middleware\RedirectIfAuthenticated::class,
    'Age' => \App\Http\Middleware\AgeMiddleware::class,
    'After' => \App\Http\Middleware\AfterMiddleware::class,
    'Before' => \App\Http\Middleware\BeforeMiddleware::class,
    'First' => \App\Http\Middleware\FirstMiddleware::class,
    'Second' => \App\Http\Middleware\SecondMiddleware::class,
    'Role' => \App\Http\Middleware\RoleMiddleware::class,
    'terminate' => \App\Http\Middleware\TerminateMiddleware::class,
];

```

Step 5 – Execute the following command to create **ABCController**.

```
php artisan make:controller ABCController --plain
```

Step 6 – After the successful execution of the URL, you will receive the following output –

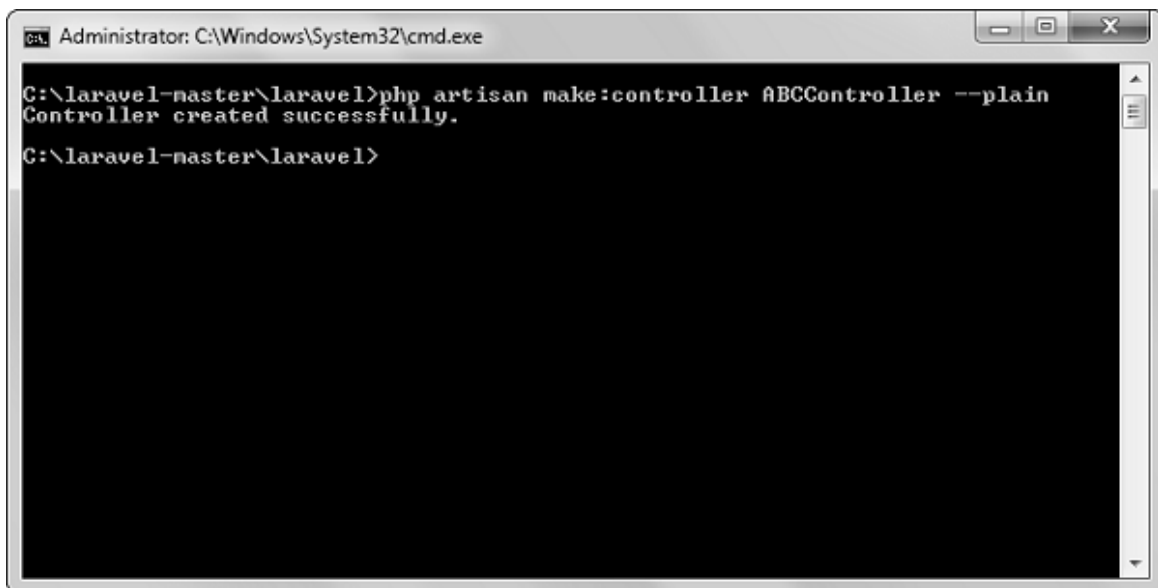

```

Administrator: C:\Windows\System32\cmd.exe

C:\laravel-master\laravel>php artisan make:controller ABCController --plain
Controller created successfully.

C:\laravel-master\laravel>

```

Step 7 – Copy the following code to **app/Http/ABCController.php** file.

app/Http/ABCController.php

```
<?php
```

```
namespace App\Http\Controllers;

use Illuminate\Http\Request;
use App\Http\Requests;
use App\Http\Controllers\Controller;

class ABCController extends Controller {
    public function index() {
        echo "<br>ABC Controller.";
    }
}
```

Step 8 – Add the following line of code in **app/Http/routes.php** file.


app/Http/routes.php

```
Route::get('terminate',[
    'middleware' => 'terminate',
    'uses' => 'ABCController@index',
]);
```

Step 9 – Visit the following URL to test the Terminable Middleware.

<http://localhost:8000/terminate>

Step 10 – The output will appear as shown in the following image.

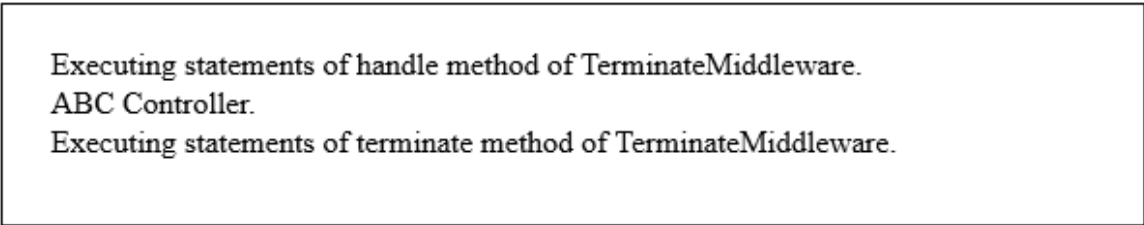

```
Executing statements of handle method of TerminateMiddleware.
ABC Controller.
Executing statements of terminate method of TerminateMiddleware.
```