Home HTML XHTML CSS JavaScript Sootstrap jQuery PHP

HTML tag



HTML tag is a phrase tag which is used to represent the important text of a document on the browser. The text within text has semantic importance for the search engines and emphasize the text with special intonation.

The text within tag renders in bold font on the browser by default; however it can be changed using CSS.

Note: Do not use tag just for making text bold, and if you want to make your text bold without any semantic importance then use or CSS property.

Syntax

```
<strong>Write your important content....</strong>
```

Following are some specifications about the HTML tag

Display	Inline	
Start tag/End tag	Both Start and End tag	
Usage	Formatting	

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Strong tag</title>
<style>

h1,h2{

text-align: center;

}
h2{

color: green;
}
```

```
</head>
<head>
<body>
<h1>Example of strong tag</h1>
<h2>Weather forecasting</h2>
The weather is not good today.
<strong>It may heavy rain today, so it will better to be in your home.</strong>

</body>
</html>
```

Test it Now

Output:



Attribute:

Tag-specific attributes:

The tag does not contain any specific attribute.

Global attribute:

The tag supports the Global attributes in HTML.

Event attribute:

The tag supports the Event attributes in HTML.

Supporting Browsers

Element	© Chrome	€ IE	Firefox	O Opera	Safari
	Yes	Yes	Yes	Yes	Yes









Feedback

• Send your Feedback to feedback@javatpoint.com

Help Others, Please Share








Learn Latest Tutorials









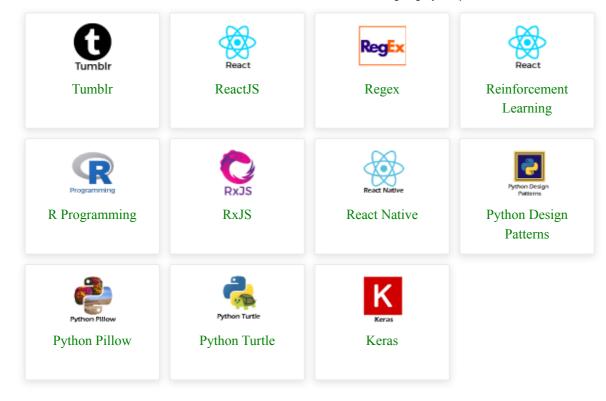

Preparation



Trending Technologies





Git Tutorial

Machine Learning Tutorial

DevOps
Tutorial
DevOps

B.Tech / MCA



Data Warehouse

AD