jupyter Keras_Baseline_sgb (unsaved changes)

Logout

File Edit View Insert Cell Kernel Widgets Help Trusted Python 3

Run Code

In [1]:
```
import pandas as pd
from keras.models import Sequential
from keras.layers import Dense
from sklearn.model_selection import train_test_split
from tensorflow import keras
import matplotlib.pyplot as plt
#from sklearn.model_selection import train_test_split
from sklearn.metrics import mean_squared_error
import tensorflow as tf
import numpy as np
```

In [2]:
```
df = pd.read_csv("row_size25_vector_size8000.csv")
```

In [3]:
```
X = df.iloc[:,7:157]
#X = df[['accelerometer_reading_x_0','accelerometer_reading_y_0','accelerometer_reading_z_0','gyro
#t = df[['linear_position_x','linear_position_y','linear_position_z','angular_position_phi','angul
#t = df[['phi_change','theta_change','psi_change']]
t = df[['phi_change']]
```

In [4]:
```
t.shape
```

Out[4]:
```
(8000, 1)
```

In [5]:
```
in_dim = X.shape[1]
out_dim = t.shape[1]
```

In [6]:
```
in_dim
```

Out[6]:
```
150
```

In [7]:
```
out_dim
```

Out[7]:
```
1
```

In [8]:
```
X_train, X_test, t_train, t_test = train_test_split(X, t, test_size=0.2)
```

In [9]:
```
t_train.shape
```

Out[9]:
```
(6400, 1)
```

In [10]:
```
model = Sequential()
model.add(Dense(256,input_dim=in_dim, activation="sigmoid"))
model.add(Dense(128, activation="sigmoid"))
model.add(Dense(64, activation="sigmoid"))
model.add(Dense(32, activation="sigmoid"))
model.add(Dense(out_dim,activation="sigmoid"))
model.compile(loss="mse", optimizer="sgd")
```

In [13]:
```
model.fit(X_train, t_train, epochs=30, batch_size=12, verbose=2)
```

```
Epoch 1/30
534/534 - 0s - loss: 0.0316
Epoch 2/30
534/534 - 0s - loss: 0.0033
Epoch 3/30
534/534 - 0s - loss: 0.0018
Epoch 4/30
534/534 - 0s - loss: 0.0012
Epoch 5/30
534/534 - 0s - loss: 9.1390e-04
Epoch 6/30
534/534 - 0s - loss: 7.3217e-04
Epoch 7/30
534/534 - 0s - loss: 6.0966e-04
Epoch 8/30
534/534 - 0s - loss: 5.2163e-04
```

```
Epoch 9/30
534/534 - 0s - loss: 4.5540e-04
Epoch 10/30
534/534 - 0s - loss: 4.0381e-04
Epoch 11/30
534/534 - 0s - loss: 3.6251e-04
Epoch 12/30
534/534 - 0s - loss: 3.2874e-04
Epoch 13/30
534/534 - 0s - loss: 3.0061e-04
Epoch 14/30
534/534 - 0s - loss: 2.7683e-04
Epoch 15/30
534/534 - 0s - loss: 2.5647e-04
Epoch 16/30
534/534 - 0s - loss: 2.3884e-04
Epoch 17/30
534/534 - 0s - loss: 2.2344e-04
Epoch 18/30
534/534 - 0s - loss: 2.0987e-04
Epoch 19/30
534/534 - 0s - loss: 1.9783e-04
Epoch 20/30
534/534 - 0s - loss: 1.8707e-04
Epoch 21/30
534/534 - 0s - loss: 1.7740e-04
Epoch 22/30
534/534 - 0s - loss: 1.6866e-04
Epoch 23/30
534/534 - 0s - loss: 1.6073e-04
Epoch 24/30
534/534 - 0s - loss: 1.5349e-04
Epoch 25/30
534/534 - 0s - loss: 1.4687e-04
Epoch 26/30
534/534 - 0s - loss: 1.4079e-04
Epoch 27/30
534/534 - 0s - loss: 1.3518e-04
Epoch 28/30
534/534 - 0s - loss: 1.3000e-04
Epoch 29/30
534/534 - 0s - loss: 1.2519e-04
Epoch 30/30
534/534 - 0s - loss: 1.2071e-04
```

Out[13]: `<tensorflow.python.keras.callbacks.History at 0x230d7fc8250>`

In [14]:
```
ypred = model.predict(X_test)
print("y1 MSE: ", mean_squared_error(t_test.iloc[:, 0], ypred[:,0]))
#print("y2 MSE: ", mean_squared_error(t_test.iloc[:, 1], ypred[:,1]))
#print("y3 MSE: ", mean_squared_error(t_test.iloc[:, 2], ypred[:,2]))

```

```
y1 MSE:  0.00011835889818810482
```

In [15]:
```
x_ax = range(len(X_test))

plt.scatter(x_ax, t_test.iloc[:, 0],  s=6, label="y1-test")
plt.scatter(x_ax, ypred[:,0], label="y1-pred",c="red",alpha = 0.1)

plt.legend()
plt.show()
```

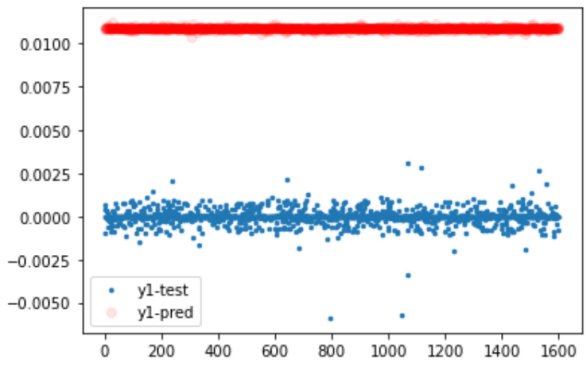

In [16]:
```
x_ax = range(len(X_test))

```

```
y_test_index = np.argsort(t_test.iloc[:, 0], axis=0).to_numpy()

f = plt.figure()
plt.scatter(x_ax, t_test.iloc[y_test_index],  s=6, label="y_test")
plt.scatter(x_ax, ypred[y_test_index], s=6, label="pred",c="orange", alpha=0.5)
#plt.ylim(t_test.iloc[y_test_index[0]].to_numpy()[0])
plt.legend()
plt.show()

f.savefig("foo.pdf", bbox_inches='tight')
```

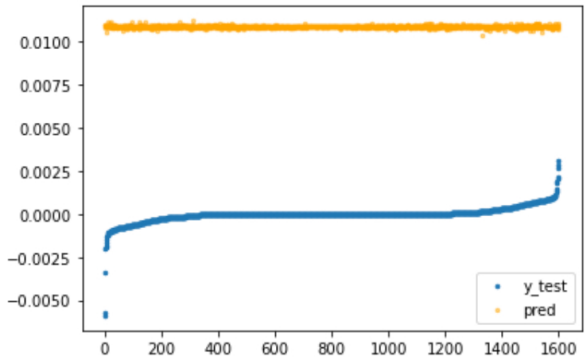

In [ ]:
```
1
```