



AMRITA

VISHWA VIDYAPEETHAM

USER INTERFACE DESIGN LAB MANUAL

SUBMITTED BY:

NAME	MALLAMAPTI SAIKRISHNA
ROLL NO	AV.SC.U4CSE25128
YEAR/SEM	1 ST YEAR/SEM-2
CREDITS	3
SECTION	CSE-B

SUBMITTED TO:

NAME	DR.RAJKUMAR BATCHU SIR
DESIGNATION	Assistant Professor (Sl. Gd.)
DEPARTMENT	School Of Computing

INDEX

S.No	Title	Page no	Remarks
1.	WEEK 1: 1A.installation of vs code 1B.understanding basics of HTML 1C.understanding basics of HTML tags	8-15	
2.	WEEK2: 2(A) Aim: To create a static webpage using only HTML that displays basic information about Amrita Vishwa Vidyapeetham, including a heading, descriptive text, background styling through HTML attributes, and a table showing the list of campuses in different states.	16-18	
3.	WEEK3: 3A. Construct a class time-table using html tags 3B. Construct a web page that should display that	19-36	

	syllabus of each subject in image format also display the current semester time-table.		
4.	WEEK4: 4A. A College wants to collect student details through an online admission form.Design a registration form using HTML tags(no css) with proper labels,table alignment background color and borders 4B. A Company wants to design a webpage that displays two different forms side by side using iframes.one iframe should display a login form and the other should display a registration form	37-42	
5.	WEEK 5: (A)create a responsive card layout using html and css. with three cards, each contain an image ,title,		

	some paragraph and a button. (B) to design a mini website using iframe with navigation links such as home , about ,contact. where clicking on each link diplays the respective content within the same page using internal or external css (C) to design an amrita login page using html and css that displays different campuses where clicking on each csmplus shows its details on the same page	43-59	
6.	WEEK 6 (A)Design a responsive e-commerce application using the grid layout. This application should contain different categories of products such as electronics, clothing, home-appliances, books. Based on the category we select corresponding products	60-73	

	should be displayed on the sidebar		
7.	WEEK 7 Create a github account and create a repository named UID LAB and upload every week experiments lab report in that repository and make the repository private.	74-77	
8.	WEEK 8 A.:create a web page that displays a square that continuously rotates 360 using css animation B.:create a ball that moves up and down continuously using css animation C.:create a circle that moves horizontally and rotates At the same time	78-85	
9.	Week-9: Create an webpage using html, CSS, java script based on the given conditions:	86-94	

	a) Create a button for each program, based on the button clicked the corresponding program has to be executed and should display the output. b) The logics for each button includes finding an even numbers, odd number, prime or not, factorial of a number, armstrong or not. c) Use appropriate designs to display the output.		
10.	WEEK-10: a) Sign of Product of Three Numbers Using Functions b) Sort Three Numbers Using Functions c) Find the Largest of Five Numbers Using Function and OnClick Event d) Check Whether Numbers from 0 to 15 are Odd or Even Using For Loop e) Calculate Student Grade from Average Marks of Six Subjects	95-101	
11.	WEEK-11: 1) Username Validation (Minimum 5 Characters) 2) Email Format Validation Before Form Submission 3) Password Strength Checker 4) Mobile Number Validation (10 Digits) 5) Registration Form Validation (Name, Email, Password)	102-125	


12.	Week-12: Installation of Electron Framework application	126-135	
-----	---	---------	--

WEEK 1


1(A)AIM: Installation of VS code tool

Procedure:


Step 1: Visit the Official Website of the Visual Studio Code using any web browser like [Google Chrome](#), [Microsoft Edge](#), etc.

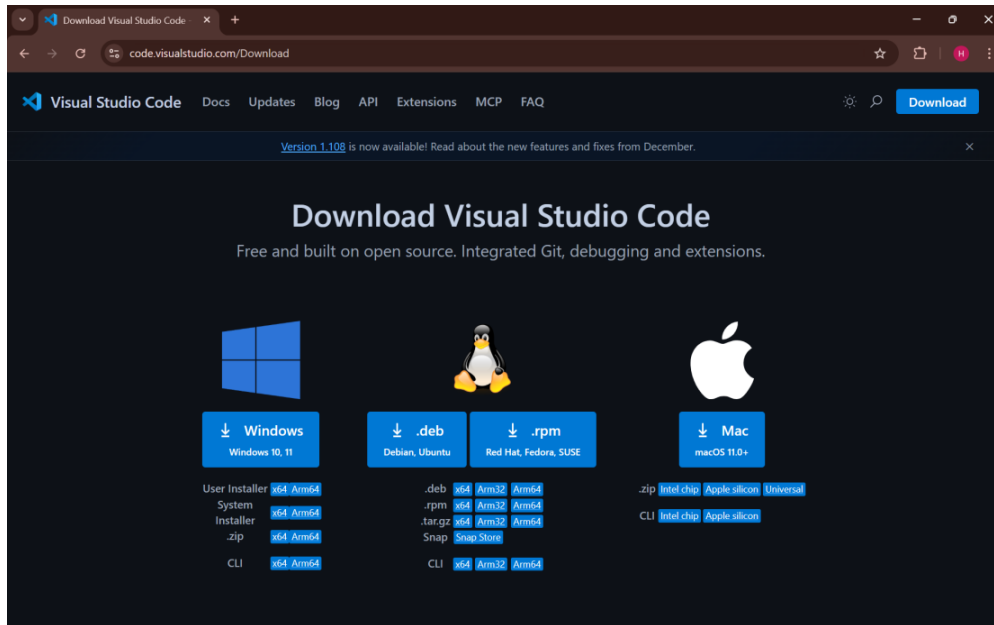

[Step 2]: Press the "Download for Windows" button on the website to start the download of the Visual Studio Code Application.

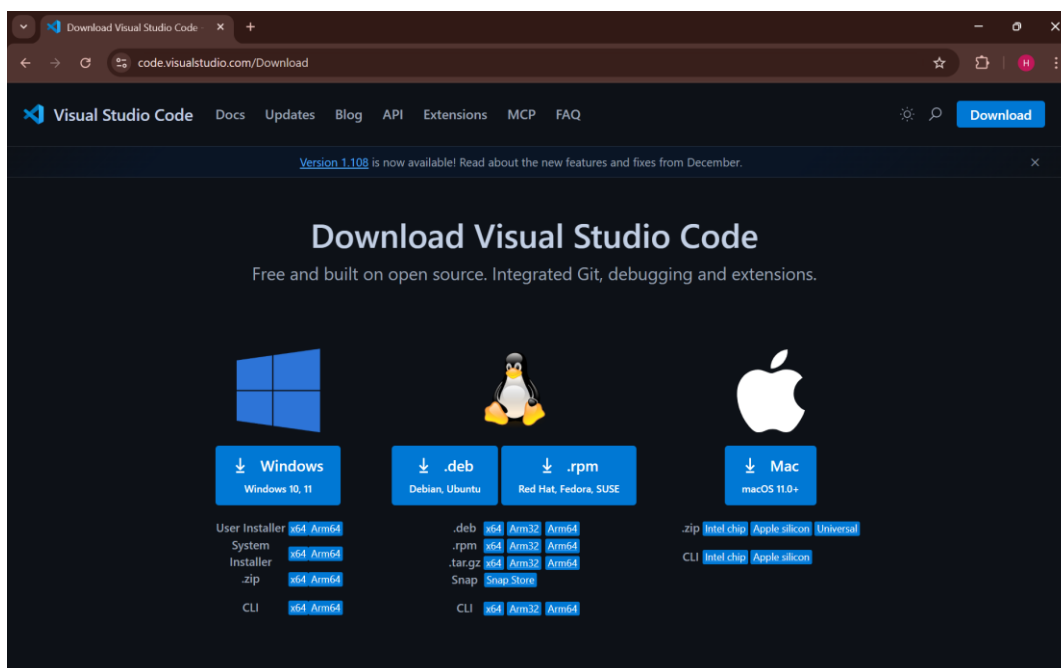


[Step3] When the download finishes, then the Visual Studio Code Icon appears in the downloads folder.

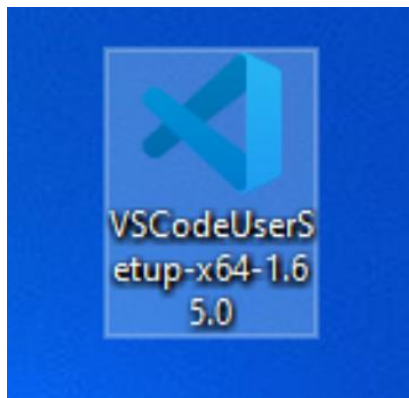


[Step4] Click on the Installer icon to start the installation process of the Visual Studio Code.

[Step5] After the Installer opens, it will ask you to accept the terms and conditions of the Visual Studio Code. Click on I accept the agreement and then click the Next button.

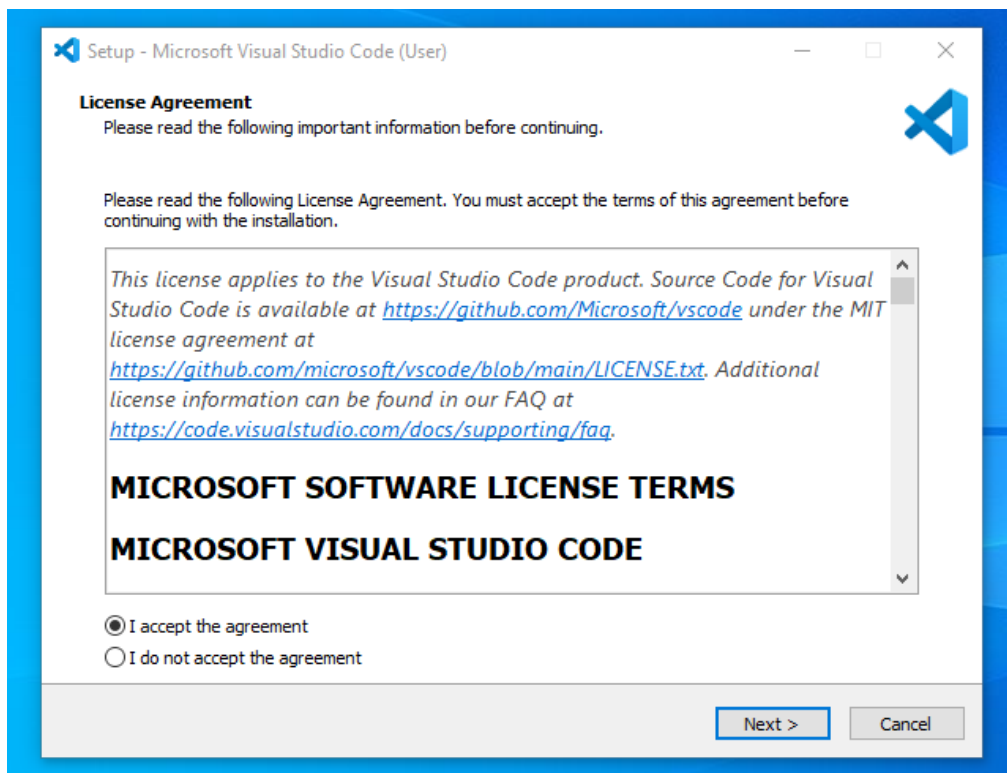


[Step6]: Choose the location data for running the Visual Studio Code. It will then ask you to browse the location. Then click on the Next button.

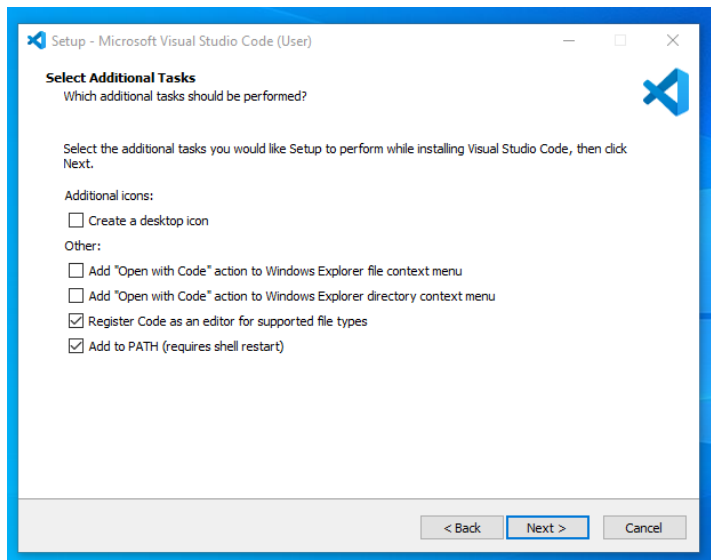


[Step7]Then it will ask to begin the installation setup. Click on the Install button. After clicking on Install, it will take about 1 minute to install the Visual Studio Code on your device.

After the Installation setup for Visual Studio Code is finished, it will show a window like this below. Tick the "Launch Visual Studio Code" checkbox and then click Next.

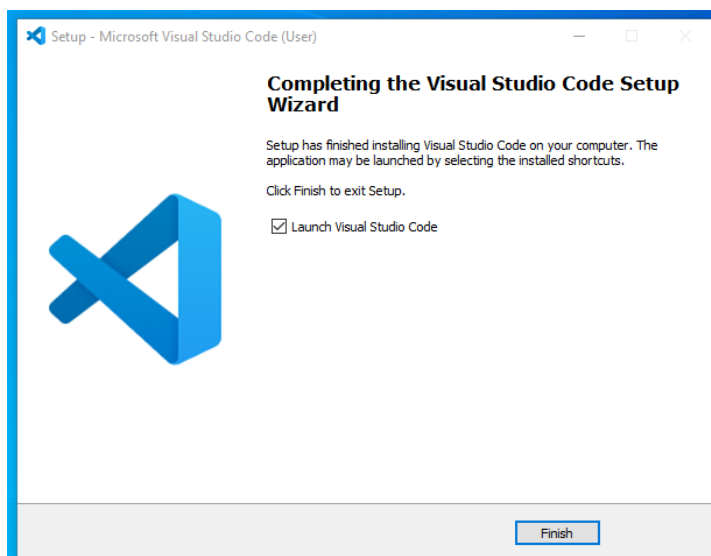

[Step 10]: After the previous step, the Visual Studio Code window opens successfully. Now you can create a new file in the Visual Studio Code window and choose a language of yours to begin your programming journey!

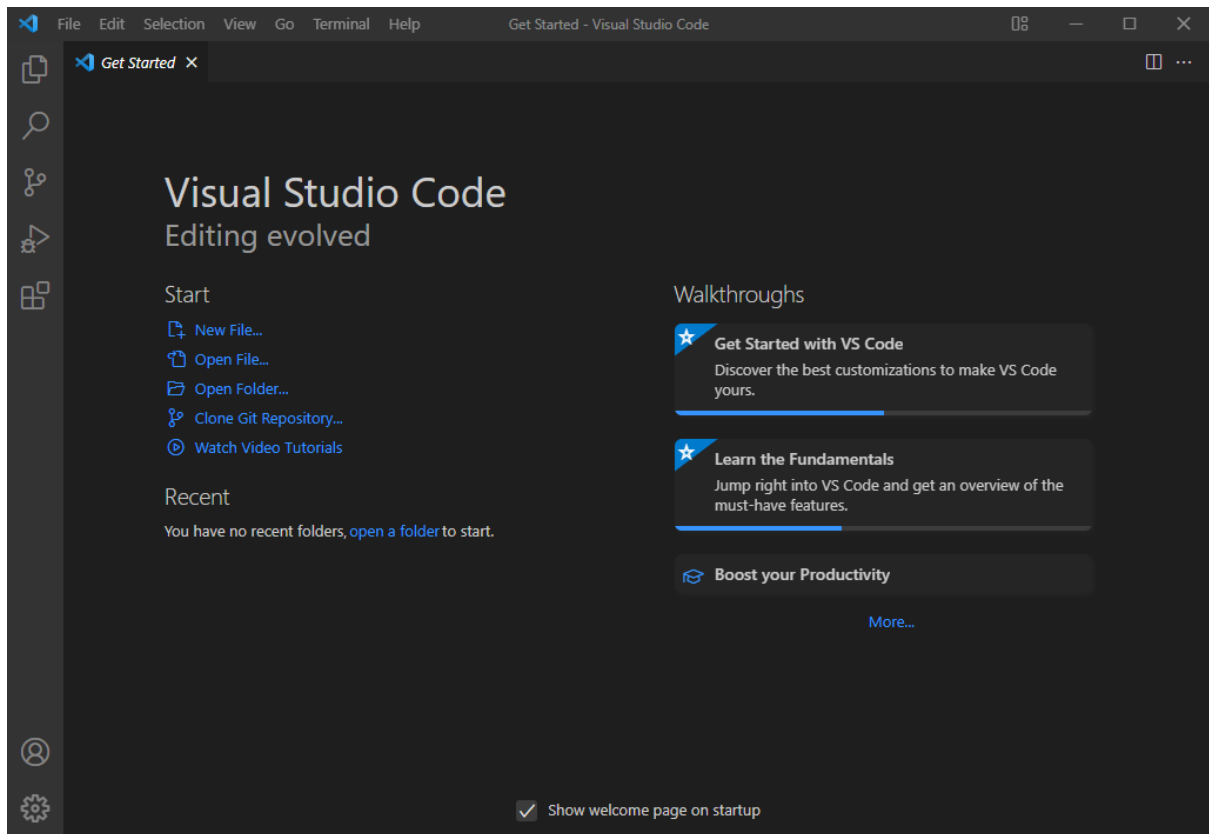

So this is how we successfully installed Visual Studio Code on our Windows system. The steps mentioned in the above guideline can be used in any kind of Windows Browsers for Downloading & Installation VS Code on Windows 10. So, try these steps to get the VS Code IDE on your device as well.

(B)**Aim:** To Understand the Structure of HTML

Procedure:

Mallampati Saikrishna;AV.SC.U4CSE25128;CSE B

```
<!DOCTYPE html>
```

```
<html>
```

```
<title>
```

```
    HTML BASICS
```

```
</title>
```

```
<body>
```


```
    <h1>FIRST HEADING</h1>
```

```
    <p>FIRST PARAGRAPH</p>
```

```
</body>
```

```
</html>
```

Output:

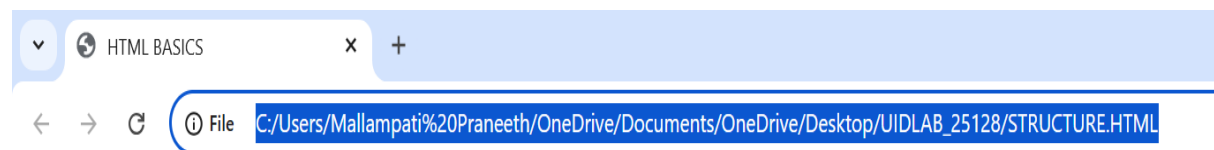

Mallampati Saikrishna;AV.SC.U4CSE25128;CSE B

FIRST HEADING

FIRST PARAGRAPH

EXPLANATION:

- HTML: HYPER TEXT MARKUP LANGUAGE
- Used To Create And Structure Webpages
- <!DOCTYPE HTML>: tells that the doc type is html5
- <html>: The element is the root element of an HTML page.
- <head>: The element contains meta information about the HTML page
- <title>: The <title> element specifies a title for the HTML page.
- <body>: The <body> element contains all visible content like text images, link, tables, etc.
- <h1>: the <h1> element defines a large heading
- <p>: The <p> element defines a paragraph

(C)**Aim:** To Understand Basic html tags

Procedure:

Mallampati Saikrishna:AV.SC.U4CSE25128:CSE B

```
<!DOCTYPE HTML>
```

```
<html>
```

```
  <head>
```

```
    <title>
```

```
      WEBPAGE(all in one)
```

```
    </title>
```

```
  </head>
```

```
  <body style="background-color: yellow;">
```

```
    <h1 style="background-color: brown; font-size: larger;">
```

```
      UNIVERSTIES IN AMARAVATHI
```

```
    </h1>
```

```
    <p>
```

```
      Here are the Universities in Amaravati
```

```
    </p>
```

```
    <p>
```

```
      1. Amrita University
```

```
    </p>
```

```
    
```

```
    <br>
```

```
    <a href="https://www.amrita.edu/campus/amaravati/">AMRITA AMARAVATI</a>
```

```
    <p>
```

```
      VIT AP University
```

```
    </p>
```


VIT AMARAVATI

<p>

SRM University

</p>

SRM AMARAVATI

<p>


THANK YOU FOR VISTING THE WEBSITE

</p>

</body>

</html>

OUTPUT :

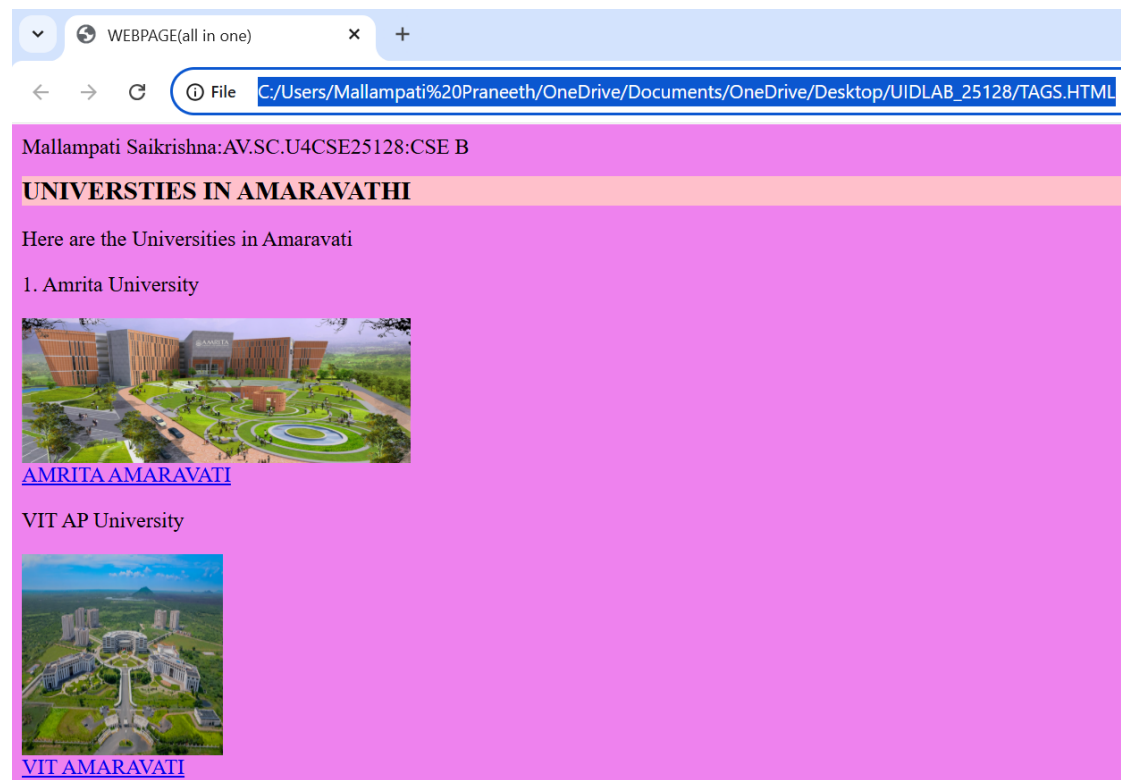

SRM University



[SRM AMARAVATI](#)

THANK YOU FOR VISTING THE WEBSITE

Explanation:

- `<!DOCTYPE HTML>`: tells that the doc type is html5
- `<html>`: The element is the root element of an HTML page.
- `<head>`: The element contains meta information about the HTML page
- `<title>`: The `<title>` element specifies a title for the HTML page.
- `<body>`: The `<body>` element contains all visible content like text images, link, tables, etc.
- `<h1>`: the `<h1>` element defines a large heading
- `<p>`: The `<p>` element defines a paragraph
- `<br>`: it is used to break the lines
- `<img src="">`: it is used to add image
- `<a href="">`: it is used to add link in the html website

WEEK 2

2(A)AIM: Amrita Campus Website

Procedure:

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<title>STYLES</title>
```

```
</head>
```

```
<body style="background-color: bisque;background-image:
url(https://www.avchennai.edu.in//assets_kk/images/amma/amma-yellow-bg.jpg);">
```

```
<h1 style="text-align: center;color:blue;font-size: larger;border:4px solid
violet">AMRITAVISHWAVIDYAPEETHAM</h1>
```

```
<pre style="color: white;font-size: large;font-style: italic;">
```

AMRITAAMMA, lovingly known as Amma, is a world-renowned spiritual leader from India.

She is famous for her simple yet powerful message of love, compassion, and selfless service.

Amma is best known for embracing people as a way of offering comfort, peace, and emotional healing, earning her the name “The Hugging Saint.”

```
</pre>
```

```
<table border="1" cellpadding="5" cellspacing="10" width="60%" align="center"
style="color: white;"
```

```
<tr>
```

```
<th>S.NO</th>
```

```
<th>CAMPUS</th>
```

```
<th>location</th>
```

```
<th>EMPLOYEES</th>
```


```
<th>link</th>
```

```
</tr>
```

```
<tr>
```

1	AMARAVATHI	kuragallu	100	https://www.amrita.edu/campus/amaravati/
2	amritapuri	amrita nagar	500	https://www.amrita.edu/campus/amritapuri/
3	COIMBATORE	kerala	1000	https://www.amrita.edu/campus/coimbatore/

Output:

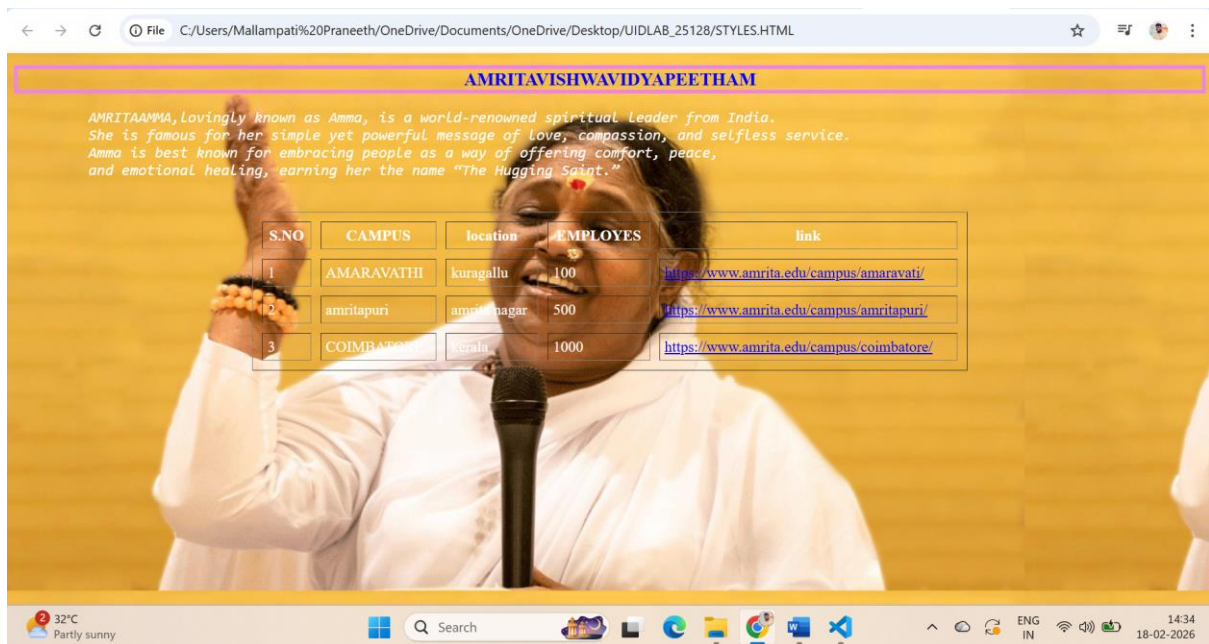

Explanation:

`<!DOCTYPE html>` defines the document as HTML5 and is written at the top of the page.

`<html>` is the root element that contains the entire HTML document.

`<head>` contains information about the webpage like title and metadata.

`<title>` sets the name of the webpage shown on the browser tab.

`<body>` contains all the visible content of the webpage.

`<h1>` is used to display the main heading of the page.

`<pre>` displays preformatted text and preserves spaces and line breaks.

`<table>` is used to create a table to display data in rows and columns.

`<tr>` defines a row in the table.

`<th>` defines a heading cell in the table (bold by default).

`<td>` defines a normal data cell in the table.

`<a>` is used to create hyperlinks using the href attribute.

WEEK 3

3(A).AIM: SYLLABUS

Procedure:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <STYLE>
    table,th,td{
      border: 2px solid black;
      border-radius: 10 px;
    th,td{
      background-color: aliceblue;
    }
  }
</STYLE>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>TIMETABLE</title>
</head>
<body>

<P>NAME :M SAI KRISHNA SEC: CSE B ROLL NO: U4CSE25128</P>
<table align="center">
  <tr>
    <th>Time/Day</th>
    <th>SLOT 1</th>
    <th>SLOT 2</th>
    <th>10.35-10.45</th>
```

```

<th>SLOT 3 </th>
<th>SLOT 4 </th>
<th>SLOT 5</th>
<th>1.15-2.05</th>
<TH>SLOT 6</TH>
<TH>3.00-3.10</TH>
<TH>SLOT 7</TH>
<TH>SLOT 8</TH>
</tr>
<tr>
<td>Monday</td>
<td colspan="2">Linear Algebra Lab</td>
<td rowspan="5" style="background-color: yellow;">short break</td>
<td>Glimpses of glorious india</td>
<td>Modern physics</td>
<td>library</td>
<td rowspan="5" style="background-color: yellow;">Lunch Break</td>
<td>Manufacturing lab</td>
<td rowspan="5" style="background-color: yellow;">Short break</td>
<td colspan="2">Manufacturing lab</td>
</tr>
<TR>
<TD>TUESDAY</TD>
<TD>DISCRETE MATHEMATICS</TD>
<TD>LINEAR ALGEBRA</TD>
<TD>MODERN PHYSICS</TD>
<TD>OBJECT ORIENTED PROGRAMMING</TD>
<TD>USER INTERFACE DESIGN</TD>
<TD>GLIMPSE OF GLORIOUS</TD>

```

```

        <TD colspan="2">SPORTS/LIBRARY</TD>
</TR>
<TR>
        <TD>WEDNESDAY</TD>
        <TD COLSPAN="2">OBJECT ORIENTED PROGRAMMING LAB_</TD>
        <TD>DISCRETE MATHEMATICS</TD>
        <TD>USER INTERFERENCE DESIGN</TD>
        <TD>GLIMPSE OF GLORIOUS</TD>
        <TD>LIBRARY/SPORTS</TD>
        <TD colspan="2">SPORTS</TD>
</TR>
<TR>
        <TD>THURSDAY</TD>
        <TD>LINEAR ALGEBRA</TD>
        <TD>OBJECT ORIENTED PROGRAMING</TD>
        <TD>DISCRETE MATHEMATICS</TD>
        <TD>COUNSELLING</TD>
        <TD>LIBRARY</TD>
        <TD>MODERN PHYSICS</TD>
        <TD colspan="2">LIBRARY/SPORTS</TD>
</TR>
<TR>
        <TD>FRIDAY</TD>
        <TD colspan="2">USER INTERFERENCE DESIGN LAB_</TD>
        <TD>LINEAR ALGEBRA</TD>
        <TD>OBJECT ORIENTED PROGRAMMING</TD>
        <TD>LIBRARY/SPORTS</TD>
        <TD>COUNSELLING</TD>
        <TD colspan="2"> MATHEMATICS LAB_</TD>

```

```

</TR>

<TR>
<TD> COURSE CODE</TD>
<TD colspan="2">COURSE NAME</TD>
<TD></TD>
<TD>L-T-P</TD>
<TD>CREDITS</TD>
<TD colspan="3">FACULTY NAME</TD>
<TD></TD>
<TD colspan="2">ASSISTING FACULTY</TD>
</TR>

<TR>
<TD>23MAT116</TD>
<TD colspan="2">Discrete Mathematics</TD>
<TD></TD>
<TD> 3-0-2 </TD>
<TD>4</TD>
<TD colspan="3">Dr.Srivivasa Rao Thota</TD>
<TD></TD>
<TD colspan="2"></TD>
</TR>

<TR>
<TD>23MAT117</TD>
<TD colspan="2">Linear Algebra</TD>
<TD></TD>
<TD> 3-0-2 </TD>
<TD>4</TD>
<TD colspan="3"> Mr.Sapavat Bixapathi</TD>
<TD></TD>

```

```

        <TD colspan="2"></TD>
    </TR>
    <TR>
        <TD>23CSE111</TD>
        <TD colspan="2">Object Oriented Programming</TD>
        <TD></TD>
        <TD> 3-0-2 </TD>
        <TD>4</TD>
        <TD colspan="3">Dr. Balaji TK</TD>
        <TD></TD>
        <TD colspan="2"></TD>
    </TR>
    <TR>
        <TD>23PHY115</TD>
        <TD colspan="2">Modern Physics</TD>
        <TD></TD>
        <TD> 2-1-0 </TD>
        <TD>3</TD>
        <TD colspan="3"> Dr. C R Kesavalu</TD>
        <TD></TD>
        <TD colspan="2"></TD>
    </TR>
    <TR>
        <TD>23CSE113</TD>
        <TD colspan="2">User Interface Design</TD>
        <TD></TD>
        <TD> 2-0-2 </TD>
        <TD>3</TD>
        <TD colspan="3"> Dr.Rajkumar Batchu</TD>

```

<TD></TD>	<TD colspan="2"> Mr. Barge Bharadwaj</TD>	
</TR>		
<TR>		
<TD>23MEE115</TD>	<TD colspan="2">Manufacturing Practice</TD>	
<TD></TD>	<TD> 0-0-3 </TD>	
<TD>1</TD>	<TD colspan="3">Dr. Sathies S.</TD>	
<TD></TD>	<TD colspan="2"></TD>	
</TR>		
<TR>		
<TD>22ADM111</TD>	<TD colspan="2">Glimpses of Glorious India</TD>	
<TD></TD>	<TD> 2-0-1 </TD>	
<TD>2</TD>	<TD colspan="3"> Dr. Siva Panuganti</TD>	
<TD></TD>	<TD colspan="2"></TD>	
</TR>		
<TR>		
<TD></TD>	<TD colspan="2">Total (15L + 1Tut +12P =28 hrs)</TD>	
<TD></TD>	<TD> 15-1-12</TD>	
<TD>21</TD>		

```

<TD colspan="3"></TD>

<TD></TD>

<TD colspan="2"></TD>

</TR>

</table>

</body>

</html>

```

OUTPUT:

C

File

C:/Users/Mallampati%20Praneeth/OneDrive/Documents/OneDrive/Desktop/UIDLAB_25128/TIMETABLE.HTML

☆

🔍

🔗

🔧

🔖

NAME :M SAI KRISHNA SEC: CSE B ROLL NO: U4CSE25128

Time/Day	SLOT 1	SLOT 2	10.35-10.45	SLOT 3	SLOT 4	SLOT 5	1.15-2.05	SLOT 6	3.00-3.10	SLOT 7	SLOT 8		
Monday	Linear Algebra Lab		short break	Glimages of glorious india	Modern physics	library	Lunch Break	Manufacturing lab	Short break	Manufacturing lab			
TUESDAY	DISCRETE MATHMATICS	LINEAR ALGEBRA		MODREN PHYSICS	OBJECT ORIENTED PROGRAMMING	USER INTERFERENCE DESIGN		GLIMPSE OF GLORIOUS		SPORTS/LIBRARY			
WEDNESDAY	OBJECT ORIENTED PROGRAMMING LAB_			DISCRETE MATHMATICS	USER INTERERENCE DESIGN	GLIMPSE OF GLORIOUS		LIBRARY/SPORTS		SPORTS			
THURSDAY	LINEAR ALGEBRA	OBJECT ORIENTED PROGRAMING		DISCRETE MATHMATICS	COUNSELLING	LIBRARY		MODREN PHYSICS		LIBRARY/SPORTS			
FRIDAY	USER INTERFERENCE DESIGN LAB			LINEAR ALGEBRA	OBJECT ORIENTED PROGRAMMING	LIBRARY/SPORTS		COUNSELLING		MATHMATICS LAB			
COURSE CODE	COURSE NAME			L-T-P	CREDITS	FACULTY NAME				ASSISTING FACULTY			
23MAT116	Discrete Mathematics			3-0-2	4	Dr.Srivivasa Rao Thota							
23MAT117	Linear Algebra			3-0-2	4	Mr.Sapavat Bixapathi							
23CSE111	Object Oriented Programming			3-0-2	4	Dr. Balaji TK							
23PHY115	Modern Physics			2-1-0	3	Dr. C R Kesavala							
23CSE113	User Interface Design			2-0-2	3	Dr.Rajkumar Batchu				Mr. Barge Bharadwaj			
23MEE115	Manufacturing Practice			10-0-3	11	Dr. Sathies S.							

Explanation:

The given HTML program is used to create a college timetable using tables.

The <table> tag is used to organize data into rows and columns.

<tr> defines table rows, <th> defines heading cells, and <td> defines data cells.

colspan is used to merge columns and rowspan is used to merge rows.

CSS styling is applied inside the <style> tag to add borders, colors, and alignment to the table.

3(B) **AIM:** COLLEGE SYLLABUS AND TIMETABLE

Procedure

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<title>
```

```
SYLLABUS
```

```
</title>
```

```
</head>
```

```
<BODY>
```

```
<P>Mallampati Sai Krishna,av.sc.u4cse25128,CSE-B</P>
```

```
<h1 style="text-align: center;color: rgb(6, 8, 0);font-family: 'Times New Roman', Times, serif;border:3px solid rgb(12, 236, 173);">
```

```
SYLLABUS AND TIMETABLE OF CSE-B SECTION -2ND SEM
```

```
<div style="float:left;width: 50%;">
```

```
<h1 style="font-size: medium;color: rgb(9, 54, 234)"> DISCRETE MATHEMATICS  
</h1>
```

```
<img src= "C:\Users\Mallampati  
Praneeth\OneDrive\Documents\OneDrive\Documents\dm.jpeg"style="width:70%;height:  
60%;">
```

```
</div>
```

```
<div style="float: right;width: 50%;">
```

```
<h1 style="font-size: medium;color: rgb(9, 54, 234)"> LINEAR ALGEBRA</h1>
```

```

```

```
</div>
```

```
<div style="float:left;width: 50%;">
```

```
<h1 style="font-size: medium;color: rgb(9, 54, 234);">MODERN PHYSICS</h1>
```

```

```

```

</div>

<div style="float:right;width: 50%;">

    <h1 style="font-size: medium;color: rgb(9, 54, 234);">USER INTERFACE
DESIGN</h1>

</div>

<div style="float:right;width: 50%;">

    <h1 style="font-size: medium;color: rgb(9, 54, 234)">MANUFACTURING
PRACTICE</h1>

</div>

<div style="float:left;width: 50%;">

    <h1 style="font-size: medium;color: rgb(9, 54, 234);">OOPS</h1>

</div>

<div style="float:left;width: 50%;">

    <h1 style="font-size: medium;color: rgb(9, 54, 234);">GGI</h1>

</div>

</BODY>

<body>

    <table style="width: fit-content;font-size: 12px;font-family: 'Franklin Gothic Medium',
'Arial Narrow', Arial, sans-serif;background-color:azure;" border="1" cellpadding="5" align="center">

```

<caption>Mallampati Sai Krishna,av.sc.u4cse25128,CSE-B</caption>

<tr>

<th style="background-color: rgb(245, 229, 4);font-size: x-large;"colspan="12">CSE B MASTER TIME TABLE</th>

</tr>

<tr>

<td colspan="6" class="left">

Dept: CSE

Class: B.Tech CSE-B

Semester-II

</td>

<td colspan="6" class="left">Class Room Venue: 511</td>

</tr>

<tr>

<td colspan="6">class advisor:

1. Name: Dr. Kurmala Gowri Raghavendra Narayan

Email : kgr_narayan@av.amrita.edu

Mobile Number : +91-9705409393

</td>

<td colspan="6">

2. Name: Dr. Ankit Sachan

Email : s_ankit@av.amrita.edu

Mobile Number :+91-8381800129

</td>

</tr>

<tr>

<th rowspan="2">Time / Day</th>

<th>Slot 1</th>

```

<th>Slot 2</th>
<th rowspan="2" class="yellow">10.35am–10.45am</th>
<th>Slot 3</th>
<th>Slot 4</th>
<th>Slot 5</th>
<th rowspan="2" class="yellow">01.15pm–02.05pm</th>
<th>Slot 6</th>
<th rowspan="2" class="yellow">3.00pm–3.10pm</th>
<th>Slot 7</th>
<th>Slot 8</th>
</tr>

<tr>
<th>08.55–09.45am</th>
<th>09.45–10.35am</th>
<th>10.45–11.35am</th>
<th>11.35am–12.25pm</th>
<th>12.25pm–01.15pm</th>
<th>02.10–03.00pm</th>
<th>03.10–04.00pm</th>
<th>04.00–04.50pm</th>
</tr>

<tr>
<td>MONDAY</td>
<td colspan="2">23MAT117 Linear Algebra LAB(BYOD)</td>
<td style="background-color: yellow;text-align: center;font-weight: bold;font-size:
large;" rowspan="5">B<br>r<br>e<br>a<br>k</td>
<td>Library</td>
<td>23PHY115 Modern Physic</td>

```

```

<td>Library</td>

<td style="background-color: yellow;text-align: center;font-weight: bold;font-size:
large;"rowspan="5">L<br>u<br>n<br>c<br>h<br>B<br>r<br>e<br>a<br>k</td>

<td>23MEE115 Manufacturing Practice LAB</td>

<td style="background-color: yellow;text-align: center;font-weight: bold;font-size:
large;"rowspan="5">B<br>r<br>e<br>a<br>k</td>

<td colspan="2">23MEE115 Manufacturing Practice LAB</td>

</tr>

<TR>

<TD>TUESDAY</TD>

<td> 23MAT116 Discrete Mathematics</td>

<td>23MAT117 Linear Algebra</td>

<td>23PHY115 Modern Physics</td>

<td>23CSE111Object Oriented Programming</td>

<td>23CSE113 User Interface Design</td>

<td>Library/Sport</td>

<td colspan="2">22ADM111 Glimpses of Glorious India</td>

</TR>

<TR>

<TD>WEDNESDAY</TD>

<td colspan="2">23CSE111Object Oriented Programming_lab2</td>

<td>23MAT116 Discrete Mathematics</td>

<td>23CSE113 User Interface Design</td>

<td>22ADM111 Glimpses of Glorious India</td>

<td>COUNSELLING</td>

```

```

        <td colspan="2">Library/Sports</td>
</TR>
<TR>
    <TD>THURSDAY</TD>
    <td>23MAT117 Linear Algebra</td>
    <td>23CSE111Object Oriented Programming</td>

    <td>23MAT116 Discrete Mathematics</td>
    <td>COUNSELLING</td>
    <td>Library</td>

    <td>23PHY115 Modern Physics(T)</td>

    <td colspan="2">Library/Sports</td>
</TR>
<TR>
    <TD>FRIDAY</TD>
    <td colspan="2">23CSE113 User Interface Design lab (BYOD)</td>
    <td>23MAT117 Linear Algebra</td>

    <td>23CSE111Object Oriented Programming</td>
    <td>Library/Sports</td>

    <td>22ADM111 Glimpses of Glorious India(P)</td>

    <td colspan="2">23MAT116 Discrete Mathematics LAB</td>
</TR>

```

```

<TR>
  <TD> COURSE CODE</TD>
  <TD colspan="2">COURSE NAME</TD>
  <TD></TD>
  <TD>L-T-P</TD>
  <TD>CREDITS</TD>
  <TD colspan="3">FACULTY NAME</TD>
  <TD></TD>
  <TD colspan="2">ASSISTING FACULTY</TD>
</TR>
<TR>
  <TD>23MAT116</TD>
  <TD colspan="2">Discrete Mathematics</TD>
  <TD></TD>
  <TD> 3-0-2 </TD>
  <TD>4</TD>
  <TD colspan="3">Dr.Srivivasa Rao Thota</TD>
  <TD></TD>
  <TD colspan="2"></TD>
</TR>
<TR>
  <TD>23MAT117</TD>
  <TD colspan="2">Linear Algebra</TD>
  <TD></TD>
  <TD> 3-0-2 </TD>
  <TD>4</TD>
  <TD colspan="3"> Mr.Sapavat Bixapathi</TD>
  <TD></TD>
  <TD colspan="2"></TD>

```

```

</TR>
<TR>
  <TD>23CSE111</TD>
  <TD colspan="2">Object Oriented Programming</TD>
  <TD></TD>
  <TD> 3-0-2 </TD>
  <TD>4</TD>
  <TD colspan="3">Dr. Balaji TK</TD>
  <TD></TD>
  <TD colspan="2"></TD>
</TR>
<TR>
  <TD>23PHY115</TD>
  <TD colspan="2">Modern Physics</TD>
  <TD></TD>
  <TD> 2-1-0 </TD>
  <TD>3</TD>
  <TD colspan="3"> Dr. C R Kesavalu</TD>
  <TD></TD>
  <TD colspan="2"></TD>
</TR>
<TR>
  <TD>23CSE113</TD>
  <TD colspan="2">User Interface Design</TD>
  <TD></TD>
  <TD> 2-0-2 </TD>
  <TD>3</TD>
  <TD colspan="3"> Dr.Rajkumar Batchu</TD>
  <TD></TD>

```

<TD colspan="2"> Mr. Barge Bharadwaj</TD>		
</TR>		
<TR>		
<TD>23MEE115</TD>		
<TD colspan="2">Manufacturing Practice</TD>		
<TD></TD>		
<TD> 0-0-3 </TD>		
<TD>1</TD>		
<TD colspan="2">Dr. Sathies S.</TD>		
<TD></TD>		
<TD colspan="2"></TD>		
</TR>		
<TR>		
<TD>22ADM111</TD>		
<TD colspan="2">Glimpses of Glorious India</TD>		
<TD></TD>		
<TD> 2-0-1 </TD>		
<TD>2</TD>		
<TD colspan="2"> Dr. Siva Panuganti</TD>		
<TD></TD>		
<TD colspan="2"></TD>		
</TR>		
<TR>		
<TD></TD>		
<TD colspan="2">Total (15L + 1Tut +12P =28 hrs)</TD>		
<TD></TD>		
<TD> 15-1-12</TD>		
<TD>21</TD>		
<TD colspan="2"></TD>		

[illegible]

	Slot 1	Slot 2		Slot 3	Slot 4	Slot 5		Slot 6		Slot 7	Slot 8		
Time / Day	08.55–09.45am	09.45–10.35am	10.35am–10.45am	10.45–11.35am	11.35am–12.25pm	12.25pm–01.15pm	01.15pm–02.05pm	02.10–03.00pm	3.00pm–3.15pm	03.10–04.00pm	04.00–04.50pm		
MONDAY	23MAT117 Linear Algebra LAB(BYOD)			Library	23PHY115 Modern Physics	Library	L u n c h B r e a k	23MEE115 Manufacturing Practice LAB		23MEE115 Manufacturing Practice LAB			
TUESDAY	23MAT116 Discrete Mathematics	23MAT117 Linear Algebra	B r e a k	23PHY115 Modern Physics	23CEIE110 Object Oriented Programming	23CEIE113 User Interface Design		Library/Sports		22ADM111 Glimpses of Glorious India			
WEDNESDAY	23CEIE110 Object Oriented Programming lab2			23MAT116 Discrete Mathematics	23CEIE113 User Interface Design	22ADM111 Glimpses of Glorious India		COUNSELLING		Library/Sports			
THURSDAY	23MAT117 Linear Algebra	23CEIE110 Object Oriented Programming		23MAT116 Discrete Mathematics	COUNSELLING	Library		23PHY115 Modern Physics(T)		Library/Sports			
FRIDAY	23CEIE113 User Interface Design lab (BYOD)			23MAT117 Linear Algebra	23CEIE110 Object Oriented Programming	Library/Sports		22ADM111 Glimpses of Glorious India(P)		23MAT116 Discrete Mathematics LAB			
COURSE CODE	COURSE NAME			L-T-P	CREDITS	FACULTY NAME				ASSISTING FACULTY			
23MAT116	Discrete Mathematics			3-0-2	4	Dr.Srivinaya Rao Thota							
23MAT117	Linear Algebra			3-0-2	4	Mr.Sapavati Bixapathi							
23CEIE111	Object Oriented Programming			3-0-2	4	Dr. Balaji TK							
23PHY115	Modern Physics			2-1-0	3	Dr. C R Kesavulu							
23CEIE113	User Interface Design			2-0-2	3	Dr.Rajkumar Ratchu				Mr. Bange Bharadwaj			
23MEE115	Manufacturing Practice			0-0-3	1	Dr. Sathies S.							
22ADM111	Glimpses of Glorious India			2-0-1	2	Dr. Siva Panuganti							
	Total (LSL + 1Tut +12P =28 hrs)			15-1-2	21								

Explanation:

1. The <head> section contains the <title> and internal CSS styles used for formatting the page.
2. The <body> section displays the student details, heading, subject names, and images using <h1>, <h2>, <div>, and tags.
3. A <table> is used to create the master timetable with rows <tr>, table data <td>, and headings <th> including colspan and rowspan attributes.

Overall, the code designs a structured academic syllabus and timetable webpage using basic HTML elements.

WEEK-4

4(A). Aim: A college student wants to collect student details through an online admission form design a registration form using only html tags (no css) with proper labels, table alignment, bgcolor and a border.

Procedure:

```
<!DOCTYPE html>

<html>

<head>

    <title>College Admission Registration</title>

</head>

<body bgcolor="lightblue">

    <tr>

        MALLAMPATI SAIKRISHNA<br></br>

        AV.SC.U4CSE25128

        CSE-B </tr>

    <center>

        <h2>College Admission Registration</h2>

        <form>

            <table border="1" cellpadding="10" cellspacing="0" bgcolor="white">

                <tr>

                    <td><label for="fullname">Full Name:</label></td>

                    <td><input type="text" id="fullname" name="fullname"></td>

                </tr>

                <tr>

                    <td><label for="email">Email:</label></td>

                    <td><input type="email" id="email" name="email"></td>

                </tr>

                <tr>
```

```

        <td><label for="phone">Phone Number:</label></td>
        <td><input type="tel" id="phone" name="phone"></td>
    </tr>
    <tr>
        <td><label>Gender:</label></td>
        <td>
            <input type="radio" id="male" name="gender" value="Male">
            <label for="male">Male</label>
            <input type="radio" id="female" name="gender" value="Female">
            <label for="female">Female</label>
            <input type="radio" id="other" name="gender" value="Other">
            <label for="other">Other</label>
        </td>
    </tr>
    <tr>
        <td><label for="course">Course Applying For:</label></td>
        <td>
            <select id="course" name="course">
                <option value="btech">B.Tech</option>
                <option value="mtech">M.Tech</option>
                <option value="mba">MBA</option>
            </select>
        </td>
    </tr>
    <tr>
        <td><label>Hobbies:</label></td>
        <td>
            <input type="checkbox" id="sports" name="hobbies" value="Sports">
            <label for="sports">Sports</label>
        </td>
    </tr>

```

```

        <input type="checkbox" id="music" name="hobbies" value="Music">
        <label for="music">Music</label>

        <input type="checkbox" id="reading" name="hobbies" value="Reading">
        <label for="reading">Reading</label>

    </td>
</tr>

<tr>

    <td><label for="dob">Date of Birth:</label></td>

    <td><input type="date" id="dob" name="dob"></td>

</tr>

<tr>

    <td><label for="certificates">Upload Certificates:</label></td>

    <td><input type="file" id="certificates" name="certificates"></td>

</tr>

<tr>

    <td><label for="address">Address:</label></td>

    <td><textarea id="address" name="address" rows="4"
cols="40"></textarea></td>

</tr>

<tr>

    <td colspan="2" align="center">

        <input type="submit" value="Submit">

        <input type="reset" value="Reset" </td>

</tr>

</table>

</form>

</center>

</body>

</html>

```

Output:

MALLAMPATI SAIKRISHNA
AV.SC.U4CSE25128 CSE-B

College Admission Registration

Full Name:	
Email:	
Phone Number:	
Gender:	☐ Male ☐ Female ☐ Other
Course Applying For:	B.Tech
Hobbies:	☐ Sports ☐ Music ☐ Reading
Date of Birth:	dd-mm-yyyy
Upload Certificates:	Choose File No file chosen
Address:	
Submit Reset	

Explanation:

This HTML program creates a College Admission Registration Form to collect student details for admission. The webpage title is displayed in the browser tab, and the background color is set to light blue using the bgcolor attribute.

The form is designed using a <table> to arrange all input fields neatly in rows and columns. It includes different types of form elements such as text box (Full Name), email field, phone number input, radio buttons for Gender selection, dropdown list for Course selection, checkboxes for Hobbies, date picker for Date of Birth, file upload option for Certificates, and a textarea for Address.

Each input field is labeled properly using the <label> tag to improve readability and usability. The form also contains Submit and Reset buttons. The Submit button is used to send the entered data, and the Reset button clears all the fields.

Thus, the program demonstrates the use of various HTML form elements and table structure to create a structured registration form.

4(B) Aim: A company wants to design a web page that displays two different forms side by side using frames. One frame should display a login and other register form.

Procedure:

```
<!DOCTYPE html>

<html>

<head>

    <title>Two Forms Using Iframes</title>

</head>

<body>

<center>

    <h2>Two Forms Using Iframes</h2>

    <iframe src="userlogin.html" width="600" height="500"></iframe>

    <iframe src="registration.html" width="600" height="500"></iframe>

</center>

</body>

</html>
```

Output:

The screenshot shows a web browser window titled "Two Forms Using Iframes". The address bar shows the file path: C:/Users/Mallampati%20Praneeth/OneDrive/Documents/OneDrive/Desktop/UIIDLAB_25128/main%20form.html. The main content area displays two forms side-by-side under the heading "Two Forms Using Iframes".

User Login

Username:	
Password:	
Login	

User Registration

FullName:	
Email:	
Phone:	
Password:	
Register Reset	

Explanation:

<!DOCTYPE html>

Declares the document as HTML5.

<html> Tag

Root element that contains the entire webpage.

<head> Section

Contains the title of the webpage.

<title> Tag

Displays “**Two Forms Using Iframes**” in the browser tab.

<body> Section

Contains the visible content of the webpage.

<center> Tag

Centers the content on the webpage.

(Note: This tag is outdated in HTML5.)

<h2> Tag

Displays the heading

WEEK-5

5.A) Aim: creating a card layout using tag consider three cards and a button using html and css.

Code:

Name = sai krishna , Roll no = 25128 , Section-B

```
<DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<style>
```

```
body{
```

```
background-color: #ffffff;
```

```
}
```

```
h1{
```

```
text-align: center;
```

```
font-family: 'Lucida Sans', 'Lucida Sans Regular', 'Lucida Grande',  
'Lucida Sans Unicode', Geneva, Verdana, sans-serif;
```

```
}
```

```
.container {
```

```
display: flex;
```

```
justify-content: center;
```

```
gap: 25px;
```

```
padding: 40px;
```

```
background-color: #e9ecef;
```

```
border-radius: 15px;
```

```
margin: 20px;
```

```
}
```

```
.card {
```

```
background: #ffffff;
```

```
padding: 20px;;
```

```
max-width: 300px;
```

```
border-radius: 10px;
```

```
box-shadow: 0 4px 6px rgba(0,0,0,0.1);
```

```
text-align: center;
```

```
font-family: sans-serif;
```

```
}
```

```
.img{
```

```
width: 75%;
```

```
border-radius: 15px;
```

```
}
```

```
.click-me-box {
```

```
display: block;
```

```
margin: 15px auto 0;
```

padding: 10px;

background-color: #5148f9;

color: white;

border: none;

border-radius: 55px;

cursor: pointer;

font-weight: bold;

}

.click-me-box:hover {

background-color: #7094ff;

}

</style>

```
</head>
```

```
<body>
```

```
<h1>Amrita Vishwa Vidyapeetham</h1>
```

```
<div class="container">
```

```
<div class="card">
```

```
<h3>coimbatore</h3>
```

```

```

```
<p>As the administrative headquarters, this sprawling 400-acre lush  
green campus is known for its serene, nature-rich atmosphere and top-tier  
research facilities.</p>
```

```
<button class="click-me-box">Click Me</button>
```

```
</div>
```

```
<div class="card">
```

```
<h3>Banglore</h3>
```

```


<p>Situating in the heart of India's tech hub, this campus focuses on a  
"solution-mindset" with strong industry ties and a vibrant student life filled with  
diverse technical clubs.</p>

<button class="click-me-box">Click Me</button>

</div>

<div class="card">

<h3>amaravati</h3>



<p>The newest addition is a rapidly growing, sustainable greenfield  
campus near the Krishna River, featuring modern digital classrooms and a  
strong emphasis on interdisciplinary research.</p>

<button class="click-me-box">Click Me</button>


</div>

</div>

</body>

</html>

## Output:

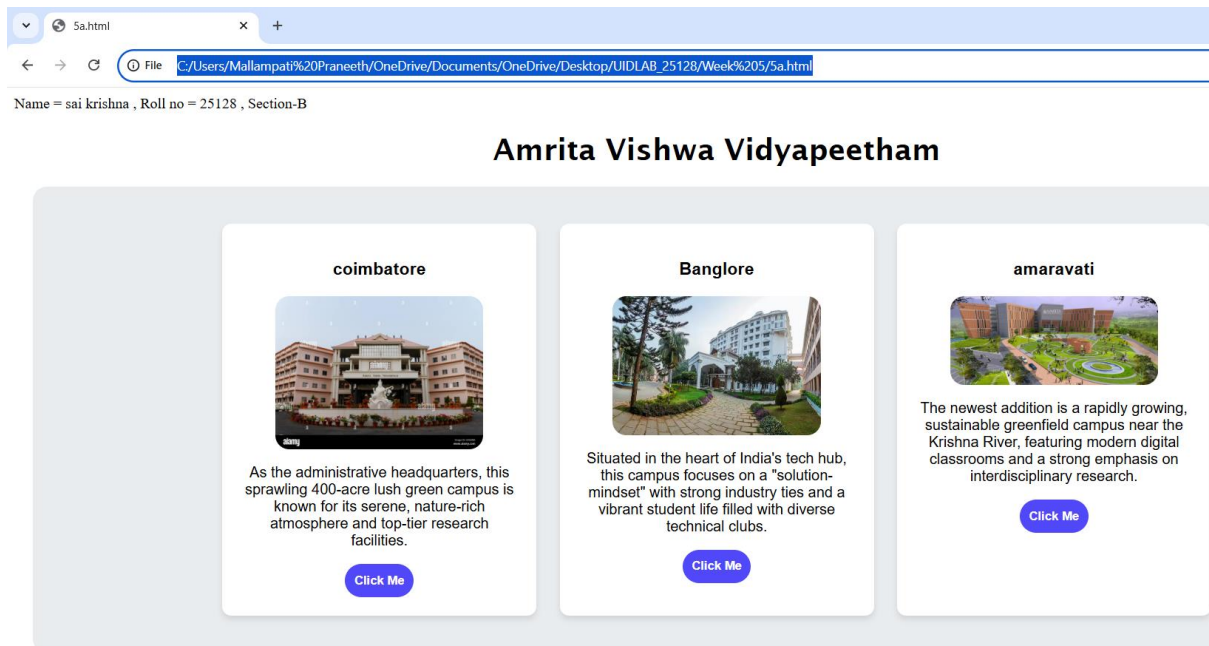

## Explanation:

1. <div> = A <div> is an invisible container used to group HTML elements together so you can style them with CSS or manipulate them with JavaScript as a single unit.
  2. <button> = we use <button> element for creating button.
  3. Class = A class is a reusable identifier used to apply the same CSS styles.
  4. Display : flex = Display flex is a CSS property used to easily align, gap, and distribute space among items within a container.
  5. Gap = Gap is the external space between multiple items inside a Flex or Grid container.
  6. Padding = Padding is the internal space inside an element (between its border and its content).
  7. Cursor : pointer = Cursor pointer is a CSS property used to change the mouse icon into a hand with a pointing finger.
- 5.B) Aim: Navigation using iframe (mini website) upon clicking each buttons the details about that button should be display on the same page.

**5b) Aim: Navigation using iframe (mini website) upon clicking each button the details about that button should be display on the same page.**

CODE:

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<style>
```

```
body {
```

```
 background-color: rgb(214, 218, 230);
```

```
 font-family: Arial;
```

```
}
```

```
.menu {
```

```
 display: flex;
```

```
 background-color: #0ecfc2;
```

```
 padding: 10px;
```

```
 text-align: center;
```

```
 justify-content: center;
```

```
 border-radius: 15px;
```

```
}
```

```
.menu a {
```

```
 color: rgb(25, 15, 138);
```

```
 margin: 0 15px;
```

```
 text-decoration: none;
```

```
 background: rgb(150, 191, 16);
```

```
 padding: 8px 12px;
```

```
 text-align: center;
```

```

 align-items: center;
 align-content: center;
 border-radius: 15px;
 }

 h1 {
 text-align: center;
 background: #12a7d0;
 color: rgb(0, 0, 0);
 padding: 20px;
 font-family: cursive;
 border-radius: 15px;
 }

 iframe {
 width: 100%;
 height: 4000px;
 border: none;
 }
</style>
</head>

<body>
 <h1>Amrita Vishwa Vidyapeetham</h1>
 <div class="menu">
 About
 Admissions
 contact
 </div>



```



```
<iframe name="frame"></iframe>

</body>

</html>
```

### OUTPUT:

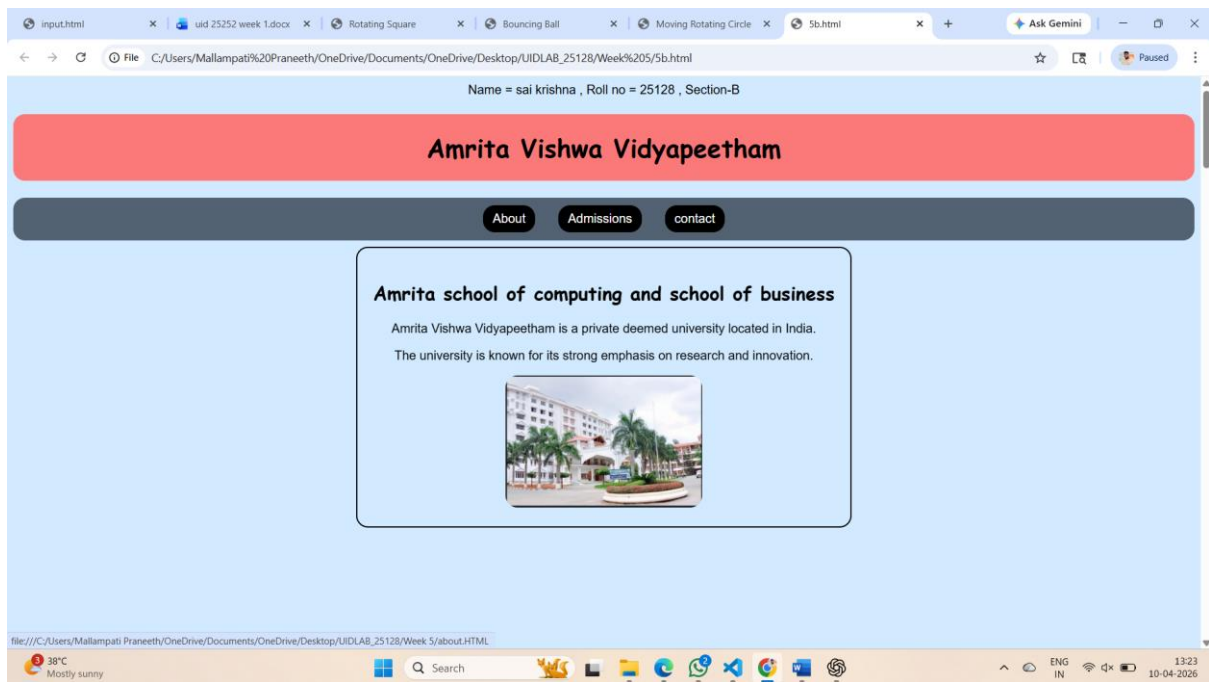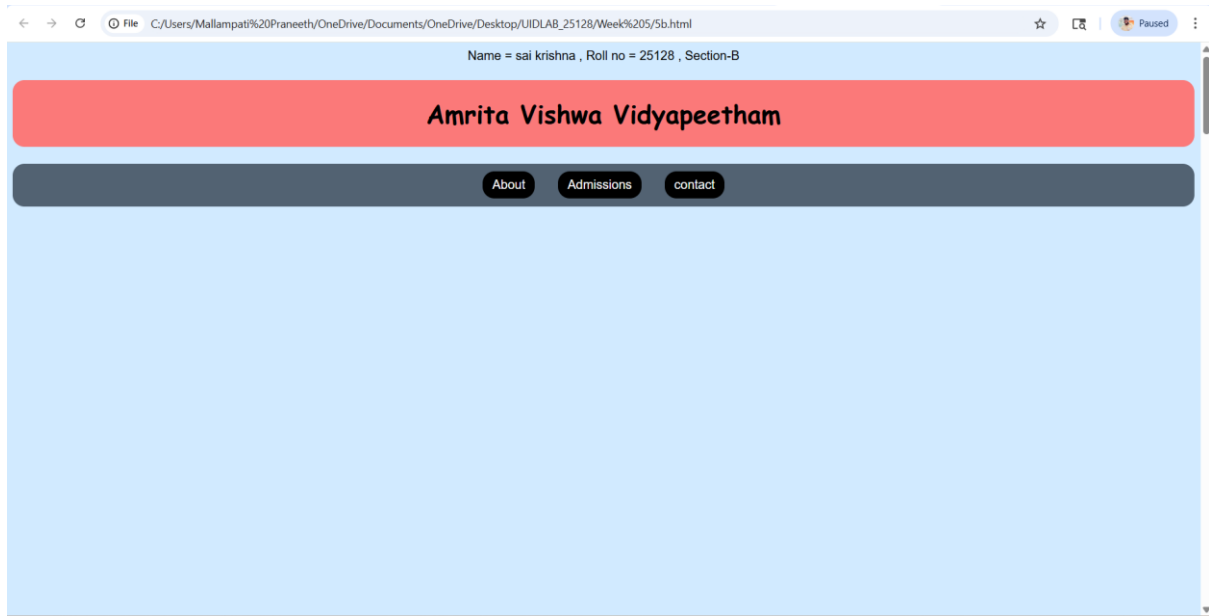

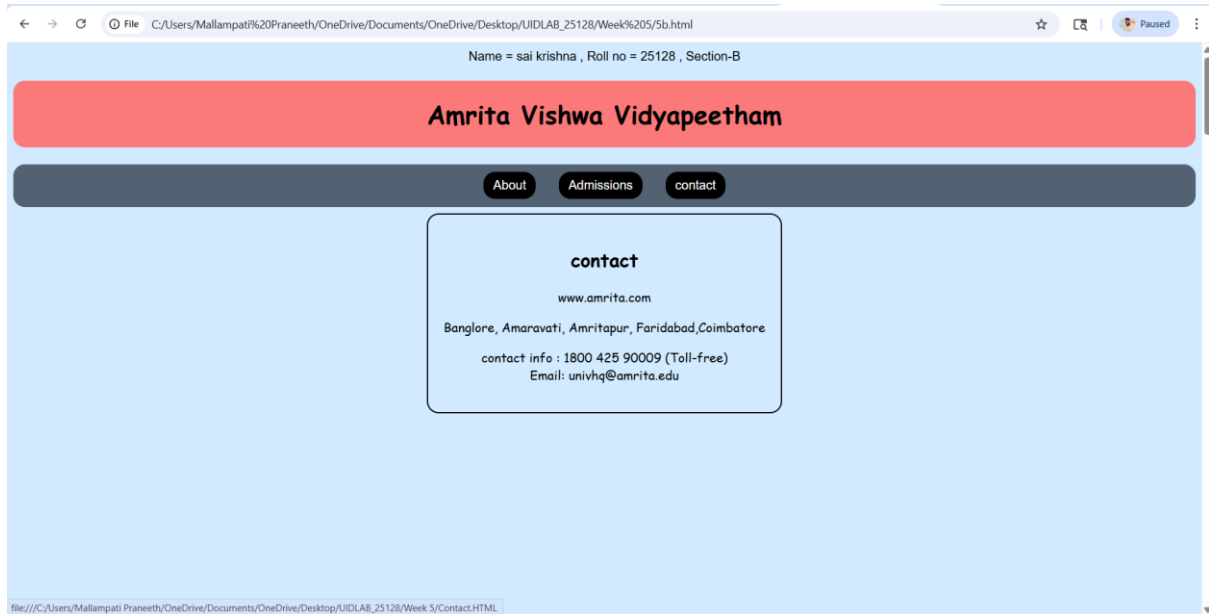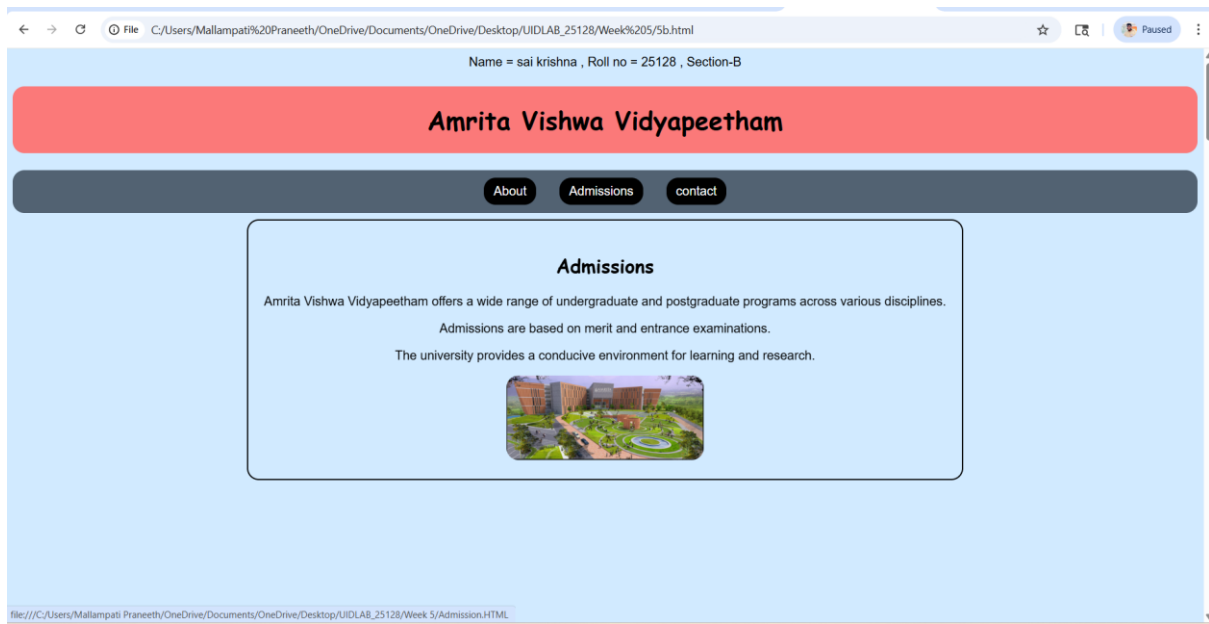

### Explanation:

- 1.<div> = A <div> is an invisible container used to group HTML elements together so you can style them with CSS or manipulate them with JavaScript as a single unit.
- 2.<button> = we use <button> element for creating button.
- 3.Class = A class is a reusable identifier used to apply the same CSS styles.
- 4.Display : flex = Display flex is a CSS property used to easily align, gap, and distribute space among items within a container.

5.Gap = Gap is the external space between multiple items inside a Flex or Grid container.

6.Padding = Padding is the internal space inside an element (between its border and its content).

7.Cursor : pointer = Cursor pointer is a CSS property used to change the mouse icon into a hand with a pointing finger.

8.Margin = Margin is a CSS property used to create empty space around an element.

9.box-shadow: 0 4px 6px rgba(0,0,0,0.1) = box-shadow is used for creating a shadow around a box.

10.Display : inline-block = Display inline-block is a CSS property that blends the best of both worlds: it allows elements to sit side-by-side.

This code is written using internal css. And all the other three codes are combined using <a href> in the main code.

**5C). Aim: Design amrita login page by showcampus on home page.upon clicking on each campus the details about each campus should be display on the same page use html and css to design a stylish webpage.**

CODE:

```
<!DOCTYPE html>

<html>

<head>

<title>login webpage</title>

<style>

body{

background-color: rgb(255, 195, 146);

background-size: cover;

}

nav{

background:#0b5ea6;

text-align:center;

padding:10px;

}
```

```
nav a{color:yellow;
margin:12px;
text-decoration:none;
font-weight:bold;
padding:5px;
}
.heading{
font-size: 35px;
color: white;
background-color: rgb(195, 81, 81);
text-align: center;
padding:12px;
border-radius: 15px;
}
.main-container {
width: 1150px;
height: 50px;
}
.login-box {
float: left;
width: 360px;
background-color: #579cb1;
padding: 35px;
color: white;
border-radius: 15px;
opacity: 0.8;
border: 1px solid rgba(255,255,255,0.3);
height: 450px;
}
```

```

 .login input[type="email"],
 .login input[type="password"] {
 width:90%;
 padding:6px;
 margin:6px 0;
 }
 .button{
 border-radius: 15px;
 background-color: #501df7;
 color: white;
 width: 75px;
 }
 iframe{
 flex:1;
 margin-left:20px;
 height:520px;
 border:none;
 background:rgb(210, 255, 254);
 border-radius:10px;
 width: 950px;
 opacity: 0.9;
 }
 </style>
</head>
<body>
<div class="heading">Amrita Vishwa Vidyapeetham</div>

<nav>
AMARAVATI

```

```

AMRITAPURI
BENGALURU
CHENNAI
COIMBATORE
KOCHI
MYSURU
</nav>
<div class="login-box">
<h2>Login</h2>
Email

<input type="email">

Password

<input type="password">
<div class="remember">
<input type="checkbox"><label>Save me</label>
</div>
<input type="button" value="Login" class="button" >

Forgot Password?

No account? Register
</div>
<iframe name="campus" src="amaravati.html"></iframe>
</body>
</html>

```

CODE FOR CHENNAI CAMPUS:

```

<!DOCTYPE html>
<html>
<body style="text-align:center;">
<h1 style="color:#a00000;">Chennai Campus</h1>

```

<p>

Chennai campus provides top-quality computing and management education

with modern infrastructure.

</p>

<p>

nirf ranking : 8th for university<br>

Popular Courses: IT, MBA, Electronics<br>

Facilities: Digital Library, Placement Cell<br>

Focus: Career Development


</p>



</body>

</html>

OUTPUT:

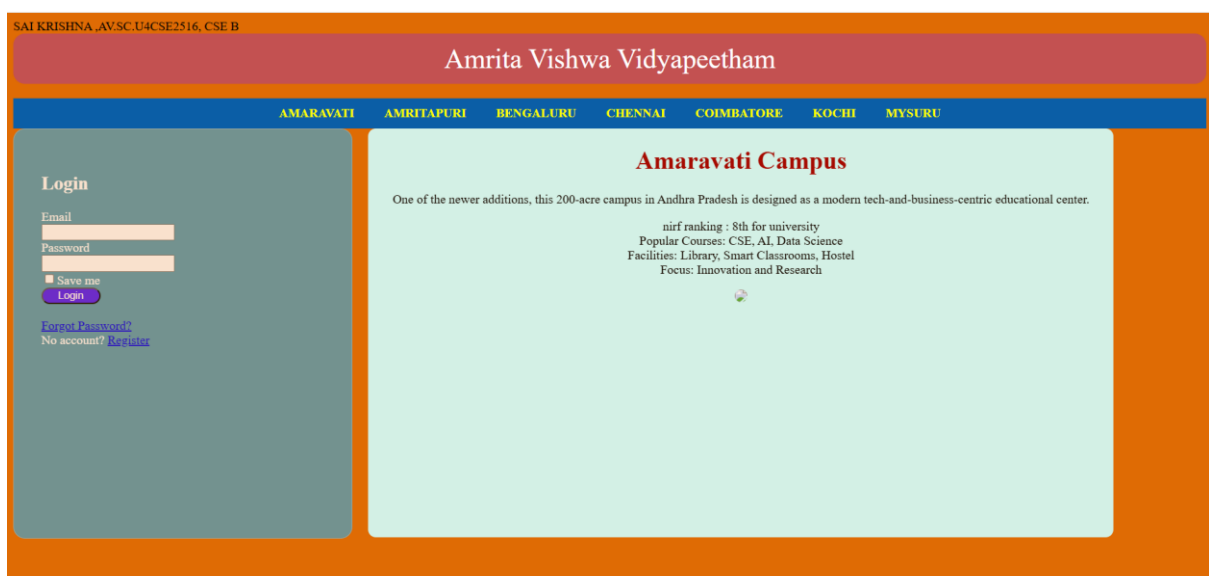

**Explanation:**

1.<div> = A <div> is an invisible container used to group HTML elements together so you can style them with CSS or manipulate them with JavaScript as a single unit.

2.<button> = we use <button> element for creating button.

3.Class = A class is a reusable identifier used to apply the same CSS styles.

4.Display : flex = Display flex is a CSS property used to easily align, gap, and distribute space among items within a container.

5.Gap = Gap is the external space between multiple items inside a Flex or Grid container.

6.Padding = Padding is the internal space inside an element (between its border and its content).

7.Cursor : pointer = Cursor pointer is a CSS property used to change the mouse icon into a hand with a pointing finger.

8.Margin = Margin is a CSS property used to create empty space around an element.

9.box-shadow: 0 4px 6px rgba(0,0,0,0.1) = box-shadow is used for creating a shadow around a box.

10.Display : inline-block = Display inline-block is a CSS property that blends the best of both worlds: it allows elements to sit side-by-side.

This code is written using internal css. And all the other three codes are combined using <a href> in the main code.

## WEEK-6:

### **AIM:**

(6)Design a responsive e-commerce application using the grid layout. This application should contain different categories of products such as electronics, clothing, home-appliances, books. Based on the category we select corresponding products should be displayed on the sidebar.

### **CODE:**

```
<!DOCTYPE html>

<html>

<head>

<title>E-Commerce </title>

<style>

body{

margin:0;

font-family:Arial, sans-serif;

}

/* GRID LAYOUT */

.container{

display:grid;

grid-template-rows:auto auto 1fr auto;

grid-template-columns:200px 1fr;

grid-template-areas:

"header header"

"sale sale"

"sidebar products"

"footer footer";

gap:10px;
```

```
padding:10px;
}
```

```
/* HEADER */
.header{
grid-area:header;
background:#222;
color:white;
text-align:center;
padding:15px;
}
```

```
/* SALE BAR */
.sale{
grid-area:sale;
background:orange;
text-align:center;
padding:10px;
font-weight:bold;
}
```

```
/* SIDEBAR */
.sidebar{
grid-area:sidebar;
background:#f4f4f4;
padding:15px;
}
.sidebar h3{
text-align:center;
```

```
margin-bottom:15px;
```

```
color:#333;
```

```
}
```

```
.sidebar a{
```

```
display:block;
```

```
background:#007bff;
```

```
color:white;
```

```
padding:10px;
```

```
margin:8px 0;
```

```
border-radius:5px;
```

```
text-decoration:none;
```

```
text-align:center;
```

```
}
```

```
.sidebar a:hover{
```

```
background:#0056b3;
```

```
}
```

```
/* PRODUCTS AREA */
```

```
.products{
```

```
grid-area:products;
```

```
}
```

```
/* PRODUCT GRID */
```

```
.product-grid{
```

```
display:none;
```

```
grid-template-columns:repeat(3,1fr);
```

```
grid-template-rows:repeat(2,auto);
```

```
gap:15px;
```

```
}
```

```
/* SHOW SELECTED CATEGORY */
```

```
.product-grid:target {
 display: grid;
}
```

```
/* PRODUCT CARD */
```

```
.card {
 border: 1px solid #ddd;
 border-radius: 8px;
 padding: 10px;
 text-align: center;
}
```

```
.card img {
 width: 300px;
 height: 250px;
 object-fit: cover;
}
```

```
.card button {
 background: #28a745;
 color: white;
 border: none;
 padding: 8px 12px;
 margin-top: 8px;
 border-radius: 5px;
 cursor: pointer;
 font-size: 14px;
}
```

```

.card button:hover{
background:#1e7e34;
}

/* FOOTER */
.footer{
grid-area:footer;
background:#222;
color:white;
text-align:center;
padding:10px;
}
</style>
</head>
<body>
<div class="container">
<div class="header">
<h1>My star mart</h1>
</div>
<div class="sale">
🔔 Big Sale Today – Up to 60% Off
</div>
<!-- SIDEBAR -->
<div class="sidebar">
<h3>Categories</h3>
Electronics
Clothing
Home Appliances
Books

```

```

</div>

<!-- PRODUCTS -->

<div class="products">

<!-- Electronics -->

<div id="electronics" class="product-grid">

<div class="card">

<h3>Laptop</h3>

<p>₹75,000</p>

<button>Add to Cart</button>

</div>

<div class="card">

<h3>Smartphone</h3>

<p>₹35,000</p>

<button>Add to Cart</button>

</div>

<div class="card">

<h3>Tablet</h3>

<p>₹22,000</p>

<button>Add to Cart</button>

</div>

<div class="card">

```



<h3>Smart Watch</h3>

<p>₹8,000</p>

<button>Add to Cart</button>

</div>

<div class="card">



<h3>Bluetooth Speaker</h3>

<p>₹3,000</p>

<button>Add to Cart</button>

</div>

<div class="card">



<h3>Headphones</h3>

<p>₹2,500</p>

<button>Add to Cart</button>

</div>

</div>

<!-- Clothing -->

<div id="clothing" class="product-grid">

```
<div class="card">

<h3>T-shirt</h3>
<p>₹400</p>
<button>Add to Cart</button>
</div>
```

```
<div class="card">

<h3>Jacket</h3>
<p>₹1500</p>
<button>Add to Cart</button>
</div>
```

```
<div class="card">

<h3>Jeans</h3>
<p>₹1200</p>
<button>Add to Cart</button>
</div>
```

```
<div class="card">

<h3>Hoodie</h3>
<p>₹900</p>
<button>Add to Cart</button>
</div>
```

```
<div class="card">

<h3>Formal Shirt</h3>
<p>₹700</p>
<button>Add to Cart</button>
</div>
```

```
<div class="card">

<h3>Blazer</h3>
<p>₹4000</p>
<button>Add to Cart</button>
</div>
```

```
</div>
```

```
<!-- Home -->
```

```
<div id="home" class="product-grid">
```

```
<div class="card">

<h3>Refrigerator</h3>
<p>₹45,000</p>
<button>Add to Cart</button>
</div>
```

```
<div class="card">
```

```

```

```
<h3>toaster</h3>
```

```
<p>₹15,000</p>
```

```
<button>Add to Cart</button>
```

```
</div>
```

```
<div class="card">
```

```

```

```
<h3>Washing Machine</h3>
```

```
<p>₹28,000</p>
```

```
<button>Add to Cart</button>
```

```
</div>
```

```
<div class="card">
```

```

```

```
<h3>Air Conditioner</h3>
```

```
<p>₹35,000</p>
```

```
<button>Add to Cart</button>
```

```
</div>
```

```
<div class="card">
```

```

```

```
<h3>Electric Kettle</h3>
```

<p>₹1,500</p>

<button>Add to Cart</button>

</div>

<div class="card">



<h3>Vacuum Cleaner</h3>

<p>₹6,000</p>

<button>Add to Cart</button>

</div>

</div>

<!-- Books -->

<div id="books" class="product-grid">

<div class="card">



<h3>the book is rising</h3>

<p>₹250</p>

<button>Add to Cart</button>

</div>

<div class="card">



<h3>The adventures of chahal pahal</h3>

<p>₹300</p>

<button>Add to Cart</button>

</div>

<div class="card">



<h3>the power of mind</h3>

<p>₹400</p>

<button>Add to Cart</button>

</div>

<div class="card">



<h3>heidi</h3>

<p>₹350</p>

<button>Add to Cart</button>

</div>

<div class="card">



<h3>the little prince</h3>

<p>₹350</p>

<button>Add to Cart</button>

</div>

<div class="card">

```

```

```
<h3>you go this+</h3>
```

```
<p>₹250</p>
```

```
<button>Add to Cart</button>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
<div class="footer">
```

© 2026 My E-Commerce Website | All rights reserved


```
</div>
```


```
</div>
```

```
</body>
```

```
</html>---
```

## OUTPUT:

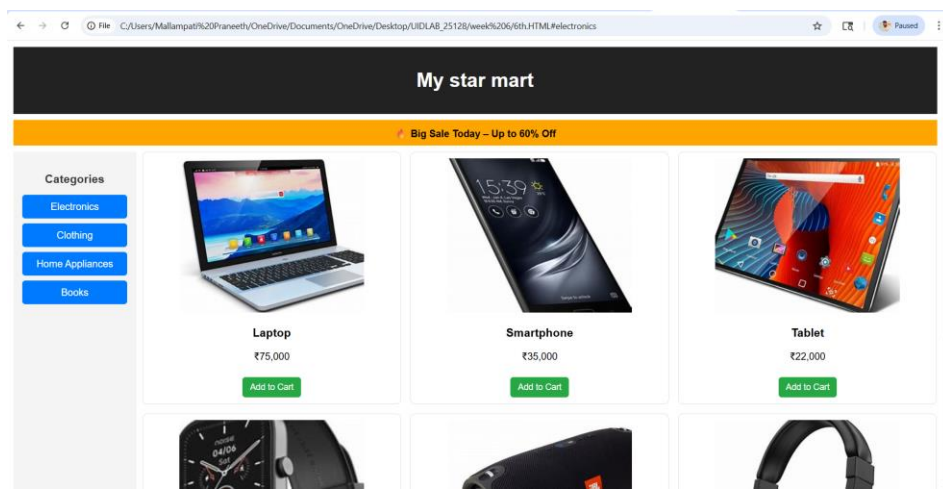

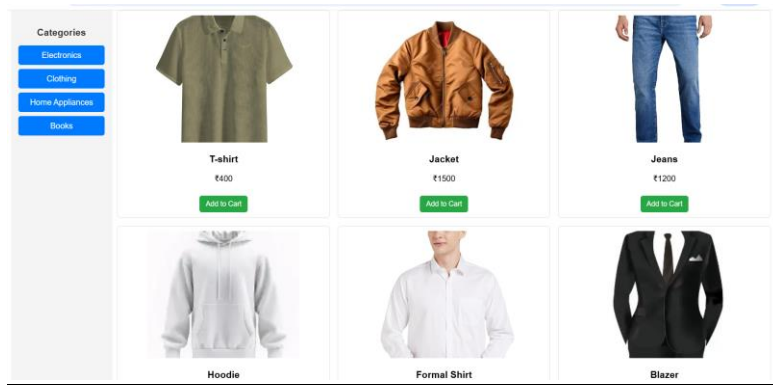


### EXPLANATION:

The E-Commerce webpage was successfully designed using HTML and CSS. HTML was used to create the structure of the webpage, including header, sidebar, product sections, and footer. CSS was used to apply styling, layout, and grid design to organize the webpage neatly. The CSS Grid Layout helped arrange the header, sale bar, sidebar, products, and footer in a structured format. Product categories such as Electronics, Clothing, Home Appliances, and Books were displayed with images, prices, and “Add to Cart” buttons. The `:target` selector was used to display products when a category is selected. Thus, a simple and responsive E-Commerce webpage layout was successfully implemented.

## WEEK-7


**7.A) Aim:** create a GitHub account and create a repository in it and pull the week 6 code files in it.

**Step 1:** browse for GitHub and enter it.

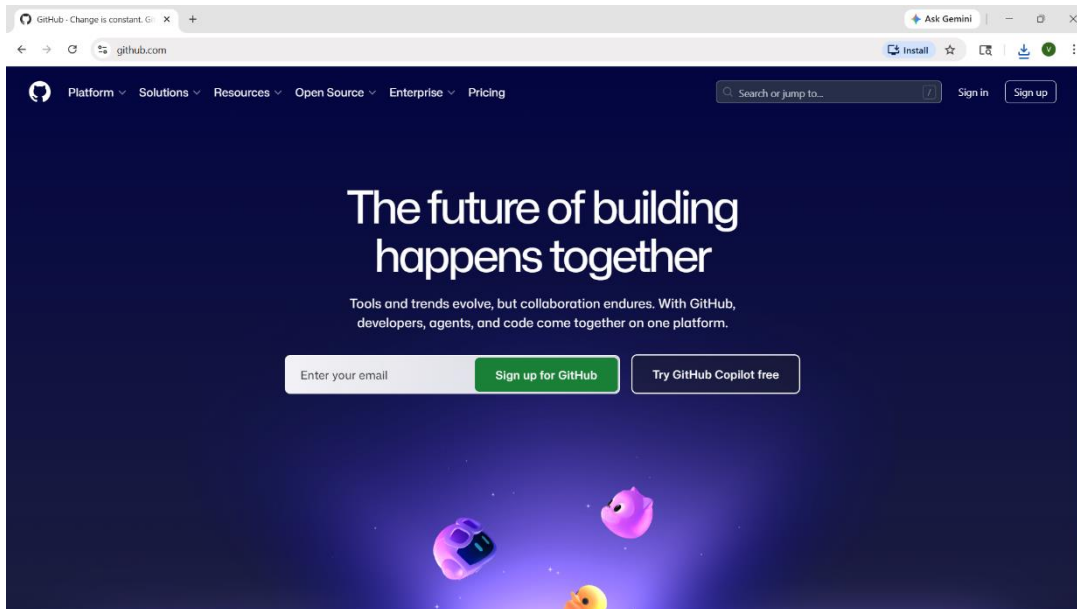


Step


2:login to GitHub account.

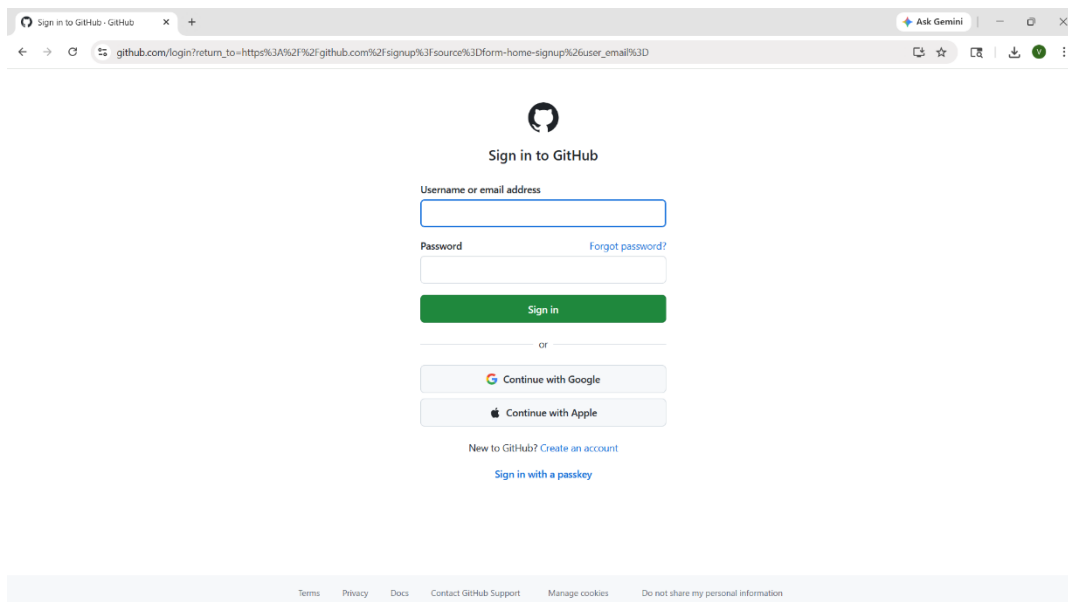


Step 3:create a repository after login by clicking new.

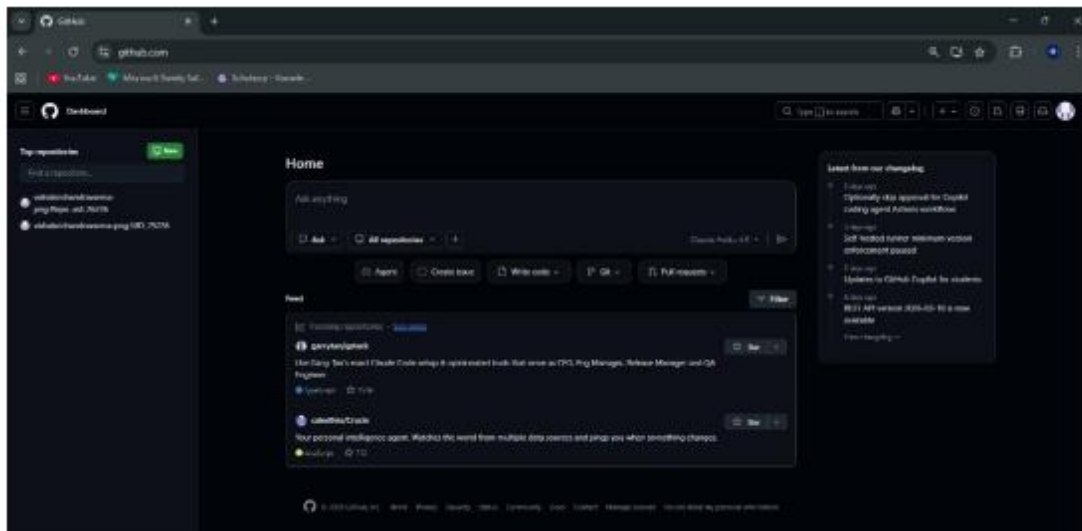


Step 4:specify the repository specifications.

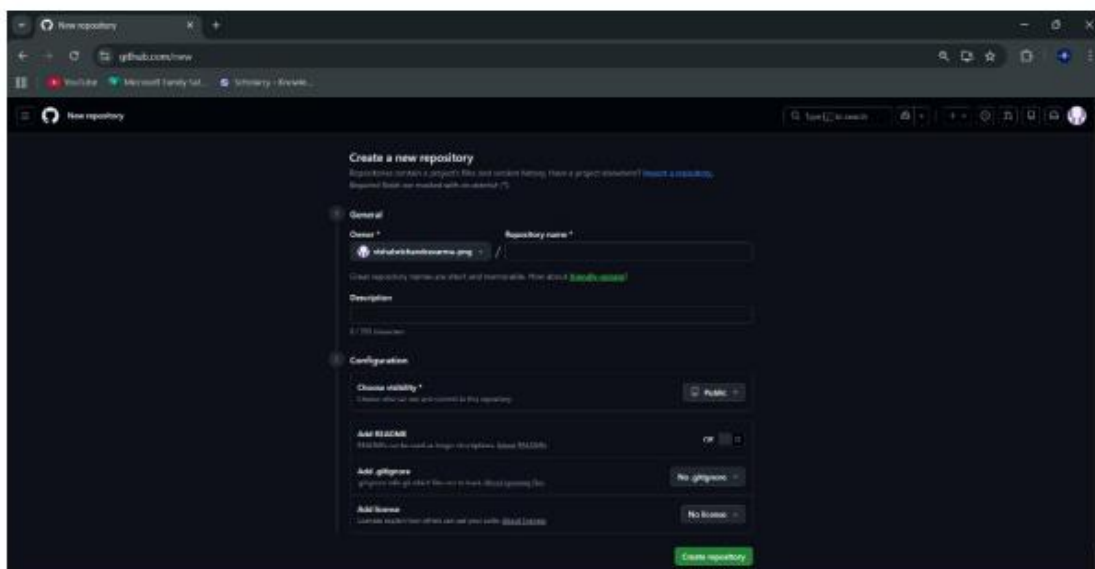


Step 5:download GitHub desktop and Launch it .

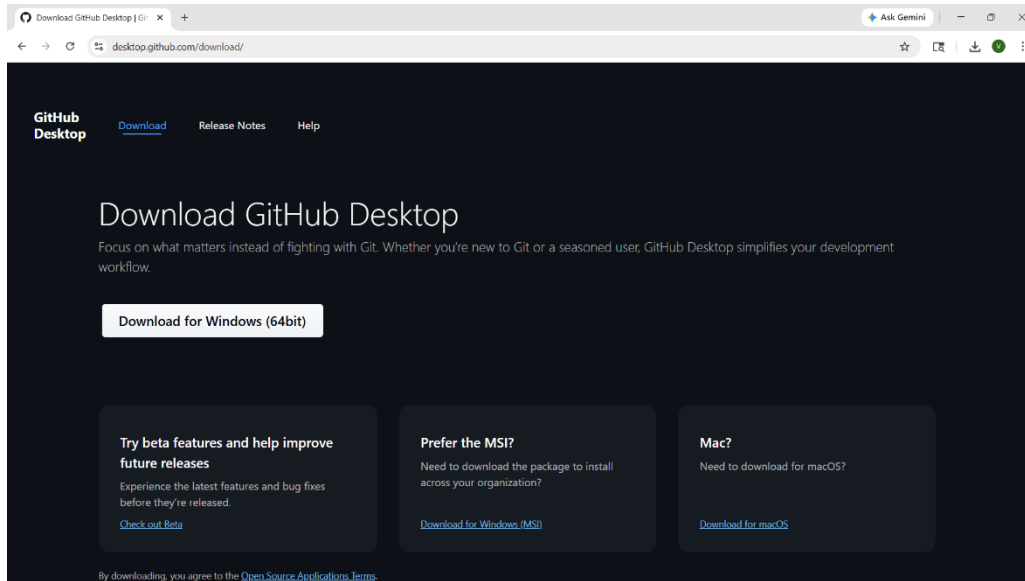


Step 6:add the vs code file to the GitHub desktop.

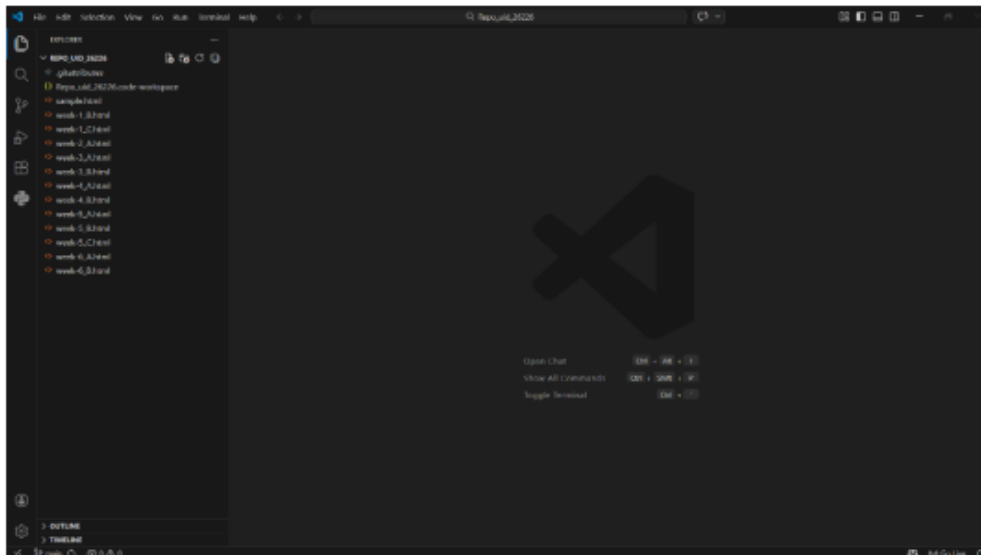

Step 7:add commit to it and the files to repository and sync the changes . it automatically pushes the files .

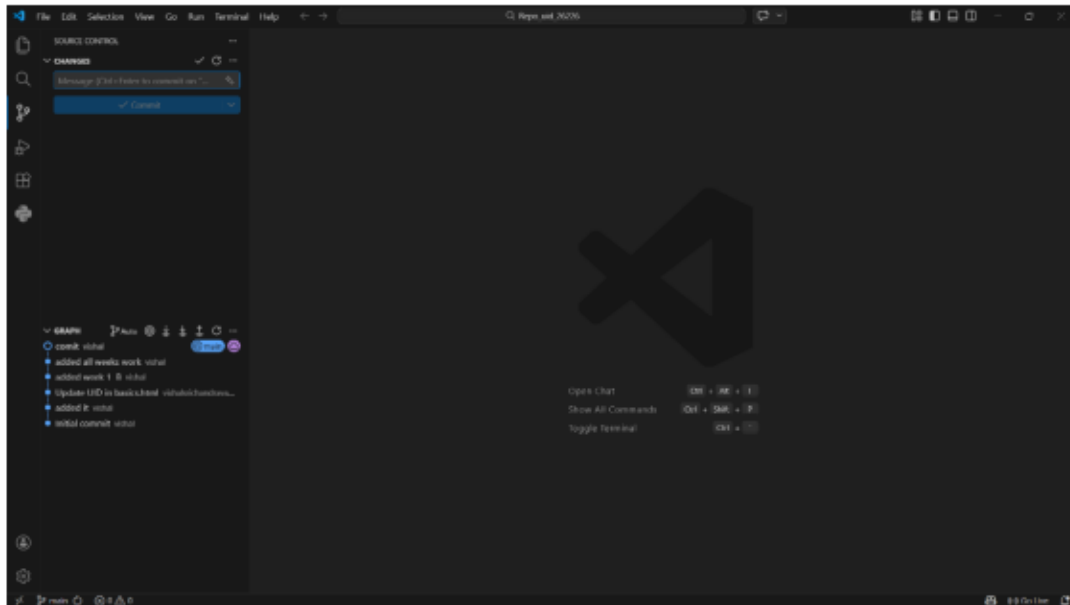

Step 9: now go to browser and check it . it will show all the new added files in the repository .

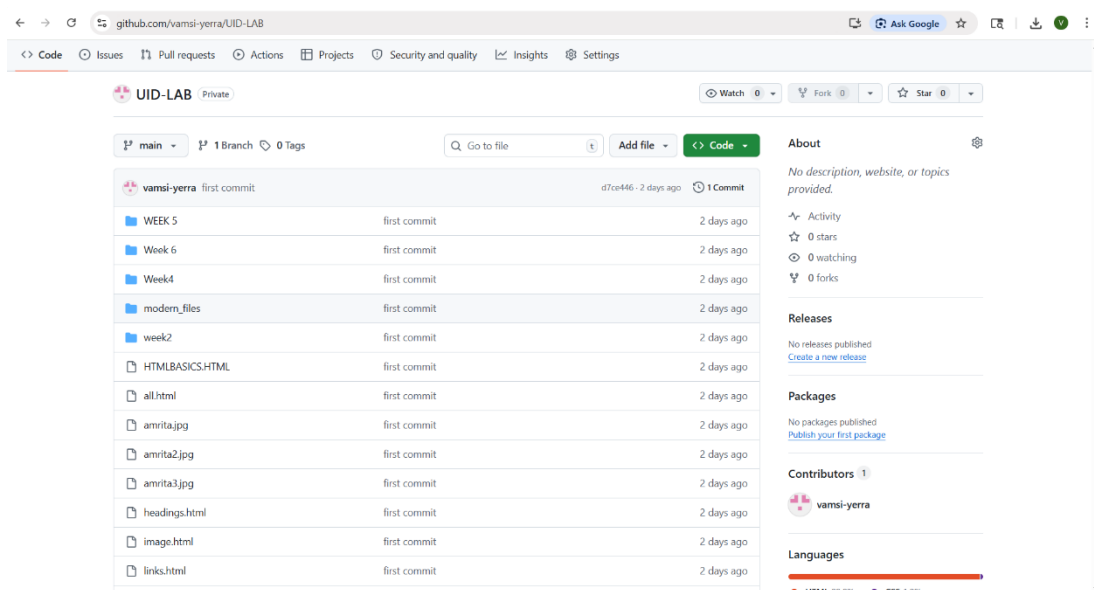

My

repository link for the UID all week's work:

[UID-LAB](https://github.com/vamsi-yerra/UID-LAB)

## WEEK-8

8.A) Aim: create a web page that displays a square that continuously rotates 360 using css animation Program

Code:

```
<!DOCTYPE html>

<html>

<head>

<title>Rotating Square</title>

<style>

body {

 margin: 0;

 height: 100vh;

 display: flex;

 flex-direction: column;

 justify-content: flex-start;

 align-items: center;

 background-color: #ff810a;

 font-family: Arial, sans-serif;

 padding-top: 50px;

}

.square {

 width: 120px;

 height: 120px;

 background: #0ce3cacc;

 border-radius: 12px;

 box-shadow: 0 8px 25px rgba(0, 0, 0, 0.2);

 animation: rotate 3s linear infinite;

}


@keyframes rotate {
```

```

 from {
 transform: rotate(0deg);
 }
 to {
 transform: rotate(360deg);
 }
}
</style>
</head>
<body>
 <h1 style="color: #fff;">Rotating Square</h1>
 <div class="square"></div>
</body>
</html>

```

OUTPUT:

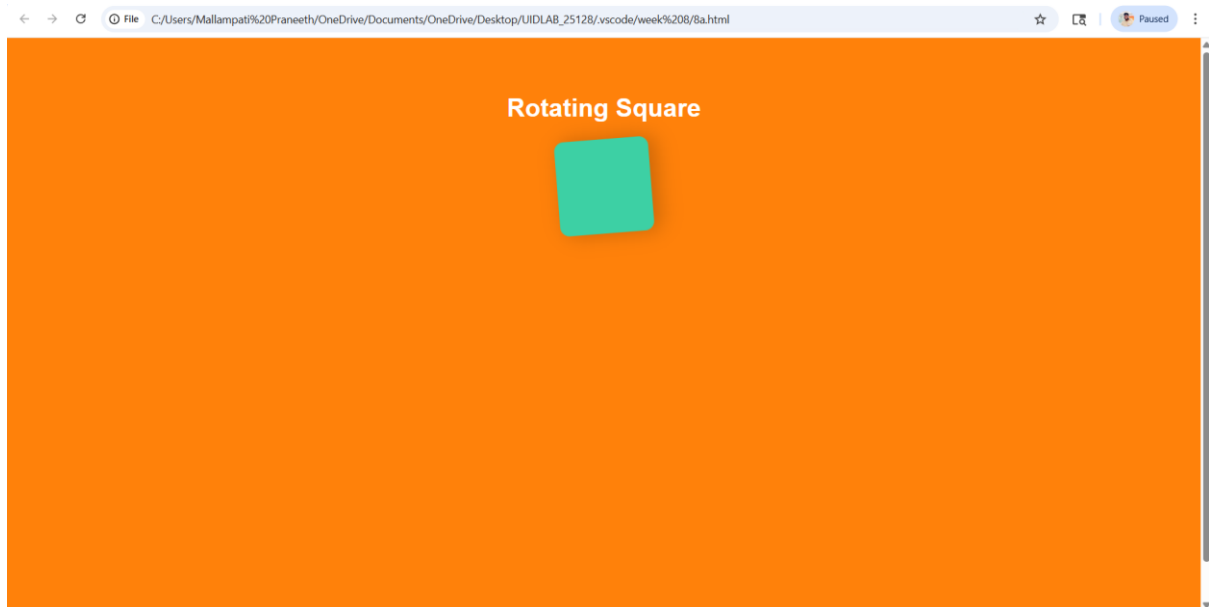

**Explanation:**

1. **flex-direction: column** = is used to change the orientation of your layout from a horizontal row to a vertical column.
2. **display: flex** = It is used to easily align the items and distribute space within the container.

3. **Align**
4. **align-items:center** = It is used to horizontally center the content because of the flex direction.
4. **<div>** = A <div> is an invisible container used to group HTML elements together so you can style them with CSS.
5. **@keyframes** = a keyframe tells the computer exactly how an element should look at a specific point in time.
6. **Animation** = Animation is shorthand property for name , duration , timing function , delay , iteration count , direction , fill mode , play state.

8.B)**Aim:** To create a ball that moves up and down continuously using css Animations.

**Code:**

```
<!DOCTYPE html>

<html>

<head>

<title>Bouncing Ball</title>

<style>

body {

 margin: 0;

 height: 100vh;

 display: flex;

 flex-direction: column;

 align-items: center;

 justify-content: flex-start;

 background: #f7f723;

}

h1 {

 margin-top: 20px;
```


```
 color: #f51313;
}

.ball {
 width: 80px;
 height: 80px;
 background: #e60505;
 border-radius: 50%;
 margin-top: 120px;
 animation: bounce 1.5s ease-in-out infinite;
}

@keyframes bounce {
 0% {
 transform: translateY(0);
 }
 50% {
 transform: translateY(-120px);
 }
 100% {
 transform: translateY(0);
 }
}

</style>
</head>
<body>
 <h1>Bouncing Ball</h1>
 <div class="ball"></div>
</body>
</html>
```

## OUTPUT:

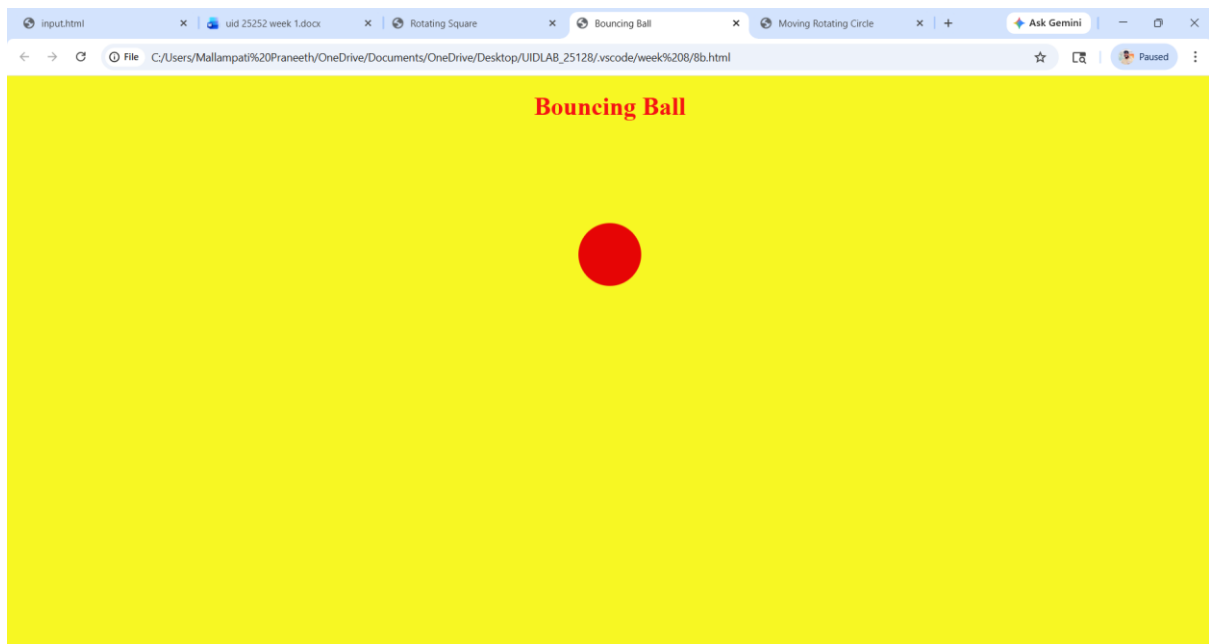

## Explanation:

1. **flex-direction: column** = is used to change the orientation of your layout from a horizontal row to a vertical column.
2. **display: flex** = It is used to easily align the items and distribute space within the container.
3. **Align-items: centre** = It is used to horizontally center the content because of the flex direction.
4. **<div>** = A **<div>** is an invisible container used to group HTML elements together so you can style them with CSS.
5. **@keyframes** = a keyframe tells the computer exactly how an element should look at a specific point in time.
6. **Animation** = Animation is shorthand property for name , duration , timing function , delay , iteration count , direction , fill mode , play state.
7. We denote percentages to tell at a particular time which work should be happen.

8.C)**Aim:** To create a ball that moves horizontally and rotates at same time.

**Code:**

```
<!DOCTYPE html>

<html lang="en">

<head>

 <title>Moving Rotating Circle</title>

 <style>

 body {

 margin: 0;

 height: 100vh;

 display: flex;

 flex-direction: column;

 align-items: center;

 justify-content: flex-start;

 background: #b40909;

 overflow: hidden;

 }

 h1 {

 margin-top: 20px;

 color: #ffffff;

 }

 .circle {

 width: 80px;

 height: 80px;

 background: #2f1bc5;

 border-radius: 50%;

 margin-top: 120px;

 animation: moveRotate 3s linear infinite;

 }

 </style>

</head>

<body>

 <h1>Moving Rotating Circle</h1>

 <div class="circle"></div>

</body>

</html>
```


```

@keyframes moveRotate {
 0% {
 transform: translateX(-150px) rotate(0deg);
 }
 50% {
 transform: translateX(150px) rotate(180deg);
 }
 100% {
 transform: translateX(-150px) rotate(360deg);
 }
}

</style>
</head>
<body>
 <h1>Moving Rotating Circle</h1>
 <div class="circle"></div>
</body>
</html>

```

Output:

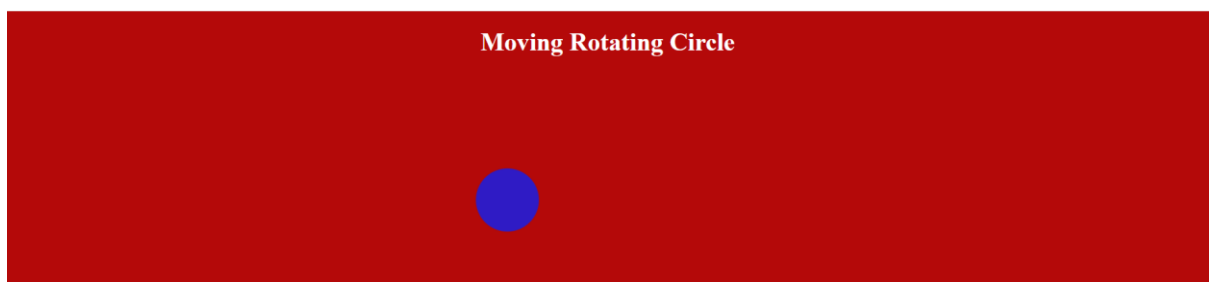

### Explanation:

1. **flex-direction: column** = is used to change the orientation of your layout from a horizontal row to a vertical column.

2. **display: flex** = It is used to easily align the items and distribute space within the container.
3. **Align-items:centre** = It is used to horizontally center the content because of the flex direction.
4. **<div>** = A **<div>** is an invisible container used to group HTML elements together so you can style them with CSS.
5. **@keyframes** = a keyframe tells the computer exactly how an element should look at a specific point in time.
6. **Animation** = Animation is shorthand property for name , duration , timing function , delay , iteration count , direction , fill mode , play state.
7. We denote percentages to tell at a particular time which work should be happen.

## WEEK-9

Aim: Create a webpage using html,css,js based on the give conditions, create a button for each program , based on the button, clicked the corresponding program has to be executed and should display the logics for each button includes finding an even or odd number , prime or not , factorial of a number , Armstrong or not use appropriate design to display the output.

CODE:

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
 <title>Calculator</title>
```

```
 <style>
```

```
 body {
```

```
 font-family: 'Segoe UI', sans-serif;
```

```
 margin: 0;
```

```
 height: 100vh;
```

```
 display: flex;
```

```
 justify-content: center;
```

```
 align-items: center;
```

```
 background: linear-gradient(135deg, #2585d9, #ae1d0f);
```

```
 }
```

```
 .container {
```

```
 background: rgba(255, 255, 255, 0.1);
```

```
 backdrop-filter: blur(12px);
```

```
 padding: 30px;
```

```
 border-radius: 15px;
```

```
 text-align: center;
```

```
width: 420px;
box-shadow: 0 10px 30px rgba(0,0,0,0.3);
}
```

```
h1 {
 color: white;
 margin-bottom: 20px;
}
```

```
input {
 padding: 12px;
 width: 80%;
 border-radius: 8px;
 border: none;
 outline: none;
 font-size: 16px;
 margin-bottom: 20px;
}
```

```
.btn {
 padding: 10px 15px;
 margin: 6px;
 border: none;
 border-radius: 8px;
 background: white;
 color: #333;
 font-weight: bold;
 cursor: pointer;
 transition: 0.3s;
```

```

 }

 .btn:hover {
 background: #ffcc00;
 transform: scale(1.05);
 }

 #outputBox {
 margin-top: 20px;
 padding: 15px;
 background: rgba(255,255,255,0.9);
 border-radius: 10px;
 font-size: 18px;
 min-height: 50px;
 }

 .btn {
padding: 10px 15px;
margin: 6px;
border: none;
border-radius: 8px;
background: linear-gradient(45deg, #ffffff, #e0e0e0);
color: #333;
font-weight: bold;
cursor: pointer;
transition: all 0.2s ease;
box-shadow: 0 4px 10px rgba(0,0,0,0.2);
 }

 .btn:hover {
background: linear-gradient(45deg, #ffcc00, #ff9900);

```

```

 transform: translateY(-3px) scale(1.05);
 box-shadow: 0 8px 20px rgba(0,0,0,0.3);
}

.btn:active {
 transform: scale(0.95);
 box-shadow: 0 2px 5px rgba(0,0,0,0.2);
}
</style>
</head>

<body>

<div class="container">
 <h1>Program Panel</h1>

 <input type="number" id="numInput" placeholder="Enter a number">

 <button class="btn" onclick="checkEven()">Even</button>
 <button class="btn" onclick="checkOdd()">Odd</button>
 <button class="btn" onclick="checkPrime()">Prime</button>
 <button class="btn" onclick="findFactorial()">Factorial</button>
 <button class="btn" onclick="checkArmstrong()">Armstrong</button>

 <div id="outputBox">Output will appear here...</div>
</div>

```

```
<script>
```

```
function getNumber() {
 var value = document.getElementById("numInput").value;
 var number = parseInt(value);
 return number;
}
```

```
function show(msg) {
 document.getElementById("outputBox").innerHTML = msg;
}
```

```
// Even
```

```
function checkEven() {
 var n = getNumber();

 if (n % 2 == 0) {
 show(n + " is Even");
 } else {
 show(n + " is Not Even");
 }
}
```

```
// Odd
```

```
function checkOdd() {
 var n = getNumber();

 if (n % 2 != 0) {
 show(n + " is Odd");
 }
}
```

```

 } else {
 show(n + " is Not Odd");
 }
}

// Prime
function checkPrime() {
 var n = getNumber();
 var isPrime = true;

 if (n < 2) {
 isPrime = false;
 } else {
 for (var i = 2; i < n; i++) {
 if (n % i == 0) {
 isPrime = false;
 break;
 }
 }
 }

 if (isPrime) {
 show(n + " is Prime");
 } else {
 show(n + " is NOT Prime");
 }
}

// Factorial (fixed + simple)

```

```
function findFactorial() {
 var n = getNumber();
 var fact = 1;

 for (var i = 1; i <= n; i++) {
 fact = fact * i;
 }

 show("Factorial is " + fact);
}


// Armstrong
function checkArmstrong() {
 var n = getNumber();
 var temp = n;
 var sum = 0;
 var digits = n.toString().length;

 while (temp > 0) {
 var d = temp % 10;
 sum = sum + Math.pow(d, digits);
 temp = Math.floor(temp / 10);
 }

 if (sum == n) {
 show(n + " is an Armstrong Number");
 } else {
 show(n + " is NOT an Armstrong Number");
 }
}
```

```
}
</script
</body>
</html>
```

OUTPUT:

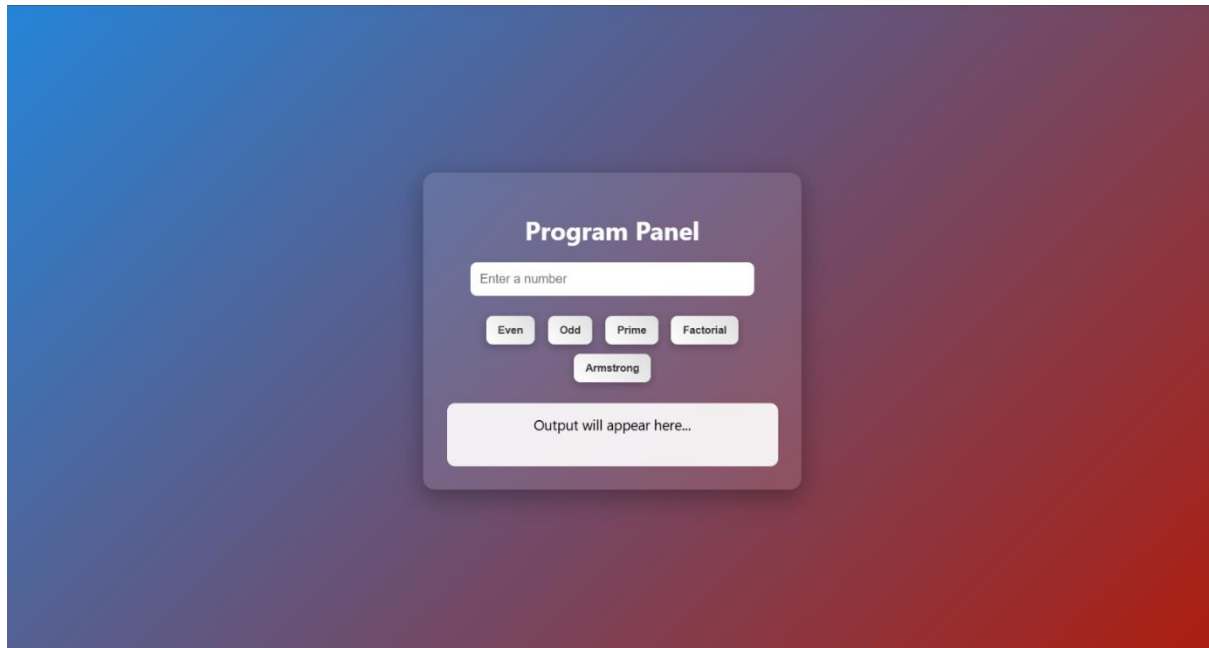

Explanation:

DOCTYPE html> : the <!DOCTYPE html> element tells the web browser that this an HTML document

or this is the latest version of HTML

<html> : the <html> element is the root element of an HTML web page

<head> : the <head> element will contain meta data about the HTML web page

<title> : the <title> element specifies a title for the HTML Page

<body> : the <body> element contains all visible content all visible content like text , image , links ,

tables , etc

<h> : we used <h> element for heading

<div>:we use <div> element for encapsulating the divisions and easy to modify

<style> : the <style> element is used to write CSS (designing part) it controls colors, layout, spacing, etc

body : the body selector is used to design the whole page here it sets background color and centers the

content

.container : used to design the main box (card) gives white background, padding, shadow and rounded

corners

input : used to design the input box width, padding, border and text alignment are set

button : used to design buttons gives color, size, border and hover effect

.output : used to design output box where result will be displayed

<input> : the <input> element is used to take user input type="number" allows only numbers id is used to

access it in JavaScript

<div class="buttons"> : groups all buttons together

<button> : used to perform actions when clicked onclick calls JavaScript functions

<div id="output"> : used to display result initially shows "Result will appear here"

<script> : the <script> element is used to write JavaScript code it adds logic and functionality to the

webpage

getElementById() : used to access HTML elements using id

.value : used to get value from input box

.textContent : used to display or change text inside an element

function : used to define a block of code that performs a task

checkEvenOdd() : checks whether number is even or odd uses  $n \% 2$

checkPrime() : checks whether number is prime or not uses loop and division logic

calcFactorial() : calculates factorial of a number multiplies numbers from 1 to n

checkArmstrong() : checks Armstrong number sum of digits power equals number

Math.sqrt() : used to find square root (used in prime logic)

parseInt() : converts string to integer

isNaN() : checks if value is not a number

## WEEK-10

AIM: write JavaScript conditional statement to find the sign of product of three numbers using functions .Display an alert box with specified sign .write a java script conditional statements to sort 3 numbers using functions display an alert box to show the result.write a java script conditional statement to find largest of five numbers using function and onclick event .display an alert box to show the result .write a java script for loop that will iterate from 0 to 15. For each iteration ,it will check if the current number odd or even , and display a message on screen .write a java script program to read 6 subjects marks from the student then computes the average marks of students then , this average is used to determine the corresponding grade.

CODE:

```
<!DOCTYPE html>

<html >

<head>

 <title>WEEK-10</title>

 <style>

 body {

 margin: 0;

 font-family: 'Segoe UI', sans-serif;

 background: linear-gradient(135deg, #667eea, #764ba2);

 height: 100vh;

 display: flex;

 justify-content: center;

 align-items: center;

 }

 .container {

 background: rgba(255, 255, 255, 0.1);

 backdrop-filter: blur(10px);

 padding: 30px;

 border-radius: 20px;

 text-align: center;
```

```
 box-shadow: 0 8px 30px rgba(0,0,0,0.2);
 width: 350px;
}
h2 {
 color: white;
 margin-bottom: 20px;
}
button {
 width: 100%;
 padding: 12px;
 margin: 8px 0;
 border: none;
 border-radius: 10px;
 background: #ffffff;
 color: #333;
 font-size: 14px;
 font-weight: bold;
 cursor: pointer;
 transition: 0.3s;
}
button:hover {
 background: #ffdd57;
 transform: scale(1.05);
}
.footer {
 margin-top: 15px;
 color: #ddd;
 font-size: 12px;
}
```

```

</style>
</head>
<body>
<div class="container">
 <h2> Calculator</h2>

 <button onclick="findSign()">Sign of Product</button>
 <button onclick="sortNumbers()">Sort 3 Numbers</button>
 <button onclick="findLargest()">Largest of 5 Numbers</button>
 <button onclick="checkOddEven()">Odd / Even (0–15)</button>
 <button onclick="calculateGrade()">Student Grade</button>
</div>
<script>
function findSign() {
 let a = parseInt(prompt("Enter first number:"));
 let b = parseInt(prompt("Enter second number:"));
 let c = parseInt(prompt("Enter third number:"));
 let product = a * b * c;

 if (product > 0) alert("Sign is +");
 else if (product < 0) alert("Sign is -");
 else alert("Product is zero");
}

function sortNumbers() {
 let a = parseInt(prompt("Enter first number:"));
 let b = parseInt(prompt("Enter second number:"));
 let c = parseInt(prompt("Enter third number:"));

 let nums = [a, b, c];

```

```

 nums.sort((x, y) => x - y);

 alert("Sorted: " + nums.join(", "));
}

function findLargest() {
 let nums = [];

 for (let i = 0; i < 5; i++) {
 nums[i] = parseInt(prompt("Enter number " + (i + 1)));
 }

 let max = nums[0];

 for (let i = 1; i < nums.length; i++) {
 if (nums[i] > max) max = nums[i];
 }

 alert("Largest number: " + max);
}

function checkOddEven() {
 let result = "";

 for (let i = 0; i <= 15; i++) {
 result += i + (i % 2 === 0 ? " is even\n" : " is odd\n");
 }

 alert(result);
}

```

```
function calculateGrade() {
 let marks = [];
 let sum = 0;

 for (let i = 0; i < 6; i++) {
 marks[i] = parseInt(prompt("Enter marks for subject " + (i + 1)));
 sum += marks[i];
 }

 let avg = sum / 6;
 let grade;


 if (avg >= 90) grade = "A+";
 else if (avg >= 80) grade = "A";
 else if (avg >= 70) grade = "B";
 else if (avg >= 60) grade = "C";
 else if (avg >= 50) grade = "D";
 else grade = "F";

 alert("Average: " + avg + "\nGrade: " + grade);
}

</script>

</body>
</html>
```

OUTPUT:

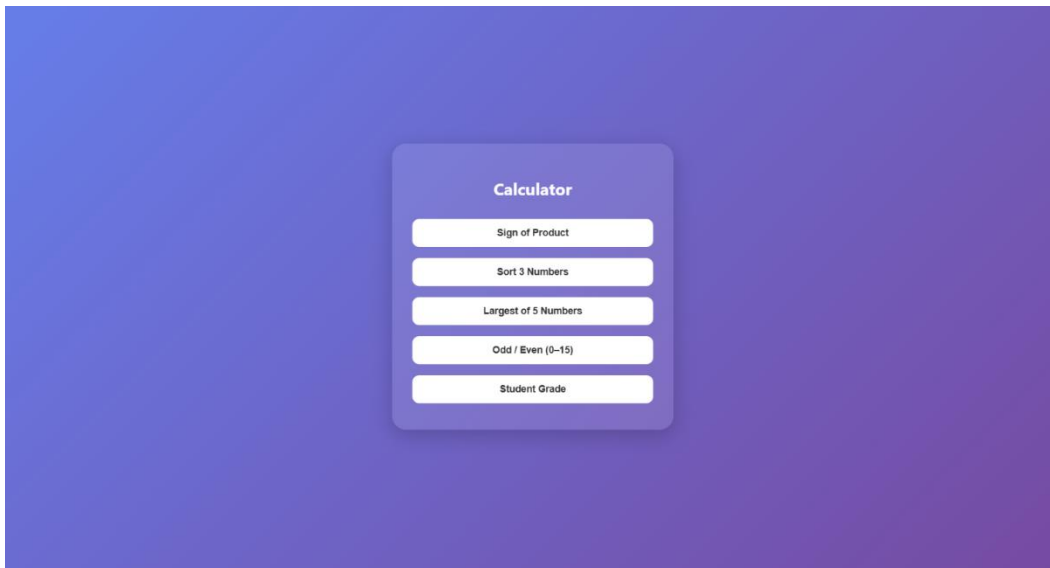

EXPLANATION:

`<!DOCTYPE html>` : the `<!DOCTYPE html>` element tells the browser that this is an HTML5 document

`<html>` : the `<html>` element is the root element of the web page all elements are written inside this

`<head>` : the `<head>` element contains meta information like title and styles

`<title>` : the `<title>` element specifies the name of the web page it appears on the browser tab

`<style>` : the `<style>` element is used to write CSS for designing the page

body : the body selector is used to style the whole page here flex is used to divide page into two sections

.left : this class is used for left side panel contains input box and buttons

.right : this class is used for right side panel used to display output

input : the `<input>` element is used to take user input here `type="text"` is used to enter numbers like 1,2,3

button : the `<button>` element is used to perform actions onclick is used to call JavaScript functions

`<div>` : the `<div>` element is used to group elements helps in layout design

`#output` : this is an id used to display result .textContent is used to change its text

`<script>` : the `<script>` element is used to write JavaScript code

function : used to define a block of code that performs a task

`getElementById()` : used to access HTML elements using id

`.value` : used to get value from input box

`.split(",")` : used to convert input string into array using comma

`.map(Number)` : converts string values into numbers

`for loop` : used to repeat code multiple times

`if condition` : used to check conditions

## WEEK-11

1.AIM : A website requires users to enter a username. The system should display a message while typing if the username is less than 5 characters.

CODE:

```
<!DOCTYPE html>

<html >

<head>

<title>Username Validation</title>

<style>

body {

 font-family: 'Segoe UI', Tahoma, Geneva, Verdana, sans-serif;

 background: linear-gradient(135deg, #74ebd5 0%, #9face6 100%);

 display: flex;

 justify-content: center;

 align-items: center;

 height: 100vh;

 margin: 0;

}

.form-container {

 background: #fff;

 padding: 30px;

 border-radius: 12px;

 box-shadow: 0 6px 12px rgba(0,0,0,0.2);

 width: 350px;

 text-align: center;

}

h2 {

 margin-bottom: 20px;
```

```
 color: #333;
}

label {
 display: block;
 text-align: left;
 margin-bottom: 8px;
 font-weight: bold;
 color: #444;
}

input[type="text"] {
 width: 100%;
 padding: 12px;
 border: 1px solid #ccc;
 border-radius: 6px;
 font-size: 14px;
 transition: border-color 0.3s;
}

input[type="text"]:focus {
 border-color: #007BFF;
 outline: none;
}

#userMsg {
 display: block;
 margin-top: 8px;
 font-size: 13px;
 font-weight: bold;
}

.error {
 color: #d9534f;
```

```

 }

 .success {
 color: #28a745;
 }
</style>
</head>
<body>
 <div class="form-container">
 <h2>Username Check</h2>
 <label for="username">Username:</label>
 <input type="text" id="username" onkeyup="checkUsername()" placeholder="Enter
username">


 </div>

 <script>
 function checkUsername() {
 let uname = document.getElementById("username").value;
 let msg = document.getElementById("userMsg");
 if (uname.length < 5) {
 msg.innerHTML = "Username must be at least 5 characters";
 msg.className = "error";
 } else {
 msg.innerHTML = "Valid username";
 msg.className = "success";
 }
 }
 </script>
</body>

```

</html>

OUTPUT:

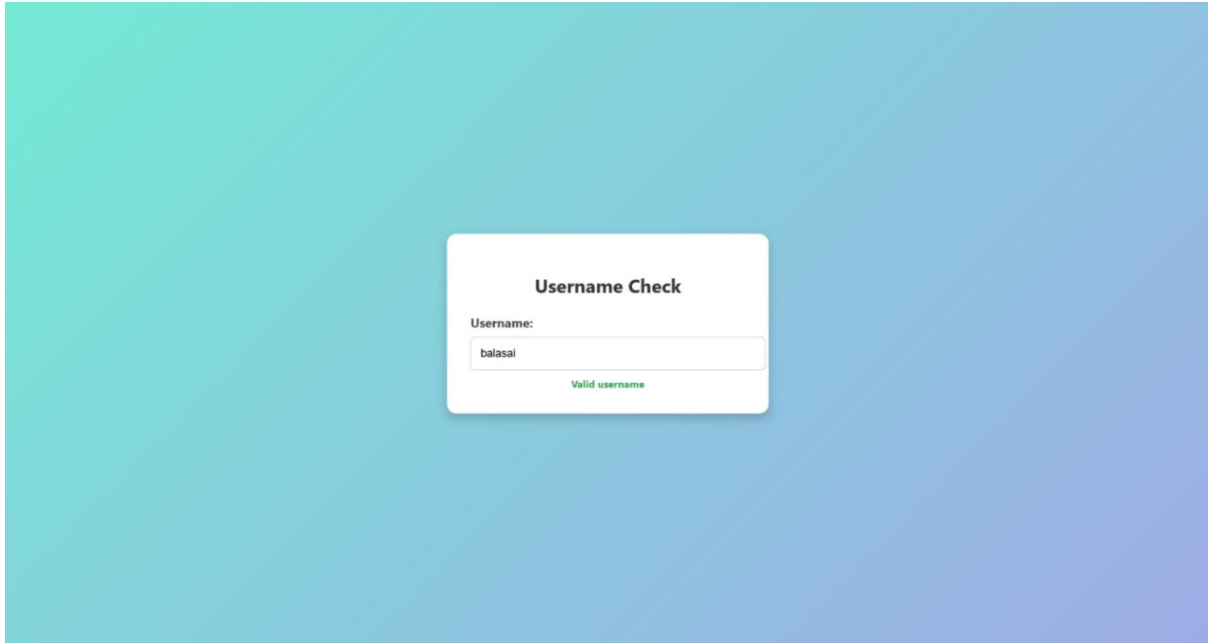

EXPLANATION:

- `<!DOCTYPE html>`: Declares the document type as HTML5.
- `<html> ... </html>`: Root element of the page.
- `<head> ... </head>`: Contains page information (not shown directly on the page).
- `<title>` → Sets the text in the browser tab ("Username Validation").
- `<style>` → Holds all your CSS rules.
- `<body> ... </body>`: Contains everything that will be visible on the page.
- `body` : Styles the whole page:
- `form-container` : Styles the white box
- `function checkUsername()` → Defines the function.
- `document.getElementById("username").value` → Gets what the user typed.
- `document.getElementById("userMsg")` → Finds the message area.

2.AIM: A registration form should validate email format before submission. If invalid, the form should not be submitted.

CODE:

```
<!DOCTYPE html>

<html>

<head>

 <title>Email Validation</title>

 <style>

 body {

 font-family: Arial, sans-serif;

 background: linear-gradient(135deg, #74ebd5 0%, #9face6 100%);

 display: flex;

 justify-content: center;

 align-items: center;

 height: 100vh;

 margin: 0;

 }

 .container {

 background: #fff;

 padding: 25px;

 border-radius: 10px;

 box-shadow: 0 4px 10px rgba(0,0,0,0.2);

 width: 320px;

 text-align: center;

 }

 h2 {

 margin-bottom: 20px;

 color: #333;

 }
```

```
input[type="text"] {
 width: 100%;
 padding: 10px;
 margin-bottom: 12px;
 border: 1px solid #ccc;
 border-radius: 6px;
 font-size: 14px;
 transition: border-color 0.3s;
}

input[type="text"]:focus {
 border-color: #007BFF;
 outline: none;
}

button {
 width: 100%;
 padding: 10px;
 background: #007BFF;
 color: white;
 border: none;
 border-radius: 6px;
 font-size: 15px;
 cursor: pointer;
 transition: background 0.3s;
}

button:hover {
 background: #0056b3;
}

#result {
 margin-top: 12px;
```

```

 font-weight: bold;

 font-size: 14px;
}

.valid {
 color: green;
}

.invalid {
 color: red;
}

</style>

</head>

<body>

<div class="container">

 <h2>Email Validation</h2>

 <input type="text" id="email" placeholder="Enter email">

 <button onclick="checkEmail()">Check</button>

 <p id="result"></p>

</div>

<script>

function checkEmail() {

 let email = document.getElementById("email").value;

 let pattern = /^[a-zA-Z0-9._]+@[a-zA-Z]+\.[a-zA-Z]{2,}$/;

 let result = document.getElementById("result");

 if (pattern.test(email)) {

 result.innerHTML = "Valid Email";


 result.className = "valid";

 } else {

```

```
 result.innerHTML = "Invalid Email";
 result.className = "invalid";
 }
}
</script>
</body>
</html>
```

OUTPUT:

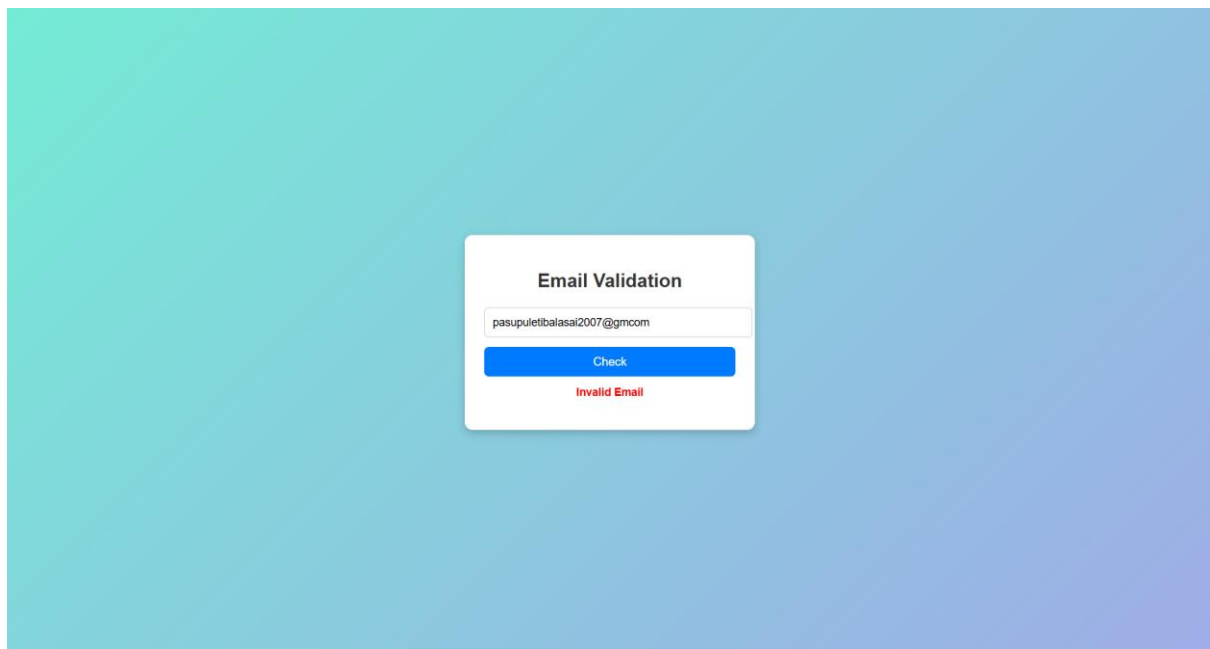

EXPLANATION:

- `<!DOCTYPE html>`: Declares the document type as HTML5.
- `<html> ... </html>`: Root element of the page.
- `<head> ... </head>`: Contains page information (not shown directly on the page).
- `<title>` → Sets the text in the browser tab (“Username Validation”).
- `<style>` → Holds all your CSS rules.
- `<body> ... </body>`: Contains everything that will be visible on the page.
- `body` : Styles the whole page:
- `<div class="container">` → White box styled with CSS.

- `<h2>` → Heading text.
- `<input>` → Text box for email input.
- `id="email"` → Unique identifier.
- `placeholder="Enter email"` → Hint text.
- `<button>` → Button that runs `checkEmail()` when clicked.
- `<p id="result"></p>` → Empty paragraph where the result message appears.

3.

AIM: A system should check password strength while typing and display whether it is weak or strong.

CODE:

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<title>Password Strength Checker</title>
```

```
<style>
```

```
body {
```

```
 font-family: Arial, sans-serif;
```

```
 background: linear-gradient(135deg, #74ebd5 0%, #9face6 100%);
```

```
 display: flex;
```

```
 justify-content: center;
```

```
 align-items: center;
```

```
 height: 100vh;
```

```
 margin: 0;
```

```
}
```

```
.container {
```

```
 background: #fff;
```

```
padding: 25px;
border-radius: 10px;
box-shadow: 0 4px 10px rgba(0,0,0,0.2);
width: 320px;
text-align: center;
}
```

```
h2 {
margin-bottom: 20px;
color: #333;
}
```

```
label {
display: block;
text-align: left;
margin-bottom: 6px;
font-weight: bold;
color: #444;
}
```

```
input[type="password"] {
width: 100%;
padding: 10px;
margin-bottom: 12px;
border: 1px solid #ccc;
border-radius: 6px;
font-size: 14px;
transition: border-color 0.3s;
}
```

```
input[type="password"]:focus {
border-color: #007BFF;
outline: none;
```

```

 }

 #passMsg {
 display: block;
 margin-top: 8px;
 font-size: 14px;
 font-weight: bold;
 }

 .weak {
 color: red;
 }

 .strong {
 color: green;
 }
}

</style>
</head>
<body>
 <div class="container">
 <h2>Password Strength</h2>
 <label for="password">Password:</label>
 <input type="password" id="password" onkeyup="checkPasswordStrength()"
placeholder="Enter password">

 </div>


 <script>
 function checkPasswordStrength() {
 let pwd = document.getElementById("password").value;
 let msg = document.getElementById("passMsg");
 if (pwd.length < 6) {

```

```
 msg.innerHTML = "Weak password";
 msg.className = "weak";
 } else {
 msg.innerHTML = "Strong password";
 msg.className = "strong";
 }
}

</script>
</body>
</html>
```

OUTPUT:

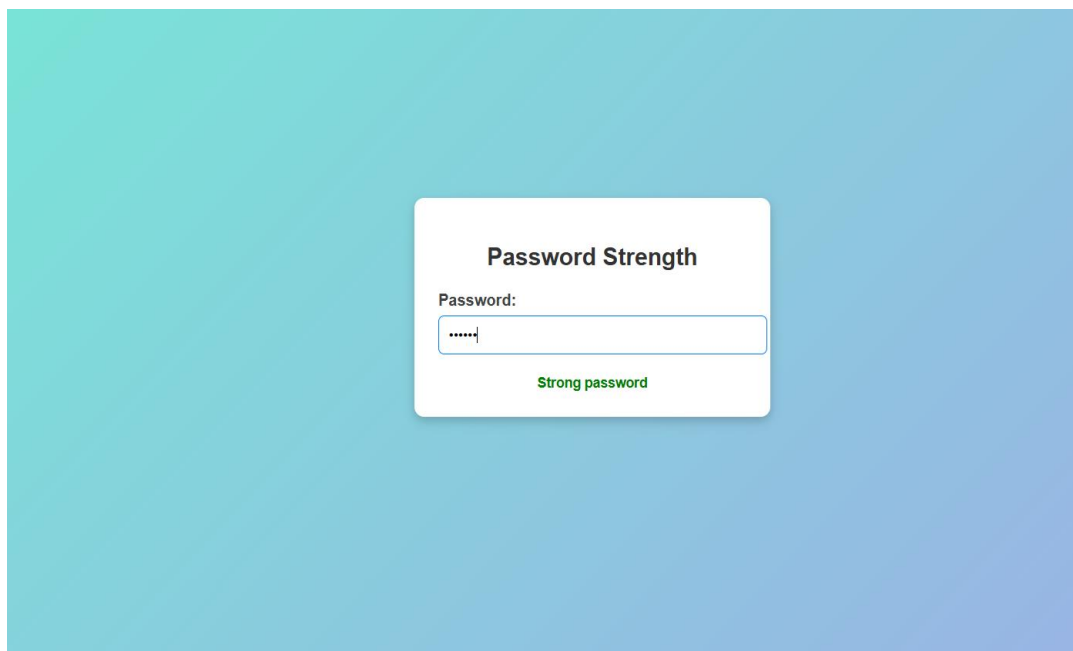

Explanation:

1. `<html>` – Defines the HTML document.
2. `<head>` – Contains metadata and CSS.
3. `<title>` – Sets the webpage title.
4. `<style>` – Adds CSS styling.
5. `<body>` – Contains the visible content.
6. `<div>` – Creates a container section.
7. `<h2>` – Displays the heading.

8. <label> – Displays text labels.
9. <input> – Accepts password input.
10. <span> – Displays password strength messages.
11. <script> – Contains JavaScript code.

4.

AIM: Create form should validate a mobile number when the user leaves the input field. The number must be exactly 10 digits.

CODE:

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<title>Mobile Number Validation</title>
<style>
 body {
 font-family: Arial, sans-serif;
```

```
padding: 40px;
background: #f5f5f5;
}
.container {
width: 320px;
padding: 20px;
background: white;
border-radius: 8px;
box-shadow: 0 0 10px rgba(0,0,0,0.1);
}
input {
width: 100%;
padding: 10px;
font-size: 16px;
border: 2px solid #ccc;
border-radius: 5px;
outline: none;
transition: 0.3s;
}
input.valid {
border-color: green;
}
input.invalid {
border-color: red;
}
#error {
margin-top: 8px;
color: red;
font-size: 14px;
```

```

 height: 18px;
 }
 button {
 margin-top: 15px;
 width: 100%;
 padding: 10px;
 background: #0078ff;
 color: white;
 border: none;
 border-radius: 5px;
 font-size: 16px;
 cursor: pointer;
 }
 button:hover {
 background: #005fcc;
 }
</style>
</head>
<body>
<div class="container">
 <h3>Mobile Number Validation</h3>

 <input type="text" id="mobile" placeholder="Enter mobile number">

 <p id="error"></p>

 <button onclick="validate()">Validate</button>
</div>
<script>
 const mobile = document.getElementById("mobile");

```

```

const error = document.getElementById("error");
mobile.addEventListener("input", () => {
 const regex = /^[6-9]\d{9}$/;


 if (regex.test(mobile.value)) {
 mobile.classList.add("valid");
 mobile.classList.remove("invalid");
 error.textContent = "";
 } else {
 mobile.classList.add("invalid");
 mobile.classList.remove("valid");
 error.textContent = "Enter a valid 10-digit mobile number";
 }
});

function validate() {
 const regex = /^[6-9]\d{9}$/;

 if (regex.test(mobile.value)) {
 alert("Valid Mobile Number");
 } else {
 alert("Invalid Mobile Number");
 }
}
</script>
</body>
</html>

```

OUTPUT:

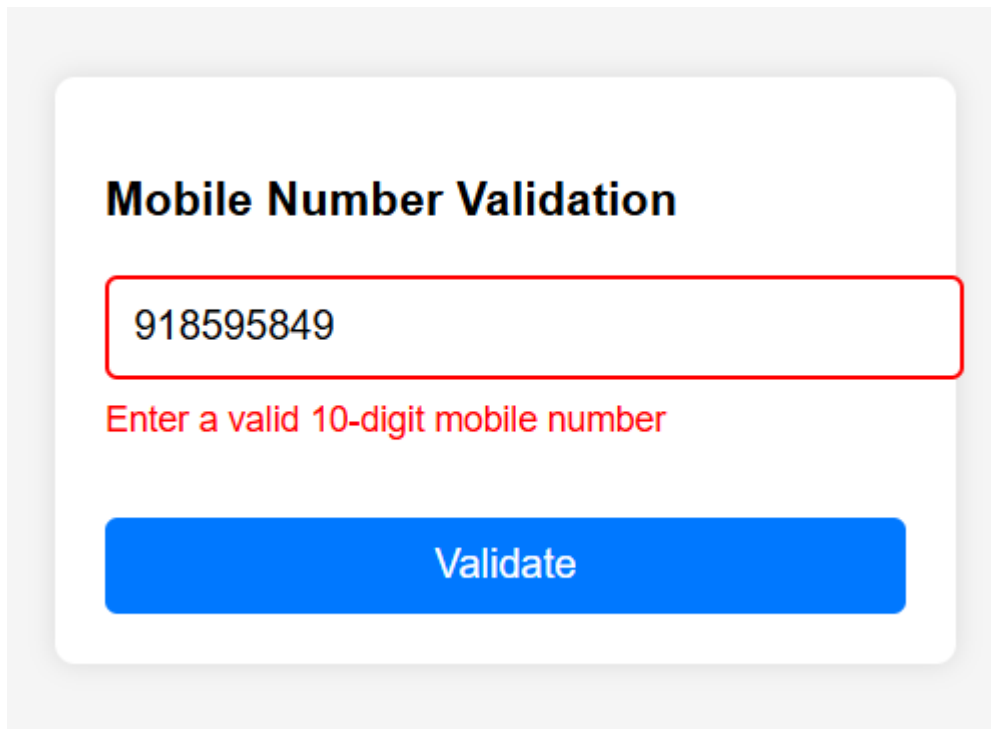A screenshot of a web form titled "Mobile Number Validation". It features a text input field containing the number "918595849", which is highlighted with a red border. Below the input field is a red error message: "Enter a valid 10-digit mobile number". At the bottom of the form is a blue button with the text "Validate".

## Mobile Number Validation

Enter a valid 10-digit mobile number

Validate

Explanation:

- `<!DOCTYPE html>`: Declares the document type as HTML5.
- `<html> ... </html>`: Root element of the page.
- `<head> ... </head>`: Contains page information (not shown directly on the page).
- `<title>` → Sets the text in the browser tab ("Username Validation").
- `<style>` → Holds all your CSS rules.
- `<body> ... </body>`: Contains everything that will be visible on the page.
- `body` : Styles the whole page:
- `<div class="container">` → White box styled with CSS.
- `<h2>` → Heading text.
- `<input>` → Text box for email input.
- `id="email"` → Unique identifier.
- `placeholder="Enter email"` → Hint text.
- `<button>` → Button that runs `checkEmail()` when clicked.
- `<p id="result"></p>` → Empty paragraph where the result message appears.

5.

AIM: Design an HTML page, such that the registration form must validate:

Name (not empty)

Email (valid format)

Password (minimum 6 characters)

CODE:

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<title>Registration Form</title>
```

```
<style>
```

```
body {
```

```
 font-family: Arial, sans-serif;
```

```
 background: #f4f7f8;
```

```
 display: flex;
```

```
 justify-content: center;
```

```
 align-items: center;
```

```
 height: 100vh;
```

```
}
```

```
.container {
```

```
 background: #c05959;
```

```
 padding: 30px;
```

```
 border-radius: 8px;
```

```
 box-shadow: 0 4px 8px rgba(0,0,0,0.2);
```

```
 width: 350px;
```

```
}
```

```
h2 {
```

```
text-align: center;
color: #333;
margin-bottom: 20px;
}
label {
display: block;
margin-bottom: 6px;
font-weight: bold;
color: #444;
}
input[type="text"], input[type="password"] {
width: 100%;
padding: 10px;
margin-bottom: 12px;
border: 1px solid #ccc;
border-radius: 4px;
transition: border-color 0.3s;
}
input[type="text"]:focus, input[type="password"]:focus {
border-color: #007BFF;
outline: none;
}
span {
font-size: 12px;
display: block;
margin-bottom: 10px;
}
input[type="submit"] {
width: 100%;
```

```

padding: 12px;
background: #007BFF;
color: white;
border: none;
border-radius: 4px;
font-size: 16px;
cursor: pointer;
transition: background 0.3s;
}
input[type="submit"]:hover {
 background: #0056b3;
}
.error {
 color: red;
}
.success {
 color: green;
}
</style>
</head>
<body>
<div class="container">
<h2>Registration Form</h2>
<form onsubmit="return validateForm(event)">
<label>Name:</label>
<input type="text" id="name">

<label>Surname:</label>
<input type="text" id="surname" onkeyup="checkSurname()">

```

```


<label>Email:</label>
<input type="text" id="email">

<label>Password:</label>
<input type="password" id="password" onkeyup="checkPasswordStrength()">

<label>Mobile:</label>
<input type="text" id="mobile" onblur="validateMobile()">

<input type="submit" value="Register">
</form>
</div>
<script>
function checkUsername() {
 let uname = document.getElementById("username").value;
 let msg = document.getElementById("userMsg");
 if (uname.length < 5) {
 msg.innerHTML = "Username must be at least 5 characters";
 msg.className = "error";
 } else {
 msg.innerHTML = "Valid username";
 msg.className = "success";
 }
}
function validateEmail(email) {

```

```

let pattern = /^[^]+@[^]+\.[a-z]{2,3}$/;

return pattern.test(email);
}

function checkPasswordStrength() {
 let pwd = document.getElementById("password").value;
 let msg = document.getElementById("passMsg");
 if (pwd.length < 6) {
 msg.innerHTML = "Weak password";
 msg.className = "error";
 } else {
 msg.innerHTML = "Strong password";
 msg.className = "success";
 }
}


function validateMobile() {
 let mob = document.getElementById("mobile").value;
 let msg = document.getElementById("mobileMsg");
 if (/^\d{10}$/.test(mob)) {
 msg.innerHTML = "Valid mobile number";
 msg.className = "success";
 } else {
 msg.innerHTML = "Mobile number must be 10 digits";
 msg.className = "error";
 }
}

function validateForm(event) {
 let name = document.getElementById("name").value;
 let email = document.getElementById("email").value;

```

```
 let password = document.getElementById("password").value;
 let mobile = document.getElementById("mobile").value;
 if (name.trim() === "") {
 alert("Name cannot be empty");
 return false;
 }
 if (!validateEmail(email)) {
 alert("Invalid email format");
 return false;
 }
 if (password.length < 6) {
 alert("Password must be at least 6 characters");
 return false;
 }
 if (!/^\\d{10}$/.test(mobile)) {
 alert("Mobile number must be exactly 10 digits");
 return false;
 }
 alert("Registration Successful!");
 return true;
}
</script>
</body>
</html>
```

## OUTPUT:

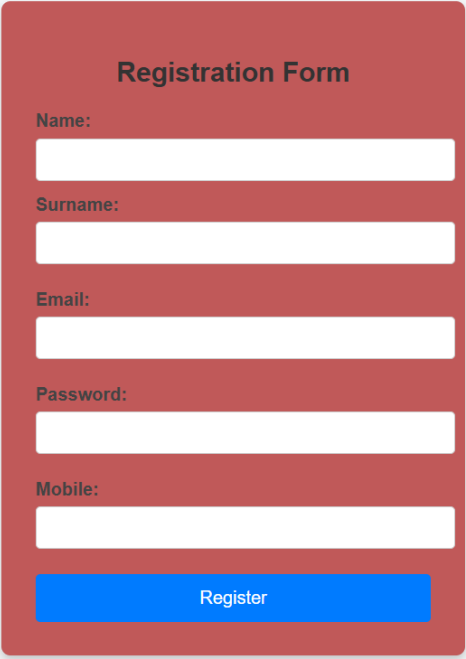

**Registration Form**

Name:

Surname:

Email:

Password:

Mobile:

## Explanation:

1. `<html>` – Defines the HTML document.
2. `<head>` – Contains title, CSS, and other metadata.
3. `<title>` – Sets the webpage title.
4. `<style>` – Adds CSS styling to the page.
5. `<body>` – Contains the visible content of the webpage.
6. `<div>` – Creates a container for the form.
7. `<h2>` – Displays the heading "Registration Form".
8. `<form>` – Creates the registration form.
9. `<label>` – Displays labels for input fields.
10. `<input>` – Accepts user input (text, password, submit button).
11. `<span>` – Displays validation messages.
12. `<script>` – Contains JavaScript code for validation.


## WEEK-12

AIM: Installation of electron


Steps for installation of electron:

Step1: Open Google Chrome browser.

open:[Node.js Official Website](https://nodejs.org/en)

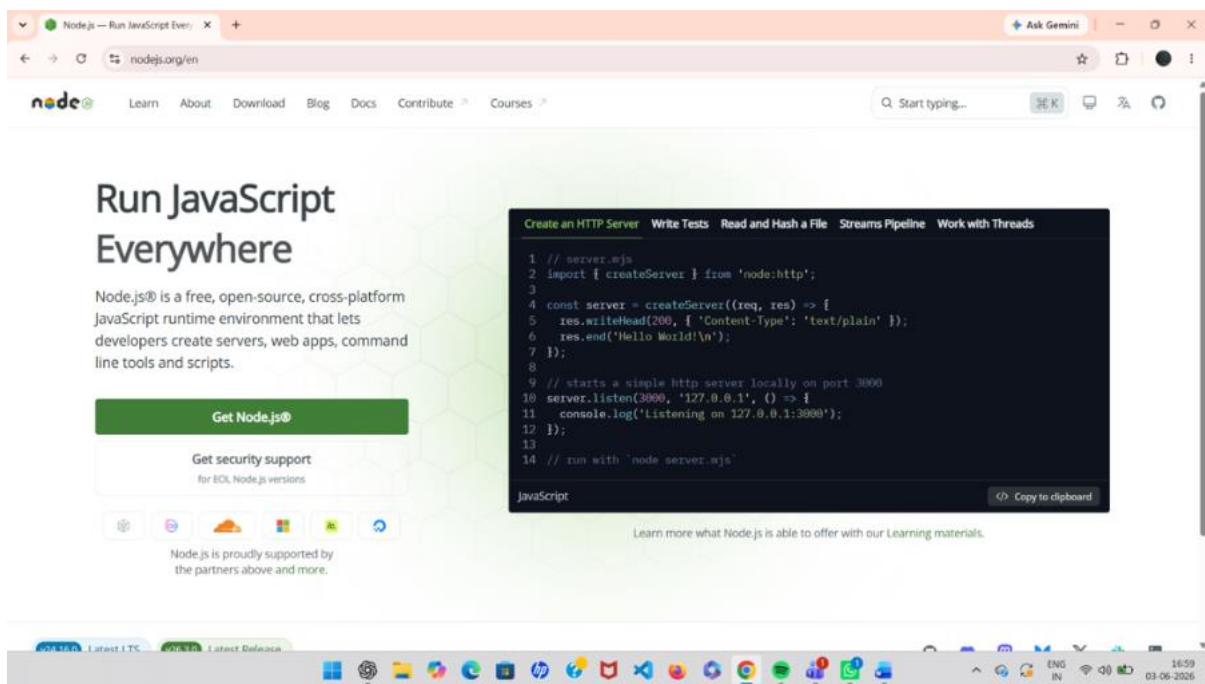

Download the LTS version

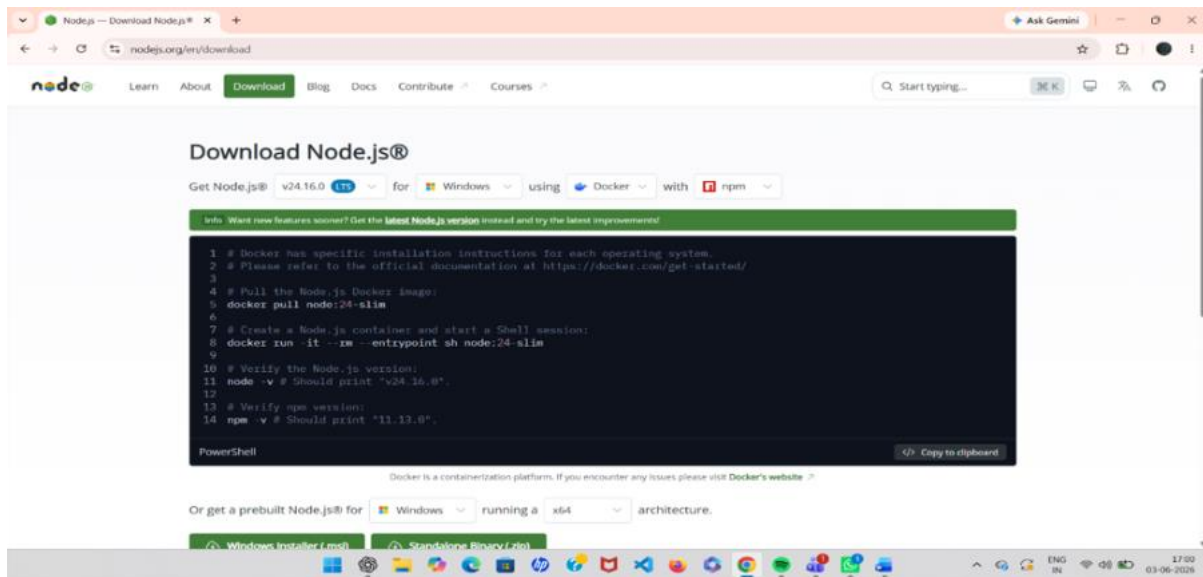


- Install it
- Keep clicking **Next** → **Next** → **Install**



Node.js automatically installs:

- Node
- npm (Node Package Manager)

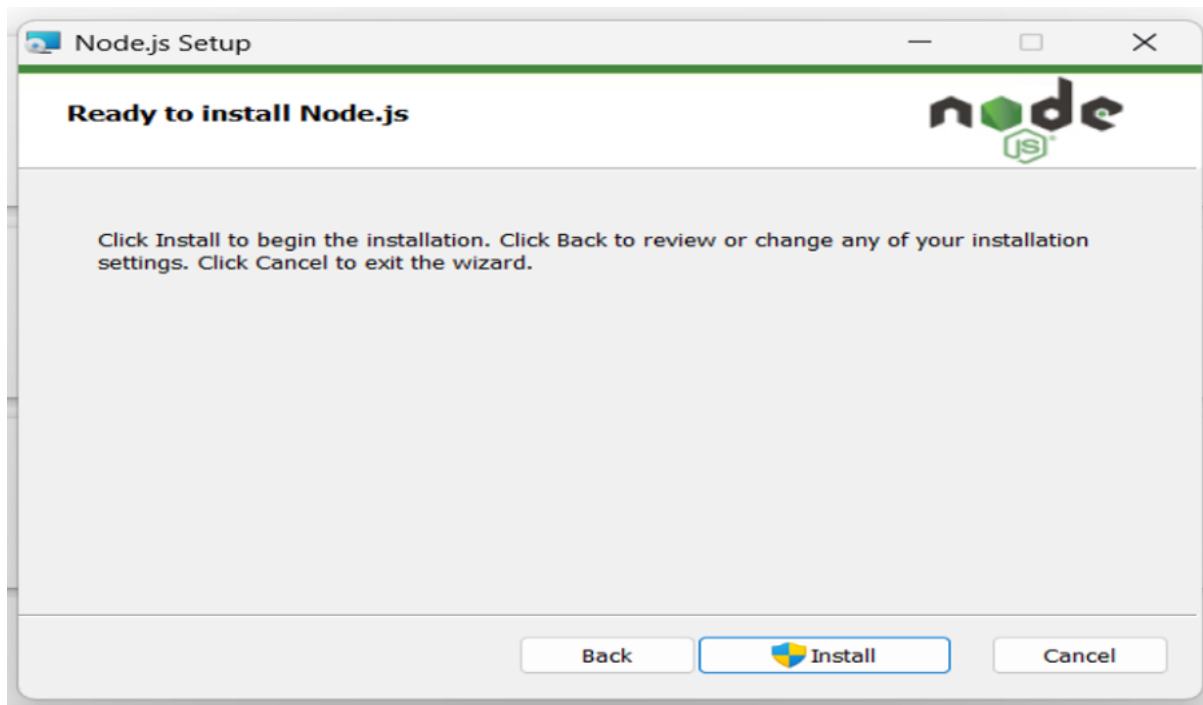

### Step2:

Open VS Code.

Open terminal:

A screenshot of a VS Code terminal window. The title bar shows 'powershell' and some window control icons. The terminal content is as follows:


```
PS C:\Users\saira\electron-app> node -v
v24.13.1
PS C:\Users\saira\electron-app> npm -v
11.8.0
PS C:\Users\saira\electron-app> █
```

### Step3:

#### Create New Empty Folder

- Create a new folder anywhere  
Example:

ElectronApp

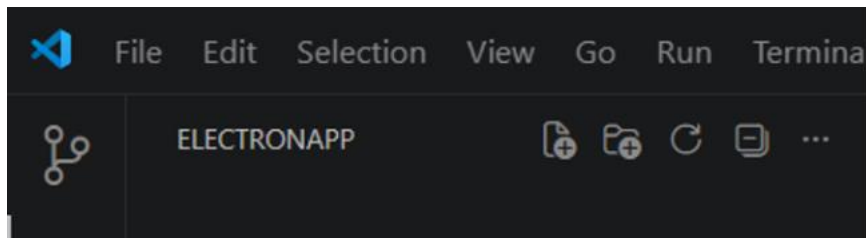

#### Step4 — Initialize Node Project

Run:

```
npm init -y
```

This creates:

package.json

```
PS C:\Users\saira\electron-app> npm init -y
Wrote to C:\Users\saira\electron-app\package.json:


{
 "name": "electron-app",
 "version": "1.0.0",
 "main": "main.js",
 "scripts": {
 "start": "electron ."
 },
 "devDependencies": {
 "electron": "^41.3.0"
 },
 "description": "",
 "dependencies": {
 "boolean": "^3.2.0",
 "buffer-crc32": "^0.2.13",
 "cacheable-lookup": "^5.0.4",
 "cacheable-request": "^7.0.4",
 "clone-response": "^1.0.3",
 "debug": "^4.4.3",
 "decompress-response": "^6.0.0",
 "defer-to-connect": "^2.0.1",
 "define-data-property": "^1.1.4",
 "define-properties": "^1.2.1",
 "detect-node": "^2.1.0",
 "end-of-stream": "^1.4.5",
 "env-paths": "^2.2.1",
 "es-define-property": "^1.0.1",
 "es-errors": "^1.3.0",
 "es6-error": "^4.1.1",
 "escape-string-regexp": "^4.0.0",
 "extract-zip": "^2.0.1",
 "fd-slicer": "^1.1.0",
 "fs-extra": "^8.1.0",
 "get-stream": "^5.2.0",
 "global-agent": "^3.0.0",
 "globalthis": "^1.0.4",
 "good": "^1.2.0".
```

## Step5 — Install Electron

Run:

```
npm install electron --save-dev
```

Wait until installation finishes.

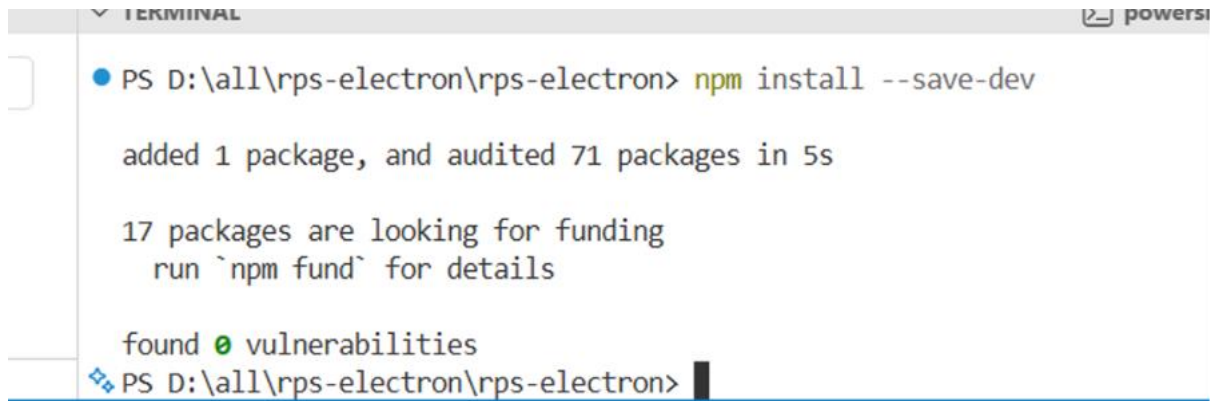A screenshot of a terminal window titled 'TERMINAL' with a 'powershell' icon in the top right corner. The terminal shows the command 'npm install --save-dev' being executed in the directory 'D:\all\rps-electron\rps-electron'. The output indicates that 1 package was added and 71 packages were audited in 5 seconds. It also mentions that 17 packages are looking for funding and provides a link to run 'npm fund' for details. Finally, it states that 0 vulnerabilities were found. The prompt 'PS D:\all\rps-electron\rps-electron>' is visible at the bottom.

```
PS D:\all\rps-electron\rps-electron> npm install --save-dev

added 1 package, and audited 71 packages in 5s

17 packages are looking for funding
 run `npm fund` for details

found 0 vulnerabilities
PS D:\all\rps-electron\rps-electron>
```

## Step6 — Modify package.json

Open package.json

Add:


```
"main": "main.js",
```

Inside "scripts" add:

```
"start": "electron ."
```

Final example:

```
{
 "name": "electronapp",
 "version": "1.0.0",
 "main": "main.js",
 "scripts": {
 "start": "electron ."
 }
}
```

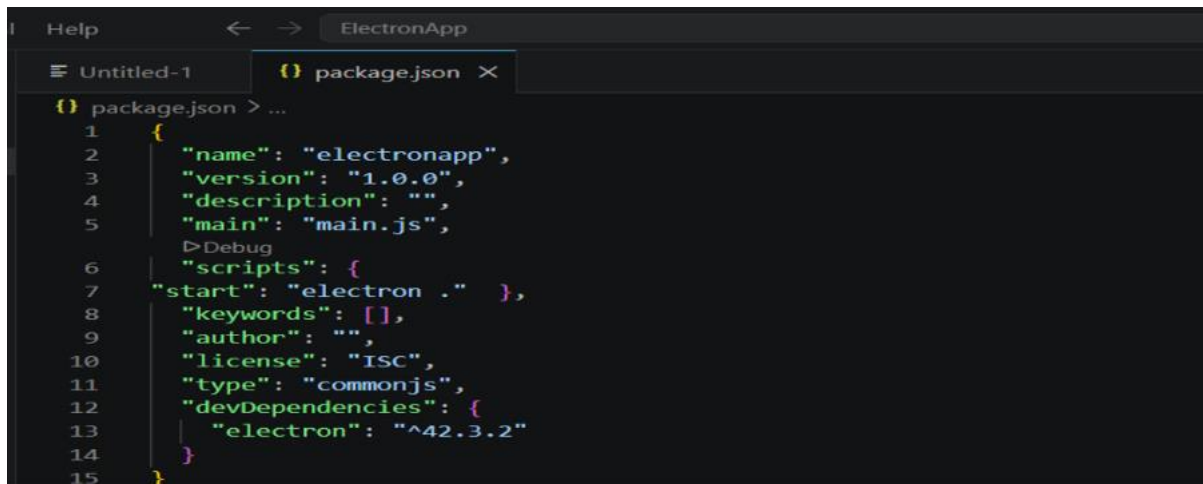

```
1 {
2 "name": "electronapp",
3 "version": "1.0.0",
4 "description": "",
5 "main": "main.js",
6 "scripts": {
7 "start": "electron ."
8 },
9 "keywords": [],
10 "author": "",
11 "license": "ISC",
12 "type": "commonjs",
13 "devDependencies": {
14 "electron": "^42.3.2"
15 }
}
```

## Step7 — Open Electron Official Website

Open Chrome.


Go to:

[Electron.js Official Website](https://electronjs.org)

Navigate:

Docs → Tutorial → Building Your First App


Copy the **Final Starter Code**.

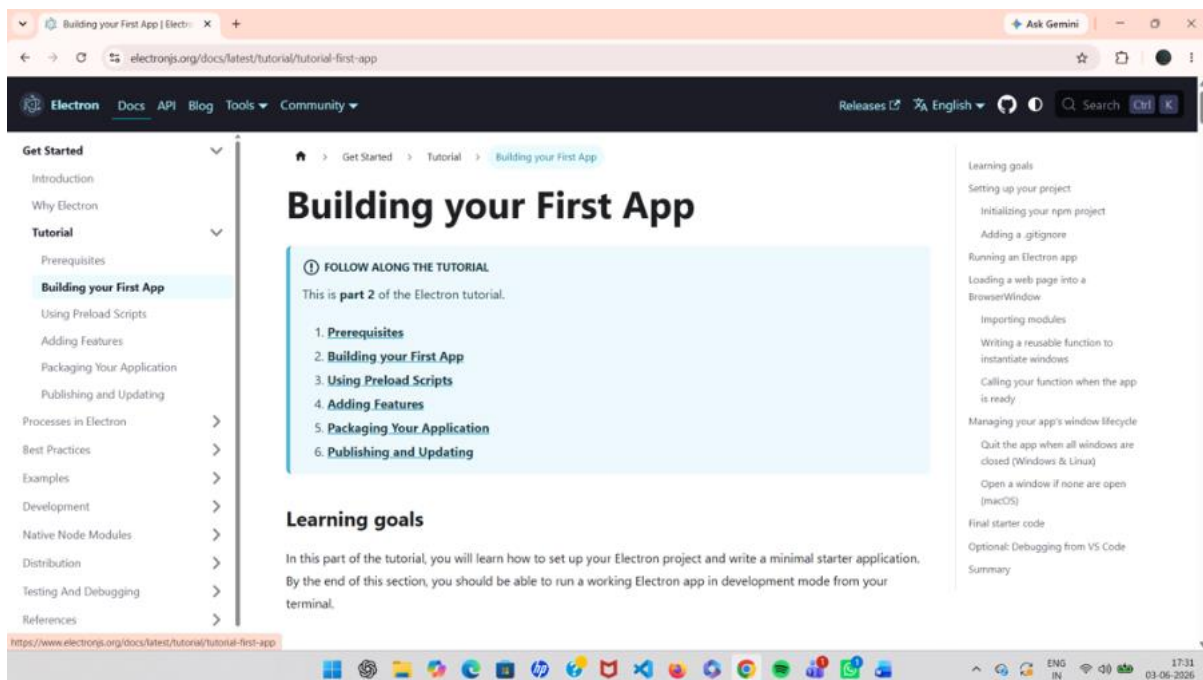


## Step8 — Create Required Files

Inside your project folder create:


main.js  
index.html

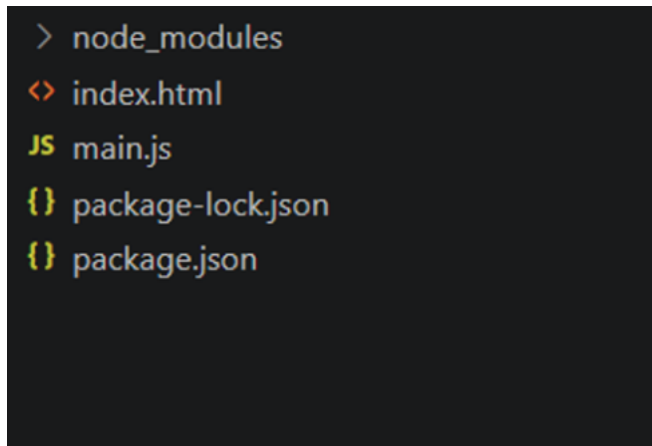

### Step9 — Paste Electron Code in main.js

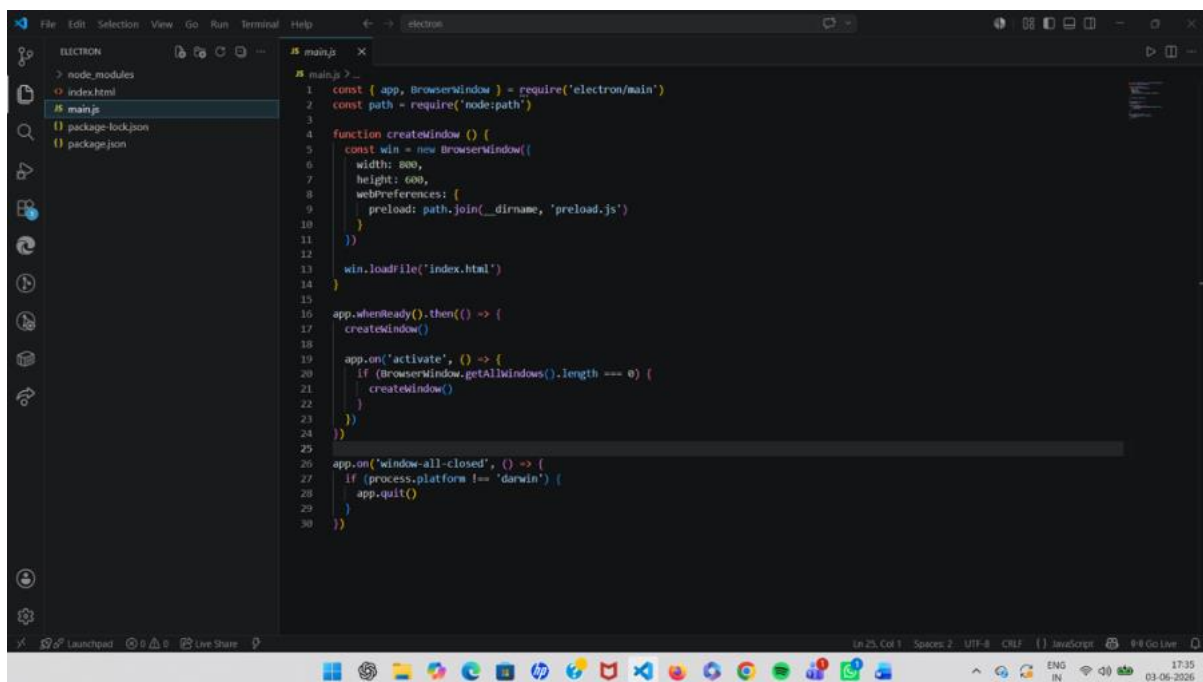

### Step10 — Add HTML File

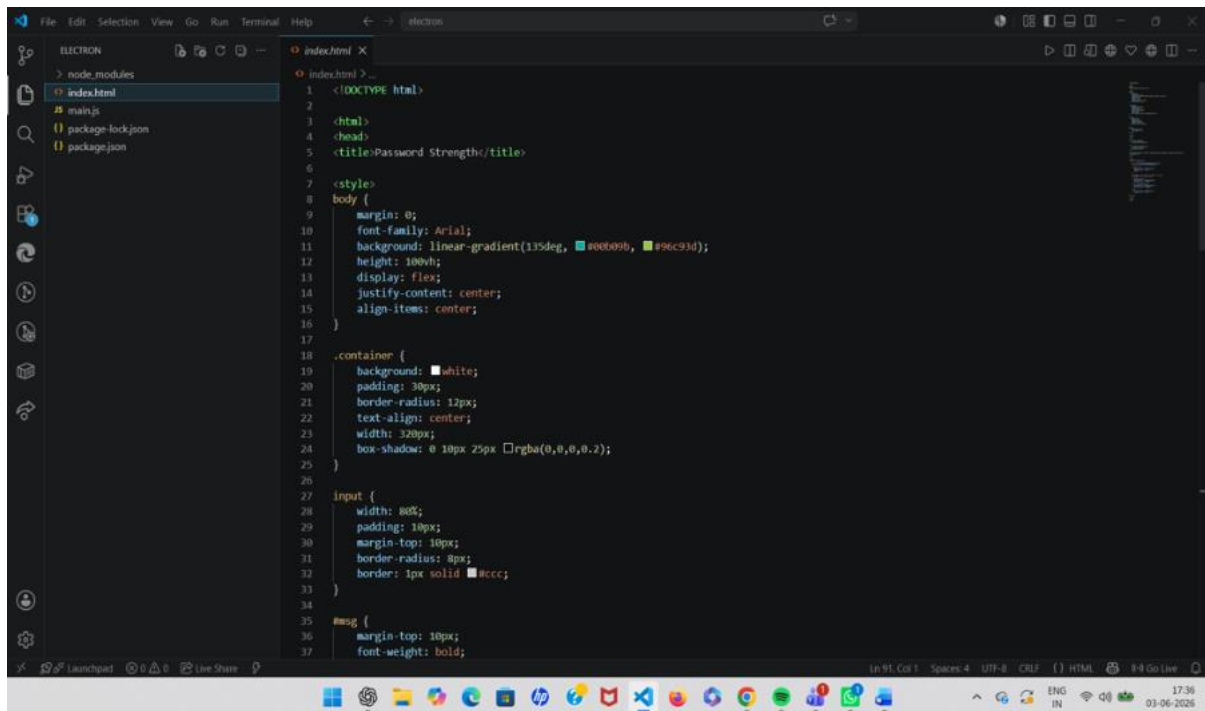

## Step11 — Verify File Names

Make sure:

`win.loadFile('index.html')`

matches your actual HTML filename.

## Step 12 — Run the Electron App

In terminal run:

`npm start`

Your Electron desktop app window will open.



**Output:**

