

SRAM: A Self-Regulated Agentic LLM for Interactive Reasoning

Mingkai Deng^{1,2,*}, Jinyu Hou^{1,2,*}, Lara Sá Neves^{1,2,*}, Varad Pimpalkhute¹
Taylor W. Killian¹, Zhengzhong Liu¹, Eric P. Xing^{1,2}

¹ Institute of Foundation Models (IFM) ² Carnegie Mellon University

*Equal contribution | Contact: {mingkai.deng,jinyu.hou,lara.saneves}@mbzuai.ac.ae

Abstract. Large language models (LLMs) are increasingly deployed as interactive agents that reason, use tools, and act over long horizons. However, current agentic LLMs typically rely on black-box chain-of-thought, where planning behavior is expected to emerge implicitly from unconstrained optimization with reinforcement learning (RL). Without control over planning presence, depth, or structure, these systems often rely on scaling reasoning length as the primary mechanism for improvement during training, leading to inefficient token consumption that does not reliably translate to accuracy gains. Prior approaches seek to contain reasoning growth by building capabilities such as effort adaptation, coarse mode-routing, and multi-agent distillation, which fall short of either explicit planning, per-turn regulation, or combination with free-formed reasoning. We introduce SRAM, an agentic LLM that combines the strengths of existing approaches while enabling more advanced planning features. Specifically, SRAM augments conventional thinking-acting LLMs with an explicit configurator and structured planner as part of its reasoning process. At each turn, the configurator decides whether to plan, continue an existing plan, or act directly; when invoked, the planner constructs explicit plans grounded in predicted future states and controlled planning depth. These components operate alongside free-form reasoning, separating self-regulation, planning, and execution while preserving end-to-end expressiveness. We realize this framework through supervised data encoding self-regulated planning structure followed by RL for task success, yielding SRAM-v0.1-8B and SRAM-v1.0-30B. Across mathematical reasoning, scientific problem-solving, tabular data analysis, and web information seeking, SRAM-v0.1-8B and SRAM-v1.0-30B achieve overall Pass@1 competitive with systems at 120-355B and 685B-1T parameters, respectively, while consuming up to 25-95% fewer reasoning tokens than comparably sized agentic LLMs. Analysis shows that RL increases average plan depth by 22.8% while planning frequency grows only 2.0%, suggesting the model learns to plan at longer horizons without overly frequent planning.

1 Introduction

A long-standing goal of AI development has been to build agents capable of long-horizon planning and goal-achieving (McCarthy et al., 1955; Newell et al., 1959). Current agentic systems based on LLMs (Radford et al., 2019; Achiam et al., 2023) show exceptional potential in this direction: they can work in browsers and computers (OpenAI; Steinberger, 2026), write software (Anthropic, 2025; OpenAI, 2025b), solve challenging STEM problems (OpenAI, 2024a; DeepSeek-AI, 2025), and conduct deep research (Google, 2024; OpenAI, 2025g), among other tasks. Crucially, by interacting with harnesses consisting of environments, tools, and predefined interaction logic (e.g., Agent Skills (Zhang et al., 2025a)), these systems can solve challenging problems by going beyond what parametric knowledge (e.g., instruct LLMs) and single-pass reasoning (e.g., reasoning LLMs) can afford, whether it be querying information, verifying hypotheses, or executing multi-step operations grounded in real-world feedback (Lewis et al., 2020; Gao et al., 2023; OpenAI, 2025e).

Coherent long-horizon behavior, however, requires persistent and deliberate planning, where current practice falls short. The dominant approach typically involves deploying LLMs to reason and act using black-box chain-of-thought (Wei et al., 2022; Yao et al., 2023b), and in some cases, training them with reinforcement learning (RL) for task success (DeepSeek-AI, 2025; Jin et al., 2025). Planning behavior is expected to emerge implicitly from within the model’s unconstrained reasoning, with no mechanism to

System Type	Environment Interaction	Agentic Training	Free-Form Reasoning	Per-Turn Regulation	Explicit Planning	Next-State Simulative Planning	Controllable Planning Depth
Reasoning LLM	✗	✗	✓	✗	✗	✗	✗
LLM + Tools	✓	✗	✓	✗	✗	✗	✗
Black-Box Agentic LLM	✓	✓	✓	✗	✗	✗	✗
<i>Adaptive Agentic LLM</i>							
– Adaptive Effort	✓	✓	✓	✓	✗	✗	✗
– Coarse Mode-Routing	✓	✓	~	✗	~	✗	✗
– Multi-Agent Distillation	✓	✓	✗	✓	✓	✗	✗
SRAM (Ours)	✓	✓	✓	✓	✓	✓	✓

Table 1: Comparison of types of LLM-based agentic systems. All adaptive agentic LLMs aim to regulate reasoning effort, but differ in what they control and how. *Environment Interaction*: can interact with environments by taking actions (e.g., tool calls). *Agentic Training*: trained to reason and act in their respective environments, rather than relying on emergent capabilities alone. *Free-Form Reasoning*: supports flexible reasoning encoding fine-grained patterns not specified categorically (~: supported in some modes only). *Per-Turn Regulation*: reasoning and planning behavior is regulated at every turn, not decided once per task. *Explicit Planning*: generates an explicit plan object separable from other reasoning (~: partial, e.g., one-shot sub-goal decomposition within a specific mode). *Next-State Simulative Planning*: plans are grounded in predicted future states, not just action directives. *Controllable Planning Depth*: planning depth is explicitly modeled via data and learned by the model, including the option to skip planning entirely. See §5 for detailed discussion.

control its presence, depth, or structure. Without control over the reasoning content, existing approaches typically rely on scaling the *amount* of reasoning via its length to compensate. This, however, can be highly inefficient, as token consumption can increase dramatically during training, while longer reasoning does not necessarily yield better answers (Gema et al., 2025; Su et al., 2025).

Human decision-making, on the other hand, offers a useful contrast. Humans *regulate* their planning based on urgency, uncertainty, complexity, and decision budget: they skip planning for simple tasks, make shorter plans in highly unpredictable situations, and continuously reassess whether replanning is needed (Kahneman, 2011). Inspired by LeCun (2022), we refer to the meta-cognitive process that governs this modulation (i.e., deciding when to deliberate, how deeply, and in what form) as the *configurator*. Equipping agentic LLMs with an analogous configurator would allow them to plan deliberately when the situation demands it, and react quickly when it does not. Such explicit self-regulation and structured planning provide explicit grounding for subsequent reasoning and action selection, reducing the need for extended unstructured deliberation to achieve the same coherence.

Prior efforts at adaptive reasoning each addresses a portion of this problem. Effort adaptation (Lou et al., 2025; Zhang et al., 2025b; Fang et al., 2025; Shen et al., 2025; Paglieri et al., 2026; Wang et al., 2025a; He et al., 2025) control the *amount* of unstructured thought but do not construct explicit plans. Coarse mode-routing (Chen et al., 2025; Jiang et al., 2025) learns a single routing decision at the start of a task, covering the full interaction without further regulation. Multi-agent distillation (Li et al., 2025b) internalizes rule-based routing among predefined capabilities, but lacks the flexibility of free-form reasoning and advanced planning capacities (e.g., grounding in predicted future states and flexible planning depth). Table 1 summarizes these distinctions.

We develop SRAM (Self-Regulated Agentic LLM), an agentic LLM that augments conventional thinking-and-acting LLMs (Yao et al., 2023b; Jin et al., 2025) with an explicit configurator and a structured planner as part of its reasoning process. At each turn, the configurator assesses the current state and decides how to proceed (e.g., make a new plan, continue or revise an existing one, or act directly without planning). When invoked, the planner constructs explicit plans consisting of proposed actions and predicted future states, providing structured grounding for subsequent execution. Critically, these components operate alongside free-form reasoning, which captures fine-grained deliberation patterns difficult to encode in structured plans alone. This separates self-regulation, planning, and execution into distinct components while preserving the expressiveness of end-to-end language-model reasoning.

To build SRAM, we construct interleaved thinking-acting traces that encode self-regulated planning structure, finetune open-weight LLMs on this data, and refine the resulting models with reinforcement learning for task success (Schulman et al., 2017; Shao et al., 2024). We develop two data construction methods: SRAM-v0.1 records the decisions of a multi-module prompted system, serving as an initial

proof of concept; SRAM-v1.0 reconstructs structured plans from the reasoning traces of pretrained LLMs, providing a more scalable approach. These yield SRAM-v0.1-8B and SRAM-v1.0-30B, respectively.

Experiments across mathematical reasoning, scientific problem solving, tabular data analysis, and web information-seeking show that self-regulation yields strong task performance with controlled reasoning cost. In terms of overall Pass@1, SRAM-v0.1-8B and SRAM-v1.0-30B outperform or compete with pretrained LLMs in the same tool harness at 120–355B and 685B–1T parameters, respectively. Compared with strong black-box and adaptive agentic LLMs of similar scale, SRAM-v1.0-30B models achieve comparable or better accuracy while consuming 25.8-95.3% fewer reasoning tokens. Ablation study shows that for SRAM-v0.1-8B, initializing RL with self-regulation structure results in 41–55% lower reasoning token consumption but higher final accuracy compared to a matched black-box baseline. Analysis of the learned planning behavior further reveals that RL encourages SRAM-v1.0-30B to plan at longer horizons (average plan depth increasing by 22.8%) without increasing how often it chooses to plan (frequency rising by only 2.0%), suggesting that the model learns to plan *better* rather than plan *more*.

2 Agent Model and Self-Regulation

We begin by formalizing the role of planning in agent decision-making, which will motivate our decomposition of the agent into a configurator, planner, and actor.

2.1 Agent-Environment Model and Deliberative Decision-Making

Consider a sequential interaction between an agent and an environment. At time step t , the agent outputs action a_t given world state s_t , and the universe μ transitions to the next state s_{t+1} according to the conditional distribution $p_\mu(s_{t+1} | s_t, a_t)$. The distribution over interaction trajectories p_μ^π until time step T given starting state s_t is thus:

$$p_\mu^\pi(a_t, s_{t+1}, \dots, s_T | s_t) = \prod_{k=t}^{T-1} \underbrace{p_\pi(a_k | s_k)}_{\text{agent}} \underbrace{p_\mu(s_{k+1} | s_k, a_k)}_{\text{universe}}$$

The agent receives reward $r(g, s_t)$ based on its goal g , and aims to maximize its expected discounted cumulative reward $V_{\pi, \mu}^g(s_t) = \mathbb{E}_{\pi, \mu} [\sum_{k=t}^{\infty} \gamma^k r(g, s_k) | s_t]$ (Sutton et al., 1998) by selecting action sequences that account for both immediate reward and predicted future states $s_{t+1}, s_{t+2}, \dots$.

Beyond simple fully observable settings (e.g., Silver et al., 2016, 2018), however, the agent does not have direct access to the true world state s_t . Instead, it needs to receive observations o_t and infer a *belief state* $\hat{s}_t$. A *world model* f can be used to predict the next belief state $\hat{s}_{t+1}$ given a proposed action a'_t , according to the conditional distribution $p_f(\hat{s}_{t+1} | \hat{s}_t, a'_t)$. By simulating sequences of actions and their predicted consequences, the agent can approximate optimal behavior without access to the true environment dynamics (Legg, 2008; Xing et al., 2025).

The output of this deliberative process π_f can be described as a *plan* c_t , which encodes current beliefs $\hat{s}_t$, candidate action sequences $(a'_t, \dots, a'_{T'-1})$, and predicted future states $(\hat{s}_{t+1}, \dots, \hat{s}_{T'})$:

$$c_t = (\hat{s}_t, a'_t, \hat{s}_{t+1}, a'_{t+1}, \dots, \hat{s}_{T'}) \sim p_{\pi_f}(\cdot | \hat{s}_t). \quad (1)$$

The plan provides grounding for coherent behavior over long horizons. For instance, an expected future state (e.g., $\hat{s}_{t+1}$) can be used to assess plan progress, while the action following a simulated state (e.g., a'_{t+1}) can be used to quickly react if the state is indeed encountered later. Operationally, the agent can keep the plan in memory and condition its action selection on it through an actor α as below:

$$a_t \sim p_\alpha(\cdot | \hat{s}_t, c_t).$$

2.2 From Black-Box Agents to Self-Regulated Agents

In practice, current LLMs do not construct explicit plans c_t . Instead, planning is expected to emerge implicitly within undifferentiated chain-of-thought reasoning. Formally, current reasoning models (OpenAI, 2024a; DeepSeek-AI, 2025) generate a chain-of-thought z_t before the action a_t using a single LLM, imposing the following latent variable model on the agent’s action distribution:

$$p_\pi(a_t | \hat{s}_t) = \sum_{z_t} p_\pi(a_t | \hat{s}_t, z_t) \underbrace{p_\pi(z_t | \hat{s}_t)}_{\text{black-box reasoning}}. \quad (2)$$

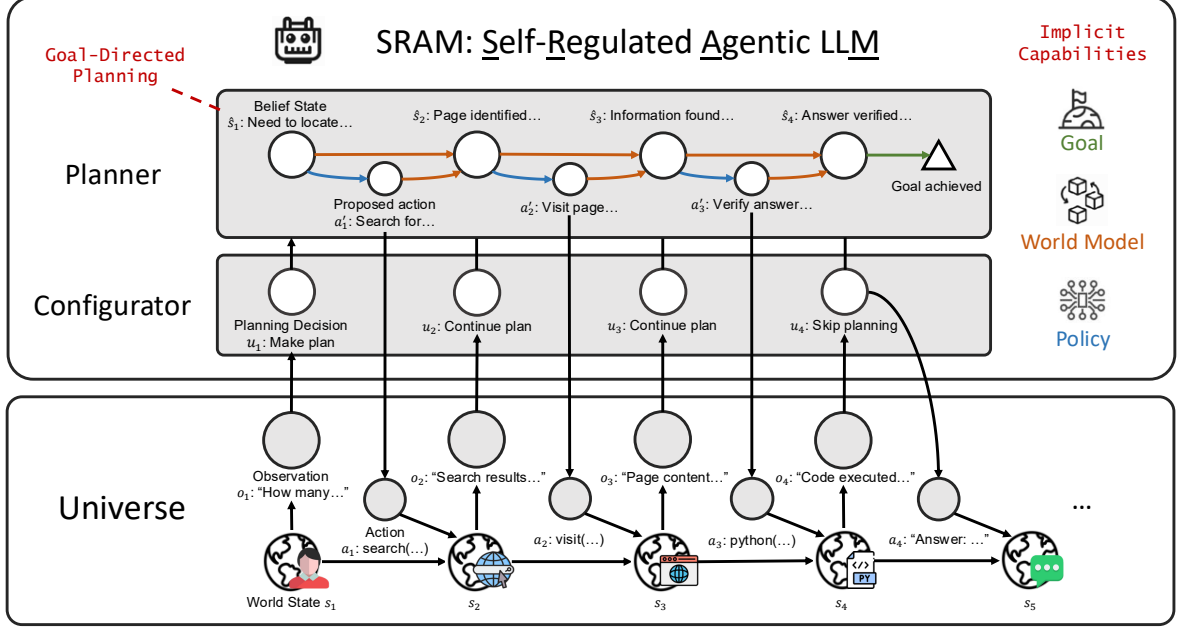


Figure 1: Illustration of the decision-making process of SRAM. The agentic LLM interacts with the universe over multiple time steps, receiving observations o_t and executing actions a_t . At each step, the configurator outputs decision u_t for whether to make a new plan, continue an existing plan, or skip planning entirely. When planning is invoked, the planner simulates a sequence of proposed actions a'_t and predicted belief states $\hat{s}_{t+1}$ conditioned on the current state $\hat{s}_t$, implicitly performing goal-directed planning with world-model simulation (right labels). Both the configurator and the planner are realized in the same LLM, with their outputs distinguished by structured generation. The example depicts a web information-seeking task where the model first carefully plans a search-and-visit strategy, continues executing the plan at steps 2 and 3, and skips planning at step 4 to provide an answer to the user.

The content of the thought z_t is left undefined, with no explicit beliefs, contingency plans, or expected outcomes for grounding action selection. For long-horizon interactions, this model relies entirely on task training (e.g., end-to-end RL (Shao et al., 2024; Jin et al., 2025)) for planning behaviors to emerge, which can be highly inefficient: learning can be slow, reasoning length can increase dramatically during training, and longer reasoning does not necessarily correspond to higher task success (Gema et al., 2025; Su et al., 2025).

One alternative would be for the agent to output a plan c_t at each step, possibly using an explicit world model f for simulation (Deng et al., 2025; Wang et al., 2025b; Ye et al., 2026). While this approach models the necessary decision ingredients more explicitly, mitigating the content indefinability and training inefficiency of black-box reasoning, such a procedure can still be prohibitively costly, particularly when replanning is unnecessary (e.g., an urgent situation or simple continuation).

A more flexible approach is to regulate planning itself (e.g., when to plan, how deeply, and when to act without deliberation). Inspired by human decision-making, where fast reaction and deliberative planning are modulated by factors like urgency, uncertainty, difficulty, and decision budget (Kahneman, 2011), we introduce a *configurator* component κ that explicitly governs the agent’s planning behavior. The configurator outputs a decision u_t based on the current belief state $\hat{s}_t$, controlling whether and how planning occurs (e.g., whether to make a new plan, continue an existing one, or skip planning entirely). Separating the configurator κ , planner π_f , and actor α , the agent’s action distribution decomposes into three stages: the configurator decides whether and how to plan, the planner constructs an explicit plan when invoked, and the actor selects the action conditioned on the result:

$$p_\pi(a_t | \hat{s}_t) = \sum_{u_t, c_t} \underbrace{p_\alpha(a_t | \hat{s}_t, c_t)}_{\text{actor}} \underbrace{p_{\pi_f}(c_t | \hat{s}_t, u_t)}_{\text{planner}} \underbrace{p_\kappa(u_t | \hat{s}_t)}_{\text{configurator}}. \quad (3)$$

This formulation models a single planning decision per turn, but generalizes naturally to iterative refinement by allowing multiple rounds of configurator decisions and plan candidates, as explored in

our v0.1 implementation (§3.2.1). Note that this decomposition defines the variable production (e.g., regulation decisions u_t , structured plans c_t , and actions a_t) but doesn’t prescribe how each component reasons internally; either the configurator or the planner may involve free-form reasoning as part of their output distribution, as explored in our v1.0 implementation (§3.2.2). In practice, the configurator can additionally interpret user intent, summarize progress, or reflect on previous plans before issuing its decision, and the planner may consider prior plans to explore more diverse options. We discuss these refinements when describing our implementations in §3.2.

Through the lens of Equation 3, we may also better understand how prior adaptive reasoning approaches (summarized in Table 1) each realizes a subset of the full self-regulated agent. Adaptive effort (e.g., Lou et al., 2025; Wang et al., 2025a) learns a decision u_t that selects among fixed modes (e.g., think/short-think/no-think) for the black-box thought z_t , but without modeling planning explicitly. Coarse mode-routing (e.g., Chen et al., 2025) learns a single decision u_1 at task onset (i.e., reason with internal thoughts only, plan and use tools, or respond directly) without per-turn regulation or explicit planning thereafter. Multi-agent distillation (e.g., Li et al., 2025b) internalizes rule-based routing among predefined LLM-based modules, but allows neither simulative, variable-depth planning described in Equation 1 nor free-form reasoning for patterns difficult to categorize. These methods each address a portion of the self-regulation problem defined in Equation 3, but none combines free-form reasoning, per-turn regulation, and planning grounded in explicit future-state prediction and depth control.

Based on this model, we develop two implementations yielding SRAM-v0.1-8B and SRAM-v1.0-30B, described in §3.

3 SRAM: A Self-Regulated Agentic LLM for Interactive Reasoning

We now describe the implementation and training of SRAM, a family of agentic LLMs for interactive reasoning tasks including mathematical problem-solving, scientific reasoning, data analysis, and web information-seeking. In these tasks, iterative coordination of external tools (e.g., code sandboxes, search engines, and web browsers) is crucial for operations such as calculation, simulation, data manipulation, and factual queries, enabling smaller LLMs to tackle tasks that would otherwise require much larger models. To train our models, we first finetune the base LLM with supervised data encoding self-regulation behavior, providing initial configurator and planning capabilities, and then train the finetuned model with RL to coordinate these abilities for task success.

3.1 Environment Description

We follow the typical setup for interactive reasoning (Jin et al., 2025; Xie et al., 2025a): at the beginning of the task, the model receives goal $g = (q, a^*)$ consisting of question q and, during training, a reference answer a^* . The first observation o_1 contains the question q (with answer format requirements where appropriate). At each following time step t , the model receives observation o_t consisting of previous reasoning context, actions, and tool outputs, and embeds them using the LLM to form the belief state $\hat{s}_t$. The model may take action a_t by calling one of several tools or generating a text response which ends the task. When called, the tool returns its output as part of the next observation o_{t+1} . The model can take up to $T_{\max}$ actions. At the end of the task, the reward $r(s_T, g)$ is computed based on the complete trajectory and final answer, as detailed in Appendix §F. Following previous work, we provide the model with the tools described below (with their names as exposed to the model in parentheses):

Search Engine (*web_search*) A search engine for querying web-scale information beyond what is reliably stored within model parameters. We adopt the implementation of Xie et al. (2025a), which takes inputs such as query, date, location, and number of results, and allows multiple simultaneous queries. For provider, we use both SerpAPI and Serper.Dev, which we find to be largely interchangeable through our experiments.

Web Browser (*visit_tool*) A web browser that crawls and summarizes webpage content given a system-provided visit goal. We adopt the implementation from Xie et al. (2025a), which crawls the content of a website and summarizes it using an instruct LLM given the visit goal. To reduce processing latency and prevent out-of-context errors, we truncate webpage content to 28,000 tokens. We find that the choice of summarizer LLM makes little difference, and uniformly use Qwen3-30B-A3B-Instruct-2507 (Qwen Team, c) for its balance of quality and efficiency.

Code Sandbox (*python_repl_tool*) A stateless Python sandbox for computation, numerical simulation, and data processing. We adopt SandboxFusion (Cheng et al., 2024) following Cheng et al. (2025), which runs self-contained Python scripts and returns printed outputs or errors. We pre-install common Python libraries to facilitate model usage. While a stateful sandbox may lead to more stable processing (as we find LLMs often assume the sandbox is persistent), our training does enable the models to use the stateless sandbox effectively for task execution.¹

3.2 Supervised Self-Regulation Data Construction

We define two methods for constructing supervised data containing self-regulation behaviors, each implemented using pretrained LLMs, which are used to train SRAM-v0.1 and SRAM-v1.0, respectively.

3.2.1 Multi-Module Inference (v0.1)

As an initial proof of concept, we implement the configurator κ and planner π_f as separate prompted LLMs, augmented with additional LLM-based modules that form richer beliefs (e.g., user intent, progress summary, plan reflection, and free-form reasoning). These modules (Appendix G) are supplied as callable tools for the configurator, which may invoke them freely before deciding on the next action. When the configurator determines that further planning is necessary, it activates the relevant capabilities; when planning is complete, it selects an action to execute. This method is agnostic to the choice of LLM. For our main experiments, we use o4-mini (OpenAI, 2025f), a closed-source reasoning LLM. We additionally explore using Qwen3-Coder-480B-A35B-Instruct (Qwen Team, 2025b), an open-source instruct LLM, for the same pipeline, with the comparison provided in Section §4.3.4.

For collection using o4-mini, we allow up to $T_{\max} = 30$ actions, and retry up to 3 times until the model returns a final answer. We then filter trajectories for answer correctness; to preserve sufficient reasoning behavior, only trajectories calling more than 3 reasoning modules or actions combined are kept. Through validation experiments, we find that mixing different sets of reasoning capabilities for different types of tasks can improve performance. For instance, we drop the summary module for tabular tasks and additionally drop the user intent module for web tasks, possibly due to the simpler structure of these types of questions. For web tasks, we additionally use an instruct LLM (i.e., GPT-4.1 (OpenAI, 2025c)) to enrich the configurator’s reasoning with more details prior to action selection, which we find improves performance in practice. The resulting traces are constructed by interleaving the configurator’s thoughts with the outputs of each invoked module. We describe a trajectory example, the full collection routine, and the collection prompts in Appendices E, F, and G, respectively.

3.2.2 Plan Reconstruction (v1.0)

Our primary data construction method takes advantage of recent open-weight reasoning LLMs (OpenAI, 2025d; DeepSeek, 2025), which produce chain-of-thought content containing useful information for both configurator decisions and task planning. Specifically, we first collect interleaved thinking-acting trajectories $(o_1, z_1, a_1, \dots, o_T, z_T, a_T)$ from a reasoning LLM, and then instruct an annotator LLM to reconstruct the configurator decisions and plan content from the existing reasoning traces. For each step t , the annotator first outputs a decision $u_t \in \{0, 1\}$ for whether planning is necessary and, implicitly, the planning horizon T' . If $u_t = 0$, no plan is generated for this step ($c_t = \emptyset$). If $u_t = 1$, the annotator infers a structured plan:

$$c_t = (\hat{s}_t^c, a'_t, \hat{s}_{t+1}^c, a'_{t+1}, \dots, \hat{s}_{T'}^c, a'_{T'}),$$

where $\hat{s}_t^c$ summarizes the conditions of the current state relevant to planning, $(a'_t, \dots, a'_{T'})$ describe proposed actions, and $(\hat{s}_{t+1}^c, \dots, \hat{s}_{T'}^c)$ are predicted future states resulting from those actions. One planning step in $[t, T']$ may summarize multiple real-time steps or a fraction of one, enabling hierarchical planning at multiple time scales. Because the plan is a structured sequence rather than an unstructured block of text, the planning depth $T' - t$ is explicitly defined and controllable by adjusting plan annotations in the training data for different task categories.

Operationally, generating the plan c_t amounts to the LLM jointly encoding the current state $\hat{s}_t^c$, proposing actions $a'_t, \dots$, and predicting their consequences $\hat{s}_{t+1}^c, \dots$, implicitly serving as encoder, policy, and world model within a single generation pass. The plans are thus simulative in the sense of predicting future states in language, grounding action selection in anticipated consequences instead of merely a list

¹During inference and RL training, all tools are implemented as fully asynchronous to avoid synchronous execution bottlenecks during model rollouts.

of action directives. We leave the introduction of explicit, separately parameterized components for these roles to future work.

In practice, the annotated plans (u_t, c_t) are appended to the original model thoughts z_t with the format “Plan:\n{plan}”, with “Plan: None” inserted when $u_t = 0$. This design preserves the content of black-box thoughts z_t , which encode fine-grained reasoning patterns difficult to specify categorically, while augmenting them with structured plans that the configurator can selectively invoke. The model thus learns self-regulation as the presence, absence, and depth of planning within its reasoning trajectory. For web-browsing questions involving highly uncertain search and browsing operations, we truncate plans to at most 2 steps to account for the unpredictability of environmental responses.

During collection, we use DeepSeek-V3.2 (DeepSeek, 2025) in thinking mode with 128K context and $T_{\max} = 100$ steps, retrying up to 5 times until the model returns a correct answer. Trajectories are filtered for answer correctness. Plan annotation is performed jointly over each trajectory in a single pass using DeepSeek-V3.2 with thinking mode enabled. A trajectory example and the annotation prompt are provided in Appendices E and H, respectively.

3.3 Reinforcement-Learning-Based Capability Refinement

After finetuning the base LLM on the supervised self-regulation data, we train the models through reinforcement learning (RL) to better coordinate these abilities for task success. For each task $g = (q, a^*)$ from dataset $\mathcal{D}$, the agent π with parameters θ generates configurator decisions u_t , planner outputs c_t , and actions a_t , while the environment μ returns observations o_{t+1} . This continues for T steps until the agent outputs a final answer or reaches $T_{\max}$ steps. The resulting trajectory τ , consisting of the interleaved agent outputs and environment observations, is distributed according to the agent-environment interaction defined in Equation 2.1:

$$\tau = (u_1, c_1, a_1, \dots, o_T, u_T, c_T, a_T) \sim p_{\mu}^{\pi}(\cdot \mid o_1, \theta).$$

Following DeepSeek-AI (2025) and Jin et al. (2025), we define the reward as a combination of three binary signals: an answer reward $r_{\text{answer}}(a_T, q, a^*)$ measuring whether the answer matches the ground truth via an LLM judge, a structure reward $r_{\text{struct}}(\tau)$ measuring whether agent outputs follow the required format across the full trajectory, and a format reward $r_{\text{final}}(a_T)$ measuring whether a final answer can be extracted from the last action following the required pattern (e.g., \boxed{ }). We combine these into a piecewise reward function $r(\tau, g)$ that prioritizes answer correctness while providing gradient signal for structural compliance even in unsuccessful trajectories:²

$$r(\tau, g) = \begin{cases} 1, & \text{if } r_{\text{answer}} \text{ and } r_{\text{struct}}, \\ 0.8, & \text{if } r_{\text{answer}} \text{ and } \neg r_{\text{struct}}, \\ 0.2, & \text{if } \neg r_{\text{answer}} \text{ and } r_{\text{struct}}, \\ 0.1, & \text{if } \neg r_{\text{answer}}, \neg r_{\text{struct}}, \text{ and } r_{\text{final}}, \\ 0, & \text{o.w.} \end{cases}$$

To update the model, we use an adapted version of Group Relative Policy Optimization (GRPO, Shao et al., 2024). For each initial observation $o_1 \sim \mathcal{D}$, we sample a group of G trajectories $\{\tau_i\}_{i=1}^G$ from the current policy parameters θ_{old} and compute the corresponding rewards $\{r_i\}_{i=1}^G$. Let τ_{it}^{π} denote the t -th agent-generated token in trajectory i (excluding environment observations), and let $|\tau_i^{\pi}|$ be the total number of such tokens. We estimate the advantage $\hat{A}_{it}$ of each token via group-level z-score normalization, and compute the likelihood ratio $r_{it}(\theta)$ between the current and old parameters:

$$\hat{A}_{it} = \frac{r_i - \text{mean}(\{r_j\}_{j=1}^G)}{\text{std}(\{r_j\}_{j=1}^G)}, \quad r_{it}(\theta) = \frac{p_{\pi}(\tau_{it}^{\pi} \mid o_1, \tau_{i,<t}, \theta)}{p_{\pi}(\tau_{it}^{\pi} \mid o_1, \tau_{i,<t}, \theta_{\text{old}})}.$$

²These reward values were fixed throughout all experiments and were not tuned.

Our training objective maximizes the clipped surrogate advantage, with asymmetric clipping bounds ϵ_{low} and ϵ_{high} (Yu et al., 2025):

$$\mathcal{J}(\theta) = \mathbb{E}_{o_1 \sim \mathcal{D}, \{\tau_i\}_{i=1}^G \sim p_{\mu}^{\pi}(\cdot | o_1, \theta_{\text{old}})} \left\{ \frac{1}{G} \sum_{i=1}^G \frac{1}{|\tau_i^{\pi}|} \sum_{t=1}^{|\tau_i^{\pi}|} \min [r_{it}(\theta) \hat{A}_{it}, \text{clip}(r_{it}(\theta), 1 - \epsilon_{\text{low}}, 1 + \epsilon_{\text{high}}) \hat{A}_{it}] \right\}. \quad (4)$$

To stabilize training, we keep all model updates on-policy. For models of 30B and above, we follow Xie et al. (2025b) and filter out trajectories that terminate due to truncation, as noisy training signal from malformed negative trajectories can cause format collapse. We experimented with several other techniques (e.g., dynamic sampling and GSPO (Zheng et al., 2025)), but did not observe better performance, so we keep the original GRPO objective which delivers strong performance in practice. Recent work has proposed additional refinements such as token-level loss aggregation (Yu et al., 2025) and mean-only group normalization (Liu et al., 2025c) which may further stabilize training; we leave their integration to future work.

3.4 Training Dataset and Hyperparameters

3.4.1 Dataset and Data Construction

We build our training dataset from open-source math, science, tabular, and web reasoning datasets.

SRAM-v0.1 We use Guru (Cheng et al., 2025) for math, science, and tabular data (152,660 examples from 5 sources before filtering), and combine HotpotQA (Yang et al., 2018), 2WikiMultihopQA (Ho et al., 2020), MuSiQue (Trivedi et al., 2022), and WebWalkerQA-silver (Wu et al., 2025b) for web data (288,173 examples). To standardize the language, we translate Chinese questions from WebWalkerQA-silver into English using Qwen3-32B (Qwen Team, 2025a), while instructing the model to include Chinese proper names in parentheses. From the combined 440,832 examples, we sample 6,400 for self-regulation data construction, balanced proportionally to the square root of each domain’s frequency. After construction and filtering, 4,845 supervised examples (20.7M tokens) remain.

SRAM-v1.0 We build on the v0.1 dataset and additionally include MegaScience (Fan et al., 2025) for math and science data, and WebDancer (Wu et al., 2025a), WebShaper (Tao et al., 2025), TaskCraft (Shi et al., 2025), and ASearcherLRM35k (Gao et al., 2025) for web data. As MegaScience is an automatically constructed dataset with possibly noisy responses, we only keep questions with answers fewer than 1,024 characters long. For TaskCraft, to ensure sufficient difficulty and answer reachability, we only keep questions with `valid_hop` at least 3 and exclude those requiring image tools. Due to the large size of MegaScience (1.25M), we sample only the same number as our new web examples combined (42,863 examples). After deduplication, the additional datasets amount to 86,087 examples. We sample 6,400 questions from this new set and combine them with the 6,400 from v0.1, for a total of 12,800 questions for self-regulation data construction, yielding 10,787 supervised examples (39.5M tokens) after filtering. For RL, we combine the new datasets with half of the v0.1 dataset to ensure a diverse distribution of data sources.

3.4.2 RL Data Filtering

GRPO-style objectives benefit from questions that produce diverse reward signals across sampled trajectories, as questions with uniform rewards yield zero advantages and uninformative gradients. While approaches like DAPO (Yu et al., 2025) address this through dynamic sampling at training time, the oversample-and-filter approach can reduce training efficiency. Instead, we follow previous approaches (Cheng et al., 2025; Song et al., 2025) and perform difficulty-based filtering prior to training: we roll out each question K times using the pre-RL checkpoint and retain only those with $\text{Pass}@K \in [a, b]$. In practice, we do not necessarily need to run each question for the full K times to determine whether $\text{Pass}@K$ falls within the target range (e.g., to ensure $\text{Pass}@K > 0$, it is enough to see one success), which improves filtering efficiency. For tasks where agentic rollouts are expensive (e.g., web-search-heavy reasoning), we follow Li et al. (2025b) and use a strong instruct LLM to sample N answers for each question, keeping questions with $\text{Pass}@N < c$, which reflects question difficulty based on parametric knowledge alone.

SRAM-v0.1 We take $K = 16$, $a = \frac{1}{16}$, and $b = \frac{15}{16}$. For web questions, we use Qwen3-Next-80B-Instruct (Qwen Team, f) for filtering with $N = 32$ and $c = 0.3$. After filtering, we are left with 110,086 non-web questions and 124,596 web questions. Due to the large size which may bias training, we downsample the web subset to 33.3% of its original size, resulting in a final RL data mix of 151,218 examples.

SRAM-v1.0 We find the pre-RL checkpoint to be stronger, and thus impose more stringent requirements by taking $K = 8$, $a = \frac{1}{8}$, and $b = \frac{6}{8}$. For web questions, we use Qwen3-235B-A22B-Instruct-2507 (Qwen Team, a) with $N = 32$ and $c = 0.3$ for filtering. After filtering half of the dataset (except for v0.1 web data which we sample $\frac{1}{24}$ from), we are left with 7,795 v0.1 non-web questions, 5,154 v1.0 non-web questions, 4,555 v0.1 web questions, and 5,154 v1.0 web questions. To build the RL dataset, we take the filtered non-web data, mix in v0.1 web examples equal to 33.3% of the v0.1 non-web examples, and v1.0 web examples equal to the number of v1.0 non-web examples. The final mix contains 20,701 examples in total. During RL training, we filter the remaining parts of the dataset using intermediate checkpoints to keep data up-to-date with model capability.

3.4.3 Training Details

SRAM-v0.1 We start with Qwen3-8B (Qwen Team, e) as the base model. SFT is performed using Axolotl (Axolotl maintainers and contributors, 2023), a FSDP-based LLM finetuning library, with global batch size 32 and max context length 32,768, using Adam (lr=2.5e-5, linear warmup with ratio 0.1, cosine decay to 2.5e-6, weight decay 0.01) (Kingma & Ba, 2015) for 4 epochs following Bercovich et al. (2025). RL is performed using Slime with rollout batch size 128, 8 samples per prompt, max response length 8,192, max context length 40,960, temperature 0.8, max 40 action steps, $\epsilon_{\text{low}} = 0.2$, $\epsilon_{\text{high}} = 0.28$, and Adam (constant lr=1e-6, weight decay 0.1). We train for 400 steps (51.2K examples) and stop when improvement slows down. For the reward function, we use the LLM judges from Guru (Cheng et al., 2025) for math and science questions, and the GAIA and SimpleQA judges from MiroThinker (Wang et al., 2025c) for tabular and web questions, respectively. All LLM judges are implemented using Qwen3-30B-A3B-Instruct-2507. Using 8 and 32 Hopper GPUs respectively, SFT takes 3 hours and RL takes about 3.3 days. We also train another model with Qwen3-32B as the base model, using the same hyperparameters except training for 300 steps instead of 400. However, the resulting model shows only modest improvement over the 8B variant, suggesting that the v0.1 data construction method rather than model scale was the primary bottleneck. This observation motivated the v1.0 plan reconstruction approach described above. After training for 200 steps, we filter the data for the next 100 steps using the 200-step checkpoint to adapt the dataset to new model capabilities. Over the same resources, SFT takes 30 hours and RL training takes about 2.6 days.

SRAM-v1.0 We use Qwen3-30B-A3B-Thinking-2507 (Qwen Team, d) as a strong base model that supports long context natively. SFT is performed using ms-swift, a Megatron-based LLM finetuning library, with global batch size 32, max context length 131,072, sample packing, and MoE auxiliary loss 0.01, using Adam (lr=1e-5, warmup fraction 0.05, cosine decay to 1e-6, weight decay 0.01) for 4 epochs. RL uses the same GRPO configuration as v0.1, except with max response length 16,384, max context length 122,880, temperature 1.0, top-p 0.95, and max 100 tool steps. We train for 200 steps (25.6K examples). Specifically, we first train for 160 steps, and then filter additional data using the intermediate checkpoint to obtain data of sufficient difficulty for the remaining 40 steps. We use the same reward function as v0.1, except using Qwen3-235B-A22B-Instruct-2507 as a stronger LLM judge. Using 32 Hopper GPUs, SFT takes 1.5 hours and RL takes about 6 days.

For both models, we still observe reward and evaluation improvement by the end of training, indicating the models may be undertrained. Scaling training data and compute with more efficient fully asynchronous training remains an exciting direction for future work.

4 Experiments

4.1 Experiment Setup

Evaluation Benchmarks We evaluate our models on four categories of representative benchmarks. For math, we use AIME-24 (Mathematical Association of America, 2024), AIME-25 (MAA Communications, 2024), and MATH-500 (Hendrycks et al., 2021); for science, GPQA-Diamond (Rein et al., 2024),

SuperGPQA (Du et al., 2025), and HLE (Phan et al., 2025); for tabular analysis, FinQA (Chen et al., 2021b) and MultiHier (Zhao et al., 2022); and for web information seeking, BrowseComp (OpenAI, 2025a), GAIA-103 (Mialon et al., 2023), and XBench-DeepSearch (xBench Team, 2025). To stabilize evaluation on benchmarks with small test sets, we follow Chen et al. (2025) and duplicate the test set 32× for AIME-24 and AIME-25, and 4× for GPQA-Diamond, GAIA-103, and XBench-DeepSearch; reported metrics are averaged across all duplicated runs. For HLE, we use the same 500-question subset as in Li et al. (2025b). All other benchmarks use their full test sets.

Baselines We compare our model against three groups of baselines. For models with configurable reasoning effort (i.e., GPT-5.4, GPT-OSS-120b, and K2-Think-V2), we choose the highest tier (i.e., xhigh, high, and high, respectively).

- **Reasoning LLMs:** As a baseline for LLM reasoning without tools, we evaluate leading reasoning LLMs in a range of parameter sizes through direct prompting without tool use, including GPT-5.4-xhigh (OpenAI, 2026), DeepSeek-V3.2 (DeepSeek, 2025), K2-Think-V2-high (MBZUAI Institute of Foundation Models, K2 Think Team, 2026), and Qwen3-30B-A3B-Thinking-2507 (Qwen Team, d). To allow the models to fully explore the reasoning space, we do not impose any maximum completion token limit.
- **LLM + Tools:** To compare with pretrained LLMs prompted with a tool harness directly, we evaluate GPT-5.4-xhigh, Kimi-K2.5 (Moonshot AI), DeepSeek-V3.2, GLM-4.6 (Z.ai Team), GPT-OSS-120B-high (OpenAI, 2025d), and Qwen3 models of various sizes (Qwen3-235B-A22B-Thinking-2507 (Qwen Team, b), Qwen3-30B-A3B-Thinking-2507, and Qwen3-8B (Qwen Team, e), using the same tools and inference settings as our trained model (see Section 3.1).
- **Agentic LLMs:** We further compare our model with other strong agentic LLMs trained to interact with similar tools such as search engine, web browser, and code sandbox. Following the taxonomy in Table 1, we segment these into black-box and adaptive agentic LLMs. Black-box agentic LLMs include Tongyi-DeepResearch (30B) (Team et al., 2025), MiroThinker-v1.5-30B (Wang et al., 2025c), WebSailor (7B/32B) (Xie et al., 2025a), ASearcher-Web (7B/32B-QWQ-v2) (Song et al., 2025), SimpleTIR (7B/32B) (Wei et al., 2025), and WebExplorer-8B (Liu et al., 2025a). Adaptive agentic LLMs include A²FM (32B) (Chen et al., 2025) and AFM (Web-7B/Code-7B) (Li et al., 2025b). For all agentic LLM baselines, we use their default inference parameters and routines. For models that require a browsing summarization LLM, we use the same model described in Section 3.1.

Evaluation Protocol Following WebSailor-V2 (Xie et al., 2025b), we report results on all benchmarks using consistent inference settings to ensure stability and reproducibility. To ensure reasonable inference time, we impose timeouts per turn at 10 minutes, per tool at 5 minutes, and per overall response at 60 minutes. For all models running through our tool harness (SRAM and LLM + Tools), we set the per-turn max completion tokens to 16,384. For our models, we use the RL rollout temperature (0.8 for SRAM-v0.1-8B, 1.0 for SRAM-v1.0-30B) and top-p=0.95; for LLM + Tools and Reasoning LLM baselines, we use their default generation hyperparameters. For SRAM-v0.1-8B and Qwen3-8B, we set the max context length to 40,960 and the max turn limit to 50. For all other models, we set the max context length to 131,072 and the max turn limit to 100.

Evaluation Metric An effective agentic model should achieve strong task success while reasoning efficiently. For task success, we perform Pass@K evaluation (Chen et al., 2021a) following Xie et al. (2025b), reporting Pass@1 by default and Pass@3 where applicable. Specifically, each system is evaluated by its overall Pass@K, defined as the unweighted average of Pass@K across all datasets. Given M datasets with N_i examples for the i -th dataset, and with p_{ij}^K denoting the correctness of the j -th example in the i -th dataset over K passes:

$$\text{Overall Pass@K} = 100 \times \frac{1}{M} \sum_{i=1}^M \frac{1}{N_i} \sum_{j=1}^{N_i} p_{ij}^K$$

The evaluation function for each benchmark, including the judge LLM and scoring method, is summarized in Table 3. To facilitate answer extraction, we follow Cheng et al. (2025) and append a one-sentence instruction to all questions for all evaluated systems asking the model to present its final answer wrapped

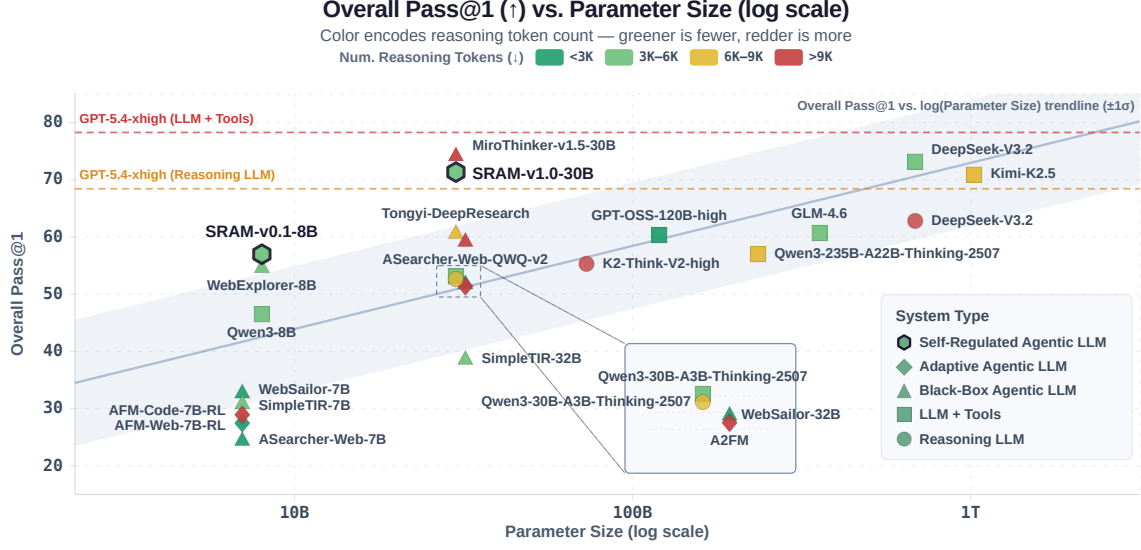


Figure 2: Overall Pass Rate vs. Parameter Size across all evaluated systems. Marker shape denotes system type; color encodes average reasoning token count per trajectory (greener = fewer, redder = more). The trendline and shaded band show the linear fit ($\pm 1\sigma$) of Overall Pass@1 against Log Parameter Size. Dashed orange/red line mark GPT-5.4-xhigh performance as Reasoning LLM and LLM + Tools for reference. Both SRAM models sit above the scaling trend, achieving accuracy competitive with substantially larger systems while remaining in the relatively low token consumption tiers.

in \boxed{}. For reasoning efficiency, we report the average number of reasoning tokens per trajectory, defined as the total tokens generated by the agent (e.g., free-form reasoning, configurator decisions, and plans) excluding environment observations, actions, and tool outputs.

4.2 Main Results

We present our main results along two dimensions: overall Pass@1 averaged across all 11 benchmarks, and average reasoning tokens per trajectory. Figure 2 plots each system’s accuracy against its parameter count on a log scale, with marker color encoding reasoning token consumption (greener = fewer, redder = more). Per-benchmark results are provided in Appendix C.

Task Performance. Both SRAM models demonstrate strong performance relative to their parameter sizes. SRAM-v0.1-8B achieves an overall Pass@1 of 57.0, outperforming other systems at the same parameter scale and competitive with a range of agentic LLMs at 30–32B and LLM + Tools systems at 120–355B. SRAM-v1.0-30B reaches 71.3, competitive with DeepSeek-V3.2 (685B, 73.2) and Kimi-K2.5 (1.0T, 70.9) in the same LLM + Tools harness, and exceeding GPT-5.4-xhigh as a text-only reasoning LLM (68.4) while approaching it in the tool harness (78.3). Among 30–32B agentic LLMs, SRAM-v1.0-30B outperforms a wide range of baselines and is competitive with MiroThinker-v1.5-30B (74.2).

Reasoning Efficiency. To compare reasoning efficiency, Figure 2 encodes each system’s average reasoning tokens via marker color, and Figure 3 provides a detailed comparison among 30–32B agentic LLMs. Among 7–8B models, SRAM-v0.1-8B consumes 3,698 reasoning tokens per trajectory on average, fewer or comparable to other systems at the same scale (601–11,206) while outperforming them in pass@1. Among stronger 30–32B agentic LLMs (Overall Pass@1 at 60.0 or above), SRAM-v1.0-30B consumes 25.8–95.3% fewer reasoning tokens while achieving better or competitive accuracy. In particular, compared to MiroThinker-v1.5-30B, SRAM-v1.0-30B achieves competitive pass@1 while consuming 51.2% fewer reasoning tokens (5,518 vs. 11,295).

These results indicate that the self-regulated SRAM achieves strong task success for its parameter size compared to a wide range of systems, while effectively controlling reasoning length, compared to both black-box and adaptive agentic LLMs of similar scale.

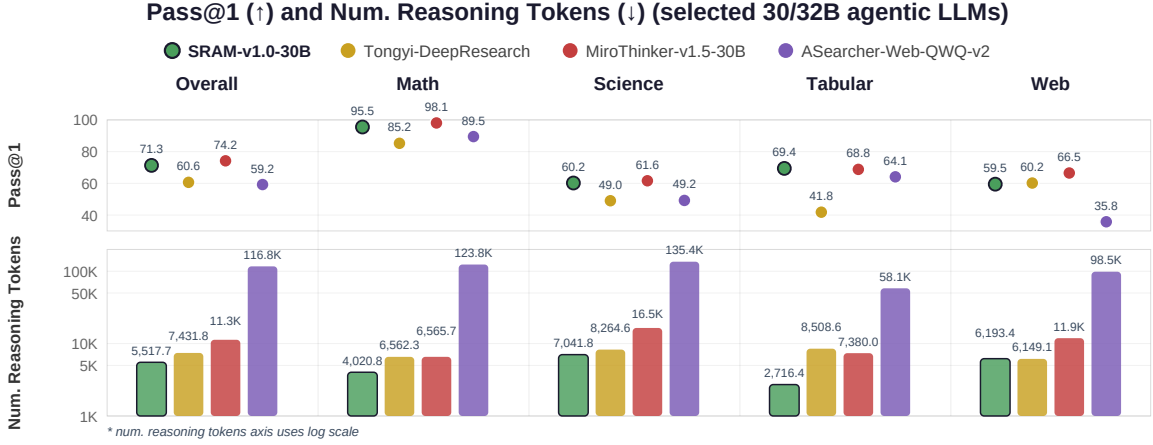


Figure 3: Average reasoning token usage and Pass@1 scores across four 30/32B agentic LLMs, broken down by task category (Math, Science, Tabular, Web) and overall. Bars indicate the average number of reasoning tokens consumed per query (log scale), while dots represent Pass@1 performance. SRAM-v1.0-30B achieves competitive scores across all categories while using significantly fewer reasoning tokens than comparable models – notably 20× fewer than ASearcher-Web-QWQ-v2.

Configuration	# Reas. Tok.	Pass@1	Pass@3
SRAM-v1.0-30B (SFT)	4,925	66.6	79.4
– Free-form Reasoning	1,188	46.8	66.1
– Plan Depth Control	4,829	65.3	77.3
– Selective Planning	5,451	65.2	78.8
– Simulative Planning	4,602	65.2	78.5
Original Teacher CoT (SFT)	3,844	65.3	78.5
SRAM-v1.0-30B (SFT + RL)	5,414	72.8	82.4

Table 2: Ablation on plan reconstruction for SRAM-v1.0-30B. Comparisons include removing individual components from the plan reconstruction pipeline (v1.0) and directly finetuning on the original teacher CoT. The result after 200 RL steps is shown for reference. Removing free-form reasoning causes the largest accuracy drop (66.6 → 46.8); removing selective planning increases token consumption (# Reas. Tok.) the most (4,925 → 5,451), while removing simulative planning reduces tokens slightly but compromises accuracy. These results suggest that each component serves a distinct role.

4.3 Analysis of Self-Regulation Training

We present a series of analyses to validate the self-regulation training pipeline. We first analyze the v1.0 pipeline, our primary contribution, to examine which data components matter and how RL refines planning behavior, and then present supporting evidence from v0.1 on the role of self-regulation initialization. Unless otherwise noted, analyses use 30 randomly sampled examples from each of the 11 benchmarks (330 samples), repeated 3 times (990 runs).

4.3.1 Component Ablation of Plan Reconstruction

To test whether each component of the self-regulation model (Equation 3) contributes meaningfully, we ablate individual components of the supervised finetuning (SFT) data for SRAM-v1.0, including selective planning (the configurator’s ability to set $u_t = 0$), next-state simulative planning (c_t ’s state-action-future-state structure), controllable plan depth (i.e., truncation of planning horizon T' for web tasks due to high uncertainty), and the inclusion of free-form reasoning z_t . We compare against direct SFT on original teacher chain-of-thought (CoT), and report the result after 200 RL steps for reference.

Results are in Table 2. Removing free-form reasoning causes the largest drop in Pass@1 (66.6 to 46.8), indicating that structured plans c_t alone cannot replace implicit reasoning z_t , but serve complementary

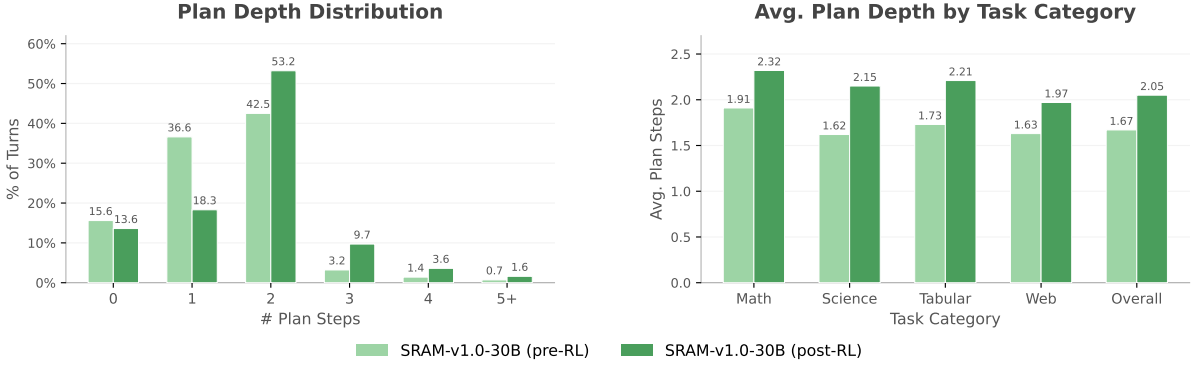


Figure 4: Plan depth analysis of SRAM-v1.0-30B before (light green) and after (green) 200 RL steps. **Left:** Distribution of plan steps per assistant turn. RL shifts mass from 1-step plans toward 2- and 3+ step plans (5.3% $\rightarrow$ 14.9%), while the proportion of unplanned turns (0 steps) remains stable (15.6% $\rightarrow$ 13.6%), indicating that RL deepens planning without increasing planning frequency. **Right:** Average plan depth by task category, conditional on planning. All categories show consistent increases, with the largest gain in science (32.7%) and the smallest in web (20.9%), consistent with the latter’s shorter feasible horizon under environmental uncertainty.

roles. Ablating selective planning, simulative planning, and controllable plan depth each also reduces Pass@1 (65.2–65.3 vs. 66.6). Among these, removing selective planning (forcing $u_t = 1$ at every step) increases token consumption the most (4,925 $\rightarrow$ 5,451), confirming that the configurator is a direct contributor to efficiency; removing simulative planning slightly reduces tokens (to 4,602) but compromises accuracy, indicating that the belief-state/action representation provides useful grounding beyond what unstructured planning offers; removing the planning step limit on web questions reduces pass@1 (to 65.3), supporting the uncertainty-aware depth control. Our full plan reconstruction improves over direct SFT on teacher CoT (66.6 vs 65.3), suggesting that augmenting the original reasoning with structured planning components is effective for modeling useful reasoning phenomena, which RL can selectively refine. The result is a model that learns to *plan better*, not just to *think more* as observed in black-box approaches. Indeed, 200 RL steps further lift Pass@1 to 72.8 with moderate growth in reasoning tokens (4,924 to 5,414); we analyze the mechanism behind this improvement next.

4.3.2 RL Refines Planning Depth Without Overplanning

Having established that both structured plans and implicit reasoning contribute, we now examine how RL refines the self-regulation behavior obtained from SFT. Specifically, we are interested in whether RL incentivizes the model to engage in selective, longer-horizon planning, or to merely increase the frequency of planning. To test this, we analyze the planning patterns of SRAM-v1.0-30B before and after RL through the distribution of plan depth (number of plan steps) at each turn (Figure 4, left). This is enabled by the structured plan representation which facilitates consistent counting (0 plan step indicates no planning). Results show RL clearly increases the model’s planning depth (e.g., frequency of 1-step plans dropping sharply from 36.6% to 18.3%, 2-step plans increasing from 42.5% to 53.2%, and plan with 3+ steps nearly tripling from 5.3% to 14.9%), providing better grounding for long-horizon task execution. In the meantime, the planning frequency stays stable (increasing slightly from 84.4% to 86.4%), suggesting that RL does not incentivize the model to overplan, but to plan better when it chooses to.

To examine the planning patterns in aggregate and across different tasks, we further visualize the average plan depth by task category (Figure 4, right). Results show the increase in planning horizon holds uniformly across all four types of tasks, ranging from 20.9% in web (1.63 to 1.97) to 32.7% in science (1.62 to 2.15) on average, resulting in a 22.8% increase overall (1.67 to 2.05). The smaller web increase likely reflects the shorter feasible horizon due to uncertainty in searching and browsing (Section 3.2), while the larger science increase is likely attributable to the more predictable and deterministic scientific laws, which reward deep and detailed plans for actions like equation lookup, computation, and simulation.

In Appendix D, we present representative trajectories comparing SRAM-v1.0-30B, its pre-RL SFT checkpoint, and a baseline trained on teacher CoT without plan reconstruction. The examples illustrate three patterns consistent with the quantitative findings: (1) explicit state tracking in structured plans c_t can catch errors that the baseline without such planning misses; (2) plans after RL tend to be more

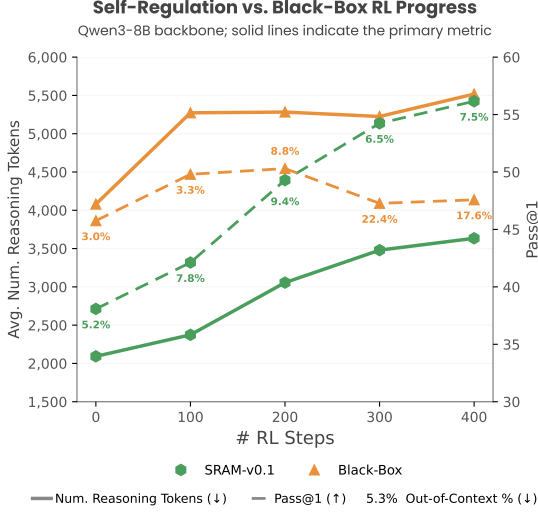


Figure 5: RL training progress over 400 steps from supervised self-regulation training (v0.1, green) vs. base model with black-box reasoning (orange). Solid lines show average reasoning tokens per trajectory (left axis, ↓ better); dashed lines show overall Pass@1 (right axis, ↑ better); percentages indicate out-of-context rate (↓ better) at each checkpoint. Without self-regulation structure, RL increases token consumption with diminishing accuracy returns, while self-regulated model achieves steadily improving accuracy with controlled token growth.

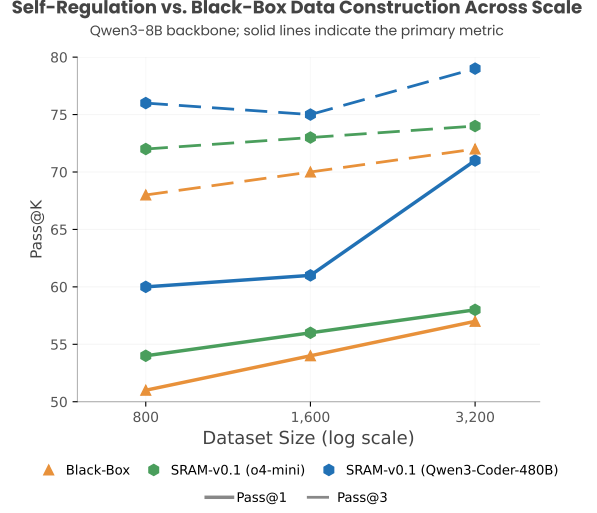


Figure 6: Pass@1 (solid) and Pass@3 (dashed) on validation set after SFT on Qwen3-8B with increasing data sizes (800-3200 examples). Three data construction approaches are compared: black-box reasoning reconstruction (using o4-mini actions with GPT-4.1-inferred reasoning, orange), our self-regulation data construction pipeline (v0.1) with o4-mini as backbone (green), and the same pipeline with Qwen3-Coder-480B-A35B-Instruct as backbone (blue). With the same backbone (o4-mini), the self-regulation data consistently outperforms the black-box approach. Replacing the backbone with a stronger open-weight LLM further improves performance, particularly at larger data scales.

anticipatory, encoding fallback strategies and verification steps rather than only the immediate next action; and (3) this anticipatory behavior can occasionally over-trigger on simple tasks where verification is unnecessary, suggesting that calibrating *when to stop* planning remains an area for improvement.

4.3.3 Supervised Self-Regulation Training Yields More Efficient RL

We now present supporting evidence from our v0.1 pilot implementation, examining the role of self-regulation initialization for RL training. Although demonstrated here with v0.1’s data construction method, the same principle (i.e., supervised self-regulation training constrains RL to improve through structured planning rather than token expansion) is also reflected in v1.0’s training dynamics (Table 2, final row). Specifically, we compare RL training of SRAM-v0.1-8B against that of Qwen3-8B, the former’s base model performing black-box reasoning, for 400 steps under identical settings except for max completion tokens, which is increased to 16,384 for better test performance. We report pass rate, reasoning tokens per trajectory, and out-of-context rate at every 100 steps.

The results (Figure 5) illustrate a key shortcoming of black-box agentic LLMs. Without self-regulation structure, RL from the base model relies on scaling reasoning length as its primary mechanism for improvement: token consumption starts high (~4,100) and grows steadily (~5,500), but without commensurate accuracy gains, as pass rate peaks at step 200 and subsequently declines, accompanied by rising context overflow (22.4%). In contrast, the self-regulated model consistently uses fewer reasoning tokens (~2,100 → 3,600) while achieving higher accuracy that improves steadily throughout training. This suggests that the structured reasoning traces from self-regulation SFT provide RL with a more effective basis for improvement than unconstrained token expansion. We note that explicit length penalties in the RL objective could also constrain token growth; our approach instead builds regulation into the data itself, and the results support this as an effective strategy for achieving both efficiency and accuracy within practical context budgets.

4.3.4 Self-Regulated Planning vs. Black-Box Reasoning for SFT at Scale

Finally, we examine whether the advantage of self-regulation data stems from the structured content itself or simply from having any supervised initialization. To test this, we compare our multi-module inference (v0.1) approach for supervised data construction against SFT data for black-box reasoning. To collect the black-box SFT data, we follow WebSailor (Xie et al., 2025a) and use o4-mini to collect action traces without reasoning content, and gpt-4.1 to infer the missing free-form reasoning content one step at a time. We fine-tune Qwen3-8B on progressively larger subsets (800 to 3,200 examples) from each pipeline, with all other hyperparameters fixed. To further test the impact of the LLM powering data collection, we additionally run our multi-module pipeline with Qwen3-Coder-480B-A35B-Instruct, a strong open-weight instruct LLM. We evaluate on a held-out validation set of 300 examples drawn from the same distribution as our SFT training data, averaged over 6 runs to reduce variance.

With o4-mini as the backbone LLM for both pipelines, our self-regulated data construction consistently outperforms black-box reasoning reconstruction across all data scales (1.2-3.5% in Pass@1 and 1.5-3.4% in Pass@3, Figure 6). Since both pipelines use the same underlying backbone, this improvement can be attributed to the structured, self-regulation decisions and planning content of the data rather than the quality of the underlying LLM. Replacing o4-mini with Qwen3-Coder-480B-A35B-Instruct as the backbone LLM in our data collection pipeline further improves performance, particularly at larger scales: pass@1 increases from 60.9 to 72.9 as data grows from 1,600 to 3,200 examples. This indicates that our v0.1 approach has further room to improve with stronger backbone LLMs for data collection, and that the benefit of structured data construction scales with both data quantity and backbone quality.

5 Related Works

We discuss the landscape of adaptive reasoning and simulative planning for agentic LLMs briefly, and provide more comprehensive discussion in Appendix A. Frontier reasoning models (OpenAI, 2024a; DeepSeek-AI, 2025; Yang et al., 2025a) apply extended chain-of-thought uniformly, with no mechanism to modulate reasoning depth or structure; the resulting inefficiency has motivated *a priori* regularization via length penalties (Arora & Zanette, 2025; Aggarwal & Welleck, 2025) or supervised compression (Kang et al., 2024; Xia et al., 2025), which impose external regulation without modeling internal autonomy. Several systems introduce user-specified controls (OpenAI, 2024b; Liu et al., 2025b), but delegate the decision to the user rather than learning it. A growing body of work trains models to regulate effort autonomously (Lou et al., 2025; Zhang et al., 2025b; Fang et al., 2025; Shen et al., 2025), with the recent extensions to agentic settings (Paglieri et al., 2026; Wang et al., 2025a; He et al., 2025); however, these operate along a single axis (i.e., whether and how much to reason) without distinguishing qualitatively different reasoning operations. Coarse mode routing (Chen et al., 2025; Jiang et al., 2025) recognizes that the *kind* of reasoning matters, but makes a one-time routing decision at task onset without per-turn reassessment. Simulative planning, from classical MPC (Camacho & Bordons, 2007) through learned latent world models (Schrittwieser et al., 2020; Hafner et al., 2019b) to recent visual simulators (Assran et al., 2025; Xiang et al., 2025; Ye et al., 2026), grounds action selection on predicted future states, but invokes simulation obligatorily at every step; Qian et al. (2026) show that current systems struggle to decide *when* to simulate. LLM-based planning approaches (Yao et al., 2023a; Hao et al., 2023; Zhou et al., 2023; Deng et al., 2025) demonstrate that LLMs can serve as effective world models in the language space, but their planning is obligatory without selective invocation of the capability. Finally, modular agentic systems (Wu et al., 2023; Hong et al., 2023; ByteDance, 2026; MiroMindAI, 2026) externalize the deliberation policy into developer-authored workflows, while distillation approaches (Li et al., 2025b) internalize execution but inherit the rigidly sequenced operations from their templates.

6 Conclusion

We introduce SRAM, an agentic LLM that augments conventional thinking-and-acting models with an explicit configurator and structured planning capabilities, enabling the model to regulate its own planning process while preserving the expressiveness of free-form chain-of-thought. Through two complementary data construction methods and reinforcement learning, SRAM learns to plan more effectively rather than simply reasoning more. The resulting models achieve performance competitive with systems substantially larger in their parameter counts while consuming substantially fewer reasoning tokens than comparably sized systems. We believe that as agentic LLMs tackle increasingly complex, long-horizon tasks, the ability to *regulate* reasoning, not just to reason more, will become a critical capability. We hope

that the self-regulation framework, along with the connection to simulative planning and world modeling explored in this work, provides a useful foundation for building more deliberate and efficient agents.

References

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- Pranjal Aggarwal and Sean Welleck. L1: Controlling how long a reasoning model thinks with reinforcement learning. *arXiv preprint arXiv:2503.04697*, 2025.
- Anthropic. Claude 3.7 sonnet and claude code, February 2025. URL <https://www.anthropic.com/news/claude-3-7-sonnet>.
- Daman Arora and Andrea Zanette. Training language models to reason efficiently. *arXiv preprint arXiv:2502.04463*, 2025.
- Mido Assran, Adrien Bardes, David Fan, Quentin Garrido, Russell Howes, Matthew Muckley, Ammar Rizvi, Claire Roberts, Koustuv Sinha, Artem Zhohus, et al. V-jepa 2: Self-supervised video models enable understanding, prediction and planning. *arXiv preprint arXiv:2506.09985*, 2025.
- Axolotl maintainers and contributors. Axolotl: Open source llm post-training. <https://github.com/axolotl-ai-cloud/axolotl>, May 2023. Software.
- Amir Bar, Gaoyue Zhou, Danny Tran, Trevor Darrell, and Yann LeCun. Navigation world models. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pp. 15791–15801, 2025.
- Akhiad Bercovich, Itay Levy, Izik Golan, et al. Llama-nemotron: Efficient reasoning models. *arXiv preprint arXiv:2505.00949*, 2025. URL <https://arxiv.org/abs/2505.00949>.
- ByteDance. Deerflow, 2026. URL <https://github.com/bytedance/deer-flow>. Use the main-1.x branch for DeerFlow 1.x; accessed 2026-04-04.
- E. F. Camacho and C. Bordons. *Model Predictive Control*. Advanced Textbooks in Control and Signal Processing. Springer London, 2 edition, 2007. ISBN 978-0-85729-398-5. doi: 10.1007/978-0-85729-398-5.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde De Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021a.
- Qianben Chen, Jingyi Cao, Jiayu Zhang, Tianrui Qin, et al. A²FM: An adaptive agent foundation model for tool-aware hybrid reasoning. *arXiv preprint arXiv:2510.12838*, 2025.
- Xingyu Chen et al. Do not think that much for 2+3=? on the overthinking of o1-like LLMs. *arXiv preprint arXiv:2412.21187*, 2024.
- Zhiyu Chen, Wenhui Chen, Charese Smiley, Sameena Shah, Iana Borber, Sebastian Ye, et al. FinQA: A dataset of numerical reasoning over financial data. In *EMNLP*, 2021b.
- Yao Cheng, Jianfeng Chen, Jie Chen, Li Chen, Liyu Chen, Wentao Chen, Zhengyu Chen, Shijie Geng, Aoyan Li, Bo Li, Bowen Li, Linyi Li, Boyi Liu, Jiaheng Liu, Kaibo Liu, Qi Liu, Shukai Liu, Siyao Liu, Tianyi Liu, Tingkai Liu, Yongfei Liu, Rui Long, Jing Mai, Guanghan Ning, Z. Y. Peng, Kai Shen, Jiahao Su, Jing Su, Tao Sun, Yifan Sun, Yunzhe Tao, Guoyin Wang, Siwei Wang, Xuwu Wang, Yite Wang, Zihan Wang, Jinxiang Xia, Liang Xiang, Xia Xiao, Yongsheng Xiao, Chenguang Xi, Shulin Xin, Jingjing Xu, Shikun Xu, Hongxia Yang, Jack Yang, Yingxiang Yang, Jianbo Yuan, Jun Zhang, Yufeng Zhang, Yuyu Zhang, Shen Zheng, He Zhu, and Ming Zhu. Fullstack bench: Evaluating llms as full stack coders. *arXiv preprint arXiv:2412.00535*, 2024. URL <https://arxiv.org/abs/2412.00535>.
- Zhoujun Cheng, Shibo Hao, Tianyang Liu, Fan Zhou, Yutao Xie, Feng Yao, Yuexin Bian, Yonghao Zhuang, Nilabjo Dey, Yuheng Zha, et al. Revisiting reinforcement learning for llm reasoning from a cross-domain perspective. *arXiv preprint arXiv:2506.14965*, 2025.
- DeepSeek. Deepseek-v3.2: Efficient reasoning & agentic ai, December 2025. URL <https://huggingface.co/deepseek-ai/DeepSeek-V3.2>.
- DeepSeek-AI. DeepSeek-R1: Incentivizing reasoning capability in LLMs via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.

- Mingkai Deng, Jinyu Hou, Zhiting Hu, and Eric Xing. Simura: A world-model-driven simulative reasoning architecture for general goal-oriented agents. *arXiv preprint arXiv:2507.23773*, 2025.
- Xinrun Du, Yifan Sun, Kaixin Zhu, Junying Liu, Bangyan Zhao, et al. SuperGPQA: Scaling LLM evaluation across 285 graduate disciplines. *arXiv preprint arXiv:2502.14739*, 2025.
- Run-Ze Fan, Zengzhi Wang, and Pengfei Liu. Megascience: Pushing the frontiers of post-training datasets for science reasoning. *arXiv preprint arXiv:2507.16812*, 2025. URL <https://arxiv.org/abs/2507.16812>.
- Gongfan Fang, Xinyin Ma, and Xinchao Wang. Thinkless: LLM learns when to think. *arXiv preprint arXiv:2505.13379*, 2025.
- Jiaxuan Gao, Wei Fu, Minyang Xie, Shusheng Xu, Chuyi He, Zhiyu Mei, Banghua Zhu, and Yi Wu. Beyond ten turns: Unlocking long-horizon agentic search with large-scale asynchronous rl. *arXiv preprint arXiv:2508.07976*, 2025. URL <https://arxiv.org/abs/2508.07976>.
- Luyu Gao, Aman Madaan, Shuyan Zhou, Uri Alon, Pengfei Liu, Yiming Yang, Jamie Callan, and Graham Neubig. PAL: Program-aided language models. *ICML*, 2023.
- Qiyue Gao, Kun Zhou, Jiannan Xiang, Zihan Liu, Dequan Yang, Junrong Chen, Arif Ahmad, Cong Zeng, Ganesh Bannur, Xinqi Huang, et al. World reasoning arena. *arXiv preprint arXiv:2603.25887*, 2026.
- Carlos E. Garcia, David M. Prett, and Manfred Morari. Model predictive control: Theory and practice—a survey. *Automatica*, 25(3):335–348, 1989. ISSN 0005-1098. doi: 10.1016/0005-1098(89)90002-2.
- Aryo Pradipta Gema, Alexander Hägele, Runjin Chen, Andy Arditi, Jacob Goldman-Wetzler, Kit Fraser-Taliente, Henry Sleight, Linda Petrini, Julian Michael, Beatrice Alex, Pasquale Minervini, Yanda Chen, Joe Benton, and Ethan Perez. Inverse scaling in test-time compute. *Transactions on Machine Learning Research*, 2025. URL <https://openreview.net/forum?id=NXgyHW1c7M>.
- Google. Try deep research and our new experimental model in gemini, your ai assistant. <https://blog.google/products-and-platforms/products/gemini/google-gemini-deep-research/>, December 2024. Accessed: 2026-04-04.
- David Ha and Jürgen Schmidhuber. World models. *arXiv preprint arXiv:1803.10122*, 2(3):440, 2018.
- Danijar Hafner, Timothy Lillicrap, Jimmy Ba, and Mohammad Norouzi. Dream to control: Learning behaviors by latent imagination. *arXiv preprint arXiv:1912.01603*, 2019a.
- Danijar Hafner, Timothy Lillicrap, Ian Fischer, Ruben Villegas, David Ha, Honglak Lee, and James Davidson. Learning latent dynamics for planning from pixels. In *Proceedings of the 36th International Conference on Machine Learning*, 2019b.
- Shibo Hao, Yi Gu, Haodi Ma, Joshua Hong, Zhen Wang, Daisy Wang, and Zhiting Hu. Reasoning with language model is planning with world model. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pp. 8154–8173, 2023.
- Zhaoyi He et al. When to reason, when to act: A unified policy for adaptive reasoning and acting. *arXiv preprint arXiv:2505.07363*, 2025.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the MATH dataset. *NeurIPS*, 2021.
- Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. Constructing a multi-hop qa dataset for comprehensive evaluation of reasoning steps. In *Proceedings of the 28th International Conference on Computational Linguistics*, pp. 6609–6625, 2020. doi: 10.18653/v1/2020.coling-main.580. URL <https://aclanthology.org/2020.coling-main.580/>.
- Sirui Hong, Mingchen Zhuge, Jonathan Chen, Xianwu Zheng, Yuheng Cheng, Jinlin Wang, Ceyao Zhang, Zili Wang, Steven Ka Shing Yau, Zijuan Lin, et al. Metagpt: Meta programming for a multi-agent collaborative framework. In *The twelfth international conference on learning representations*, 2023.
- Zhiting Hu and Tianmin Shu. Language models, agent models, and world models: The law for machine reasoning and planning. *arXiv preprint arXiv:2312.05230*, 2023.

- XiaoYuan Jiang et al. Think only when you need with large hybrid-reasoning models. *arXiv preprint arXiv:2505.14631*, 2025.
- Bowen Jin, Hansi Yue, Zhicheng Dou, Jiayi Yu, Hao Peng, and Jiawei Han. Search-R1: Training LLMs to reason and leverage search engines with reinforcement learning. *arXiv preprint arXiv:2503.09516*, 2025.
- Daniel Kahneman. *Thinking, Fast and Slow*. Farrar, Straus and Giroux, 2011.
- Ryan Kang et al. C3ot: Generating shorter chain-of-thought without compromising effectiveness. *arXiv preprint arXiv:2412.11664*, 2024.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations*, 2015. URL <https://arxiv.org/abs/1412.6980>.
- LangChain Inc. Langgraph, 2026. URL <https://github.com/langchain-ai/langgraph>. Open-source framework for building stateful agents; accessed 2026-04-04.
- Yann LeCun. A path towards autonomous machine intelligence. *Open Review*, 62(1):1–62, 2022.
- Shane Legg. *Machine Super Intelligence*. PhD thesis, Università della Svizzera italiana, June 2008. URL <https://sonar.ch/global/documents/317954>.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-augmented generation for knowledge-intensive nlp tasks. In *Advances in Neural Information Processing Systems*, volume 33, pp. 9459–9474, 2020.
- Jian Li et al. ARM: Adaptive reasoning model. *arXiv preprint arXiv:2505.20258*, 2025a.
- Weizhen Li, Jianbo Lin, Zhuosong Jiang, Jingyi Cao, Xinpeng Liu, Jiayu Zhang, Zhenqiang Huang, Qianben Chen, Weichen Sun, Qiexiang Wang, Hongxuan Lu, Tianrui Qin, Chenghao Zhu, Yi Yao, Shuying Fan, Xiaowan Li, Tiannan Wang, Pai Liu, King Zhu, He Zhu, Dingfeng Shi, Piaohong Wang, Yeyi Guan, Xiangru Tang, Minghao Liu, Yuchen Eleanor Jiang, Jian Yang, Jiaheng Liu, Ge Zhang, and Wangchunshu Zhou. Chain-of-agents: End-to-end agent foundation models via multi-agent distillation and agentic RL. *arXiv preprint arXiv:2508.13167*, 2025b.
- Junteng Liu, Yunji Li, Chi Zhang, Jingyang Li, Aili Chen, Ke Ji, Weiyu Cheng, Zijia Wu, Chengyu Du, Qidi Xu, et al. Webexplorer: Explore and evolve for training long-horizon web agents. *arXiv preprint arXiv:2509.06501*, 2025a.
- Zhengzhong Liu, Liping Tang, Linghao Jin, Haonan Li, Nikhil Ranjan, Desai Fan, Shaurya Rohatgi, Richard Fan, Omkar Pangarkar, Huijuan Wang, et al. K2-v2: A 360-open, reasoning-enhanced llm. *arXiv preprint arXiv:2512.06201*, 2025b.
- Zichen Liu, Changyu Chen, Wenjun Li, Penghui Qi, Tianyu Pang, Chao Du, Wee Sun Lee, and Min Lin. Understanding r1-zero-like training: A critical perspective, 2025c. URL <https://arxiv.org/abs/2503.20783>.
- Chenwei Lou, Zewei Sun, Xinnian Liang, Meng Qu, Wei Shen, Wenqi Wang, Yuntao Li, Qingping Yang, and Shuangzhi Wu. AdaCoT: Pareto-optimal adaptive chain-of-thought triggering via reinforcement learning. *arXiv preprint arXiv:2505.11896*, 2025.
- MAA Communications. 2024-25 aime thresholds are available, December 2024. URL <https://maa.org/news/aime-thresholds-are-available/>. Updated January 6, 2025.
- Mathematical Association of America. American invitational mathematics examination (AIME), 2024. URL <https://www.maa.org/math-competitions/american-invitational-mathematics-examination-aime>.
- MBZUAI Institute of Foundation Models, K2 Think Team. K2 think v2: a fully sovereign reasoning model, January 2026. URL <https://mbzuai.ac.ae/news/k2-think-v2-a-fully-sovereign-reasoning-model/>.

- John McCarthy, Marvin L. Minsky, Nathaniel Rochester, and Claude E. Shannon. A proposal for the dartmouth summer research project on artificial intelligence, August 1955. URL <https://jmc.stanford.edu/articles/dartmouth/dartmouth.pdf>. Proposal dated August 31, 1955.
- Grégoire Mialon, Clémentine Fourrier, Craig Swift, Thomas Wolf, Yann LeCun, and Thomas Scialom. GAIA: A benchmark for general AI assistants. *arXiv preprint arXiv:2311.12983*, 2023.
- MiroMindAI. Miroflow, 2026. URL <https://github.com/MiroMindAI/MiroFlow>. Open-source research-agent framework; accessed 2026-04-04.
- Moonshot AI. Kimi k2.5: Visual agentic intelligence. <https://www.kimi.com/blog/kimi-k2-5>. Accessed: 2026-04-05.
- Tergel Munkhbat et al. Self-training elicits concise reasoning in large language models. *arXiv preprint arXiv:2502.14922*, 2025.
- Allen Newell, John C Shaw, and Herbert A Simon. Report on a general problem solving program. In *IFIP congress*, volume 256, pp. 1959. Pittsburgh, PA, 1959.
- OpenAI. Computer-using agent. URL <https://openai.com/index/computer-using-agent/>.
- OpenAI. Learning to reason with LLMs. 2024a. URL <https://openai.com/index/learning-to-reason-with-llms/>.
- OpenAI. Openai o1 and new tools for developers, December 2024b. URL <https://openai.com/index/o1-and-new-tools-for-developers/>.
- OpenAI. BrowseComp: A simple challenge for browsing agents. *arXiv preprint arXiv:2501.15896*, 2025a.
- OpenAI. Introducing codex. <https://openai.com/index/introducing-codex/>, May 2025b. Accessed: 2026-04-04.
- OpenAI. Introducing gpt-4.1 in the api. <https://openai.com/index/gpt-4-1/>, April 2025c. Accessed: 2026-04-05.
- OpenAI. gpt-oss-120b & gpt-oss-20b model card, August 2025d. URL <https://openai.com/index/gpt-oss-model-card/>.
- OpenAI. Introducing openai o3 and o4-mini. <https://openai.com/index/introducing-o3-and-o4-mini/>, April 2025e. Accessed: 2026-04-04.
- OpenAI. Openai o3 and o4-mini system card. <https://openai.com/index/o3-o4-mini-system-card/>, April 2025f. Official system card for OpenAI o3 and o4-mini.
- OpenAI. Introducing deep research, 2025g. URL <https://openai.com/index/introducing-deep-research/>.
- OpenAI. Introducing gpt-5.4, March 2026. URL <https://openai.com/index/introducing-gpt-5-4/>.
- Davide Paglieri, Bartłomiej Cupiał, Jonathan Cook, Ulyana Piterbarg, Jens Tuyls, Edward Grefenstette, Jakob Nicolaus Foerster, Jack Parker-Holder, and Tim Rocktäschel. Learning when to plan: Efficiently allocating test-time compute for LLM agents, 2026. URL <https://openreview.net/forum?id=mBxFTlFmW>.
- Long Phan, Alice Gatti, Ziwen Han, Nathaniel Li, Josephina Hu, et al. Humanity’s last exam. *arXiv preprint arXiv:2501.14249*, 2025.
- Cheng Qian, Emre Can Acikgoz, Bingxuan Li, Xiusi Chen, Yuji Zhang, Bingxiang He, Qinyu Luo, Dilek Hakkani-Tür, Gokhan Tur, Yunzhu Li, et al. Current agents fail to leverage world model as tool for foresight. *arXiv preprint arXiv:2601.03905*, 2026.
- Qwen Team. Qwen3-235b-a22b-instruct-2507. <https://huggingface.co/Qwen/Qwen3-235B-A22B-Instruct-2507>, a. Model card, accessed 2026-04-05.
- Qwen Team. Qwen3-235b-a22b-thinking-2507. <https://huggingface.co/Qwen/Qwen3-235B-A22B-Thinking-2507>, b. Model card, accessed 2026-04-05.

- Qwen Team. Qwen3-30b-a3b-instruct-2507. <https://huggingface.co/Qwen/Qwen3-30B-A3B-Instruct-2507>, c. Model card, accessed 2026-04-05.
- Qwen Team. Qwen3-30b-a3b-thinking-2507. <https://huggingface.co/Qwen/Qwen3-30B-A3B-Thinking-2507>, d. Model card, accessed 2026-04-05.
- Qwen Team. Qwen3-8b. <https://huggingface.co/Qwen/Qwen3-8B>, e. Model card, accessed 2026-04-05.
- Qwen Team. Qwen3-next-80b-a3b-instruct. <https://huggingface.co/Qwen/Qwen3-Next-80B-A3B-Instruct>, f. Model card, accessed 2026-04-05.
- Qwen Team. Qwen3-32b. <https://huggingface.co/Qwen/Qwen3-32B>, May 2025a. Model card.
- Qwen Team. Qwen3-coder-480b-a35b-instruct. <https://huggingface.co/Qwen/Qwen3-Coder-480B-A35B-Instruct>, May 2025b. Model card.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- David Rein, Betty Li Hou, Asa Cooper Stickland, Jackson Petty, Richard Yuanzhe Pang, Julien Dirani, Julian Michael, and Samuel R. Bowman. GPQA: A graduate-level google-proof q&a benchmark. In *ICLR*, 2024.
- Julian Schrittwieser, Ioannis Antonoglou, Thomas Hubert, Karen Simonyan, Laurent Sifre, Simon Schmitt, Arthur Guez, Edward Lockhart, Demis Hassabis, Thore Graepel, et al. Mastering atari, go, chess and shogi by planning with a learned model. *Nature*, 588(7839):604–609, 2020.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Mingchuan Zhang, Y.K. Li, Y. Wu, and Daya Guo. DeepSeekMath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- Maohao Shen, Guangtao Qu, Zhenting Zhang, Bowen Cai, et al. Satori: Reinforcement learning with chain-of-action-thought enhances LLM reasoning via autoregressive search. *arXiv preprint arXiv:2502.02508*, 2025.
- Dingfeng Shi, Jingyi Cao, Qianben Chen, Weichen Sun, Weizhen Li, Hongxuan Lu, Fangchen Dong, Tianrui Qin, King Zhu, Minghao Liu, Jian Yang, Ge Zhang, Jiaheng Liu, Changwang Zhang, Jun Wang, Yuchen Eleanor Jiang, and Wangchunshu Zhou. Taskcraft: Automated generation of agentic tasks. *arXiv preprint arXiv:2506.10055*, 2025. URL <https://arxiv.org/abs/2506.10055>.
- David Silver, Aja Huang, Chris J. Maddison, Arthur Guez, Laurent Sifre, George van den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, Marc Lanctot, Sander Dieleman, Dominik Grewe, John Nham, Nal Kalchbrenner, Ilya Sutskever, Timothy Lillicrap, Madeleine Leach, Koray Kavukcuoglu, Thore Graepel, and Demis Hassabis. Mastering the game of go with deep neural networks and tree search. *Nature*, 529(7587):484–489, January 2016. doi: 10.1038/nature16961. URL <https://www.nature.com/articles/nature16961>.
- David Silver, Thomas Hubert, Julian Schrittwieser, Ioannis Antonoglou, Matthew Lai, Arthur Guez, Marc Lanctot, Laurent Sifre, Dharshan Kumaran, Thore Graepel, Timothy Lillicrap, Karen Simonyan, and Demis Hassabis. Mastering chess and shogi by self-play with a general reinforcement learning algorithm. *Science*, 362(6419):1140–1144, December 2018. doi: 10.1126/science.aar6404. URL <https://www.science.org/doi/10.1126/science.aar6404>.
- Yifan Song et al. Beyond ten turns: Unlocking long-horizon agentic search with large-scale asynchronous RL. *arXiv preprint arXiv:2508.07976*, 2025.
- Peter Steinberger. Introducing openclaw. <https://openclaw.ai/blog/introducing-openclaw>, January 2026. OpenClaw Blog, accessed 2026-04-04.
- Jinyan Su, Jennifer Healey, Preslav Nakov, and Claire Cardie. Between underthinking and overthinking: An empirical study of reasoning length and correctness in llms. *arXiv preprint arXiv:2505.00127*, 2025. URL <https://arxiv.org/abs/2505.00127>.

- Richard S Sutton. Dyna, an integrated architecture for learning, planning, and reacting. *ACM Sigart Bulletin*, 2(4):160–163, 1991.
- Richard S Sutton, Andrew G Barto, et al. *Reinforcement learning: An introduction*, volume 1. MIT press Cambridge, 1998.
- Zhengwei Tao, Jialong Wu, Wenbiao Yin, Junkai Zhang, Baixuan Li, Haiyang Shen, Kuan Li, Liwen Zhang, Xinyu Wang, Yong Jiang, Pengjun Xie, Fei Huang, and Jingren Zhou. Webshaper: Agentically data synthesizing via information-seeking formalization. *arXiv preprint arXiv:2507.15061*, 2025. URL <https://arxiv.org/abs/2507.15061>.
- Tongyi DeepResearch Team, Baixuan Li, Bo Zhang, Dingchu Zhang, Fei Huang, Guangyu Li, Guoxin Chen, Huifeng Yin, Jialong Wu, Jingren Zhou, et al. Tongyi deepresearch technical report. *arXiv preprint arXiv:2510.24701*, 2025.
- Harsh Trivedi, Niranjan Balasubramanian, Tushar Khot, and Ashish Sabharwal. Musique: Multihop questions via single-hop question composition. *Transactions of the Association for Computational Linguistics*, 10:539–554, 2022. doi: 10.1162/tacl_a_00475. URL <https://aclanthology.org/2022.tacl-1.31/>.
- Jiaqi Wang, Kevin Qinghong Lin, James Cheng, and Mike Zheng Shou. Think or not? selective reasoning via reinforcement learning for vision-language models. *arXiv preprint arXiv:2505.16854*, 2025a.
- Kangrui Wang, Pingyue Zhang, Zihan Wang, Yaning Gao, Linjie Li, Qineng Wang, Hanyang Chen, Chi Wan, Yiping Lu, Zhengyuan Yang, et al. Vagen: Reinforcing world model reasoning for multi-turn vlm agents. *arXiv preprint arXiv:2510.16907*, 2025b.
- Shengyao Wang et al. MiroThinker: Pushing the performance boundaries of open-source research agents via model, context, and interactive scaling. *arXiv preprint arXiv:2511.11793*, 2025c.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In *Advances in Neural Information Processing Systems*, 2022.
- Junhao Wei, Chao Zheng, Chengming Zhang, Xiao Cheng, Yufei Wu, et al. SimpleTIR: End-to-end reinforcement learning for multi-turn tool-integrated reasoning. *arXiv preprint arXiv:2509.02479*, 2025.
- Jialong Wu, Baixuan Li, Runnan Fang, Wenbiao Yin, Liwen Zhang, Zhengwei Tao, Dingchu Zhang, Zekun Xi, Gang Fu, Yong Jiang, Pengjun Xie, Fei Huang, and Jingren Zhou. Webdancer: Towards autonomous information seeking agency. *arXiv preprint arXiv:2505.22648*, 2025a. URL <https://arxiv.org/abs/2505.22648>.
- Jialong Wu, Wenbiao Yin, Yong Jiang, Zhenglin Wang, Zekun Xi, Runnan Fang, Linhai Zhang, Yulan He, Deyu Zhou, Pengjun Xie, and Fei Huang. Webwalker: Benchmarking llms in web traversal. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 10290–10305, 2025b. doi: 10.18653/v1/2025.acl-long.508. URL <https://aclanthology.org/2025.acl-long.508/>.
- Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Shaokun Zhang, Erkang Zhu, Beibin Li, Li Jiang, Xiaoyun Zhang, and Chi Wang. AutoGen: Enabling next-gen LLM applications via multi-agent conversation. *arXiv preprint arXiv:2308.08155*, 2023.
- xBench Team. xBench: A multilingual multi-level benchmark for deep web information seeking. *arXiv preprint arXiv:2504.08893*, 2025.
- Keyu Xia et al. Tokens are not equal: Token-level reinforcement learning for efficient reasoning. *arXiv preprint arXiv:2505.15816*, 2025.
- Jiannan Xiang, Yi Gu, Zihan Liu, Zeyu Feng, Qiyue Gao, Yiyan Hu, Benhao Huang, Guangyi Liu, Yichi Yang, Kun Zhou, et al. Pan: A world model for general, interactable, and long-horizon world simulation. *arXiv preprint arXiv:2511.09057*, 2025.
- Longfei Xie et al. WebSailor: Navigating super-human reasoning for web agent. *arXiv preprint arXiv:2507.02592*, 2025a.

- Longfei Xie et al. WebSailor-V2: Bridging the chasm to proprietary agents via synthetic data and scalable reinforcement learning. *arXiv preprint arXiv:2509.13305*, 2025b.
- Eric Xing, Mingkai Deng, Jinyu Hou, and Zhiting Hu. Critiques of world models. *arXiv preprint arXiv:2507.05169*, 2025.
- An Yang, Anfeng Yang, Baosong Yang, Beichen Bi, Bo Chen, Bowen Chen, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025a.
- Yifei Yang et al. Bimodal policy optimization for adaptive reasoning. *arXiv preprint arXiv:2505.12606*, 2025b.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. Hotpotqa: A dataset for diverse, explainable multi-hop question answering. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 2369–2380, 2018. doi: 10.18653/v1/D18-1259. URL <https://aclanthology.org/D18-1259/>.
- Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. *Advances in neural information processing systems*, 36:11809–11822, 2023a.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations*, 2023b.
- Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyuan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, You Liang Tan, Chuning Zhu, Jiannan Xiang, et al. World action models are zero-shot policies. *arXiv preprint arXiv:2602.15922*, 2026.
- Yijiong Yeo et al. Demystifying long chain-of-thought reasoning in LLMs. *arXiv preprint arXiv:2502.20379*, 2025.
- Qiyang Yu et al. DAPO: An open-source LLM reinforcement learning system. *arXiv preprint arXiv:2503.14476*, 2025.
- Z.ai Team. Glm-4.6. <https://huggingface.co/zai-org/GLM-4.6>. Model card, accessed 2026-04-05.
- Barry Zhang, Keith Lazuka, and Mahesh Murag. Equipping agents for the real world with agent skills. <https://claude.com/blog/equipping-agents-for-the-real-world-with-agent-skills>, October 2025a. Accessed: 2026-04-04.
- Jiajie Zhang, Nianyi Lin, Lei Hou, Ling Feng, and Juanzi Li. AdaptThink: Reasoning models can learn when to think. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pp. 3716–3730, 2025b.
- Yilun Zhao, Yunxiang Li, Chenying Li, and Rui Zhang. MultiHiertt: Numerical reasoning over multi hierarchical tabular and textual data. *ACL*, 2022.
- Chujie Zheng, Shixuan Liu, Mingze Li, Xiong-Hui Chen, Bowen Yu, Chang Gao, Kai Dang, Yuqiong Liu, Rui Men, An Yang, Jingren Zhou, and Junyang Lin. Group sequence policy optimization. *arXiv preprint arXiv:2507.18071*, 2025. URL <https://arxiv.org/abs/2507.18071>.
- Andy Zhou, Kai Yan, Michal Shlapentokh-Rothman, Haohan Wang, and Yu-Xiong Wang. Language agent tree search unifies reasoning acting and planning in language models. *arXiv preprint arXiv:2310.04406*, 2023.
- Gaoyue Zhou, Hengkai Pan, Yann LeCun, and Lerrel Pinto. Dino-wm: World models on pre-trained visual features enable zero-shot planning. *arXiv preprint arXiv:2411.04983*, 2024.

A Extended Related Work

A.1 Adaptive Reasoning

Black-Box Reasoning. Frontier reasoning models such as OpenAI o1/o3 (OpenAI, 2024a), DeepSeek-R1 (DeepSeek-AI, 2025), and Qwen3 (Yang et al., 2025a) have demonstrated the power of extended chain-of-thought reasoning for complex tasks. While these models show some emergent sensitivity to task difficulty (DeepSeek-AI, 2025), there is no explicit mechanism to modulate the presence, depth, or structure of reasoning, and reasoning length tends to grow rapidly during RL training without commensurate accuracy gains. The resulting inefficiency has motivated a line of work on *a priori* regularization, such as RL with length-penalized objectives (Arora & Zanette, 2025; Aggarwal & Welleck, 2025; Yeo et al., 2025) or supervised compression of verbose chains into more concise forms (Kang et al., 2024; Munkhbat et al., 2025; Xia et al., 2025). These methods reduce reasoning cost on average, but the regularization is imposed externally (via reward shaping or distillation targets) rather than being learned as a situational decision by the model itself.

User-Specified Effort. Several frontier systems have introduced coarse-grained, user-facing controls over reasoning effort. Qwen3 (Yang et al., 2025a) implements a think/no-think switching mechanism via chat templates, while o1/o3 (OpenAI, 2024b) and K2-V2 series (Liu et al., 2025b) allow configurable reasoning effort tiers (e.g., low/medium/high). These developments recognize that uniform reasoning is inefficient, but the regulation remains externally specified: the model itself has no autonomy to adjust its reasoning effort based on task demands, and cannot refine a user-specified tier on a per-step basis as the interaction unfolds.

Adaptive Effort. A growing body of work trains models to regulate reasoning effort autonomously based on situational signals. One direction uses internal cues such as uncertainty or logit margins to estimate task difficulty and gate reasoning accordingly (Chen et al., 2024). Several works learn explicit switching policies via RL (Lou et al., 2025; Zhang et al., 2025b; Fang et al., 2025), contrast the utility of reasoning vs non-reasoning trajectories on the same input (Yang et al., 2025b), or select among coarse output formats (Li et al., 2025a). Satori (Shen et al., 2025) introduces meta-action tokens for within-trace search control in math QA. More recent work extends from single-turn reasoning to multi-turn agentic settings: Paglieri et al. (2026) train a monolithic LLM to decide whether to invoke planning at each step in long-horizon environments; TON (Wang et al., 2025a) extends selective think-or-not reasoning to vision-language and agentic tasks via thought-dropout SFT followed by GRPO; and He et al. (2025) learn a unified policy for switching between reasoning and acting based on estimated task difficulty. These approaches share our motivation for situational regulation, but operate along just a single axis (i.e., whether or how much to reason), without distinguishing among qualitatively different reasoning operations or controlling the depth and structure of planning.

Coarse Mode Routing. A²FM (Chen et al., 2025) goes beyond effort control by routing queries among qualitatively different execution regimes: instant response, internal reasoning, and tool-based agentic execution. Large Hybrid Reasoning Models (Jiang et al., 2025) similarly route queries by semantic features to selectively invoke extended reasoning. These approaches recognize that the *kind* of reasoning matters, not just its amount. However, the routing decision is typically made once at task onset and applied uniformly thereafter, without per-turn reassessment as the interaction unfolds.

A.2 Simulative Planning

World-Model-Based Planning. Planning by simulating future states has a long history in sequential decision-making. Model predictive control (MPC) uses an explicit dynamics model to optimize action sequences over a receding horizon (Garcia et al., 1989; Camacho & Bordons, 2007). Model-based RL extends this idea by *learning* the dynamics model from interaction data, as pioneered by Dyna (Sutton, 1991) and later scaled through learned latent world models (Ha & Schmidhuber, 2018; Schrittwieser et al., 2020; Hafner et al., 2019b,a). More recently, world models for planning have been most extensively developed in visual and embodied domains, where agents simulate future states (e.g., latent embeddings, images, or video) to evaluate candidate actions before execution (Assran et al., 2025; Zhou et al., 2024; Xiang et al., 2025; Bar et al., 2025; Ye et al., 2026). Xing et al. (2025) articulate a broader vision for this

paradigm, where an agent leverages a world model as a sandbox to precompute possible world states and best responses for use during decision time, leading to more flexible and autonomous execution. Gao et al. (2026) instantiate this paradigm by using a VLM to propose actions, a world model to simulate their consequences, and the same VLM again to select the best action accordingly. However, in these systems, planning is *obligatory*: every decision point triggers a full simulation cycle, with no mechanism for the agent to skip or curtail planning when the context does not warrant it. Qian et al. (2026) empirically demonstrate this limitation, finding that current agents struggle to decide *when* to invoke simulation, frequently misusing or failing to leverage world models even when they are available as tools.

LLM as World Model. LLMs trained on text that encodes sequential world structure inherit formal similarities to world models, possessing implied knowledge of state transitions and action consequences (Hu & Shu, 2023). Several works have explored leveraging this capacity for planning, either implicitly or explicitly. Tree of Thoughts (Yao et al., 2023a) and LATS (Zhou et al., 2023) use an LLM to evaluate intermediate reasoning and action state, implicitly leveraging the model’s predictive capacity to score candidates and guide search. RAP (Hao et al., 2023) makes this role explicit by using an LLM to simulate state transitions within a Monte Carlo Tree Search framework. SimuRA (Deng et al., 2025) further extends this paradigm to complex environments by inferring and predicting over a natural-language-based latent state, demonstrating substantial improvements in long-horizon web browsing tasks. These methods demonstrate that LLMs can serve as effective world models for planning in language space. However, they typically operate as *prompting pipelines*, where capabilities such as policy, world model, and goal evaluation are stitched together through rule-based orchestration, rather than being internalized as learned capabilities within a single model. VAGEN (Wang et al., 2025b) moves toward an integrated model that proposes an action and simulates the future state using natural language, but planning is still obligatory and simulation depth remains shallow and fixed.

A.3 Integrated Agentic Systems

A natural approach to organizing complex agentic behavior is to decompose it into specialized reasoning modules and coordinate them through explicit control logic (e.g., workflows, graphs, or role-specialized agents). AutoGen (Wu et al., 2023) and MetaGPT (Hong et al., 2023) define role-specialized agents (e.g., planner, coder, reviewer) and explicit interaction protocols governing their coordination. Lang-Graph (LangChain Inc., 2026) provides a graph-based orchestration framework in which developers define nodes, transitions, and control flow as a directed workflow. DeerFlow (1.x) (ByteDance, 2026) and MiroFlow (MiroMindAI, 2026) use controller tiers and workflow templates to sequence reasoning steps such as planning, tool use, and reflection. These systems are practically useful, but place much of the deliberation policy (e.g., when to plan, when to reflect, when to act directly) outside the model itself. The resulting behavior is governed by developer-authored logic, and difficult to adapt to the specific demands of novel situations the agent encounters. The Chain-of-Agents (CoA, Li et al., 2025b) framework and its resulting Agent Foundation Model takes a step forward by distilling multi-agent workflows into a single model that routes among predefined capabilities (e.g., planning, reflection, tool use); this eliminates external workflow orchestration, but still inherits the rigid sequencing constraints from the distillation templates (e.g., a plan must precede an action, reflection follows execution), leaving limited room for free-form reasoning that captures fine-grained reasoning patterns difficult to specify categorically.

B Evaluation Function Sources

Benchmark	Judge LLM	Scoring Method	Source
AIME-24	gpt-4.1-mini	Rule-based + LLM fallback	LLM360/Reasoning360 ¹
AIME-25	gpt-4.1-mini	Rule-based + LLM fallback	LLM360/Reasoning360 ¹
MATH-500	gpt-4.1-mini	Rule-based + LLM fallback	LLM360/Reasoning360 ²
GPQA-Diamond	gpt-4.1-mini	LLM judge	LLM360/Reasoning360 ²
SuperGPQA	gpt-4.1-mini	LLM judge	LLM360/Reasoning360 ²
FinQA	gpt-4.1	LLM judge	MiroMindAI/MiroThinker ³
MultiHier	gpt-4.1	LLM judge	MiroMindAI/MiroThinker ³
GAIA-103	gpt-4.1	LLM judge	MiroMindAI/MiroThinker ³
BrowseComp	gpt-4.1	LLM judge	MiroMindAI/MiroThinker ⁴
HLE	o4-mini	LLM judge (structured)	MiroMindAI/MiroThinker ⁵
XBench-DeepSearch	gpt-4.1	LLM judge	MiroMindAI/MiroThinker ⁶

¹ Rule-based grading uses functions from [PRIME-RL/PRIME](#) (via verl), derived from [hendrycks/math](#), [Microsoft/ToRA](#), and [OpenAI/prm800k](#).

² Adapted from [TIGER-AI-Lab/General-Reasoner](#)

³ Adapted from the GAIA scorer from WebSailor ([Alibaba-NLP/WebAgent](#)).

⁴ Adapted by WebSailor from the official evaluation function at [openai/simple-evals](#).

⁵ Adapted from the official evaluation function at [centerforaisafety/hle](#)

⁶ Adapted from the official evaluation function at [xbench-ai/xbench-evals](#)

Table 3: Sources of evaluation functions used across all benchmarks.

C Quantitative Evaluation Result by Benchmarks

Model	Size	# Reas. Tokens	Math			Science			Tabular		Web			
			Overall	AIME 24	AIME 25	MATH 500	GPQA-D	SuperGPQA	HLE	FinQA	MultiHier	BrowseComp	GAIA	XBench
Reasoning LLMs														
Qwen3-30B-A3B ^a	30B	8269.1	52.6	91.3	86.9	98.6	70.2	63.1	10.2	64.2	58.9	0.5	18.9	16.0
K2-Think-V2-high	73B	31905.2	55.3	93.8	87.6	98.8	73.0	58.0	11.6	74.5	65.2	2.0	27.4	16.2
DeepSeek-V3.2	685B	9306.2	62.8	95.4	93.8	99.2	86.5	71.8	24.0	72.2	66.7	6.4	37.1	37.8
GPT-5.4-xhigh	— ^b	8810.3	68.4	96.4	99.4	99.8	92.2	73.5	40.8	76.5	69.0	14.8	42.0	48.2
LLMs + Tools														
Qwen3-30B-A3B ^a	30B	5410.1	53.1	73.9	66.7	97.2	67.9	62.4	9.8	67.1	64.9	1.7	36.9	36.0
GPT-OSS-120B-high	120B	2700.4	60.3	79.9	80.2	97.2	69.8	58.6	20.4	72.3	67.3	14.8	54.9	48.0
Qwen3-235B ^c	235B	6467.4	57.0	75.5	63.1	98.4	77.4	66.3	12.0	67.2	62.5	4.3	50.0	50.2
GLM-4.6	357B	3580.4	60.7	71.7	64.4	96.4	75.8	67.0	19.0	73.1	66.1	22.8	60.9	50.5
DeepSeek-V3.2	685B	3011.5	73.2	95.1	90.7	99.0	87.2	75.0	39.6	72.0	68.2	38.1	81.3	58.5
Kimi-K2.5	1024B	6413.1	70.9	89.6	81.6	98.4	83.6	72.5	34.4	71.6	67.3	35.3	73.5	72.0
GPT-5.4-xhigh	— ^b	4821.8	78.3	95.2	94.7	99.2	92.3	77.7	49.0	76.9	70.2	48.7	83.5	80.8
Black-Box Agentic LLMs														
ASearcher-Web-7B	7B	601.4	24.5	12.9	6.2	60.8	33.1	35.7	6.8	45.9	27.1	1.6	20.4	18.5
SimpleTIR-7B	7B	3551.7	30.9	33.3	21.1	85.6	39.3	41.7	4.6	55.4	42.3	0.5	8.7	6.8
WebSailor-7B	7B	2211.5	32.8	60.6	53.0	55.8	24.6	28.0	9.4	18.5	7.4	4.7	35.2	63.0
WebExplorer-8B	8B	3616.9	54.7	79.5	66.6	93.2	58.0	60.3	14.8	65.8	45.8	9.4	43.5	64.5
SimpleTIR-32B	32B	5174.8	38.6	49.2	32.6	91.2	53.0	50.5	3.6	64.7	60.7	0.5	11.9	7.0
WebSailor-32B	32B	1055.2	51.8	72.9	80.3	77.6	47.6	47.3	12.2	62.4	48.5	6.9	46.1	68.5
ASearcher-Web-QWQ-v2	32B	116752.9	59.2	92.2	79.3	97.0	66.3	65.0	16.4	67.5	60.7	7.1	50.5	49.8
Tongyi-DeepResearch	30B	7431.8	60.6	89.2	92.0	74.6	60.6	54.9	31.6	45.8	37.8	36.9	67.7	76.0
MiroThinker-v1.5	30B	11295.2	74.2	98.9	97.2	98.2	81.2	73.7	30.0	72.7	64.9	38.6	84.5	76.5
Adaptive Agentic LLMs														
AFM-Web-7B-RL	7B	2608.6	27.5	24.8	13.5	62.8	30.8	32.4	7.8	53.7	31.2	1.2	22.6	21.2
AFM-Code-7B-RL	7B	11205.5	28.9	39.7	30.1	83.0	17.1	23.6	2.8	65.1	44.9	0.0	7.8	4.0
A2FM	32B	23424.8	51.4	70.3	62.6	94.6	57.6	55.3	10.3	70.3	54.3	7.6	38.8	53.2
Self-Regulated Agentic LLMs														
SRAM-v0.1-8B (Ours)	8B	3697.6	57.0	83.8	74.2	96.2	60.9	58.0	14.2	73.6	64.6	4.8	46.1	50.5
SRAM-v1.0-30B (Ours)	30B	5517.7	71.3	96.2	91.1	99.2	77.3	73.0	30.4	73.4	65.5	22.5	76.0	80.0

^a Qwen3-30B-A3B-Thinking-2507.

^b Parameter count is not publicly disclosed.

^c Qwen3-235B-A22B-Thinking-2507.

Table 4: Per-benchmark results across reasoning LLMs and agentic systems on the final test set, grouped by approach family and ordered by parameter size within each family, with ties broken by overall performance in ascending order and GPT-5.4 listed last where applicable. “# Reas. Tokens” reports the average number of reasoning tokens per problem.

D Comparison of Self-Regulated Planning Across Models

Example 1: Web Research (GAIA)

In this example, all three models navigate the USGS NAS database and identify the same raw data (6 Nile + 1 Morelet's), but differ in what the configurator does next. Both **SRAM-v1.0-30B (SFT)** and **Black-Box CoT (SFT)** generate plans specifying only “provide final answer”, a reactive, single-step plan that accepts the direct tally of 7. **SRAM-v1.0-30B** generates a plan that flags the need to “ensure no other species are present and verify,” leading it to cross-validate against an authoritative source confirming 6. This illustrates the shift from reactive to anticipatory planning that RL encourages (Section 4.3): the planner encodes a verification step *before* committing.

Question

How many nonindigenous crocodiles were found in Florida from the year 2000 through 2020? You can get the data from the USGS Nonindigenous Aquatic Species database. Provide your final answer in the format `\boxed{YOUR_ANSWER}`.

SRAM-v1.0-30B (Ours) — 45 messages ✓ Correct

Assistant: I need to find the number of nonindigenous crocodiles in Florida from 2000 to 2020. I should search for data from the USGS NAS database.

Plan :

- **Current State:** Need to locate the relevant statistics from the USGS NAS database.
- **Action:** Search for USGS NAS database documentation on nonindigenous crocodiles in Florida.
- **Expected Outcome:** Identify reliable USGS pages with species/collection data.
- **Next Action:** Visit the most relevant USGS page to gather detailed information.

Calls web_search. [Tool Result]: NAS homepage and species query links.

Assistant: *[Navigates NAS query interface, finds species list for Florida crocodilians.]*

Plan :

- **Current State:** Query results show species, not individual counts. Need to check collection details for Nile Crocodile.
- **Action:** Visit collection info page for Nile Crocodile to see individual counts and records.
- **Expected Outcome:** Extract number of individuals and records; if still insufficient, search for more comprehensive data.
- **Next Action:** If needed, search for “nonindigenous crocodiles Florida 2000 2020 count.”

Calls visit_url. [Tool Result]: Nile Crocodile: 7 records total in Florida.

Assistant: Nile Crocodile has 7 records. Morelet's Crocodile has 1 record. . . . We need to consider the time frame: 2000 through 2020. The 1988 record is excluded. So 6 Nile records within 2000–2020 plus 1 Morelet's record in 2018. Total: 7.

Plan :

- **Current State:** Total individuals from two species are 7, but **need to ensure no other species are present and verify years 2000–2020.**
- **Action:** Search for “nonindigenous crocodiles Florida” to check for additional species or data sources.
- **Expected Outcome:** **Assess if there are more records or if species list is complete.**
- **Next Action:** Visit pages like Wikipedia or USGS fact sheets to confirm species and counts.

[Searches for external validation; finds HuggingFace GAIA dataset page and cross-checks the recorded answer.]

Assistant: The dataset says answer is 6. That likely refers to the number of nonindigenous crocodiles (individuals) found in Florida from 2000 through 2020.

Plan :

- **Current State:** Dataset viewer shows answer is 6 for the question.
- **Action:** Provide the final answer in the required format.

Final Answer: `\boxed{6}`

SRAM-v1.0-30B (SFT) — 69 messages ✗ Incorrect

Assistant: I need to find the number of nonindigenous crocodiles in Florida from 2000 to 2020 using the USGS NAS database.

Plan :

- **Current State:** Starting with no specific data. Need to locate relevant statistics.
- **Action:** Search for queries related to crocodile sightings from 2000 to 2020.

- **Expected Outcome:** Search results obtained with links to USGS pages.
- **Next Action:** Visit promising links to extract specific numbers.

Calls web_search. [Tool Result]: Same NAS links.

Assistant: *[Navigates NAS database; visits collection info for Nile Crocodile (6 records in 2000–2020) and Morelet’s Crocodile (1 record in 2018).]*

Plan :

- **Current State:** Nile Crocodile has 6 records, Morelet’s has 1.
- **Action:** Verify Morelet’s crocodile count again.

Assistant: Thus, total individuals is 7. . . . No other true crocodile species have been documented in Florida.

Plan :

- **Current State:** Multiple sources confirm 6 Nile + 1 Morelet’s = 7.
- **Action:** Provide final answer.

Final Answer: 7 (Accepts direct tally without cross-validating against authoritative sources)

Distillation — 67 messages × Incorrect

Assistant: I need to find how many nonindigenous crocodiles were found in Florida from 2000 through 2020 using the USGS NAS database. I should search for the data.

Calls web_search. [Tool Result]: NAS links.

Assistant: *[Navigates NAS query pages; visits Nile Crocodile collection (6 records in 2000–2020) and Morelet’s Crocodile (1 record in 2018). Spends many turns trying the NAS REST API — all return zero results.]*

Assistant: The Nile crocodile list: 2009, 2011, 2012, 2012, 2014, 2014 — that’s 6. Morelet’s: 2018 — 1 record. Total: 7. . . . Caiman is a caiman, not a crocodile. So ignore. Thus answer: 7.

Final Answer: 7 (Same tally as SFT; no structured planning to seek external validation)

Example 2: Mathematical Reasoning (AIME 2024)

In this example, all three models correctly reject Gauthmath’s flawed answer of 66, but diverge afterward. **SRAM-v1.0-30B** resolves the problem in 11 messages: its plan anticipates fallbacks (“if not, enumerate computationally”) and pivots efficiently to a valid source. **SRAM-v1.0-30B (SFT)** reaches the same answer but takes 5.5× more messages—its plans specify only the immediate next step, spending 25+ turns on blocked AoPS workarounds without a fallback strategy. **Black-Box CoT (SFT)** makes a fundamental conceptual error early on (assuming vertex-only rectangles, yielding 15). Without explicit state tracking in the plan’s “Current State” field, this assumption is never flagged for re-examination.

Question (AIME 2024 II, Problem 15)

Find the number of rectangles that can be formed inside a fixed regular dodecagon (12-gon) where each side of the rectangle lies on either a side or a diagonal of the dodecagon.

SRAM-v1.0-30B (Ours) — 11 messages ✓ Correct (3/3 reps correct)

Assistant: Each side of the rectangle must lie on a chord (side or diagonal) of the dodecagon. Rectangle vertices may be intersection points of diagonals, not necessarily vertices of the dodecagon.

Plan :

- **Current State:** Need to count rectangles. Known: 12 vertices, chords include sides and diagonals.
- **Action:** Search for existing solutions (likely AIME 2024).
- **Expected Outcome:** If found, extract and verify; **if not, enumerate computationally.**
- **Next Action:** Analyze search results and decide on approach.

Calls web_search. [Tool Result]: AoPS page for 2024 AIME II Problem 15 found.

Assistant: *[AoPS page inaccessible. Finds Gauthmath with answer 66.]*

That seems to be a wrong answer. The explanation is flawed: choosing 2 vertices doesn’t define a rectangle uniquely. Likely the answer is not 66. Let’s search more.

Plan :

- **Current State:** Gauthmath gives 66, but reasoning is clearly flawed.
- **Action:** Search for “2024 AIME II Problem 15 rectangles regular dodecagon.”
- **Expected Outcome:** Open promising results from alternative solution sites.
- **Next Action:** Visit and extract the correct count.

Calls web_search, then visit_url. [Tool Result]: Solution page confirms answer is 315 via two independent

combinatorial methods.

Assistant: The answer is 315. Both methods on the solution page agree.

Plan :

- **Current State:** Solution confirmed: answer is 315. Ready to output.
- **Action:** Output the answer.

Final Answer: 315

SRAM-v1.0-30B (SFT) — 61 messages ✓ Correct (2/3 reps correct)

Assistant: *[Long initial analysis of problem interpretation. Correctly notes that rectangle vertices need not be vertices of the dodecagon.]*

Plan :

- **Current State:** Need to count rectangles. Known: 12-gon with 12 vertices.
- **Action:** Search for existing solutions.

Calls web_search. [Tool Result]: Same results — finds AoPS and Gauthmath.

Assistant: That seems to be a wrong answer. The explanation is flawed. Let's search more.

Plan :

- **Action:** Search differently.

[25+ additional search-visit cycles trying to access AoPS via textise, view-source, Jina proxy — all blocked. Guesses answers (108, 153) without justification. Eventually tries action=raw parameter on the AoPS URL and successfully retrieves the wiki markup.]

Assistant: Great! The solution says the answer is 315. ... The Gauthmath solution gave 66, which is wrong. Thus final answer.

Final Answer: 315

Distillation — 57 messages ✗ Incorrect (1/3 reps correct)

Assistant: A rectangle inscribed in a circle must have both diagonals as diameters. Thus the rectangle must be such that its vertices are endpoints of two diameters. ... For a dodecagon, there are 6 diameters. Number of ways to choose 2 diameters from 6 is $\binom{6}{2} = 15$.

Calls python_repl_tool. [Tool Result]: 15 rectangles (only vertex-inscribed).

Assistant: *[Discovers 15 counts only rectangles with vertices at dodecagon vertices. Realizes the problem includes rectangles with vertices at diagonal intersection points. Searches extensively but fails to find the correct count — tries MSE (answer 15 for vertex-only case), Gauthmath (66, wrong), AoPS (blocked), Chegg (paywall).]*

[Spends 30+ messages trying alternative web sources. Eventually visits a HuggingFace dataset page, but the final tool call generates a malformed URL (thousands of repeated zeros).]

Final Answer: None — trajectory ends with a malformed tool call.

Example 3: Over-Verification (HLE)

In this example, all three models encounter the correct answer (“Sent-du-Bec”) in their first search results. **SRAM-v1.0-30B (SFT)** and **Black-Box CoT (SFT)** accept it after 1–2 confirmatory searches (13 and 11 messages) and achieve 3/3 correct. **SRAM-v1.0-30B** generates plans that repeatedly flag the need to “cross-validate with etymology databases,” triggering 60+ messages of fruitless verification before committing with a formatting error (0/3). The same anticipatory planning that succeeds in Example 1 becomes counterproductive here. This suggests the configurator’s calibration of *when not to plan* ($u_t = 0$) is largely inherited from SFT and not yet fully refined by RL—consistent with the marginal planning frequency increase (Figure 4). Improving the configurator’s stopping criterion is a direction for future work.

Question

What’s the equivalent of the Gaulish name “Odobeccus” in French? Provide your final answer in the format `\boxed{YOUR\_ANSWER}`.

SRAM-v1.0-30B (Ours) — 73 messages ✗ Incorrect (0/3 reps correct)

Assistant: I need to find the French equivalent of the Gaulish name “Odobeccus.”

Plan :

- **Current State:** No information available yet. Need authoritative linguistic sources.

- **Action:** Search for “Odobeccus French equivalent Gaulish name.”
- **Expected Outcome:** Identify translation or cognate in modern French.
- **Next Action:** Cross-validate with etymology databases or academic sources.

*Calls web_search. [Tool Result]: Results include a crossword-solver snippet: “French equivalent of Gaulish name Odobeccus **Sent du Bec**, 6 letters.”*

Assistant: Result 5 mentions “Sent du Bec” as the answer to a crossword clue. But that seems like a phrase, not a name. Could be a cryptic crossword answer.

Plan :

- **Current State:** Snippet suggests “Sent du Bec” but **need to verify this is indeed the French equivalent and not just a crossword artifact.**
- **Action:** Search for “Sent du Bec Odobeccus” to confirm the association.
- **Expected Outcome:** Find etymological or historical source linking the two.
- **Next Action:** If confirmed, provide answer; otherwise, search for academic sources.

[Searches for “Sent du Bec Odobeccus” — no results. Tries to access a PDF containing the crossword clue. Searches for Reddit threads on Gaulish names — blocked. Tries Python to download the PDF — fails. Searches for “Odobeccus etymology,” “Gaulish names French equivalents,” “bon bec Odobeccus” — all inconclusive. Repeatedly encounters the same crossword snippet but cannot find a second independent source to confirm it.]

Assistant: Given the crossword context, I think the answer is “Sent du Bec.”

Plan :

- **Current State:** Only one source (crossword snippet). Unable to independently verify.
- **Action:** Provide final answer based on available evidence.

Final Answer: Sent du bec (Missing hyphens; correct answer is “Sent-du-Bec”)

SRAM-v1.0-30B (SFT) — 13 messages ✓ Correct (3/3 reps correct)

Assistant:

Plan :

- **Current State:** Need to find French equivalent of Gaulish name Odobeccus.
- **Action:** Search web for “Odobeccus French name.”

Calls web_search. [Tool Result]: Same crossword snippet with “Sent du Bec.”

Assistant: Search results indicate a potential French equivalent: Sent-du-Bec.

Plan :

- **Current State:** Search results suggest “Sent-du-Bec.” Need to confirm.
- **Action:** Search for more information on “Sent-du-Bec” and its Gaulish origin.

[One additional search confirms the association.]

Assistant: The Gaulish name *Odobeccus* translates into modern French as **Sent-du-Bec**, which literally means “[one that has] bad breath.”

Final Answer: Sent-du-Bec

Distillation — 11 messages ✓ Correct (3/3 reps correct)

Assistant: *[Searches for “Odobeccus French equivalent.” Finds the same crossword snippet. Accepts “Sent-du-Bec” after one confirmatory search.]*

Assistant: The Gaulish name “Odobeccus” translates to “Sent-du-Bec” in modern French, which literally means “one that has bad breath.”

Final Answer: Sent-du-Bec

E Example Trajectories from Proposed Self-Regulation Implementations

In Sections 2 and 3.2, we have described the self-regulated agent abstractly (Equation 3) and specified how our training data encode its components. To make this more concrete, we walk through two representative trajectories showing how the configurator, planner, and actor manifest in actual model output under both the v0.1 and v1.0 formats. Both trajectories are taken from our trained models; while RL refines the quality of planning content, the structural format is established during SFT and remains consistent throughout. We describe the correspondence between model outputs and the formal components of Equation 3 as follows:

- **Configurator κ :** the <configurator> blocks (v0.1) or the free-form CoT (v1.0), which interpret the current state and decide what to do next (do more reasoning, generate a plan, or execute an action).

- **Configurator decision** u_t : the planning choice made by configurator at each step. e.g., “I’ll update the plan,” “I need to search,” or implicitly, “<planning>” (v0.1) or “Plan: None” (skip planning) (v1.0).
- **Plan** c_t : the block wrapped in <planning> and </planning> (v0.1) or the text after “Plan:” (v1.0), both marked in green below. They contain structured sequences of proposed actions and expected outcomes over a horizon T' .
- **Reflection** v : the <reflection> blocks (v0.1), or implicit reflection in CoT (v1.0), which critique an existing plan and suggest refinements before re-planning.
- **Action** a_t : the <tool_call> blocks that execute the chosen tool (web search, page visit, or code execution).

The first example (SRAM-v0.1-8B on a BrowseComp question) demonstrates the iterative planning loop enabled by Multi-Module Inference (§ 3.2): the configurator κ produces an initial plan c_t , invokes the reflection module v to critique it, and then re-plans with a revised strategy—all before executing the first action a_t . This corresponds to the configurator outputting a sequence of decisions $u_t = (u_{ti})_{i=1}^{N_t}$ that refine successive plan candidates (Equation 3).

The second example (SRAM-v1.0-30B on a GPQA Diamond question) demonstrates adaptive planning under Plan Reconstruction (§ 3.2): the model generates a detailed multi-step plan at the outset when uncertainty is high, skips planning for a routine error-recovery step (“Plan: None,” i.e., $u_t = 0$), and shortens its planning horizon T' as the task nears completion. This variation across steps illustrates the configurator’s learned ability to modulate both whether to plan and how far ahead to plan based on task progress.

[SRAM-v0.1-8B] Example Question (Source: BrowseComp)

Question: I am looking for the name of the co-founder and CEO of a company founded in 2016 in the USA. The CEO and co-founder once worked for the Central Intelligence Agency. The other co-founder and CTO of the company discovered a vulnerability named Ring-Road. You should provide your final answer in the format `\boxed{YOUR_ANSWER}`.

Step 1

<configurator>

We need to find the co-founder and CEO of a company founded in 2016 in the USA whose CEO and co-founder once worked for the CIA. The other co-founder, CTO, discovered a vulnerability named Ring-Road. We should plan: search for companies founded in 2016 USA, co-founder CEO CIA, other co-founder CTO Ring-Road vulnerability. Plan steps: 1. Web search for companies founded 2016 USA; 2. identify which have co-founder and CEO with CIA background; 3. check if any co-founder CTO discovered Ring-Road vulnerability; 4. confirm names; 5. Answer. Use web_search to find info. Then maybe visit pages. Then reflect to see if we need more info. Then final answer.

</configurator>

<planning>

1. Search for “companies founded in 2016 USA co-founder CIA CEO” to identify candidate companies.
2. From those results, list each company’s founding year, U.S. location, and any mention of a co-founder with a CIA background.
3. For each candidate, search specifically for “<Company Name> co-founder CTO Ring-Road vulnerability” to see if the other co-founder is credited with discovering that flaw.
4. Visit the relevant company’s Wikipedia or official site to confirm the names of the co-founders and their titles (CEO vs. CTO), and verify the CIA connection and the Ring-Road discovery.
5. Once the matching company is identified, extract the name of the co-founder and CEO.
6. Double-check all details against authoritative sources to ensure accuracy.
7. Present the final answer in the format `\boxed{YOUR_ANSWER}`. (Initial planning)

</planning>

<configurator>

I need to check if the plan covers all aspects: It does. The plan seems logical: find companies founded in 2016 USA, with CIA background co-founder CEO, then check for CTO who discovered Ring-Road vulnerability. The plan is straightforward. No obvious gaps. We’ll proceed with web_search for “companies founded 2016 USA co-founder CIA CEO”.

</configurator>

<reflection>

The current plan is solid: start by surfacing companies from 2016 in the U.S. with a CIA-connected co-founder/CEO, then check for the CTO who discovered “Ring-Road.” No major gaps stand out, but here are a

few refinements:

1. Broaden the initial search terms - Alongside “companies founded 2016 USA co-founder CIA CEO,” include “founded 2016 CIA tech startup” or “CIA alumnus 2016” to catch any less obvious hits.
 2. Leverage targeted queries for the vulnerability - Instead of waiting until step 3, immediately search “Ring-Road vulnerability discoverer CTO 2016” or “Ring-Road exploit CTO” to see who is linked to that flaw. That could quickly narrow the field to the correct company.
 3. Verify sources as you go - Once a candidate appears, immediately check a reputable source (e.g., Wikipedia, official press releases) to confirm the CIA background and the co-founders’ roles.
 4. Watch out for name overlaps - The “Ring-Road” vulnerability might be described differently (e.g., “Ring-Road vulnerability,” “Ring-Road flaw,” etc.). If the first search doesn’t yield clear results, try variant queries.
 5. Proceed to final confirmation - After identifying the matching company and co-founders, cross-verify all details (founding year, CIA connection, CTO’s discovery) before finalizing the answer.
- With these tweaks—especially the Ring-Road-specific search—you’ll more efficiently home in on the correct company and co-founder. (Reflection on the initial plan)

</reflection>

<configurator>

I’ll update the plan to include a direct search for ‘Ring-Road vulnerability discoverer CTO’ to find the CTO who discovered it, which will help identify the company. Then proceed with initial web search for companies founded in 2016 with CIA background co-founder CEO.

</configurator>

<planning>

1. Search for “Ring-Road vulnerability discoverer CTO” (and variants like “Ring-Road flaw CTO”) to identify which CTO discovered that vulnerability.
2. Note the company name and its co-founders from those search results.
3. Search for “companies founded 2016 USA co-founder CIA CEO” to see which startups match.
4. Cross-reference the company name from step 1 with the candidate from step 3.
5. Visit the company’s official site or Wikipedia page to confirm: a. Founding year and U.S. location b. Names of co-founders and their roles (CEO vs. CTO) c. CIA background of the CEO/co-founder d. That the CTO is indeed the one who discovered the Ring-Road vulnerability
6. Extract the name of the co-founder and CEO.
7. Double-check all details against authoritative sources.
8. Provide the final answer as \boxed{YOUR_ANSWER}. (Iterative planning)

</planning>

<configurator>

I need to search for companies founded in 2016 in the USA with a co-founder and CEO who worked at the CIA. The initial search should combine the key terms to capture relevant info. I’ll call web_search with queries like ‘companies founded 2016 USA co-founder CIA CEO’ and ‘2016 founded tech company CIA co-founder’. This will help me identify possible candidates. I’ll then review the results for company names, co-founder names, and CIA connection.

</configurator>

<tool_call>

web_search("companies founded 2016 USA co-founder CIA CEO", "2016 founded tech company CIA co-founder")

</tool_call>

Step 2

<configurator>

I see that my initial web search results for ‘companies founded 2016 USA co-founder CIA CEO’ mostly mention Palantir Technologies, but Palantir was actually founded in 2003, not 2016. However, there are also references to CIA-backed startups in 2016 and In-Q-Tel. There is no direct mention of a company founded in 2016 with the required co-founders. My plan suggests also searching directly for ‘Ring-Road vulnerability discoverer CTO’ to find the company’s name and co-founder. I’ll do that now to see if I can find the company from the vulnerability information. This might help narrow down the correct company even if my first search missed it.

</configurator> (Direct execution for simple steps following previous plan)

<tool_call>

web_search("Ring-Road vulnerability discoverer CTO", "Ring-Road vulnerability CTO", "Ring-Road exploit discoverer")

</tool_call>

Step 3

<configurator>

The previous web search for 'Ring-Road' vulnerability didn't clearly link to the company; however, the first result mentions a startup that discovered the vulnerability, with Jacob W. Crisp as co-founder and CEO. I notice that the search results mention a startup, which may be relevant. I should check the specific article to see if there is a company founded in 2016, with Jacob W. Crisp as co-founder and CEO, and whether the other co-founder is CTO and has CIA background. To do this, I'll visit the Purdue University news release, since it seems directly connected to the 'Ring-Road' vulnerability and the co-founder/CEO named Jacob W. Crisp. This should provide more concrete information about the company and its co-founders.

</configurator>

<tool_call>

```
visit_tool(url="https://www.purdue.edu/newsroom/archive/releases/2017/Q2/startup-discovers-email-vulnerability-that-could-impact-up-to-a-billion-internet-users.html")
goal: "Find details about the startup, co-founders, their roles (CEO, CTO), and any CIA connections"
```

</tool_call>

Step 4

<configurator>

I need to verify the founding year of Spotlight Cybersecurity to see if it was founded in 2016 as per the user's query. The previous news article didn't specify the founding year directly, but it mentions assistance from Purdue Foundry, which was named a top recipient at the 2016 Innovation and Economic Prosperity Universities Designation and Awards Program. This suggests the startup was founded around 2016, but I need to confirm the exact year. I'll search for 'Spotlight Cybersecurity founded year' to find an authoritative source like Wikipedia or the company's official site. Once I find the founding year, I can check if it matches the user's requirement of being founded in 2016.

</configurator>

<tool_call>

```
web_search("Spotlight Cybersecurity founded year", "Spotlight Cybersecurity LLC founded")
```

</tool_call>

Step 5

<configurator>

The search results from web_search indicate that Spotlight Cybersecurity was founded in 2016, matching the user's requirement of being founded in 2016 in the USA. However, I need to confirm whether the co-founder and CEO (Jacob W. Crisp) has ever worked for the CIA, as stated in the user's question. To do this, I'll search for 'Jacob W. Crisp CIA' to see if there are any credible sources linking him to the CIA. This will allow me to verify if he fits the 'CEO and co-founder once worked for the CIA' criterion before confirming him as the answer.

</configurator>

<tool_call>

```
web_search("Jacob W. Crisp CIA", "Jacob Crisp worked for CIA")
```

</tool_call>

Step 6

<configurator>

The previous search found that Jacob Crisp (CEO of Spotlight Cybersecurity) was once an officer at the CIA, which matches part of the user's requirement. However, the search result snippet mentions Bold Business as stating Crisp was an officer at the CIA and CEO. I need to verify this detail directly from a reputable source. Therefore, I'll visit the Bold Business article to confirm whether Jacob Crisp worked for the CIA and to ensure the accuracy of this claim before concluding that he is the co-founder and CEO the user is asking about.

</configurator>

<tool_call>

```
visit_tool(url="https://insights.boldbusiness.com/communications/cybersecurity-leaders-bold-business-lists-top-25/", goal="Verify if Jacob Crisp worked for the CIA")
```

</tool_call>

Step 7

<configurator>

I need to verify that the other co-founder, Robert Morton, is the CTO and discovered the 'Ring-Road' vulnerability, as required by the user's question. The Purdue article already mentions that Robert Morton is the CTO and discovered the vulnerability. However, I should search for Robert Morton's biography or official sources to confirm his title and the nature of his work at Spotlight Cybersecurity. By checking Robert Morton's LinkedIn or official Spotlight Cybersecurity website, I can confirm that he is indeed the CTO and that he discovered the

'Ring-Road' vulnerability. This will ensure that all the user's criteria are met before finalizing the answer.

</configurator>

<tool_call>

```
web_search("Robert Morton Spotlight Cybersecurity CTO", "Robert Morton Spotlight CTO", "Robert Morton Spotlight Cybersecurity")
```

</tool_call>

Step 8

<configurator>

I have established that Spotlight Cybersecurity was founded in 2016 in the USA, the CEO is Jacob W. Crisp (who previously worked at the CIA), and the CTO is Robert Morton, who discovered the 'Ring-Road' vulnerability. All the user's criteria are met: the company is from 2016, co-founder and CEO with CIA background, co-founder and CTO discovered Ring-Road. There is no conflicting information. I should provide the final answer: the co-founder and CEO is Jacob W. Crisp. Therefore, I will present the final answer as \boxed{Jacob W. Crisp}.

</configurator>

\boxed{Jacob W. Crisp} (Provide answer)

Answer: Jacob W. Crisp

[SRAM-v1.0-30B] Example Question (Source: GPQA Diamond)

Question: If uncertainty in space of electron's location, which is travelling with speed $v = 2 \times 10^8$ m/s along x-direction is $\Delta x = 0.1$ nm. Based on the information estimate the minimum uncertainty in the energy ΔE of electron.

- A) 10^{-18} J
- B) 10^{-17} J
- C) 10^{-16} J
- D) 10^{-19} J

Please reason step by step, and put your final answer option within \boxed{\}. Only put the letter in the box, e.g. \boxed{A}. There is only one correct answer.

Step 1

<think>

We need to interpret the problem: It says "If uncertainty in space of electron's location, which is travelling with speed $v = 2 \times 10^8$ m/s along x-direction is $\Delta x = 0.1$ nm. Based on the information estimate the minimum uncertainty in the energy ΔE of electron." This appears to be a Heisenberg uncertainty principle problem. The Heisenberg uncertainty principle relates position uncertainty Δx and momentum uncertainty Δp : $\Delta x \Delta p \geq \hbar/2$ (or sometimes $\hbar$). However, the question asks for uncertainty in energy ΔE . There is also an energy-time uncertainty principle: $\Delta E \Delta t \geq \hbar/2$. But we have Δx , not Δt . Possibly we can relate Δx and Δt via velocity: $\Delta t = \Delta x / v$ (if we consider time to travel that distance). Then $\Delta E \geq \hbar / (2 \Delta t) = \hbar v / (2 \Delta x)$. That seems plausible.

Let's compute. Planck's constant $h = 6.626 \times 10^{-34}$ J·s. Reduced Planck's constant $\hbar = h / (2\pi) \approx 1.0545718 \times 10^{-34}$ J·s. $\Delta x = 0.1$ nm = 0.1×10^{-9} m = 1×10^{-10} m. $v = 2 \times 10^8$ m/s.

Compute $\Delta E_{\min} = \hbar v / (2 \Delta x)$ using $\hbar = 1.0545718 \times 10^{-34}$.

Let's do calculation with Python.

Plan:

- **Current State:** Goal: compute minimum ΔE . Given: $\Delta x = 0.1$ nm, $v = 2 \times 10^8$ m/s. Known: Heisenberg uncertainty principles, Planck constants. Derived: $\Delta E \approx \hbar v / (2 \Delta x)$ using energy-time uncertainty with $\Delta t = \Delta x / v$. Progress: calculation started.

- **Action:** Compute ΔE using Python code with proper constants and units.

- **Expected Outcome:** After computation, obtain ΔE value. Compare with given options to identify the correct order of magnitude.

- **Next Action:** Analyze result to choose between $\sim 10^{-18}$ J, $\sim 10^{-17}$ J, $\sim 10^{-16}$ J, $\sim 10^{-19}$ J.

- **Expected Outcome:** Based on analysis, select the option that matches the computed ΔE order. Prepare final answer.

- **Next Action:** Output the final answer in the required format. (Careful long-horizon planning)

</think>

<tool_call>

```
python_repl_tool(Code omitted...)
```

```
</tool_call>
```

Step 2

<think>

So $\Delta E_{\min} \approx 1.05 \times 10^{-16} \text{ J}$, which is of order 10^{-16} J . The options are:

A) 10^{-18} J B) 10^{-17} J C) 10^{-16} J D) 10^{-19} J

Thus answer C.

But we should double-check if we used the correct formula. The energy-time uncertainty principle is often stated as $\Delta E \Delta t \geq \hbar/2$. Here Δt is the time over which the energy is measured, or characteristic time. If we consider the electron traveling at speed v , the time to traverse the uncertainty in position Δx is $\Delta t = \Delta x / v$. That seems reasonable.

Alternatively, we could use the momentum uncertainty: $\Delta p = \hbar / \Delta x$ (minimum uncertainty product). Then uncertainty in kinetic energy: $\Delta E = \Delta(p^2/(2m)) = (1/(2m)) * 2p \Delta p = (p \Delta p)/m$. Since $p = m v$, we get $\Delta E = (m v \Delta p)/m = v \Delta p = v * (\hbar / \Delta x)$. That gives $\Delta E = \hbar v / \Delta x$, which is twice the previous estimate. So $\Delta E_{\min} = \hbar v / \Delta x \approx 2.109 \times 10^{-16} \text{ J}$, still $\sim 10^{-16} \text{ J}$. So same order.

Thus answer C.

We should also consider if the uncertainty in energy is related to the uncertainty in frequency via $\Delta E = \hbar \Delta f$, but that's similar.

Thus answer is C.

Now we need to put final answer in `\boxed{C}`.

But let's verify with quick search to ensure typical uncertainty principle problems.

Plan: None (Skip planning for an out-of-plan quick search)

</think>

<tool_call>

```
web_search("uncertainty principle energy uncertainty time position velocity delta x delta p  
minimum uncertainty energy electron speed 2e8 m/s delta x 0.1 nm")
```

</tool_call>

Step 3

<think>

Search didn't directly show the answer. But our calculation seems correct.

Let's also compute using exact values: $\hbar = 6.626 \times 10^{-34} \text{ J s}$, $\hbar = \hbar / (2\pi) \approx 1.0545718 \times 10^{-34}$. Use more precise. Already did.

Now compute $\Delta E = \hbar v / (2\pi \Delta x)$. Let's compute with $\hbar$.

Plan:

- **Current State:** Computed $\Delta E \approx 1.05 \times 10^{-16} \text{ J}$, matching option C. Considering alternative approach using Planck's constant $\hbar$ for verification.

- **Action:** Recompute ΔE using $\hbar = \hbar / (2\pi)$ to see consistency.

- **Expected Outcome:** After recomputation, confirm ΔE order of magnitude and decide on final answer.

- **Next Action:** If consistent, finalize answer; otherwise, reassess.

- **Expected Outcome:** Ready to produce final answer in required format.

- **Next Action:** Provide step-by-step reasoning and final answer within boxed. (Re-planning)

</think>

<tool_call>

```
python_repl_tool(Code omitted...)
```

</tool_call>

Step 4

<think>

Forgot import math. Let's do again.

Plan: None (Skip planning when no need for re-plan)

</think>

<tool_call>

```
python_repl_tool(Code omitted...)
```

</tool_call>

Step 5

<think>

$\Delta E \approx 2.11 \times 10^{-16} \text{ J}$, still $\sim 10^{-16} \text{ J}$.

Thus answer C.

Now we should present reasoning step by step.

Reasoning:

1. Heisenberg uncertainty principle for energy and time: $\Delta E \Delta t \geq \hbar/2$. 2. Characteristic time Δt for the electron to traverse the uncertainty in position: $\Delta t = \Delta x/v$. 3. Minimum uncertainty: $\Delta E_{\min} = \hbar/(2\Delta t) = \hbar v/(2\Delta x)$. 4. Plug in values: $\hbar \approx 1.0546 \times 10^{-34} \text{ J} \cdot \text{s}$, $v = 2 \times 10^8 \text{ m/s}$, and $\Delta x = 0.1 \text{ nm} = 1 \times 10^{-10} \text{ m}$. 5. Compute: $\Delta E_{\min} = (1.0546 \times 10^{-34} \cdot 2 \times 10^8)/(2 \cdot 1 \times 10^{-10}) = 1.0546 \times 10^{-16} \text{ J}$. 6. Order of magnitude $\sim 10^{-16} \text{ J}$, matches option C.

Thus answer is C.

Now produce final answer.

Plan:

- **Current State:** All calculations confirm $\Delta E_{\min} \sim 10^{-16} \text{ J}$, corresponding to option C. Ready to present final answer.

- **Action:** Write final answer with step-by-step reasoning and boxed option.

</think> (Adjusting planning horizon towards the end of task)

The minimum uncertainty in energy is estimated using the energy-time uncertainty principle:

$$\Delta E \cdot \Delta t \geq \frac{\hbar}{2},$$

where Δt is the characteristic time it takes the electron to traverse the uncertainty in its position, i.e., $\Delta t = \frac{\Delta x}{v}$.

Thus,

$$\Delta E_{\min} = \frac{\hbar}{2\Delta t} = \frac{\hbar v}{2\Delta x}.$$

Given: - Reduced Planck's constant $\hbar \approx 1.0546 \times 10^{-34} \text{ J} \cdot \text{s}$, - Electron speed $v = 2 \times 10^8 \text{ m/s}$, - Position uncertainty $\Delta x = 0.1 \text{ nm} = 1 \times 10^{-10} \text{ m}$.

Substituting the values:

$$\Delta E_{\min} = \frac{(1.0546 \times 10^{-34}) \times (2 \times 10^8)}{2 \times (1 \times 10^{-10})} = 1.0546 \times 10^{-16} \text{ J}.$$

The order of magnitude is 10^{-16} J , which corresponds to option C.

\boxed{C} (Provide answer)

Answer: \boxed{C}

F SRAM-v0.1 Data Collection Routine

Algorithm 1 details the SRAM-v0.1 data collection procedure. For each question–answer pair $(q, a^*) \in \mathcal{D}$, the teacher LLM κ is run for up to $T_{\max} = 30$ turns and $R = 3$ retries. At each turn, κ optionally invokes the sub-modules $v_{\text{intent}}, \pi_f, v_{\text{reflect}}, v_{\text{sum}}$ (Appendix G) before selecting an action. Trajectories are retained only if the final answer is deemed correct, and the trajectory contains more than $M_{\min} = 3$ tool calls.

Algorithm 1 SRAM-v0.1 Multi-Module Inference Data Collection

Require: Questions $\mathcal{D} = \{(q_i, a_i^*)\}$; $T_{\max} = 30$, max retries $R = 3$, $M_{\min} = 3$;

- 1: LLM κ (*o4-mini*);
- 2: answer judge r_{answer} (*Qwen3-30B-A3B-Instruct*);
- 3: sub-modules v_{intent} (user intent), π_f (planner), v_{reflect} (reflection), v_{sum} (summary);
- 4: environment μ

Ensure: Dataset $\mathcal{D}_{\text{SFT}}$

```

5:  $\mathcal{D}_{\text{SFT}} \leftarrow \emptyset$ 
6: for each goal  $g = (q, a^*) \in \mathcal{D}$  do
7:   for retry  $r = 1, \dots, R$  do
8:     Initialize trajectory  $\tau$ ; set  $o_1 \leftarrow q$ 
9:     for  $t = 1, \dots, T_{\max}$  do
10:      Form belief state  $\hat{s}_t$  from  $o_1, \dots, o_t$ 
11:      Deliberate:  $\kappa$  reads  $\hat{s}_t$  and may invoke  $v_{\text{intent}}, \pi_f, v_{\text{reflect}}, v_{\text{sum}}$ 
12:      Produce decision  $u_t$  and plan  $c_t$ 
13:      Act: select  $a_t \in \{\text{answer}, \text{web\_search}, \text{visit}, \text{python\_repl}\}$ 
14:      if  $a_t = \text{answer}$  then
15:        break
16:      end if
17:      Execute  $a_t$ , receive  $o_{t+1}$  from  $\mu$ ; append  $(u_t, c_t, a_t, o_{t+1})$  to  $\tau$ 
18:    end for
19:    if  $r_{\text{answer}}(a_t, q, a^*) = 1$  then
20:      break ▷ LLM judge passes; exit retry loop
21:    end if
22:  end for
23:  if  $r_{\text{answer}}(a_t, q, a^*) = 1$  and  $|\tau| > M_{\min}$  then
24:     $\tau^{\text{SFT}} \leftarrow \tau$ 
25:     $\mathcal{D}_{\text{SFT}} \leftarrow \mathcal{D}_{\text{SFT}} \cup \{\tau^{\text{SFT}}\}$ 
26:  end if
27: end for
28: return  $\mathcal{D}_{\text{SFT}}$ 

```

G Supervised Data Collection Prompts for Multi-Module Inference (v0.1)

The Multi-Module Inference pipeline uses the following prompts to collect supervised trajectories for SRAM-v0.1 (Section 3.2).

Configurator

Today is: {formatted_date}

You are K2-Researcher, a task-solving agent that calls tools step-by-step to answer the user's question. Below is the method and order in which you should call the tools:

Given a question, you must first use the `user_intent` tool to analyze the intent of the user. Then, you must use the `planning` tool to make a step-by-step plan that uses web search, web browsing, and python code execution to gather information.

After using the `planning` tool, make sure to use the `reflection` tool to determine possible issues or gaps in the plan. If there are significant issues, use the `planning` tool to update the plan.

Once you have a plan you are confident in, use the `web_search`, `visit_tool`, or `python_repl_tool` tools to execute the plan. After using an execution tool, use the `summary` tool to interpret how it informs the next steps.

Each specialized module is triggered by a unique system prompt and a specific instruction that includes the current context:

Planning

System Prompt: You are a planning expert who makes plans to solve complex problems or questions, or update plans based on the results of previous tool calls. Your task is to analyze the question and the current progress, determine the gap in information needed, and make a step-by-step plan.

Developer Instruction: Below is the context of the question and the current progress: {context}. Provide a plan that is easy to read for a human.

Reflection

System Prompt: You are a reflection expert who reflects on the previous tool calls and results step by step, analyzes any problems or mistakes made, and suggests how to improve or correct them in the next steps.

Developer Instruction: Below is the context of the question, previous tool calls, and results: {context}. Provide reflection that is easy to read for a human.

User Intent

System Prompt: You are a user intent analysis expert who analyzes the given user message, identifying the user's intent and needs, and provide practical guidance. Concisely list potential challenges and areas that require special attention.

Developer Instruction: Below is the context of the user's message: {context}. Provide analysis that is easy to read for a human.

Summary

System Prompt: You are a summary expert who analyzes and summarizes the latest tool response. Highlight key information that is useful for the next steps or any milestones achieved for the plan.

Developer Instruction: Below is the context of the question and the latest tool response: {context}. Provide a summary that is easy to read for a human.

H Supervised Data Annotation Prompts for Plan Reconstruction (v1.0)

We use the following prompt for plan reconstruction as per described in Section 3.2.

Plan Reconstruction

You are a planning augmenter for an agent's reasoning and acting trajectories. Given a goal and a trajectory consisting of actions a_t (and optional observations o_t ; black-box thoughts z_t may be omitted), infer for each step t an optional plan p_t .

A plan p_t is a sequence of predicted state-action transitions starting from the current state s_t : $p_t = (s'_{t'}, a'_{t'}, s'_{t'+1}, a'_{t'+1}, \dots, s'_{T'})$ with one step in index t' optionally representing multiple real steps. In the plan, $s_t = s'_{t'}$, and $a'_{t'}$, $s'_{t'+1}$, $\dots$ are high-level descriptions of actions and predicted next states.

If the agent is following a previously given plan and not updating it, then there is no need to make a new plan; in that case set $p_t = []$. Do not alter or contradict the original a_t (and z_t if present). For each step t , do not include specific content of future o_{t+1} , z_{t+1} , a_{t+1} , $\dots$ (e.g., exact search results, code outputs, numeric calculations, or final answers). You may use placeholders like $\langle \text{result} \rangle$ or describe contingencies.

Return ONLY valid JSON matching the schema:

```
{
  "plans": [
    {
      "t": "<int: time step>",
      "plan": [
        {
          "s": "<string: state summary like goals, givens,
              known constants, derived, missing,
              progress, etc.>",
          "a": "<string: action like search, visit webpage,
              code, calculation, answer, etc.>"
        }
      ]
    }
  ]
}
```

I System Prompt

System Prompt

You are K2-Researcher, a reasoning assistant with the ability to perform web searches, browse web pages, and execute Python code to help you answer the user's question. You must call the tools at least once to gather sufficient information before responding. Do not use a piece of information unless you have verified it through searching or browsing. Only perform computation or data analysis through Python code.