


Outputs

Exercise 1

```
Command Prompt
C:\Users\Hp>git --version
git version 2.49.0.windows.1
C:\Users\Hp>
```

```
MINGW64:/c/Users/Hp
Hp@LAPTOP-RSAV72SQ MINGW64 ~
$ git config --global user.name "Saimohan"
Hp@LAPTOP-RSAV72SQ MINGW64 ~
$ git config --global user.email "e.saimohan04@gmail.com"
Hp@LAPTOP-RSAV72SQ MINGW64 ~
$ git config --global --list
user.name=Saimohan
user.email=e.saimohan04@gmail.com
Hp@LAPTOP-RSAV72SQ MINGW64 ~
$
```

Exercise 2

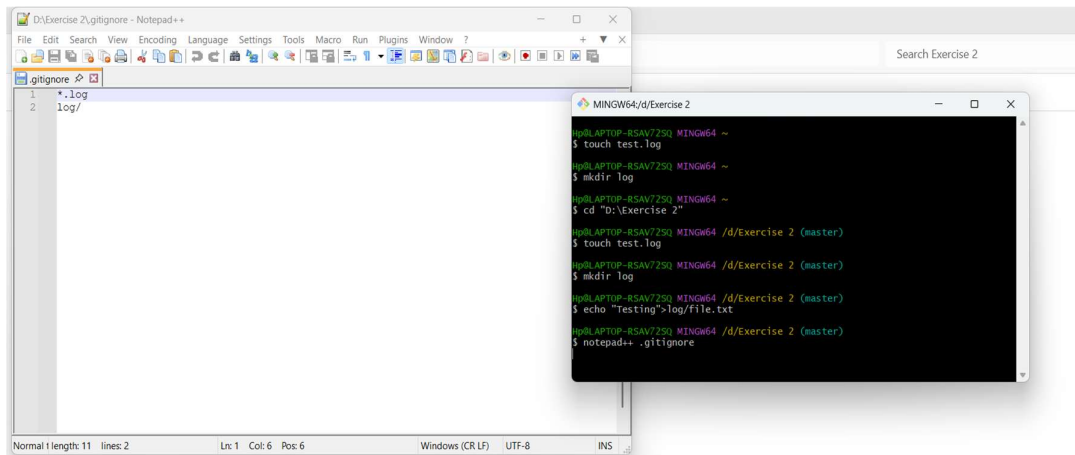

```
Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 2 (master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore

nothing added to commit but untracked files present (use "git add" to track)
Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 2 (master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore

nothing added to commit but untracked files present (use "git add" to track)
Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 2 (master)
$ git check-ignore -v test.log
.gitignore:1:*.log      test.log
Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 2 (master)
$ git check-ignore -v log/file.txt
.gitignore:2:log/      log/file.txt
Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 2 (master)
$
```

Exercise 3

```
MINGW64/d/Exercise 3
Hp@LAPTOP-RSAV725Q MINGW64 ~
$ cd "D:\Exercise 3"

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3
$ git init
Initialized empty Git repository in D:/Exercise 3/.git/

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (master)
$ echo "Some random content is here">random.txt

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (master)
$ git add random.txt
warning: in the working copy of 'random.txt', LF will be replaced by CRLF the ne
xt time Git touches it

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (master)
$ git commit -m "Initial commit"
[master (root-commit) d73fd6c] Initial commit
 1 file changed, 1 insertion(+)
 create mode 100644 random.txt

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (master)
$ git branch GitNewBranch

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (master)
$ git branch -a
* master

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (master)
$ git checkout GitNewBranch
Switched to branch 'GitNewBranch'

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (GitNewBranch)
$ echo "Hey I am a branch">branch.txt

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (GitNewBranch)
$ mkdir branchFolder

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (GitNewBranch)
$ echo "This is the content of branch">branch/file.txt
bash: branch/file.txt: No such file or directory

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (GitNewBranch)
$ echo "This is the content of branch">branchFolder/file.txt

Hp@LAPTOP-RSAV725Q MINGW64 /d/Exercise 3 (GitNewBranch)
$
```

```

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (GitNewBranch)
$ git add .
warning: in the working copy of 'branch.txt', LF will be replaced by CRLF t
warning: in the working copy of 'branchFolder/file.txt', LF will be replace

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (GitNewBranch)
$ git commit -m "Added files"
[GitNewBranch 24364d8] Added files
 2 files changed, 2 insertions(+)
 create mode 100644 branch.txt
 create mode 100644 branchFolder/file.txt

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (GitNewBranch)
$ git status
On branch GitNewBranch
nothing to commit, working tree clean

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (GitNewBranch)
$

```

```

Hp@LAPTOP-RSAV72SQ MINGW64 ~
$ cd "D:\Exercise 3"

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (master)
$ git checkout master
Already on 'master'

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (master)
$ git diff master GitNewBranch
diff --git a/branch.txt b/branch.txt
new file mode 100644
index 0000000..9c0ef29
--- /dev/null
+++ b/branch.txt
@@ -0,0 +1 @@
+Hey I am a branch
diff --git a/branchFolder/file.txt b/branchFolder/file.txt
new file mode 100644
index 0000000..82bfa3e
--- /dev/null
+++ b/branchFolder/file.txt
@@ -0,0 +1 @@
+This is the content of branch

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (master)
$ git mergetool
No files need merging

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (master)
$ git merge GitNewBranch
Updating d73fd6c..24364d8
Fast-forward
 branch.txt          | 1 +
 branchFolder/file.txt | 1 +
 2 files changed, 2 insertions(+)
 create mode 100644 branch.txt
 create mode 100644 branchFolder/file.txt

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (master)
$ git log --oneline --graph --decorate
* 24364d8 (HEAD -> master, GitNewBranch) Added files
* d73fd6c Initial commit

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (master)
$ git branch -d GitNewBranch
Deleted branch GitNewBranch (was 24364d8).

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (master)
$ git status
On branch master
nothing to commit, working tree clean

Hp@LAPTOP-RSAV72SQ MINGW64 /d/Exercise 3 (master)

```

Exercise 4

```
MINGW64/C:/Users/Hp/Exercise_4
hmlaptop-BSAV725Q MINGW64 ~
$ mkdir Exercise_4
$ cd Exercise_4
$ git init
Initialized empty Git repository in C:/Users/Hp/Exercise_4/.git/

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ echo "<message>Initial content</message>" > hello.xml

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git add hello.xml
warning: in the working copy of 'hello.xml', LF will be replaced by CRLF the next time Git touches it

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git commit -m "Initial commit on master"
[master (root-commit) a17cf3a] Initial commit on master
1 file changed, 1 insertion(+)
create mode 100644 hello.xml

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git checkout -b Gitwork
Switched to a new branch 'Gitwork'

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (Gitwork)
$ echo "<message>Hello I am inside Gitwork Branch</message>" > hello.xml

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (Gitwork)
$ git add hello.xml
warning: in the working copy of 'hello.xml', LF will be replaced by CRLF the next time Git touches it

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (Gitwork)
$ git commit -m "Add and update hello.xml in Gitwork"
[Gitwork f47181d] Add and update hello.xml in Gitwork
1 file changed, 1 insertion(+), 1 deletion(-)

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (Gitwork)
$ git checkout master
Switched to branch 'master'

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ echo "<message>Hello I am inside Master Branch</message>" > hello.xml

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git add hello.xml
warning: in the working copy of 'hello.xml', LF will be replaced by CRLF the next time Git touches it

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git commit -m "Add hello.xml to master branch"
[master cd6402d] Add hello.xml to master branch
1 file changed, 1 insertion(+), 1 deletion(-)

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git log --oneline --graph --decorate --all
* cd6402d (HEAD -> master) Add hello.xml to master branch
/* f47181d (Gitwork) Add and update hello.xml in Gitwork
/* a17cf3a Initial commit on master
```

```
MINGW64/C:/Users/Hp/Exercise_4
hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git diff master Gitwork -- hello.xml
diff --git a/hello.xml b/hello.xml
index 1a2fa39..bf07aa1 100644
--- a/hello.xml
+++ b/hello.xml
@@ -1,1 @@
- <message>Hello I am inside Master Branch</message>
+ <message>Hello I am inside Gitwork Branch</message>

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git difftool -t p4merge master Gitwork -- hello.xml

Viewing 1/1: 'hello.xml'
Launch 'p4merge' [v/n]? Y

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git checkout master
Already on 'master'

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git merge Gitwork
Auto-merging hello.xml
CONFLICT (content): Merge conflict in hello.xml
Automatic merge failed; fix conflicts and then commit the result.


hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git mergetool -t p4merge
Merging:
hello.xml

Normal merge conflict for 'hello.xml':
  (local): modified file
  (remote): modified file

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git add hello.xml

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
$ git commit
[master add20cb] Merge branch 'Gitwork'

hmlaptop-BSAV725Q MINGW64 ~/Exercise_4 (master)
```

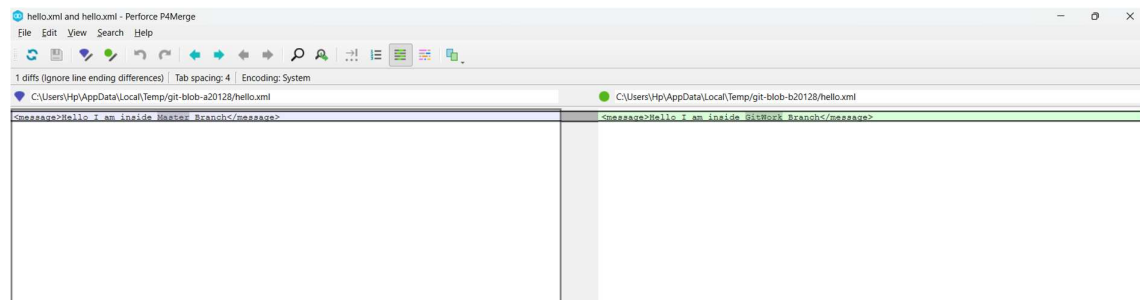

```

Hp@LAPTOP-RSAV725Q MINGW64 ~/Exercise_4 (master)
$ git add .gitignore
fatal: pathspec '.gitignore' did not match any files
Hp@LAPTOP-RSAV725Q MINGW64 ~/Exercise_4 (master)
$ git log --oneline --graph --decorate
*   add20cb (HEAD -> master) Merge branch 'gitwork'
|
| * f47181d (gitwork) Add and update hello.xml in Gitwork
| | cd6402d Add hello.xml to master branch
|_|
|/
* a17cf3a Initial commit on master
Hp@LAPTOP-RSAV725Q MINGW64 ~/Exercise_4 (master)
$ echo ".orig" >> .gitignore
Hp@LAPTOP-RSAV725Q MINGW64 ~/Exercise_4 (master)
$ echo ".bak" >> .gitignore
Hp@LAPTOP-RSAV725Q MINGW64 ~/Exercise_4 (master)
$ git add .gitignore
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the next time Git touches it
Hp@LAPTOP-RSAV725Q MINGW64 ~/Exercise_4 (master)
$ git commit -m "Add backupfiles to .gitignore"
[master c117478] Add backupfiles to .gitignore
3 file changed, 2 insertions(+)
create mode 100644 .gitignore
Hp@LAPTOP-RSAV725Q MINGW64 ~/Exercise_4 (master)
$ git branch
* gitwork
* master
Hp@LAPTOP-RSAV725Q MINGW64 ~/Exercise_4 (master)
$ git branch -d gitwork
Deleted branch gitwork (was f47181d).
Hp@LAPTOP-RSAV725Q MINGW64 ~/Exercise_4 (master)
$ git log --oneline --graph --decorate
*   add20cb (HEAD -> master) Merge branch 'gitwork'
|
| * f47181d Add and update hello.xml in Gitwork
| | cd6402d Add hello.xml to master branch
|_|
|/
* a17cf3a Initial commit on master
Hp@LAPTOP-RSAV725Q MINGW64 ~/Exercise_4 (master)

```

Exercise 5

MINGW64:/d/JAVA FSE

```

Hp@LAPTOP-RSAV725Q MINGW64 ~
$ cd "D:/JAVA FSE"

Hp@LAPTOP-RSAV725Q MINGW64 /d/JAVA FSE (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    week 8/Exercise_5/

nothing added to commit but untracked files present (use "git add" to track)

Hp@LAPTOP-RSAV725Q MINGW64 /d/JAVA FSE (main)
$ git branch -a
* main
  remotes/origin/main

Hp@LAPTOP-RSAV725Q MINGW64 /d/JAVA FSE (main)
$ git pull origin main
From https://github.com/saimohan1-cmd/Digital-Nurture-4.0-6409263
 * branch      main       -> FETCH_HEAD
Already up to date.

```

```

HPDLAPTOP-RSAV725Q MINGW64 /d/JAVA FSE (main)
$ ls -d "week 8/Exercise 2" "week 8/Exercise 5"
"week 8/Exercise 2/" "week 8/Exercise 5/"

HPDLAPTOP-RSAV725Q MINGW64 /d/JAVA FSE (main)
$ git add "week 8/Exercise_2" "week 8/Exercise_5"
fatal: pathspec 'week 8/Exercise_2' did not match any files

HPDLAPTOP-RSAV725Q MINGW64 /d/JAVA FSE (main)
$ git add "week 8/Exercise 2" "week 8/Exercise_5"
warning: in the working copy of 'week 8/Exercise_5/readme.txt', LF will be replaced by CRLF the next time Git touches it

HPDLAPTOP-RSAV725Q MINGW64 /d/JAVA FSE (main)
$ git commit -m "Add changes for Exercise 2 and Exercise 5"
[main a8fe9b5] Add changes for Exercise 2 and Exercise 5
1 file changed, 1 insertion(+)
create mode 100644 week 8/Exercise_5/readme.txt

HPDLAPTOP-RSAV725Q MINGW64 /d/JAVA FSE (main)
$ git push origin main
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 16 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 411 bytes | 411.00 KiB/s, done.
Total 3 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To https://github.com/sainohani-cnd/Digital-Nurture-4.0-6409263
   452e8b1..a8fe9b5  main -> main

HPDLAPTOP-RSAV725Q MINGW64 /d/JAVA FSE (main)
$ git fetch origin

HPDLAPTOP-RSAV725Q MINGW64 /d/JAVA FSE (main)
$ git log origin/main --oneline
a8fe9b5 (HEAD -> main, origin/main, origin/HEAD) Add changes for Exercise 2 and Exercise 5
452e8b1 Save changes in week 7 Exercise 13
08f4ff4 Add week 8
92df7a6 Added week 7
c4ce2f Added week 6
010f46a Added week 5
3bd698f Update README.md
93d320b Update README.md
30d5ada Added week 4
c30d66b Added week 3
20fd454 Added week 2 folder
eca0a13 Updated README.md
d35845d week 1 completed
69bd9db Initial commit for week 1

```