

1. Create a React app named ticketbookingapp


◆ 2. Display flight details for guest users

◆ 3. Show “Login” and “Logout” buttons

◆ 4. Conditionally render:

- Guest view when not logged in
- User view (with ticket booking access) after login

◆ 5. Toggle views using a boolean state (isLoggedIn)

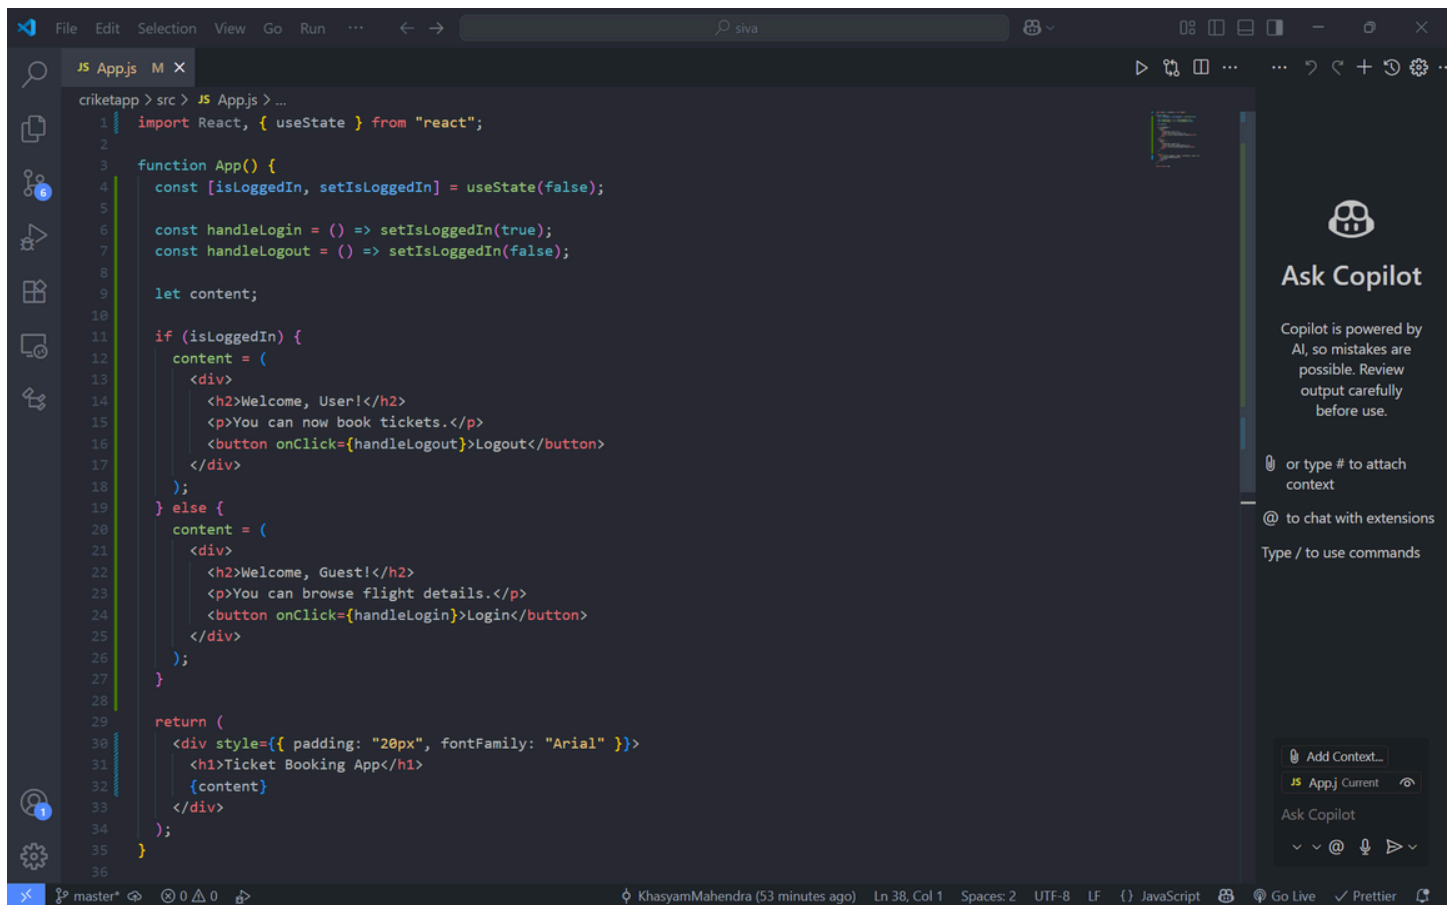

```
cricketapp > src > JS Appjs > ...
1  import React, { useState } from "react";
2
3  function App() {
4    const [isLoggedIn, setIsLoggedIn] = useState(false);
5
6    const handleLogin = () => setIsLoggedIn(true);
7    const handleLogout = () => setIsLoggedIn(false);
8
9    let content;
10
11    if (isLoggedIn) {
12      content = (
13        <div>
14          <h2>Welcome, User!</h2>
15          <p>You can now book tickets.</p>
16          <button onClick={handleLogout}>Logout</button>
17        </div>
18      );
19    } else {
20      content = (
21        <div>
22          <h2>Welcome, Guest!</h2>
23          <p>You can browse flight details.</p>
24          <button onClick={handleLogin}>Login</button>
25        </div>
26      );
27    }
28
29    return (
30      <div style={{ padding: "20px", fontFamily: "Arial" }}>
31        <h1>Ticket Booking App</h1>
32        {content}
33      </div>
34    );
35  }
36
```

Ask Copilot

Copilot is powered by AI, so mistakes are possible. Review output carefully before use.

or type # to attach context

@ to chat with extensions


Type / to use commands

Add Context...

JS Appj Current

Ask Copilot

master* 0 0 0 KhayamMahendra (53 minutes ago) Ln 38, Col 1 Spaces: 2 UTF-8 LF JavaScript Go Live Prettier

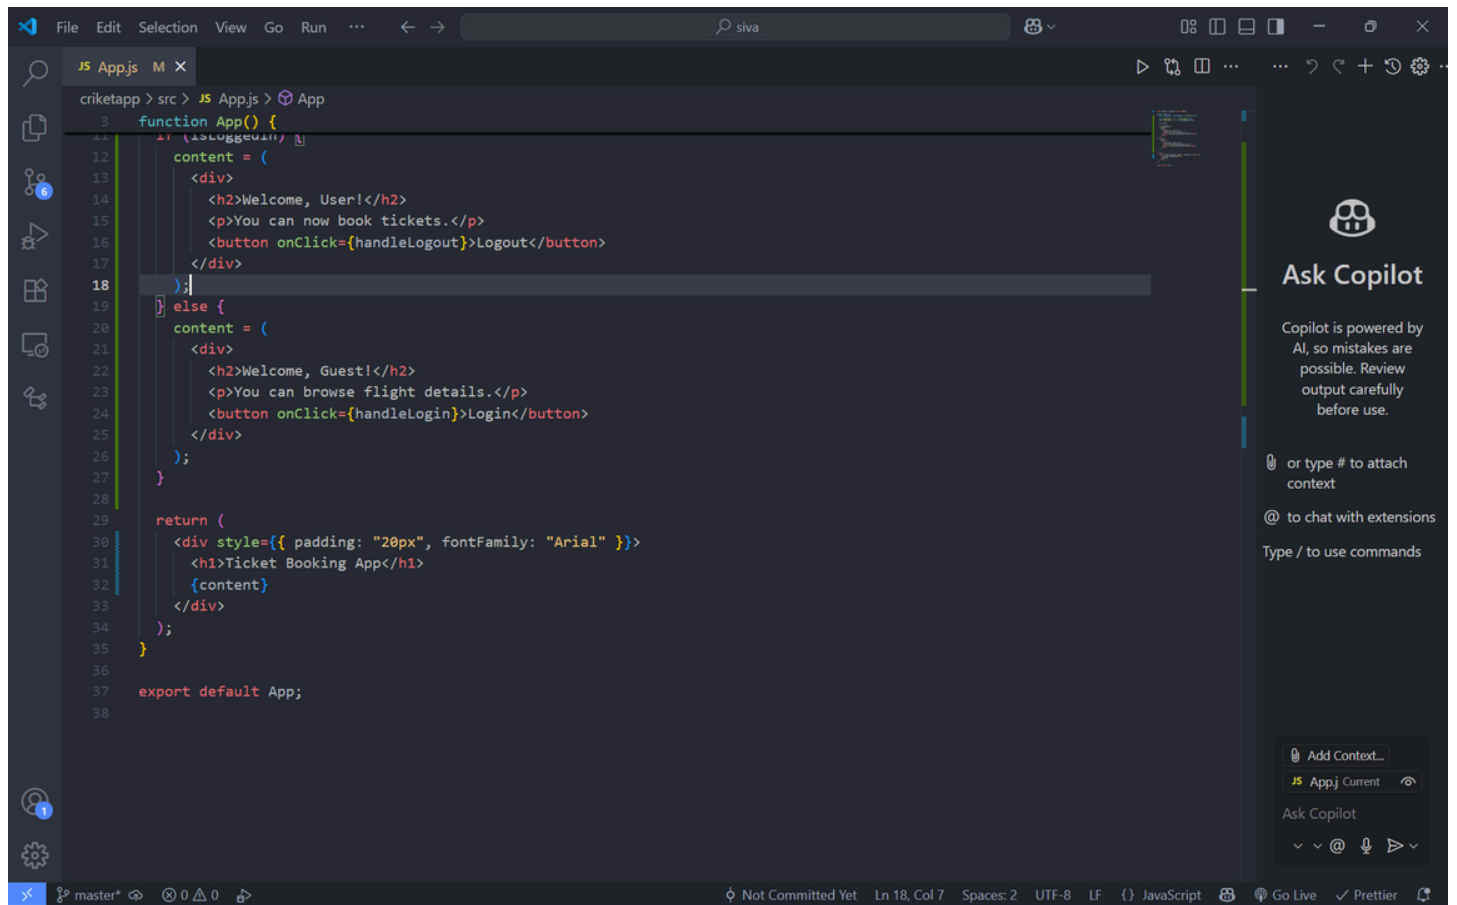

```
3 function App() {
12   content = (
13     <div>
14       <h2>Welcome, User!</h2>
15       <p>You can now book tickets.</p>
16       <button onClick={handleLogout}>Logout</button>
17     </div>
18   );
19   else {
20     content = (
21       <div>
22         <h2>Welcome, Guest!</h2>
23         <p>You can browse flight details.</p>
24         <button onClick={handleLogin}>Login</button>
25       </div>
26     );
27   }
28   return (
30     <div style={{ padding: "20px", fontFamily: "Arial" }}>
31       <h1>Ticket Booking App</h1>
32       {content}
33     </div>
34   );
35 }
37 export default App;
```

Ask Copilot

Copilot is powered by AI, so mistakes are possible. Review output carefully before use.

or type # to attach context

@ to chat with extensions

Type / to use commands

Add Context...

App.js Current

Ask Copilot

Go Live

Prettier

