



CJC

Complete Java Classes

by Kunal Sir

Package in Java: -

1. Package is nothing but a folder and it is a combination of similar type of .class files.
2. The purpose of writing package in java is reducing the naming conflict issue.
3. We can write the package in java it should be explicit first line of the code.
4. In java we can design package by the help of **package keyword**.
5. If we want to access the one package property to another package, we should compulsorily use **import keyword**.

Compilation Command of Package: -

```
javac -d . filename.java
```



CJC

Complete Java Classes

by Kunal Sir

Example: - `javac -d . A.java`

Where: -

`-d` → Current Directory.

`.` → Current Location.

`Javac` → Java Compiler.

Running Command of Package: -

`java packageName.filename`

Example: - `java com.cjc.dev.A`

Where: -

`packageName.filename` → Fully Qualified Name.

How Package Works?

Package names and directory structure are closely related.

For an example if a package name is `com.cjc.karvenagar`,




then there are three directories, com, cjc and karvenagar is such that karvenagar is present in cjc and cjc is present inside com. Also, the directory is accessible through ClassPath variable, i.e., path of parent directory of collage is present in ClassPath.

The idea is to make sure that classes are easy to locate.

Types of Packages in Java: -

There are two types of packages in java which is given in below image -

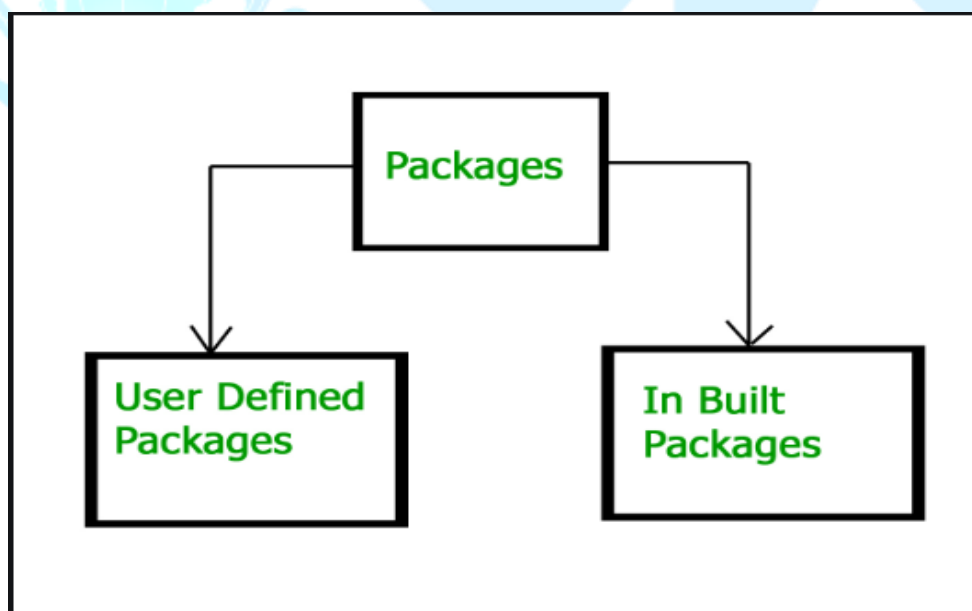



CJC

Complete Java Classes

by Kunal Sir

1. Built-In Packages: - The packages consist of a large number of classes which are a part of Java API. Some of the commonly used built-in packages are -

1. java.lang: - Contains language support classes. This package is automatically imported.
2. java.io: - Contains classes for supporting input / output operations.
3. java.util: - Contains utility classes which implement data structures like LinkedList, List, Set and Map etc.

2. User Define Packages: - These are the packages that are defined by the user. First we create a directory myPackage (name should be same as the name of the package). Then create the **MyClass** inside the directory with the first statement being the **package names**.

Example: - just like com.cjc.karvenagar