



CJC

Complete Java Classes

by Kunal Sir

Understanding To The React JS

Q) What is React JS?

React JS is JavaScript library which is used for building user interface.


Q) What is Library?

Library is nothing but the collection of predefined functions, classes, and properties, which provides specific functionality.

Q) What is the purpose of React?

Using React we can create user-interface only.

When it comes to develop real-time or dynamic web application then we have to use some other libraries.

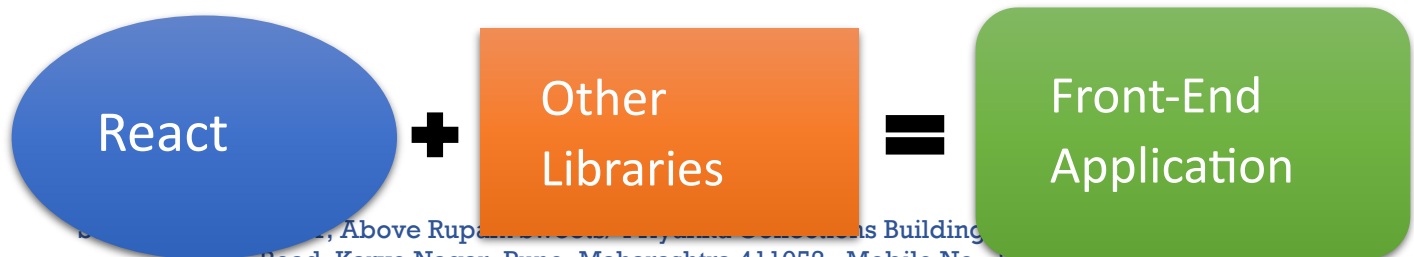



Q) Why React is use to create user-interfaces?

To understand this, we will look over the earlier technologies that we have used to create user interfaces.

❖ HTML: -

It is very easy to create user-interfaces in html because of pre-define html elements like h1, button, img, table.

But the problem with HTML is, we can-not re use the code.

Example: If we have to create 100 buttons using HTML, then we have to write button element 100 times.

❖ JavaScript: -

Creating user-interfaces in JavaScript is complex, but the advantage is, we can reuse the code.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Document</title>
</head>
```



CJC

Complete Java Classes

by Kunal Sir

```
<body>
  <div id="root">

  </div>
  <script>
    function myBttuon(lable)
    {
      var btn=document.createElement("button");
      btn.innerHTML=lable
      document.getElementById("root").appendChild(btn);
    }
    for(let i=1;i<=100;i++)
    {
      myBttuon('JS Button No '+i)
    }
  </script>
</body>
</html>
```

So, to overcome the drawbacks of this technologies ReactJS comes into the picture.

In ReactJS creating user-interface is very-very easy.


And, using ReactJS one can re-use the code.



Q) What happens when you run HTML file on browser?

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport"
content="width=device-
width, initial-
scale=1.0">
<title>Document</title>
</head>
<body>
  <h1>Welcome To CJC</h1>
</body>
</html>
```

Index.html

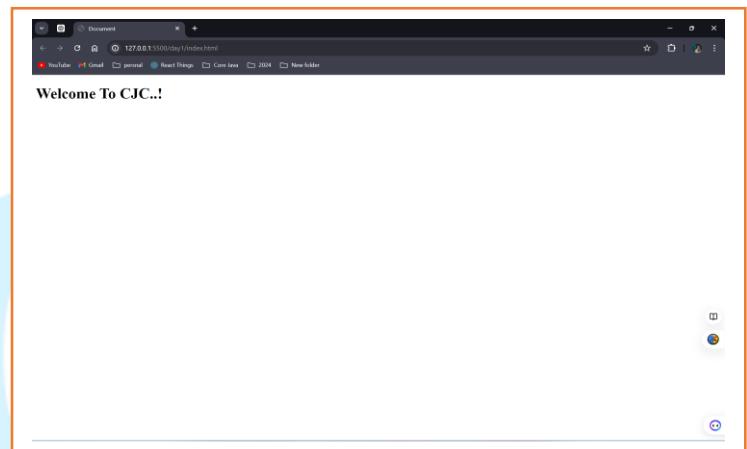

Browser

- 1) HTML file is loaded on browser.
- 2) All the html code is read by browser in the form of binary language (0,1).
- 3) This binary code will be converted into characters.
- 4) All characters are grouped into tokens (tags).



by Kunal Sir

- 5) All these tokens (tags) will be converted into objects. These objects are called as nodes.
- 6) All these nodes are arranged in sequence (Tree Data-Structure), which forms DOM-Tree.
- 7) Further Browser will display all the html element on web page according to DOM structure.

