

COUNT AND STOP CORRECTLY

Week 04

TEACH THE RECEIVER WHEN TO STOP

CHANGE CODE TO
TEACH THE RECEIVER
WHEN TO STOP




```
for (int i = 0; i < packets.Length && processed < 6; i++)  
{  
    if (packets[i] == "STOP")  
    {  
        log += "STOP received.\n";  
        break;  
    }  
  
    log += $"{processed + 1}. {packets[i]}\n";  
    processed++;  
}  
  
if (processed == 6)  
{  
    log += "Safety limit reached.\n";  
}  
  
return log + $"Processed: {processed}";
```



RECEIVER NOW
KNOWS WHEN TO
STOP AT "STOP"



DEFINITIONS

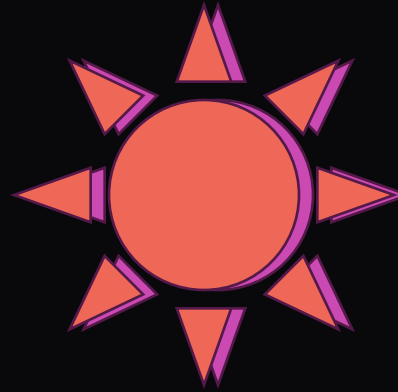

SENTINEL



A RESERVED VALUE
TO END A
SEQUENCE.

BREAK



IMMEDIATELY EXITS
THE NEAREST LOOP.

BOUNDARY
TEST



CHECKS BEHAVIOR AT A
LIMIT, INCLUDING ZERO
AND THE MAXIMUM

BREAKPOINT






PAUSES DEBUGGING
AT A CHOSEN CODE
LINE.



SCREENSHOT – PROGRAMMER HAT



SCREENSHOT OF
UPDATED CODE

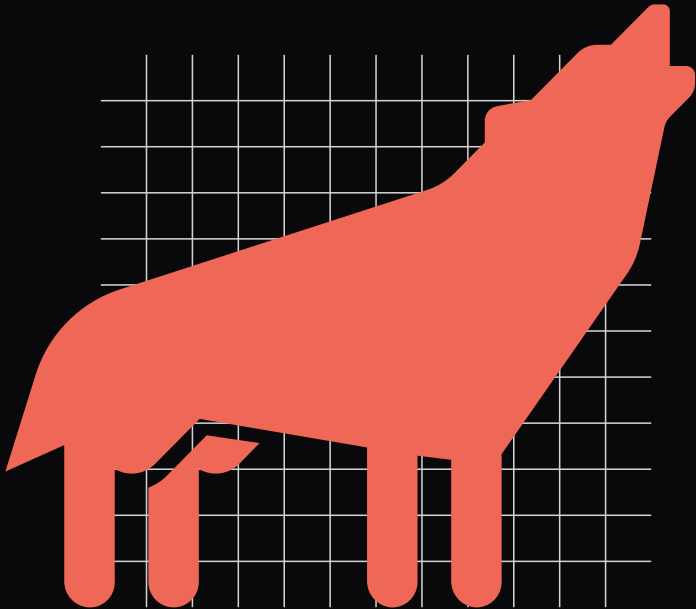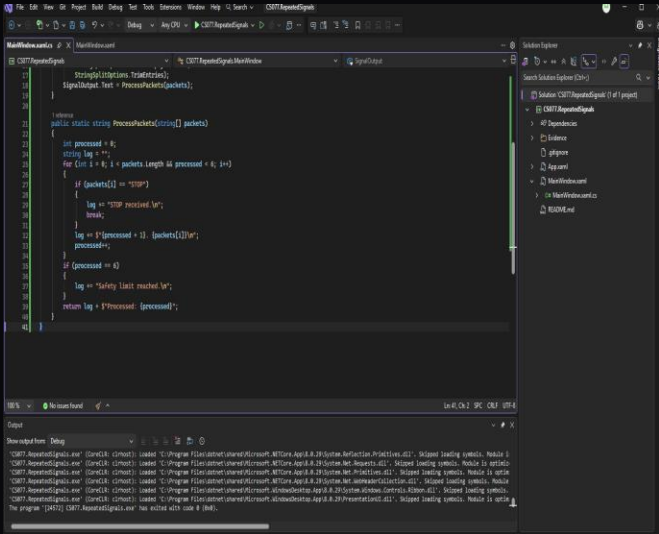

IN CLASS WORK

SCREENSHOT – USER HAT

SCREENSHOT

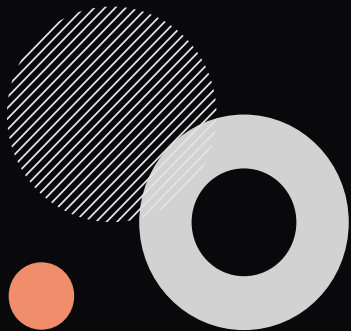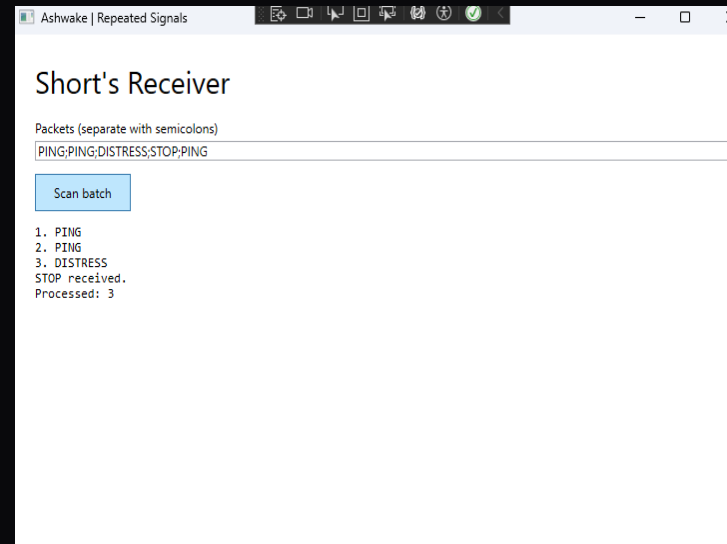

IN CLASS WORK,
RECEIVER STOPS AT
"STOP"

