

# Test Run Report



## Test Run Overview


---

Started 18 Oct 2021, 13:21:22  
Ended 18 Oct 2021, 13:30:30  
Duration (mm:ss) 09:07.858

## Test Results Summary

---

Passed 4  
Failed 0  
Skipped 0

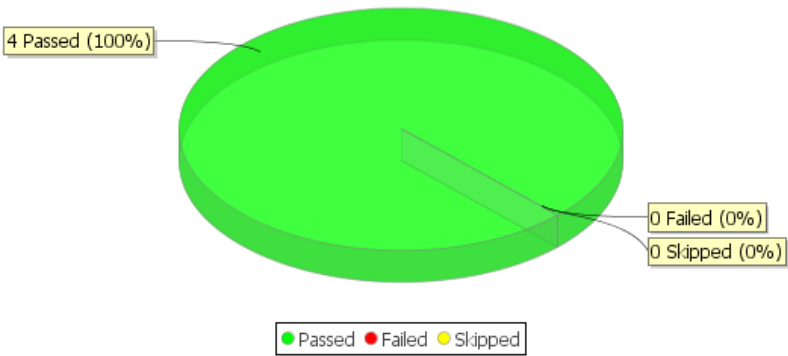

## Test Case Summary

---

tests	successful
CustomAPI.testcase	successful
EmailURL.testcase	successful
Sale & Service	successful
Service.testcase	successful
WebService.testcase	successful

## CustomAPI.testcase

---

### Output

- Get First Date Of Current Month: # date
  - ① Hello from customapis.GetFirstDateOfCurrentMonth

## EmailURL.testcase

---

### Output

- Subscribe: Gmail
  - ① Subscribing to a message source Gmail
  - ① Subscribing to a Google Mail folder. Subscription Name: mail, User: shubham.saini@provartesting.com, Folder: INBOX
- Send Message: SendMail
  - ① Sending Message from: SendMail
- Wait For: {mail.messageCount > 0}=>{30}
  - ① Start of attempt 1.
    - Attempt 1
      - ① The condition was not met - sleeping for 30 seconds.
      - ① Received message for Google Mail subscription. Subscription Name: mail, connectionName: Gmail, message Id: 170, from: s6557230@gmail.com, subject: URL
      - ① Start of attempt 2.
    - Attempt 2
      - ① Wait ending because the condition has been met.
- Match: {mail.messages.bodyText}>=>b(?:https?|ftp|file)://[-a-zA-Z0-9+&@#/%?=\_!|:.,;]\*)=>ExtractedURL
  - ① Compiling pattern. RegEx: \b(?:https?|ftp|file)://[-a-zA-Z0-9+&@#/%?=\_!|:.,;]\*)
  - ① Found match. Number: 1, Range: 147-177, Value: https://www.provartesting.com/
  - ① End of matching. Match count: 1
  - ① Stored matches. Result name: ExtractedURL

## Service.testcase

---

### Output

- Salesforce Connect: Admin (Test)
  - ① Connecting to Salesforce as Admin
  - ① Successfully connected to Salesforce as Admin
- Call Sales
  - Sales
    - Salesforce Connect: Admin (Test)
      - ① Connecting to Salesforce as Admin
      - ① Re-using existing connection. Connection: Admin, Result Name: Admin
    - Set Values: LeadCompany
      - ① Setting value LeadLastName to Sam IQ2
      - ① Successfully set LeadLastName to Sam IQ2
      - ① Setting value LeadCompany to abc IQ5
      - ① Successfully set LeadCompany to abc IQ5
    - Set Values: var.AccountName

- ① Setting value var.AccountName to Sam Account IQE
  - ① Successfully set var.AccountName to Sam Account IQE
- **Set Values: var.ContactLName**
  - ① Setting value ContactSalutation to Mr.
  - ① Successfully set ContactSalutation to Mr.
  - ① Setting value var.ContactFName to First JFZ
  - ① Successfully set var.ContactFName to First JFZ
  - ① Setting value var.ContactLName to Last JG2
  - ① Successfully set var.ContactLName to Last JG2
- **Set Values: FullName**
  - ① Setting value FullName to First JFZ Last JG2
  - ① Successfully set FullName to First JFZ Last JG2
- **Set Values: OppName**
  - ① Setting value OppName to New Opp JGI
  - ① Successfully set OppName to New Opp JGI
- **Create Object: Lead=>LeadId**
  - ① Creating a new Salesforce object. Connection Name: Admin, Name: Lead, field count: 2
  - ⚠ Failed to connect to Master Lock Manager in timeout period - assuming dead. Host: localhost, port: 54706
  - ① Setting fields:
  - ① =Field=> Company = abc IQ5
  - ① =Field=> LastName = Sam IQ2
  - 📋 Lead created successfully. Object Id: 00Q5g000008GndxEAC, Result Name: LeadId
  - ① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q5g000008GndxEAC
- **On SF Lead All Open Leads list view**
  - ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Lead&action=List&listView=AllOpenLeads
  - ① Opening Chrome webdriver instance to https://login.salesforce.com/
  - ① Successfully opened Chrome webdriver to https://login.salesforce.com/
  - ① Opening Page context. Name: screen, data: null, frame: null
  - ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: List, Page URL: /lightning/o/00Q/list?filterName=00B5g00000ROLjc, Current URL: chrome://new-tab-page/
  - ① Opening Salesforce user home page
  - ① Successfully opened user home page
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- **Sleep for {10} seconds**
  - ① Doing timed sleep. Requested duration(seconds): 10
  - Timed sleep successful. Requested duration(seconds): 10, Actual duration(seconds): 10
- **With Lead rows {Name = Sam IQ2 AND Company = abc IQ5}**
  - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=List%2FlistView%2FlistTable
  - ① Find element using xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody/tr
  - ① Waiting for element to be present. Timeout(seconds): 10
  - ① Populating webelement cells into the row Row Count: 17
  - Populated the row elements.
  - ① Applying row locator to rows. Row Count: 17, Row Locator: {Name = \$LeadLastName AND Company = \$LeadCompany}
  - ① Testing row number 1
  - ① Resolving EqualTo. Bertha Boxer = Sam IQ2, result: false
  - ① Resolving EqualTo. Farmers Coop. of Florida = abc IQ5, result: false

- ① Testing row number 2
  - ① Resolving EqualTo. Betty Bair = Sam IQ2, result: false
  - ① Resolving EqualTo. American Banking Corp. = abc IQ5, result: false
- ① Testing row number 3
  - ① Resolving EqualTo. Brenda McClure = Sam IQ2, result: false
  - ① Resolving EqualTo. Cadinal Inc. = abc IQ5, result: false
- ① Testing row number 4
  - ① Resolving EqualTo. David Monaco = Sam IQ2, result: false
  - ① Resolving EqualTo. Blues Entertainment Corp. = abc IQ5, result: false
- ① Testing row number 5
  - ① Resolving EqualTo. Jeff Glimpse = Sam IQ2, result: false
  - ① Resolving EqualTo. Jackson Controls = abc IQ5, result: false
- ① Testing row number 6
  - ① Resolving EqualTo. Kathy Snyder = Sam IQ2, result: false
  - ① Resolving EqualTo. TNR Corp. = abc IQ5, result: false
- ① Testing row number 7
  - ① Resolving EqualTo. Kristen Akin = Sam IQ2, result: false
  - ① Resolving EqualTo. Aethna Home Products = abc IQ5, result: false
- ① Testing row number 8
  - ① Resolving EqualTo. Mike Braund = Sam IQ2, result: false
  - ① Resolving EqualTo. Metropolitan Health Services = abc IQ5, result: false
- ① Testing row number 9
  - ① Resolving EqualTo. Norm May = Sam IQ2, result: false
  - ① Resolving EqualTo. Greenwich Media = abc IQ5, result: false
- ① Testing row number 10
  - ① Resolving EqualTo. Patricia Feager = Sam IQ2, result: false
  - ① Resolving EqualTo. International Shipping Co. = abc IQ5, result: false
- ① Testing row number 11
  - ① Resolving EqualTo. Phyllis Cotton = Sam IQ2, result: false
  - ① Resolving EqualTo. Abbott Insurance = abc IQ5, result: false
- ① Testing row number 12
  - ① Resolving EqualTo. Sam 111 = Sam IQ2, result: false
  - ① Resolving EqualTo. abc 111 = abc IQ5, result: false
- ① Testing row number 13
  - ① Resolving EqualTo. Sam A5V = Sam IQ2, result: false
  - ① Resolving EqualTo. abc A5V = abc IQ5, result: false
- ① Testing row number 14
  - ① Resolving EqualTo. Sam EC5 = Sam IQ2, result: false
  - ① Resolving EqualTo. abc EC5 = abc IQ5, result: false
- ① Testing row number 15
  - ① Resolving EqualTo. Sam EY0 = Sam IQ2, result: false
  - ① Resolving EqualTo. abc EY3 = abc IQ5, result: false
- ① Testing row number 16
  - ① Resolving EqualTo. Sam GWV = Sam IQ2, result: false
  - ① Resolving EqualTo. abc GWV = abc IQ5, result: false

① Testing row number 17

① Resolving EqualTo. Sam GYB = Sam IQ2, result: false

① Resolving EqualTo. abc GYB = abc IQ5, result: false

① The row locator did not match any rows. Hence doing pagination

① Scrolling the page to lazy load the records

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list?filterName=00B5g00000ROLjc>

① Find element using xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody/tr[position() > 17]`

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 15

Populated the row elements.

① Applying row locator to rows. Row Count: 15

① Testing row number 1

① Resolving EqualTo. Sam IQ2 = Sam IQ2, result: true

① Resolving EqualTo. abc IQ5 = abc IQ5, result: true

① Row number 1 matched

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● UI Assert

① Start of UIAssert. Connection: Admin

① Resolving field Name

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list?filterName=00B5g00000ROLjc>

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody/tr[position() > 17]]] -> xpath: th//span/*[self::a or self::span[not(contains(@class, 'photoContainer'))]]]`

① Asserting field attributes: Name

① Asserting Attribute: value to PrimitiveValueImpl [ value: Sam IQ2, valueId=0, createdUpdateSeq=55, updatedUpdateSeq=55]

✅ Assertion successful.Sam IQ2 EqualTo Sam IQ2

① Object read successfully. Result Name: Values

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● With Lead rows {Name = Sam IQ2}

① Start of With Row. Connection Name: Admin, target: `sf:ui:locator:row?table=List%2FlistView%2FlistTable`

① Find element using xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody//tr`

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 32

Populated the row elements.

① Applying row locator to rows. Row Count: 32, Row Locator: {Name = \$LeadLastName}

① Testing row number 1

- ① Resolving EqualTo. Bertha Boxer = Sam IQ2, result: false
- ① Testing row number 2
- ① Resolving EqualTo. Betty Bair = Sam IQ2, result: false
- ① Testing row number 3
- ① Resolving EqualTo. Brenda McClure = Sam IQ2, result: false
- ① Testing row number 4
- ① Resolving EqualTo. David Monaco = Sam IQ2, result: false
- ① Testing row number 5
- ① Resolving EqualTo. Jeff Glimpse = Sam IQ2, result: false
- ① Testing row number 6
- ① Resolving EqualTo. Kathy Snyder = Sam IQ2, result: false
- ① Testing row number 7
- ① Resolving EqualTo. Kristen Akin = Sam IQ2, result: false
- ① Testing row number 8
- ① Resolving EqualTo. Mike Braund = Sam IQ2, result: false
- ① Testing row number 9
- ① Resolving EqualTo. Norm May = Sam IQ2, result: false
- ① Testing row number 10
- ① Resolving EqualTo. Patricia Feager = Sam IQ2, result: false
- ① Testing row number 11
- ① Resolving EqualTo. Phyllis Cotton = Sam IQ2, result: false
- ① Testing row number 12
- ① Resolving EqualTo. Sam 111 = Sam IQ2, result: false
- ① Testing row number 13
- ① Resolving EqualTo. Sam A5V = Sam IQ2, result: false
- ① Testing row number 14
- ① Resolving EqualTo. Sam EC5 = Sam IQ2, result: false
- ① Testing row number 15
- ① Resolving EqualTo. Sam EY0 = Sam IQ2, result: false
- ① Testing row number 16
- ① Resolving EqualTo. Sam GWV = Sam IQ2, result: false
- ① Testing row number 17
- ① Resolving EqualTo. Sam GYB = Sam IQ2, result: false
- ① Testing row number 18
- ① Resolving EqualTo. Sam IQ2 = Sam IQ2, result: true
- ① Row number 18 matched

The row locator matched 1 row.

- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

## ● Click the Name field

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DName
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list?filterName=00B5g00000ROLjc>

- ① Interaction: ui:interaction?name=action
- ① Doing before wait. waitUrl: default
- ① End of <default>; wait.
- ① Found element: [ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody/tr -> xpath: th/span/\*[self::a or self::span[not(contains(@class, 'photoContainer'))]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Sam IQ2, href: https://provartesting36-dev-ed.lightning.force.com/lightning/r/00Q5g000008GndxEAC/view]
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GndxEAC/view
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

## ● On SF Lead View screen

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Lead&action=View&noOverride=true
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

## ● Click the Convert button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Convert&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DConvert, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Convert&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DConvert
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GndxEAC/view
- ① Interaction: ui:interaction?name=action
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Click element using xpath: /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]]/\*[(self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop')) or (self::one-record-home-flexipage2)]/\*[(self::header and contains(@role, 'banner')) or (self::force-highlights2)]/li[contains(@class, 'slds-dropdown-trigger') and contains(@class, 'slds-button\_last')]
- ① Hover>Clicking WebElement. WebElement [tag: li, text: 0, text: Show more actions]
- ① Find action link element using xpath: /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]]/\*[(self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop')) or (self::one-record-home-flexipage2)]/div[contains(@class, 'actionsContainer')] // div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/\*[(self::a or self::button)[@name='Convert' or text()='Convert']

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of &lt;default> wait.

ⓘ Found element: [[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/\*[ (self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop')) or (self::one-record-home-flexipage2)]//div[contains(@class, 'actionsContainer')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/\*[self::a or self::button][@name='Convert' or text()='Convert']

ⓘ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Convert, href: javascript:void(0)]

ⓘ Doing after wait. waitUrl: default

ⓘ End of &lt;default> wait.

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ All Sub-Test Steps were successful.

ⓘ Closing Page context. Name: screen, data: null, frame: null

ⓘ Main window reselected. Window: main

ⓘ Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GndxEAC/view

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

## ● On SF Lead Convert screen

ⓘ Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Lead&action=Convert

ⓘ Opening Page context. Name: screen, data: null, frame: null

ⓘ Hover>Clicking WebElement. WebElement [tag: h2, text: Convert Lead]

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

## ● Set the Account Name field to Sam Account IQE

ⓘ Start of Interact. Connection: Admin, Locator: ui:locator?name=name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3Dname, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3Dname

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GndxEAC/view

ⓘ Interaction: ui:interaction?name=set

ⓘ Find element using xpath: //\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'runtime\_sales\_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime\_sales\_leadConvertSectionDesktop'))][1]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[contains(@class, 'uiInputText')]/input

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of &lt;default> wait.

ⓘ Found element: [[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'runtime\_sales\_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime\_sales\_leadConvertSectionDesktop'))][1]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[contains(@class, 'uiInputText')]/input



- Got webElement. tagName: INPUT, id: 1:1916;a, type: text, class: input
- Typing value. tagName: INPUT, type: text, value: Sam Account IQE, blur: false
- Doing after wait. waitUrl: default
- End of &lt;default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

## Set the Salutation picklist to Mr.

- Start of Interact. Connection: Admin, Locator: ui:locator?name=salutation&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3Dsalutation, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=salutation&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3Dsalutation
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GndxEAC/view
- Interaction: ui:interaction?name=set
- Expanding the Section : [[[[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: // \*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))] ]/div[contains(@class, 'runtime\_sales\_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime\_sales\_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/ancestor::div[contains(@class, 'entityPanel')]/div[contains(@class, 'col1')]/section]] -> xpath: ./h3// \*[self::button or self::a]]
- Hover>Clicking WebElement. WebElement [tag: a, text: Contact, href: javascript:void(0);]
- Find element using xpath: /\*\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))] ]/div[contains(@class, 'runtime\_sales\_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime\_sales\_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/ancestor::div[contains(@class, 'entityPanel')]/div[contains(@class, 'col1')]/a
- Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of &lt;default> wait.
- Found element: [[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: /\*\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))] ]/div[contains(@class, 'runtime\_sales\_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime\_sales\_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/ancestor::div[contains(@class, 'entityPanel')]/div[contains(@class, 'col1')]/a
- Got webElement. tagName: A, id: null, type: null, class: select
- Typing value. tagName: A, type: null, value: Mr., blur: false
- Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]
- Clicking WebElement. WebElement [tag: a, text: Mr., href: javascript:void(0);]
- Doing after wait. waitUrl: default
- End of &lt;default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

## Set the First Name field to First JFZ

- Start of Interact. Connection: Admin, Locator: ui:locator?name=firstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DfirstName, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=firstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DfirstName

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GndxEAC/view

Interaction: ui:interaction?name=set

Find element using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[3]/div[contains(@class, 'uiInputText')]/input`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of &lt;default> wait.

Found element: `[[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: /*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[3]/div[contains(@class, 'uiInputText')]/input]`

Got webElement. tagName: INPUT, id: 39:1972;a, type: text, class: input

Typing value. tagName: INPUT, type: text, value: First JFZ, blur: false

Doing after wait. waitUrl: default

End of &lt;default> wait.

Going to update browser window handles.

Successfully updated browser window handles.

## Set the Last Name field to Last JG2

Start of Interact. Connection: Admin, Locator: ui:locator?name=lastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DlastName, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=lastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DlastName

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GndxEAC/view

Interaction: ui:interaction?name=set

Find element using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[5]/div[contains(@class, 'uiInputText')]/input`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of &lt;default> wait.

Found element: `[[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: /*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[5]/div[contains(@class, 'uiInputText')]/input]`

Got webElement. tagName: INPUT, id: 47:1972;a, type: text, class: input

Typing value. tagName: INPUT, type: text, value: Last JG2, blur: false

- Doing after wait. waitUrl: default
- End of &lt;default&gt; wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

## ● Set the Opportunity Name field to New Opp JGI

- Start of Interact. Connection: Admin, Locator: ui:locator?name=name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3Dname, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3Dname
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GndxEAC/view
- Interaction: ui:interaction?name=set
- Expanding the Section : [[[[[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: // \* [contains (@class, 'active') and ( (contains (@class, 'open') and (contains (@class, 'forceModal') or contains (@class, 'uiModal')) or (self::section and ((contains (@class, 'oneConsoleTab') and ancestor::div [contains (@class, 'active') and (contains (@class, 'oneWorkspace') or contains (@class, 'navexWorkspace')) and not (contains (@class, 'hasPinnedRegionTemplate') and contains (@class, 'hasActiveSubtab')))) or (contains (@class, 'tabContent') and ancestor::div [contains (@class, 'wsTabset') and not (contains (@class, 'wsTabBarHidden'))]) and ancestor::div [contains (@class, 'active') and (contains (@class, 'oneWorkspace') or contains (@class, 'navexWorkspace')) and contains (@class, 'hasPinnedRegionTemplate') and contains (@class, 'hasActiveSubtab')))) ) ] ] /div [contains (@class, 'runtime\_sales\_leadConvertDesktop') ] ] /fieldset [contains (@class, 'slds-form-element') and (contains (@class, 'runtime\_sales\_leadConvertSectionDesktop')) ] ] [3] /div [contains (@class, 'entityPanel') ] /div [contains (@class, 'col2') ] /div [contains (@class, 'createPanel') ] /div [contains (@class, 'entityPanel') ] /div [contains (@class, 'col1') ] /section ] ] -> xpath: ./h3// \* [self::button or self::a] ]
- Hover->Clicking WebElement. WebElement [tag: a, text: Opportunity, href: javascript:void(0);]
- Find element using xpath: // \* [contains (@class, 'active') and ( (contains (@class, 'open') and (contains (@class, 'forceModal') or contains (@class, 'uiModal')) or (self::section and ((contains (@class, 'oneConsoleTab') and ancestor::div [contains (@class, 'active') and (contains (@class, 'oneWorkspace') or contains (@class, 'navexWorkspace')) and not (contains (@class, 'hasPinnedRegionTemplate') and contains (@class, 'hasActiveSubtab')))) or (contains (@class, 'tabContent') and ancestor::div [contains (@class, 'wsTabset') and not (contains (@class, 'wsTabBarHidden'))]) and ancestor::div [contains (@class, 'active') and (contains (@class, 'oneWorkspace') or contains (@class, 'navexWorkspace')) and contains (@class, 'hasPinnedRegionTemplate') and contains (@class, 'hasActiveSubtab')))) ) ] ] /div [contains (@class, 'runtime\_sales\_leadConvertDesktop') ] ] /fieldset [contains (@class, 'slds-form-element') and (contains (@class, 'runtime\_sales\_leadConvertSectionDesktop')) ] ] [3] /div [contains (@class, 'entityPanel') ] /div [contains (@class, 'col2') ] /div [contains (@class, 'createPanel') ] /div [contains (@class, 'uiInputText') ] /input
- Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of &lt;default&gt; wait.
- Found element: [[[[[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: // \* [contains (@class, 'active') and ( (contains (@class, 'open') and (contains (@class, 'forceModal') or contains (@class, 'uiModal')) or (self::section and ((contains (@class, 'oneConsoleTab') and ancestor::div [contains (@class, 'active') and (contains (@class, 'oneWorkspace') or contains (@class, 'navexWorkspace')) and not (contains (@class, 'hasPinnedRegionTemplate') and contains (@class, 'hasActiveSubtab')))) or (contains (@class, 'tabContent') and ancestor::div [contains (@class, 'wsTabset') and not (contains (@class, 'wsTabBarHidden'))]) and ancestor::div [contains (@class, 'active') and (contains (@class, 'oneWorkspace') or contains (@class, 'navexWorkspace')) and contains (@class, 'hasPinnedRegionTemplate') and contains (@class, 'hasActiveSubtab')))) ) ] ] /div [contains (@class, 'runtime\_sales\_leadConvertDesktop') ] ] /fieldset [contains (@class, 'slds-form-element') and (contains (@class, 'runtime\_sales\_leadConvertSectionDesktop')) ] ] [3] /div [contains (@class, 'entityPanel') ] /div [contains (@class, 'col2') ] /div [contains (@class, 'createPanel') ] /div [contains (@class, 'uiInputText') ] /input ]
- Got webElement. tagName: INPUT, id: 1:2026;a, type: text, class: input
- Typing value. tagName: INPUT, type: text, value: New Opp JGI, blur: false
- Doing after wait. waitUrl: default
- End of &lt;default&gt; wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

## ● Click the Convert button

- Start of Interact. Connection: Admin, Locator: ui:locator?name=submitConvert&binding=sf%3Aui%3AAbinding%3Aobject%3Faction%3DsubmitConvert, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=submitConvert&binding=sf%3Aui%3AAbinding%3Aobject%3Faction%3DsubmitConvert
- Interaction: ui:interaction?name=action
- Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GndxEAC/view
- Interaction: ui:interaction?name=action
- Find element using xpath: ( // \* [contains (@class, 'active') and ( (contains (@class, 'open') and (contains (@class, 'forceModal') or contains (@class, 'uiModal')) or (self::section and ((contains (@class, 'oneConsoleTab') and ancestor::div [contains (@class, 'active') and (contains (@class, 'oneWorkspace') or contains (@class, 'navexWorkspace')) and not (contains (@class, 'hasPinnedRegionTemplate') and contains (@class, 'hasActiveSubtab')))) or (contains (@class, 'tabContent') and ancestor::div [contains (@class, 'wsTabset') and not (contains (@class, 'wsTabBarHidden'))]) and ancestor::div [contains (@class, 'active') and (contains (@class, 'oneWorkspace') or contains (@class, 'navexWorkspace')) and contains (@class, 'hasPinnedRegionTemplate') and contains (@class, 'hasActiveSubtab')))) ) ] ] /div [contains (@class, 'runtime\_sales\_leadConvertDesktop') ] ] /fieldset [contains (@class, 'slds-form-element') and (contains (@class, 'runtime\_sales\_leadConvertSectionDesktop')) ] ] [3] /div [contains (@class, 'entityPanel') ] /div [contains (@class, 'col2') ] /div [contains (@class, 'createPanel') ] /div [contains (@class, 'uiInputText') ] /input

and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'modal-footer') or contains(@class, 'modal\_\_footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')][last()]/button[contains(@data-aura-rendered-by, '2134:0')]

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of &lt;default> wait.

Found element: [[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: (//\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'modal-footer') or contains(@class, 'modal\_\_footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')][last()]/button[contains(@data-aura-rendered-by, '2134:0')]]

Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Convert]

Doing after wait. waitUrl: default

End of &lt;default> wait.

Going to update browser window handles.

Successfully updated browser window handles.

### SOQL Query: select Id from Account where Account.Name = '{var.AccountName}'=>AccountId

Reading a Salesforce object. Connection Name: Admin, Query: select Id from Account where Account.Name = 'Sam Account IQE'

Query successful. Row Count: 1.

### SOQL Query: select Id from Contact where Contact.FirstName = '{var.ContactFName}' AND Contact.LastName = '{var.ContactLName}'=>ContactId

Reading a Salesforce object. Connection Name: Admin, Query: select Id from Contact where Contact.FirstName = 'First JFZ' AND Contact.LastName = 'Last JG2'

Partner Connection retry was successful. Method: query

Query successful. Row Count: 1.

### SOQL Query: select Id from Opportunity where Opportunity.Name = 'New Opp JGI'=>OpportunityId

Reading a Salesforce object. Connection Name: Admin, Query: select Id from Opportunity where Opportunity.Name = 'New Opp JGI'

Query successful. Row Count: 1.

### Set Values: Id

Setting value Id to 00Q5g000008GndxEAC

Successfully set Id to 00Q5g000008GndxEAC

### Click the Go To Leads button

Start of Interact. Connection: Admin, Locator: ui:locator?name=convertedGoToLeads&binding=sf%3Aui%3AAbinding%3Aobject%3Faction%3DconvertedGoToLeads, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=convertedGoToLeads&binding=sf%3Aui%3AAbinding%3Aobject%3Faction%3DconvertedGoToLeads

Interaction: ui:interaction?name=action

Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GndxEAC/view

Interaction: ui:interaction?name=action

Find element using xpath: (//\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'modal-footer') or contains(@class, 'modal\_\_footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')][last()]/button[contains(@data-aura-rendered-by, '16:2318;a')]

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of &lt;default> wait.

Found element: [[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: (//\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'modal-footer') or contains(@class, 'modal\_\_footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')][last()]/button[contains(@data-aura-rendered-by, '16:2318;a')]

(contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))])) //div[contains(@class, 'modal-footer') or contains(@class, 'modal\_\_footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')]](last()))//button[contains(@data-aura-rendered-by, '16:2318;a')]]

Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Go to Leads]

Doing after wait. waitUrl: default

End of <default> wait.

Going to update browser window handles.

Successfully updated browser window handles.

All Sub-Test Steps were successful.

Closing Page context. Name: screen, data: null, frame: null

Main window reselected. Window: main

Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list?filterName=Recent

Going to update browser window handles.

Successfully updated browser window handles.

### ● Read Object: Lead = 00Q5g000008GndxEAC

Reading a Salesforce object. Connection Name: Admin, Name: Lead, Id: 00Q5g000008GndxEAC, field count: 3

Object read successfully. Result Name: LeadRead

Result assertion 'Check ConvertedAccountId' successful: '0015g00000Va1p8AAB' contains '0015g00000Va1p8AAB'

Result assertion 'Check ConvertedContactId' successful: '0035g00000GC01SAAT' contains '0035g00000GC01SAAT'

Result assertion 'Check ConvertedOpportunityId' successful: '0065g00000Czvn4AAB' contains '0065g00000Czvn4AAB'

### ● On SF Account Home screen

Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Account&action=ObjectHome

Opening Page context. Name: screen, data: null, frame: null

Opening Salesforce page. Object: Account, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/001/list?filterName=Recent, Current URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list

Opening Salesforce user home page

Successfully opened user home page

Going to update browser window handles.

Successfully updated browser window handles.

### ● With Account rows {ACCOUNT\_NAME = \$var.AccountName}

Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=ObjectHome%2Frecent%2FrecentTable

Find element using xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody//tr

Waiting for element to be present. Timeout(seconds): 10

Populating webelement cells into the row Row Count: 17

Populated the row elements.

Applying row locator to rows. Row Count: 17, Row Locator: {ACCOUNT\_NAME = \$var.AccountName}

The row locator matched 1 row.

Going to update browser window handles.

Successfully updated browser window handles.

### ● Click the Account Name field

Start of Interact. Connection: Admin, Locator: ui:locator?name=ACCOUNT\_NAME&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3DName, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=ACCOUNT\_NAME&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3DName

Interaction: ui:interaction?name=action

Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Account/list?filterName=Recent

Interaction: ui:interaction?name=action

- ① Doing before wait. waitUrl: default
- ① End of &lt;default> wait.
- ① Found element: [ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody/tr -> xpath: th/span/\*[self::a or self::span[not(contains(@class, 'photoContainer'))]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Sam Account IQE, href: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0015g00000Va1p8AAB/view]
- ① Doing after wait. waitUrl: default
- ① End of &lt;default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va1p8AAB/view
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- On SF Account View screen
  - ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Account&action=View&noOverride=true
  - ⚠ Partner Connection retry was successful. Method: describeQuickActions
  - ⚠ Partner Connection retry was successful. Method: describeQuickActions
  - ① Opening Page context. Name: screen, data: null, frame: null
  - ① Activating detailTab tab
  - ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- With Contacts rows {FULL\_NAME = First JFZ Last JG2}
  - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=View%2FContacts%2FContactsTable
  - ① Activating relatedListsTab tab
  - ① Hover>Clicking WebElement. WebElement [tag: a, text: Related, href: javascript:void(0)]
  - ① Scrolling related list into view: ((/\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]//\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]])[1]/\*[self::article and contains(@class, 'slds-card') or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]
  - ① Find element using xpath: ((/\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]//\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]])[1]/\*[self::article and contains(@class, 'slds-card') or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]



and contains(@class, 'hasActiveSubtab')))) ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]/\*[self::lst-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-related-list-single-container)]]/1/\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]/\*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::lst-template-list-item-factory]

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Populating webelement cells into the row Row Count: 0

Populated the row elements.

ⓘ Applying row locator to rows. Row Count: 1, Row Locator: {FULL\_NAME = \$FullName}

The row locator matched 1 row.

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

## ● UI Assert

ⓘ Start of UiAssert. Connection: Admin

ⓘ Resolving field FULL\_NAME

ⓘ Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va1p8AAB/view>

ⓘ Doing before wait. waitUrl: default

ⓘ End of &lt;default>; wait.

ⓘ Found element: [ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: ((//\*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')))) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) | /\*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')))) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] / ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]/\*[self::lst-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-related-list-single-container)]]/1/\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]/\*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::lst-template-list-item-factory]] -> xpath: //div[contains(@class, 'slds-grid')]/h3/\*[self::lightning-base-formatted-text or self::a or self::lightning-formatted-text]

ⓘ Asserting field attributes: FULL\_NAME

ⓘ Asserting Attribute: value to PrimitiveValueImpl [ value: First JFZ Last JG2, valueId=0, createdUpdateSeq=115, updatedUpdateSeq=115]

✓ Assertion successful.First JFZ Last JG2 Contains First JFZ Last JG2

ⓘ Reading Attribute: visible

ⓘ Reading Attribute: disabled

ⓘ Reading Attribute: readOnly

ⓘ Reading Attribute: focused

ⓘ Reading Attribute: inlineEditable

ⓘ Reading Attribute: inView

ⓘ Reading Attribute: options

ⓘ Object read successfully. Result Name: Values

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ All Sub-Test Steps were successful.

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

## ● With Opportunities rows {OPPORTUNITY\_NAME = New Opp JGI}

ⓘ Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=View%2FOpportunities%2FOpportunitiesTable

① Activating relatedListsTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Related, href: javascript:void(0)]

① Scrolling related list into view: (( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]//\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]][2]/\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]

① Find element using xpath: (( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]//\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]][2]/\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]//\*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::list-template-list-item-factory]

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 0

Populated the row elements.

① Applying row locator to rows. Row Count: 1, Row Locator: {OPPORTUNITY\_NAME = \$OppName}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● UI Assert

① Start of UiAssert. Connection: Admin

① Resolving field OPPORTUNITY\_NAME

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va1p8AAB/view>

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: (( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]//\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]][2]/\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]//\*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::list-template-list-item-factory]] -> xpath: //div[contains(@class, 'slds-grid')]/h3/\*[self::lightning-base-formatted-text or self::a or self::lightning-formatted-text]

① Asserting field attributes: OPPORTUNITY\_NAME

① Asserting Attribute: value to PrimitiveValueImpl [ value: New Opp JGI, valueId=0, createdUpdateSeq=121, updatedUpdateSeq=121]



① Found element: [[ChromeDriver: chrome on XP (c0f463fbac269bc552d1f39f9ba82dc)] -> xpath: (/)[\*contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')]) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active')]

and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )//div[contains(@class, 'forceRelatedListDesktop')]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '824:0')]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Add Products, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● On SF Opportunity Product Select Product screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=OpportunityLineItem&action=addProd

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● With Search Table {Product2\_Name = "SLA: Bronze"}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=addProd%2FSearchResults%2FSearchTable

① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[contains(@class, 'listViewContent')]/tbody/tr//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 17

Populated the row elements.

① Applying row locator to rows. Row Count: 17, Row Locator: {Product2\_Name = "SLA: Bronze"}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Check the Select Row rowSelectionCheckbox

① Start of Interact. Connection: Admin, Locator: ui:locator?name=SelectRow&rowLocator=Product2\_Name+%3D+%27SLA%3A+Bronze%27&binding=sf%3Aui%3AAbinding%3AObject%3FObject%3DOpportunityLineItem%26field%3DSelectRow, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SelectRow&rowLocator=Product2\_Name+%3D+%27SLA%3A+Bronze%27&binding=sf%3Aui%3AAbinding%3AObject%3FObject%3DOpportunityLineItem%26field%3DSelectRow

① Interaction: ui:interaction?name=check

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view

① Interaction: ui:interaction?name=check

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[contains(@class, 'listViewContent')]/tbody/tr//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr -> xpath: td[2]/input

① Got webElement. tagName: INPUT, id: null, type: checkbox

① Doing after wait. waitUrl: default

- ① End of &lt;default> wait.
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- With Search Table {Product2\_Name = "SLA: Gold"}
  - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=addProd%2FSearchResults%2FSearchTable
  - ① Find element using xpath: `//div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[contains(@class, 'listViewContent')]/tbody/tr//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr`
  - ① Waiting for element to be present. Timeout(seconds): 10
  - ① Populating webelement cells into the row Row Count: 17

Populated the row elements.

  - ① Applying row locator to rows. Row Count: 17, Row Locator: {Product2\_Name = "SLA: Gold"}

The row locator matched 1 row.

  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- Check the Select Row rowSelectionCheckbox
  - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SelectRow&rowLocator=Product2\_Name+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelectRow, before wait: default, after wait: default, auto retry: default
  - ① Locator: ui:locator?name=SelectRow&rowLocator=Product2\_Name+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelectRow
  - ① Interaction: ui:interaction?name=check
  - ① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view>
  - ① Interaction: ui:interaction?name=check
  - ① Doing before wait. waitUrl: default
  - ① End of &lt;default> wait.
  - ① Found element: `[[[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[contains(@class, 'listViewContent')]/tbody/tr//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: td[2]/input]`
  - ① Got webElement. tagName: INPUT, id: null, type: checkbox
  - ① Doing after wait. waitUrl: default
  - ① End of &lt;default> wait.
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- Click the Select button
  - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Select&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelect, before wait: default, after wait: default, auto retry: default
  - ① Locator: ui:locator?name=Select&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelect
  - ① Interaction: ui:interaction?name=action
  - ① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view>

① Interaction: ui:interaction?name=action

① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/button[contains(@class, 'forceActionButton')][2] | //div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/button[contains(@class, 'forceActionButton')][2]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/button[contains(@class, 'forceActionButton')][2] | //div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/button[contains(@class, 'forceActionButton')][2]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Next]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● On SF Opportunity Product Add Product screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=OpportunityLineItem&action=addProd2

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● With OpportunityLineItem rows {Product2Id = "SLA: Bronze"}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItemTable

① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[contains(@class, 'listViewContent')]/tbody/tr//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 2

Populated the row elements.

① Applying row locator to rows. Row Count: 2, Row Locator: {Product2Id = "SLA: Bronze"}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Set the Quantity field to 2.00

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Bronze%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DQuantity, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Bronze%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DQuantity

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view

- ① Interaction: ui:interaction?name=set
- ① Doing before wait. waitUrl: default
- ① End of &lt;default> wait.
- ① Found element: [ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])]last()//div[contains(@class, 'listViewContent')]/tbody/tr/div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: td[not(contains(@class, 'errorColumn')) and not(.span[contains(@class, 'forceVirtualCheckbox')])][1]/span/\*[self::span or self::a][1]
- ① Got webElement. tagName: SPAN, id: null, type: null, class: slds-truncate uiOutputNumber
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Edit Quantity: Item 1]
- ① Typing value. tagName: INPUT, type: text, value: 2.00, blur: false
- ① Doing after wait. waitUrl: default
- ① End of &lt;default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- With OpportunityLineItem rows {Product2Id = "SLA: Gold"}
  - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItemTable
  - ① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])]last()//div[contains(@class, 'listViewContent')]/tbody/tr/div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr
  - ① Waiting for element to be present. Timeout(seconds): 10
  - ① Populating webelement cells into the row Row Count: 2
  - Populated the row elements.
  - ① Applying row locator to rows. Row Count: 2, Row Locator: {Product2Id = "SLA: Gold"}
  - The row locator matched 1 row.
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- Set the Quantity field to 2.00
  - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunityLineItem%26field%3DQuantity, before wait: default, after wait: default, auto retry: default
  - ① Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunityLineItem%26field%3DQuantity
  - ① Interaction: ui:interaction?name=set
  - ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
  - ① Interaction: ui:interaction?name=set
  - ① Doing before wait. waitUrl: default
  - ① End of &lt;default> wait.
  - ① Found element: [ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])]last()//div[contains(@class, 'listViewContent')]/tbody/tr/div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: td[not(contains(@class, 'errorColumn')) and not(.span[contains(@class, 'forceVirtualCheckbox')])][1]/span/\*[self::span or self::a][1]
  - ① Got webElement. tagName: SPAN, id: null, type: null, class: slds-truncate uiOutputNumber
  - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Edit Quantity: Item 2]

- ① Typing value. tagName: INPUT, type: text, value: 2.00, blur: false
  - ① Doing after wait. waitUrl: default
  - ① End of &lt;default&gt; wait.
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- Click the Save button
  - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26action%3Dsave, before wait: default, after wait: default, auto retry: default
  - ① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26action%3Dsave
  - ① Interaction: ui:interaction?name=action
  - ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
  - ① Interaction: ui:interaction?name=action
  - ① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/button[contains(@class, 'forceActionButton')][3] | //div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/button[contains(@class, 'forceActionButton')][3]
  - ① Waiting for element to be present. Timeout(seconds): 10
  - ① Doing before wait. waitUrl: default
  - ① End of &lt;default&gt; wait.
  - ① Found element: [[ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/button[contains(@class, 'forceActionButton')][3] | //div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/button[contains(@class, 'forceActionButton')][3]]
  - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
  - ① Doing after wait. waitUrl: default
  - ① End of &lt;default&gt; wait.
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- On SF Opportunity Products related list
  - ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Opportunity&relatedList=OpportunityLineItems
  - ① Opening Page context. Name: screen, data: null, frame: null
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- With OpportunityLineItems rows {Product2 = "SLA: Bronze"}
  - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItems%2FOpportunityLineItemsTable
  - ① Find element using xpath: /\*\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace'))]) ]/div[contains(@class, 'listViewContent')]/tbody/tr
  - ① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 17

Populated the row elements.

① Applying row locator to rows. Row Count: 17, Row Locator: {Product2 = "SLA: Bronze"}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● UI Assert

① Start of UiAssert. Connection: Admin

① Resolving field Product2

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view>

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: `//*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace'))]) )]/div[contains(@class, 'listViewContent')]/tbody/tr` -> xpath: `th/span/*[self::a or self::span[not(contains(@class, 'photoContainer'))]]`

① Asserting field attributes: Product2

① Asserting Attribute: value to PrimitiveValueImpl [ value: SLA: Bronze, valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]

✓ Assertion successful.SLA: Bronze EqualsTo SLA: Bronze

① Object read successfully. Result Name: Values

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● With OpportunityLineItems rows {Product2 = "SLA: Gold"}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItems%2FOpportunityLineItemsTable

① Find element using xpath: `//*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace'))]) )]/div[contains(@class, 'listViewContent')]/tbody/tr`

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 17

Populated the row elements.

① Applying row locator to rows. Row Count: 17, Row Locator: {Product2 = "SLA: Gold"}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● UI Assert

① Start of UiAssert. Connection: Admin

① Resolving field Product2

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view>

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (c0f463fbae269bc552d1f39feb9a82dc)] -> xpath: `//*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace'))]) )]/div[contains(@class, 'listViewContent')]/tbody/tr` -> xpath: `th/span/*[self::a or self::span[not(contains(@class, 'photoContainer'))]]`

① Asserting field attributes: Product2

① Asserting Attribute: value to PrimitiveValueImpl [ value: SLA: Gold, valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]







① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/list?filterName=Recent>

① Hover>Clicking WebElement. WebElement [tag: button, text: Show Navigation Menu]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Cases, href: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/home>]

① Hover>Clicking WebElement. WebElement [tag: span, text: Recently Viewed]

① Clicking WebElement. WebElement [tag: span, text: Recently Viewed]

① Going to update browser window handles.

① Successfully updated browser window handles.

### ● Click the New Case button

① Start of Interact. Connection: Admin, Locator: ui:locator?name=NewCase&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26action%3DNewCase, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=NewCase&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26action%3DNewCase

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/list?filterName=Recent>

① Interaction: ui:interaction?name=action

① Find action link element using xpath: (`//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager')]]//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]]//a[contains(@data-aura-rendered-by, '3332:0')]`)

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [[ChromeDriver: chrome on XP (cc4a6dfec983006d511098c57cfcd7a)] -> xpath: (`//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager')]]//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]]//a[contains(@data-aura-rendered-by, '3332:0')]`)

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: [https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=163454389833831716](https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454389833831716)

① Going to update browser window handles.

① Successfully updated browser window handles.

### ● Set Values: CaseOrigin

① Setting value CaseStatus to New

① Successfully set CaseStatus to New

① Setting value CaseOrigin to Phone

① Successfully set CaseOrigin to Phone

### ● On SF Case New screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Case&action=New&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Switched focus to main window. URL: [https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=163454389833831716](https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454389833831716)

① Clicking the New Button

① Find action link element using xpath: `((div[contains(@class, 'active')] and (contains(@class, 'oneContent') or contains(@class, 'main-content')))/div[contains(@class, 'forceListViewManager')]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '3332:0')]`

① Clicking WebElement. WebElement [tag: a, href: javascript:void(0);]

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Sleep for {10} seconds

① Doing timed sleep. Requested duration(seconds): 10

Timed sleep successful. Requested duration(seconds): 10, Actual duration(seconds): 10

## ● Set the Status picklist to New

① Start of Interact. Connection: Admin, Locator: `ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DStatus`, before wait: default, after wait: default, auto retry: default

① Locator: `ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DStatus`

① Interaction: `ui:interaction?name=set`

① Switched focus to main window. URL: `https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454390710336172`

① Interaction: `ui:interaction?name=set`

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))) and (/text()[normalize-space()='Status'] or ./text() = 'Status')/ancestor::div[1]`

① Find field using relative xpath: `//*[self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@2f546a68 -> unknown locator]] -> xpath: .//*[self::a or self::input]]`

① Got webElement. tagName: INPUT, id: input-296, type: text, class: slds-input slds-combobox\_\_input

① Typing value. tagName: INPUT, type: text, value: New, blur: false

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item, text: New]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Set the Case Origin picklist to Phone

① Start of Interact. Connection: Admin, Locator: `ui:locator?name=Origin&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DOrgin`, before wait: default, after wait: default, auto retry: default

① Locator: `ui:locator?name=Origin&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DOrgin`

① Interaction: `ui:interaction?name=set`

① Switched focus to main window. URL: `https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454390710336172`

① Interaction: `ui:interaction?name=set`

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and`

contains(@class,'test-id\_\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Case Origin'] or ./text() = 'Case Origin')/ancestor::div[1]

① Find field using relative xpath: `//*[@self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@2f546a81 -> unknown locator]] -> xpath: `//*[@self::a or self::input]`

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Phone, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Phone, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Lookup the Contact Name reference

① Start of Interact. Connection: Admin, Locator: ui:locator?name=ContactId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DContactId, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=ContactId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DContactId

① Interaction: ui:interaction?name=sfLookup

① Switched focus to main window. URL: [https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=163454390710336172](https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454390710336172)

① Interaction: ui:interaction?name=sfLookup

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]]`  
`*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Contact Name'] or ./text() = 'Contact Name')/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@2f546a87 -> unknown locator]] -> xpath: `./input`

① Hover>Clicking WebElement. WebElement [tag: input]

① Waiting for lookup dropdown list to appear

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● On SF Contact Lookup screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lookup=Contact

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Set the Search text to First JFZ Last JG2

① Start of Interact. Connection: Admin, Locator: ui:locator?name=SearchName&path=searchFrame, before wait: null, after wait: null, auto retry: default

① Locator: ui:locator?name=SearchName&path=searchFrame

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: [https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=163454390710336172](https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454390710336172)

① Doing before wait. waitUrl: default

① End of &lt;default>; wait.

① Found element: [org.openqa.selenium.remote.RemoteWebElement@2f546a9d -> unknown locator]

① Clicking WebElement. WebElement [tag: div, text: Search Contacts "First JFZ Last JG2" in Contacts]

① Doing after wait. waitUrl: default

① End of &lt;default>; wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

### ● Click the Go! button

① Start of Interact. Connection: Admin, Locator: ui:locator?name=go&path=searchFrame, before wait: null, after wait: null, auto retry: default

① Locator: ui:locator?name=go&path=searchFrame

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: [https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=163454390710336172](https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454390710336172)

① Doing before wait. waitUrl: default

① End of &lt;default>; wait.

① Found element: com.provar.core.model.ui.java.NullWebElement@750aa9c9

① Doing after wait. waitUrl: default

① End of &lt;default>; wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

### ● Click the Name button

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: [https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=163454390710336172](https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454390710336172)

① Interaction: ui:interaction?name=action

① Populating webelement cells into the row Row Count: 0

Populated the row elements.

① Applying row locator to rows. Row Count: 1, Row Locator: {1}

The row locator matched 1 row.

① Doing before wait. waitUrl: default

① End of &lt;default>; wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@2f546aa2 -> unknown locator]] -> xpath: td[1]/span[td[1]/a]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: First JFZ Last JG2, href: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0035g00000GC01SAAT/view>]

① Doing after wait. waitUrl: default

① End of &lt;default>; wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: [https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=163454390710336172](https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454390710336172)

① Switched focus to main window. URL: [https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=163454390710336172](https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454390710336172)

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Lookup the Account Name reference

① Start of Interact. Connection: Admin, Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DAccountId, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DAccountId

① Interaction: ui:interaction?name=sfLookup

① Switched focus to main window. URL: [https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=163454390710336172](https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454390710336172)

① Interaction: ui:interaction?name=sfLookup

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]]`  
`*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Account Name'] or ./text() = 'Account Name'))/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@2f546aa4 -> unknown locator]] -> xpath: ./input]`

① Hover>Clicking WebElement. WebElement [tag: input]

① Waiting for lookup dropdown list to appear

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● On SF Account Lookup screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lookup=Account

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Set the Search text to Sam Account IQE

① Start of Interact. Connection: Admin, Locator: ui:locator?name=SearchName&path=searchFrame, before wait: null, after wait: null, auto retry: default

① Locator: ui:locator?name=SearchName&path=searchFrame

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: [https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=163454390710336172](https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454390710336172)

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: `[org.openqa.selenium.remote.RemoteWebElement@2f546aa5 -> unknown locator]`

① Clicking WebElement. WebElement [tag: div, text: Search Accounts "Sam Account IQE" in Accounts]

- ① Doing after wait. waitUrl: default
- ① End of &lt;default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

#### ● Click the Go! button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=go&path=searchFrame, before wait: null, after wait: null, auto retry: default
- ① Locator: ui:locator?name=go&path=searchFrame
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=163454390710336172
- ① Doing before wait. waitUrl: default
- ① End of &lt;default> wait.
- ① Found element: com.provar.core.model.ui.java.NullWebElement@e2d43dc
- ① Doing after wait. waitUrl: default
- ① End of &lt;default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

#### ● Click the Account Name button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=163454390710336172
- ① Interaction: ui:interaction?name=action
- ① Populating webelement cells into the row Row Count: 0  
Populated the row elements.
- ① Applying row locator to rows. Row Count: 1, Row Locator: {1}  
The row locator matched 1 row.
- ① Doing before wait. waitUrl: default
- ① End of &lt;default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@2f546abf -> unknown locator]] -> xpath: td[1]/span[td[1]]/a]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Sam Account IQE, href: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0015g00000Va1p8AAB/view]
- ① Doing after wait. waitUrl: default
- ① End of &lt;default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=163454390710336172

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=163454390710336172

① Going to update browser window handles.

① Successfully updated browser window handles.

#### ● Click the Save button

① Start of Interact. Connection: Admin, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26action%3Dsave, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26action%3Dsave

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=163454390710336172

① Interaction: ui:interaction?name=action

① Find action link element using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and not(contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/button[contains(@data-aura-rendered-by, '5420:0')]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [[ChromeDriver: chrome on XP (cc4a6dfec983006d511098c57cfcd7a)] -> xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/button[contains(@data-aura-rendered-by, '5420:0')]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● SOQL Query: select CaseNumber from Case where ContactId = '{SourceData.ConId}'=>CaseNumber

① Reading a Salesforce object. Connection Name: Admin, Query: select CaseNumber from Case where ContactId = '0035g00000GC01SAAT'

① Query successful. Row Count: 1.

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdfcAAB/view

① Injecting script to get created object ID from aura component

① Fetching created Id from URL

■ Storing created Salesforce Object ID. Result Name: caseId, created ID: 5005g00000FjdfcAAB, location: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdfcAAB/view

① Logging Salesforce Object Id for clean up. Object Name: Case, id: 5005g00000FjdfcAAB

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdfcAAB/view

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● On SF Related Record (Case) component in Case view

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?flexiPage=support\_\_Case\_rec\_L\_3col&flexiPath=leftsidebar%3A%3A0&lightningComponent=console%3ArelatedRecord

① The related record component's updateQuickActionName isn't populated. FlexiPage: support\_\_Case\_rec\_L\_3col; FlexiPath: leftsidebar::0; Region: leftsidebar; Flexi component: console:relatedRecord

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdfcAAB/view

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● UI Assert



① Start of UiAssert. Connection: Admin

① Resolving field CaseNumber

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdFcAAB/view

① Finding field placeholder using xpath: (//\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1])/\*[contains(@class, 'col') and contains(@class, 'left-col')] or (contains(@class, 'slds-region\_\_pinned-left') and contains(@class, 'slds-region')) or contains(@name, 'leftsidebar')]/\*[starts-with(@data-component-id, 'console\_relatedRecord') and not(ancestor::\*[contains(@data-component-id, 'flexipage\_\_tabset')])][1]/\*[contains(@class, 'VIEW forceQuickActionLayout')]/div[contains(@class, 'forcePageBlockSectionView')]/div[contains(@class, 'labelCol') or contains(@class, 'field-label-container')] and (span/text()[normalize-space()='Case Number' or (.) = 'Case Number'])/following-sibling::div[1]/\*[self::div and contains(@class, 'dataCol') or (self::span and contains(@class, 'test-id\_\_field-value'))]

① Waiting for element to be present. Timeout(seconds): 10

① Finding field elements using relativePath: ./span

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default&gt; wait.

① Found element: [][[ChromeDriver: chrome on XP (cc4a6dfec983006d511098c57cfcd7a)] -> xpath: (//\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1])/\*[contains(@class, 'col') and contains(@class, 'left-col')] or (contains(@class, 'slds-region\_\_pinned-left') and contains(@class, 'slds-region')) or contains(@name, 'leftsidebar')]/\*[starts-with(@data-component-id, 'console\_relatedRecord') and not(ancestor::\*[contains(@data-component-id, 'flexipage\_\_tabset')])][1]/\*[contains(@class, 'VIEW forceQuickActionLayout')]/div[contains(@class, 'forcePageBlockSectionView')]/div[contains(@class, 'labelCol') or contains(@class, 'field-label-container')] and (span/text()[normalize-space()='Case Number' or (.) = 'Case Number'])/following-sibling::div[1]/\*[self::div and contains(@class, 'dataCol') or (self::span and contains(@class, 'test-id\_\_field-value'))]] -> xpath: ./span]

① Asserting field attributes: CaseNumber

① Asserting Attribute: value to PrimitiveValueImpl [ value: 00001048, valueId=100000000009a, createdUpdateSeq=240, updatedUpdateSeq=240]

✓ Assertion successful.00001048 EqualTo 00001048

① Object read successfully. Result Name: Values

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdFcAAB/view

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● On SF Record Detail component in Case view

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?flexiPage=support\_\_Case\_rec\_L\_3col&flexiPath=main%3AdetailTabContent%3A0&lightningComponent=force%3AdetailPanel

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdFcAAB/view

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Opening Page context. Name: screen, data: null, frame: null



① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Click the Account Name reference

① Start of Interact. Connection: Admin, Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DCase%26field%3DAccountId, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DCase%26field%3DAccountId

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdfcAAB/view>

① Interaction: ui:interaction?name=action

① Finding field placeholder using xpath: (((/\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] )]//\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] )]/ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1)]//\*[(@class='region') or (contains(@class, 'region-main') and contains(@class, 'region-full-width')) or (contains(@class, 'col') and contains(@class, 'main-col')) or (contains(@class, 'column') and contains(@class, 'region-main')) or (contains(@class, 'slds-col') and contains(@class, 'main-container-wrapper')) or contains(@name, 'main')]/flexipage-component2[contains(@data-component-id, 'flexipage\_tabset')]/li[contains(@class, 'slds-tabs\_default\_\_item')]/a[starts-with(@data-tab-value, 'detailTab--') or starts-with(@data-tab-value, 'detailTab')]/ancestor::flexipage-component2/flexipage-tab2[contains(@class, 'slds-show')]//\*[starts-with(@data-component-id, 'force\_detailPanel')][1]//\*[(self::force-record-layout-section) or (self::div and contains(@class, 'forcePageBlockSectionView'))][1]/div[contains(@class, 'labelCol') or contains(@class, 'field-label-container')] and (span/text()[normalize-space()= 'Account Name' or (.) = 'Account Name'])/following-sibling::div[1]//\*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id\_\_field-value'))]

① Waiting for element to be present. Timeout(seconds): 10

① Finding elements using relativePath: //a

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default&gt; wait.

① Found element: [[[ChromeDriver: chrome on XP (cc4a6dfec983006d511098c57cfd7a)] -> xpath: (((/\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] )]//\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] )]/ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1)]//\*[(@class='region') or (contains(@class, 'region-main') and contains(@class, 'region-full-width')) or (contains(@class, 'col') and contains(@class, 'main-col')) or (contains(@class, 'column') and contains(@class, 'region-main')) or (contains(@class, 'slds-col') and contains(@class, 'main-container-wrapper')) or contains(@name, 'main')]/flexipage-component2[contains(@data-component-id, 'flexipage\_tabset')]/li[contains(@class, 'slds-tabs\_default\_\_item')]/a[starts-with(@data-tab-value, 'detailTab--') or starts-with(@data-tab-value, 'detailTab')]/ancestor::flexipage-component2/flexipage-tab2[contains(@class, 'slds-show')]//\*[starts-with(@data-component-id, 'force\_detailPanel')][1]//\*[(self::force-record-layout-section) or (self::div and contains(@class, 'forcePageBlockSectionView'))][1]/div[contains(@class, 'labelCol') or contains(@class, 'field-label-container')] and (span/text()[normalize-space()= 'Account Name' or (.) = 'Account Name'])/following-sibling::div[1]//\*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id\_\_field-value'))]] -> xpath: .//\*[(self::a and not(contains(@class, 'changeOwnerLink')) or (self::span and contains(@class, 'owner-name') and not(self::span/a)))]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, href: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0015g00000Va1p8AAB/view>]

① Doing after wait. waitUrl: default

① End of &lt;default&gt; wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va1p8AAB/view?ws=%2Fflighting%2Fr%2FCase%2F5005g00000FjdfcAAB%2Fview>

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● On SF Account View screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Account&action=View&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va1p8AAB/view?ws=%2F5005g00000FjdfcAAB%2Fview

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● With Cases rows {CASES\_CASE\_NUMBER = \$CaseNumber.CaseNumber}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=View%2FCases%2FCasesTable

① Activating relatedListsTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Related, href: javascript:void(0)]

① Scrolling related list into view: ( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))] [contains(@data-aura-rendered-by, '10721:0')]

① Find element using xpath: ( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))] [contains(@data-aura-rendered-by, '10721:0')]]/\*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::list-template-list-item-factory]

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 0

Populated the row elements.

① Applying row locator to rows. Row Count: 1, Row Locator: {CASES\_CASE\_NUMBER = \$CaseNumber.CaseNumber}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● UI Assert

① Start of UIAssert. Connection: Admin

① Resolving field CASES\_CASE\_NUMBER

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va1p8AAB/view?ws=%2F5005g00000FjdfcAAB%2Fview

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [ChromeDriver: chrome on XP (cc4a6dfec983006d511098c57cfcd7a)] -> xpath: ( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and

```

ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active')
and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate')
and contains(@class, 'hasActiveSubtab'))]] | /*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent'))
or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class,
'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class,
'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class,
'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class,
'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]] | /
ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/*[self::lst-related-list-single-container or self::div[contains(@class,
'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-related-list-single-container)]]/*
*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))][contains(@data-
aura-rendered-by, '10721:0')]]/*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::lst-
template-list-item-factory]] -> xpath: ../../[self::div or self::article][contains(@class, 'listItemBody')]/h3//a]

```

① Asserting field attributes: CASES\_CASE\_NUMBER

① Asserting Attribute: value to PrimitiveValueImpl [ value: 00001048, valueId=100000000009a, createdUpdateSeq=240, updatedUpdateSeq=240]

✅ Assertion successful.00001048 EqualTo 00001048

① Object read successfully. Result Name: Values

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Tab of type : CurrentTab

① Clicking WebElement. WebElement [tag: button, text: Close Sam Account IQE]

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdfcAAB/view

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● On SF Record Detail component in Case view

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lightningComponent=force%3AdetailPanel&flexiPath=main%3AdetailTabContent%3A0&flexiPage=support\_\_Case\_rec\_L\_3col

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdfcAAB/view

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Click the Contact Name reference

① Start of Interact. Connection: Admin, Locator: ui:locator?name=ContactId&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26field%3DContactId, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=ContactId&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26field%3DContactId

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjdfcAAB/view

① Interaction: ui:interaction?name=action

① Finding field placeholder using xpath: (((/\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]]/\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]]/\*[self::div and contains(@class, 'oneRecordHomeFlexipage') and position(=1)]/\*[(@class='region')]

or (contains(@class, 'region-main') and contains(@class, 'region-full-width')) or(contains(@class, 'col') and contains(@class, 'main-col')) or(contains(@class, 'column') and contains(@class, 'region-main')) or (contains(@class, 'slds-col') and contains(@class, 'main-container-wrapper')) or contains(@name, 'main'))//flexipage-component2[contains(@data-component-id, 'flexipage\_tabset')]/li[contains(@class, 'slds-tabs\_default\_\_item')]/a[starts-with(@data-tab-value, 'detailTab--') or starts-with(@data-tab-value, 'detailTab')]/ancestor::flexipage-component2//flexipage-tab2[contains(@class, 'slds-show')]/\*[starts-with(@data-component-id, 'force\_detailPanel')][1]//\*[self::force-record-layout-section) or (self::div and contains(@class, 'forcePageBlockSectionView'))][1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text())[normalize-space()= 'Contact Name' or (.) = 'Contact Name']]/following-sibling::div[1]//\*[self::div and contains(@class, 'dataCol')] or (self::span and contains(@class, 'test-id\_\_field-value'))]

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Finding elements using relativePath: ./a

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [[[[[ChromeDriver: chrome on XP (cc4a6dfec983006d511098c57cfcd7a)] -> xpath: (//\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]) ]]/\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]) ]]/ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1)]/[(@class='region') or (contains(@class, 'region-main') and contains(@class, 'region-full-width')) or(contains(@class, 'col') and contains(@class, 'main-col')) or(contains(@class, 'column') and contains(@class, 'region-main')) or (contains(@class, 'slds-col') and contains(@class, 'main-container-wrapper')) or contains(@name, 'main')]/flexipage-component2[contains(@data-component-id, 'flexipage\_tabset')]/li[contains(@class, 'slds-tabs\_default\_\_item')]/a[starts-with(@data-tab-value, 'detailTab--') or starts-with(@data-tab-value, 'detailTab')]/ancestor::flexipage-component2/flexipage-tab2[contains(@class, 'slds-show')]/\*[starts-with(@data-component-id, 'force\_detailPanel')][1]//\*[self::force-record-layout-section) or (self::div and contains(@class, 'forcePageBlockSectionView'))][1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text())[normalize-space()= 'Contact Name' or (.) = 'Contact Name']]/following-sibling::div[1]//\*[self::div and contains(@class, 'dataCol')] or (self::span and contains(@class, 'test-id\_\_field-value'))]] -> xpath: ./\*[self::a and not(contains(@class, 'changeOwnerLink')) or (self::span and contains(@class, 'owner-name') and not(self::span/a))]]

ⓘ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, href: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0035g00000GC01SAAT/view]

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ All Sub-Test Steps were successful.

ⓘ Closing Page context. Name: screen, data: null, frame: null

ⓘ Main window reselected. Window: main

ⓘ Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Contact/0035g00000GC01SAAT/view?ws=%2Flightning%2Fr%2FCASE%2F5005g00000FjdfcAAB%2Fview

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

## ● On SF Contact View screen

ⓘ Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&action=View&noOverride=true

ⓘ Opening Page context. Name: screen, data: null, frame: null

ⓘ Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Contact/0035g00000GC01SAAT/view?ws=%2Flightning%2Fr%2FCASE%2F5005g00000FjdfcAAB%2Fview

ⓘ Activating detailTab tab

ⓘ Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

## ● With Cases rows {CASES\_CASE\_NUMBER = \$CaseNumber.CaseNumber}

ⓘ Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=View%2FCases%2FCasesTable

ⓘ Activating relatedListsTab tab

ⓘ Hover>Clicking WebElement. WebElement [tag: a, text: Related, href: javascript:void(0)]

① Scrolling related list into view: ( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))] [contains(@data-aura-rendered-by, '12446:0')]

① Find element using xpath: ( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))] [contains(@data-aura-rendered-by, '12446:0')]]/\*[self::div[contains(@class, 'listViewContent') or self::li[contains(@class, 'forceRecordLayout') or self::list-template-list-item-factory]

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 0

Populated the row elements.

① Applying row locator to rows. Row Count: 1, Row Locator: {CASES\_CASE\_NUMBER = \$CaseNumber.CaseNumber}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● UI Assert

① Start of UiAssert. Connection: Admin

① Resolving field CASES\_CASE\_NUMBER

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Contact/0035g00000GC01SAAT/view?ws=%2Fflightning%2Fr%2FCase%2F5005g00000FjdfcAAB%2Fview>

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (cc4a6dfec983006d511098c57cfcd7a)] -> xpath: ( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))] [contains(@data-aura-rendered-by, '12446:0')]]/\*[self::div[contains(@class, 'listViewContent') or self::li[contains(@class, 'forceRecordLayout') or self::list-template-list-item-factory]] -> xpath: .//\*[self::div or self::article][contains(@class, 'listItemBody')]/h3//a]

① Asserting field attributes: CASES\_CASE\_NUMBER

① Asserting Attribute: value to PrimitiveValueImpl [ value: 00001048, valueId=100000000009a, createdUpdateSeq=240, updatedUpdateSeq=240]

✓ Assertion successful.00001048 EqualTo 00001048

① Object read successfully. Result Name: Values

① Going to update browser window handles.

① Successfully updated browser window handles.



① All Sub-Test Steps were successful.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Contact/0035g00000GC01SAAT/view?ws=%2Flightning%2Fr%2FCase%2F5005g00000FjdfcAAB%2Fview>

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Read Object: Case = 5005g00000FjdfcAAB

① Reading a Salesforce object. Connection Name: Admin, Name: Case, Id: 5005g00000FjdfcAAB, field count: 2

① Object read successfully. Result Name: CaseRead

✓ Result assertion 'Check Status' successful: 'New' = 'New'

✓ Result assertion 'Check Subject' successful: <null> is empty

## WebService.testcase

---

### Output

#### ● Web Connect: JsonAPI

① Opening RestService connection Connection name: JsonAPI

① Connecting to restservice. Address: <https://jsonplaceholder.typicode.com/>

Connection name: JsonAPI, ResultName: JsonAPI, resultScope: Test

① Connection details. Connection name: JsonAPI, urlString: restservice:url= <https://jsonplaceholder.typicode.com/>; authenticationType=NO\_AUTHENTICATION, url: <https://jsonplaceholder.typicode.com/>

#### ● Web Request (REST): #GetRestResponse

① Calling a Web Service. Connection Name: JsonAPI, target: rest:untyped?method=GET&bodyStyle=JSON

① Connecting to website. Address: <https://jsonplaceholder.typicode.com/posts/1>

① Reading response. Content Type: application/json; charset=utf-8, Encoding: null

① Parsing JSON response.

① REST Response stored successfully. Name: GetRestResponse

① Web Response Status stored successfully. Name: RestResponseStatus

#### ● Web Request (REST): #PostRestResponse

① Calling a Web Service. Connection Name: JsonAPI, target: rest:untyped?method=POST&bodyStyle=JSON

① Connecting to website. Address: <https://jsonplaceholder.typicode.com/posts/>

① Sending body. Length: 85

① Reading response. Content Type: application/json; charset=utf-8, Encoding: null

① Parsing JSON response.

① REST Response stored successfully. Name: PostRestResponse

① Web Response Status stored successfully. Name: RestResponseStatus

#### ● Web Request (REST): #PutRestResponse

① Calling a Web Service. Connection Name: JsonAPI, target: rest:untyped?method=PUT&bodyStyle=JSON

① Connecting to website. Address: <https://jsonplaceholder.typicode.com/posts/1>

① Sending body. Length: 85

① Reading response. Content Type: application/json; charset=utf-8, Encoding: null

① Parsing JSON response.

① REST Response stored successfully. Name: PutRestResponse

① Web Response Status stored successfully. Name: RestResponseStatus